





ISO/IEC17025 Accredited Lab.

Report No: FCC1003251 File reference No: 2010-03-31

Applicant: Potency Co.,Ltd.

Product: 2.4G Wireless Speaker

Model No: 2010A

Brand Name: EZ-TV Listening

Test Standards: FCC Part 15 Subpart C, Paragraph 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: Mar 31, 2010

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1003251 Page 2 of 34

Date: 2010-03-31



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 34

Report No: 1003251 Date: 2010-03-31



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample.	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	5
3.0	Technical Details.	6
3.1	Summary of Test Results.	6
3.2	Test Standards.	6
4.0	EUT Modification.	6
5.0	Power Line Conducted Emission Test.	7
5.1	Schematics of the Test.	7
5.2	Test Method and Test Procedure.	7
5.3	Configuration of the EUT	7
5.4	EUT Operating Condition.	8
5.5	Conducted Emission Limit.	8
5.6	Test Result.	8
6.0	Radiated Emission test.	11
6.1	Test Method and Test Procedure.	11
6.2	Configuration of the EUT	11
6.3	EUT Operation Condition.	11
6.4	Radiated Emission Limit	12
6.5	Test Result.	13
7.0	Band Edge	20
7.1	Test Method and Test Procedure.	20
7.2	Radiated Test Setup.	20
7.3	Configuration of the EUT	20
7.4	EUT Operating Condition.	20
7.5	Band Edge Limit.	20
7.6	Band Edge Test Result.	21
8.0	Antenna Requirement.	23
9.0	20dB bandwidth measurement.	24
10.0	FCC ID Label	27
11.0	Photo of Test Setup and EUT View	28

Date: 2010-03-31



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Potency Co.,Ltd.

Address: No.142,Xinghua Road Zhuhai,China

Telephone: +86-756-226822 Fax: +86-756-2268111

1.3 Description of EUT

Product: 2.4G Wireless Speaker

Manufacturer: Potency Co.,Ltd.
Brand Name: EZ-TV Listening

Model Number: 2010A
Additional Model Name N/A
Additional Trade Name N/A
Rating: DC 5V

Power Supply: Input: 100-240V~, 0.4A, 50-60Hz, Output: DC5V, 2A; Model: ADP-10SB

REV.M

Modulation Type: GFSK

Operation Frequency 2402-2478MHz

Antenna Designation Dipole Antenna with the antenna gain 2.15dBi

1.4 Submitted Sample

1 Sample

1.5 Test Duration

2010-03-24 to 2010-03-31

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 34

Report No: 1003251 Date: 2010-03-31



1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

2.0	0 Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2009-12-05	2010-12-04	
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2009-12-05	2010-12-04	
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2009-12-05	2010-12-04	
Ultra Broadband ANT	Schwarebeck	VULB9163	9163/340	2010-02-21	2011-02-20	
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2010-03-29	2011-03-28	
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2010-02-17	2011-02-16	
Power meter	Anritsu	ML2487A	6K00003613	2010-02-17	2011-02-16	
Power sensor	Anritsu	MA2491A	32263	2010-02-17	2011-02-16	
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2010-02-17	2011-02-16	
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2009-08-15	2010-08-14	
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2009-07-02	2010-07-01	
Loop Antenna	EMCO	6507	102615	2009-04-26	2010-04-25	

Page 6 of 34

Report No: 1003251 Date: 2010-03-31



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:				
Standard	Test Type	Result	Notes	
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS	Complies	
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	PASS	Complies	
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Complies	
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	PASS	Complies	

3.2 **Test Standards**

FCC Part 15 Subpart C, Paragraph 15.249

4.0 **EUT Modification**


No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

Report No: 1003251 Date: 2010-03-31



5. Power Line Conducted Emission Test

5.1 Schematics of the test

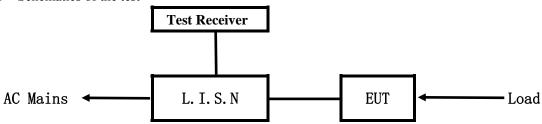


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Block diagram of Test setup

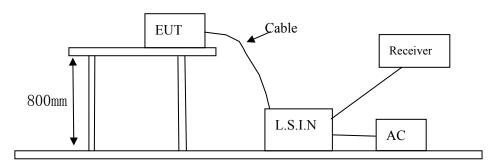

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
2.4G wireless	Potency Co.,Ltd.	2010A	YAO MD2010
Speaker			

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 8 of 34

Report No: 1003251 Date: 2010-03-31

Device	Manufacturer	Model	FCC ID/DOC	Cable	
N/A					

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Eraguanay(MHz)		Class A Lir	nits (dB µ V)	Class B Limits $(dB \mu V)$	
	Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
	$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
	$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
	5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2010-03-31

A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep EUT transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

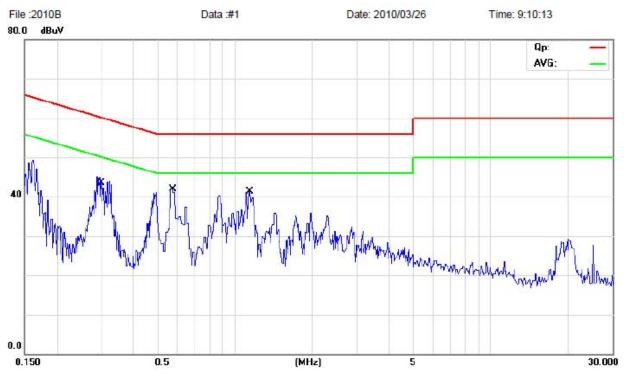

Frequency	Line	Reading(dBμV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.2988	Live	37.76	10.36	60.28	50.28
0.5784	Live	38.35	15.05	56.00	46.00
1.1512	Live	38.46	14.86	56.00	46.00

Date: 2010-03-31

B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep EUT transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

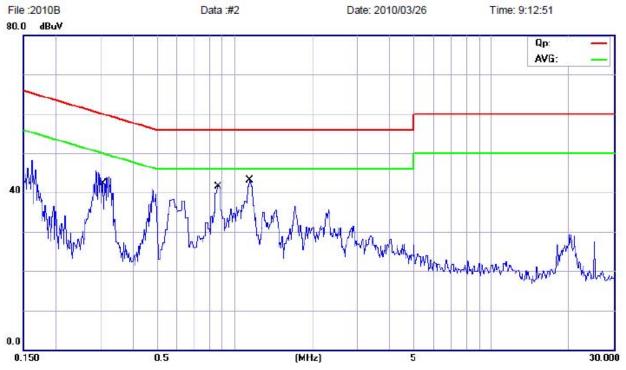

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.3090	Neutral	33.57	8.67	60.00	50.00
1.1514	Neutral	39.56	16.56	56.00	46.00
0.8633	Neutral	38.46	15.46	56.00	46.00

Report No: 1003251 Page 11 of 34


Date: 2010-03-31



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup for frequency 30MHz-1000MHz

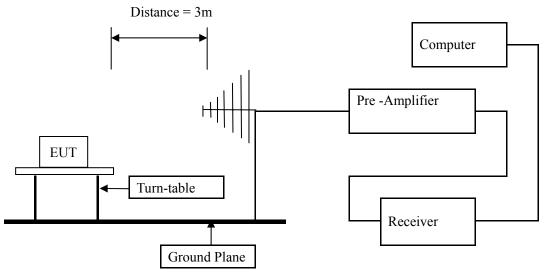


Page 12 of 34

Report No: 1003251 Date: 2010-03-31



Block diagram of Test setup for frequency below 30MHz

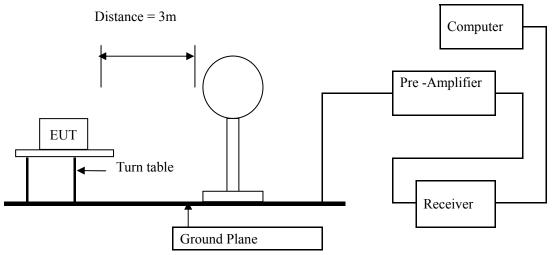

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Page 13 of 34

Report No: 1003251 Date: 2010-03-31



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Strength of Fundamental (3m)			Field Strength of Harmonics (3m)		
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

		8 1
Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
0.009-0.490	3	20log 2400/F (kHz) + 80
0.490-1.705	3	20log 24000/F (kHz) + 40
1.705-30	3	20log 30 + 40
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. New Battery used in the Radiated Emissions test
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK and AV detector.
- 6. If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula Ld1 = Ld2 * (d2/d1)

Report No: 1003251 Page 14 of 34

Date: 2010-03-31



6.5 Test result

Fundamental & Harmonics Radiated Emission Data \mathbf{A}

Product:	2.4G wireless Speaker	Test Mode:	Low Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	120VAC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2402	100.12 / 66.17	V	114/94	-13.88/-27.83
2402	85.18 / 57.79	Н	114/94	-28.82/-36.21
4804	56.73 / 39.47	V	74/54	-17.27/-14.53
4804	38.36 / 29.30	Н	74/54	-35.64/-24.70
9612		H/V	74/54	
12015		H/V	74/54	
14418		H/V	74/54	
16821		H/V	74/54	
19224		H/V	74/54	
21627		H/V	74/54	
24030		H/V	74/54	

Page 15 of 34

Product:	2.4G wireless Speaker	Test Mode:	Middle Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	120VAC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2442	101.65/63.60	V	114/94	-12.35/-30.40
2442	81.57/54.12	Н	114/94	-32.43/-39.88
4884	59.35/38.47	V	74/54	-14.65/-15.53
4884	42.12/29.98	Н	74/54	-31.88/-24.02
7323		H/V	74/54	
9764		H/V	74/54	
12205		H/V	74/54	
14646		H/V	74/54	
17087		H/V	74/54	
19528		H/V	74/54	
21969		H/V	74/54	
24410		H/V	74/54	

Page 16 of 34

Report No: 1003251 Date: 2010-03-31

Product:	2.4G wireless Speaker	Test Mode:	High Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	12VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2478	100.52/61.95	V	114/94	-13.48/-32.05
2478	76.90/51.69	Н	114/94	-37.01/-42.31
4956	66.48/40.35	V	74/54	-7.52/-13.65
4956	38.76/31.16	Н	74/54	-35.24/-22.84
7440		H/V	74/54	
9920		H/V	74/54	
12400		H/V	74/54	
14880		H/V	74/54	
17360		H/V	74/54	
19840		H/V	74/54	
22320		H/V	74/54	
24800		H/V	74/54	

Note: (1) PK= Peak, AV= Average

- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) The measured PK value less than the AV limit.

Report No: 1003251 Date: 2010-03-31




A. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep transmitting Mode: Low Channel

Results: Pass

Please refer to following diagram for individual

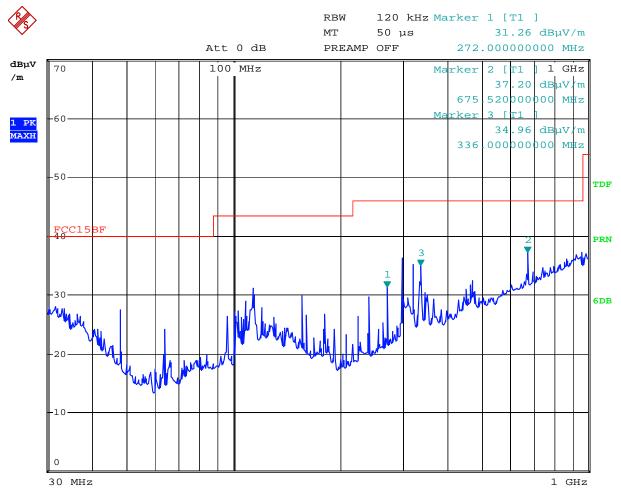

Date: 25.MAR.2010 07:43:25

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
272.00	31.26	V	46.00
675.52	37.20	V	46.00
336.00	34.96	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1003251 Date: 2010-03-31




B Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep transmitting Mode: Low Channel

Results: Pass

Please refer to following diagram for individual

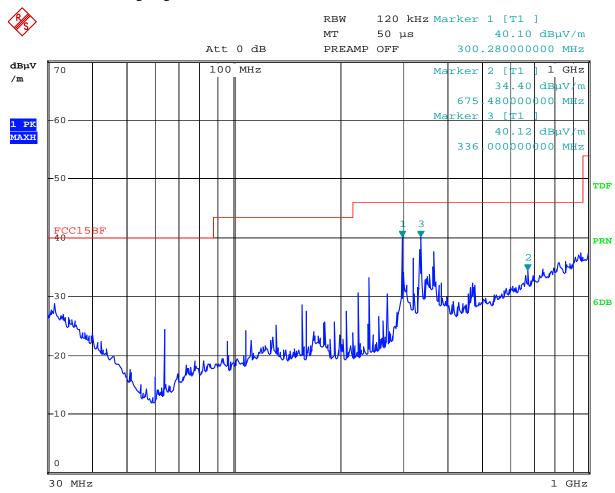

Date: 25.MAR.2010 07:45:36

Frequency (MHz)	Level@3m (dB \u03ba V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
300.28	40.10	Н	46.00
675.48	34.40	Н	46.00
336.00	40.12	Н	46.00

Report No: 1003251 Page 19 of 34


Date: 2010-03-31

Radiated Emission from 0.009MHz-30MHz

EUT set Condition: Keep transmitting Mode: Low Channel

Results: Pass

Please refer to following diagram for individual

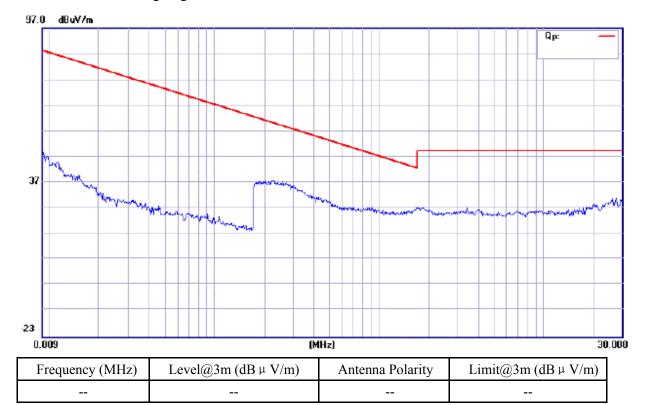

Page 20 of 34

Report No: 1003251 Date: 2010-03-31




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) Set Spectrum as RBW=VBW=1MHz and Peak detector used
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

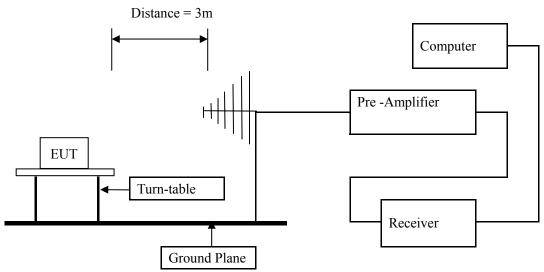

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Page 21 of 34

Report No: 1003251 Date: 2010-03-31



7.6 Test Result

	t Kesuit							1			
	oduct:		2.4G wireless Speaker			Tes	Test Mode:		Low Channel		
N	/lode		Keeping Transmitting		Test	Voltage		AC120V			
Temp	perature		24	deg. C		Hu	Humidity		56% RH		
Test	Result:]	Pass		De	etector		PF	Κ	
220	2390MHz		dBμV/m)	5	59.66 29.30		Limit		74(dB _k	ιV/m)	
239			dBμV/m)	2					54(dB _µ	ιV/m)	
		1	Marker	1 [T1]		RBW	1 M	Hz R	F Att	10 dB	
R	ef Lvl		Tidi Kei		12 dBμV	VBW	1 M			10 00	
	107 dBμ\	/	2	.402585		SWT	5 m		nit	dB μ V	
107	<u> </u>		1						l	1	ı
100-							▼ 1	[T1]	105.	$\mathbb{Z} \setminus dB\mu V$	Α
100							∇2	[T1]	68.	$14 dB\mu V$	
									2.39000	1 \	
90 –											
80 –											
00										1	
	1MAX										1MA
70 –								سر	The same of the sa		
							بمسمعة	and the same			
60 –		Λ			man	~~~~~·*					
~	~~~~	~~ \~									
50-											
40 –											
30-											
36											
20 –											
10 -											
5	Start 2.3	31 GHz			10 M	1Hz/			Stop 2	2.41 GHz	
Date:	19	.MAR.2	P∩1∩ 12.	:00:40					•		
Date.	1.0		.010 12								

Note: Field Strength in restrict band measured in conventional manner

Page 22 of 34

Report No: 1003251 Date: 2010-03-31

Product:		2.4G wireless Speaker				t Mode:		High Channel		
Mode			Transmitt	ing	-	Test Voltage		DC12V		
Temperature		24	deg. C,		Humic	Humidity		56% RH		
Test Result:			Pass		De	Detector		Pk	ζ	
2483.5MHz	PK (dBμV/m)	7	1.59		imit		74(dBµ	ιV/m)	
2463.3WIIIZ	AV(dBμV/m)	3	35.62		Limit		54(dBµ	$\iota V/m)$	
		Marker	1 [T1]		RBW	1 M	Hz R	F Att	20 dB	
Ref Lvl			107.4	-1 dBμV	VBW	1 M				
117 dB μ V	/	2	.477975	95 GHz	SWT	5 m	s U	Init	$dB\muV$,
117						v ₁	[T1]	107.	41 dBμV	Α
110						∇2	[T1]	-2.47757 	555 БНZ 07 dB <i>µ</i> V	1
100						. 2			000 GHz	
100)										
90	$\overline{}$									
	/									
1MAX 80			2							1MA
			Acceptant of the same of the s	·						
70										
							~~~~	· · · · · · · · · · · · · · · · · · ·		
60										Ì
00										
50										1
40										
30										
20										l
17 <b>L</b> Start 2.4	176 GH	Z		2.4 ٢	1Hz/			Stop	2.5 GHz	•
	.MAR.2		:25:50					1-		
paie: 13		_010 12	. ∠ ∪ . JU							

Note: Field Strength in restrict band measured in conventional manner

Report No: 1003251 Page 23 of 34

Date: 2010-03-31



## 8.0 Antenna Requirement

# **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.


Dipole antenna .The maximum Gain of the antennas is 2.15dBi.

Test Result: Pass


Page 24 of 34

Product: 2.4G wireless Spea		Product: 2.4G wireless Speaker		2.4G wireless Speaker			Test Mode:		Low Channel		
Mode	Keep	ing Transmi	tting	Test	Test Voltage		AC120V				
Temperature		24 deg. C,		Hu	midity		56% RH				
Test Result:	Pass			De	etector		P	K			
dB Bandwidth		2.014MHz					-	-			
	Mark	er 1 [T1	ndB]	RBW	100 k	Hz RF	= Att	10 dB			
Ref Lvl	ndB		.00 dB	VBW	100 k						
107 dBμV 107	ВИ	2.01402	806 MHz	SWT	5 m	s Ur	⊓it	$dB\mu$	V		
107									-		
100								1	┨		
			1								
90			1	$\overline{}$				1	1		
				\							
80			<b>Y</b>	h	\				-		
1MAX		T 1			W				11		
70	al	7			Two	<u> </u>			┨"		
						hy					
60	-						~ ~		1		
Augusta Comment	~ [/]					4	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \				
50							,	M 4 /	~		
40											
30											
20											
20											
4.0											
10									1		

Page 25 of 34

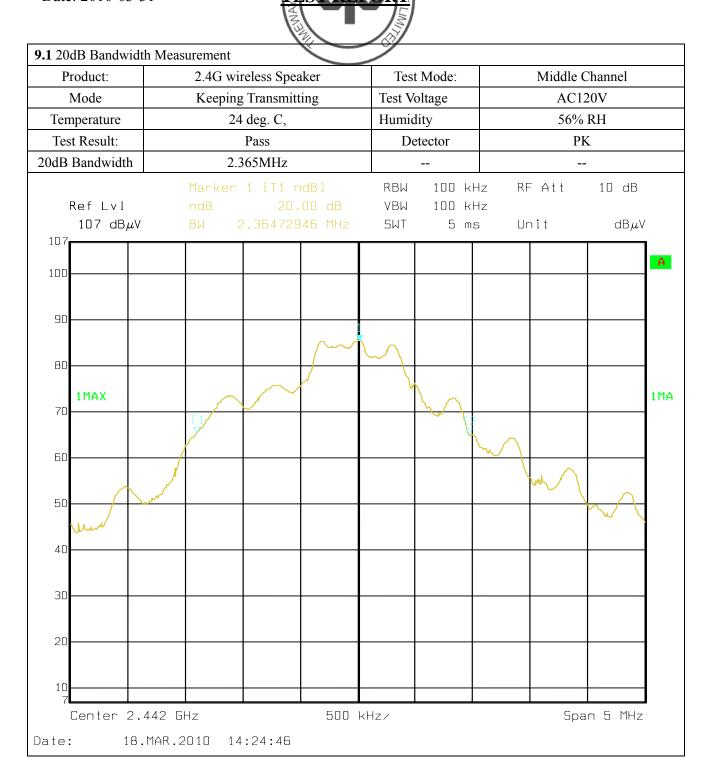

Page 26 of 34

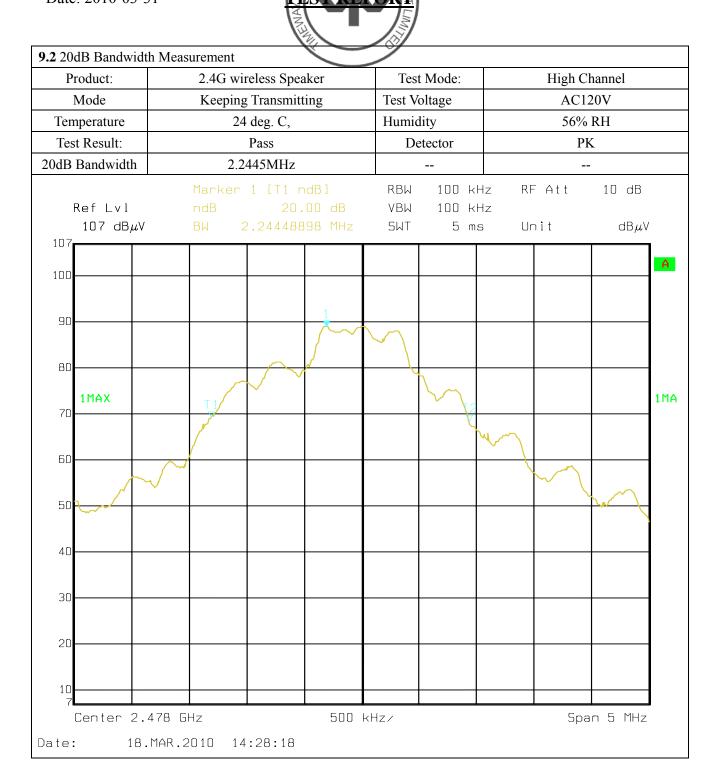

Page 27 of 34

Report No: 1003251 Date: 2010-03-31




#### 10.0 FCC ID Label

# FCC ID: YAOMD2010

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**

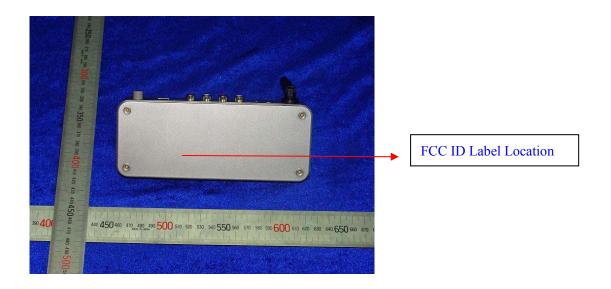

Report No: 1003251 Date: 2010-03-31




#### 11.0 Photo of testing

#### 11.1 Conducted test View--



#### 11.2 Radiated emission test view

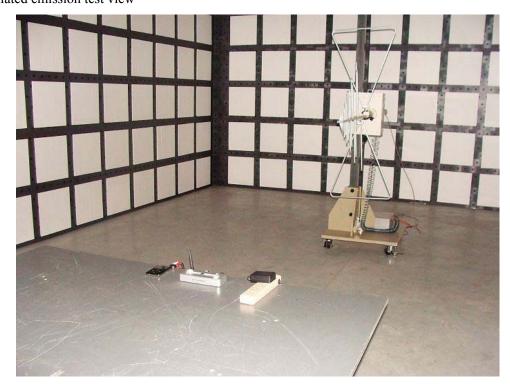

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 29 of 34

Report No: 1003251 Date: 2010-03-31



#### 11.3 Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No: 1003251 Date: 2010-03-31



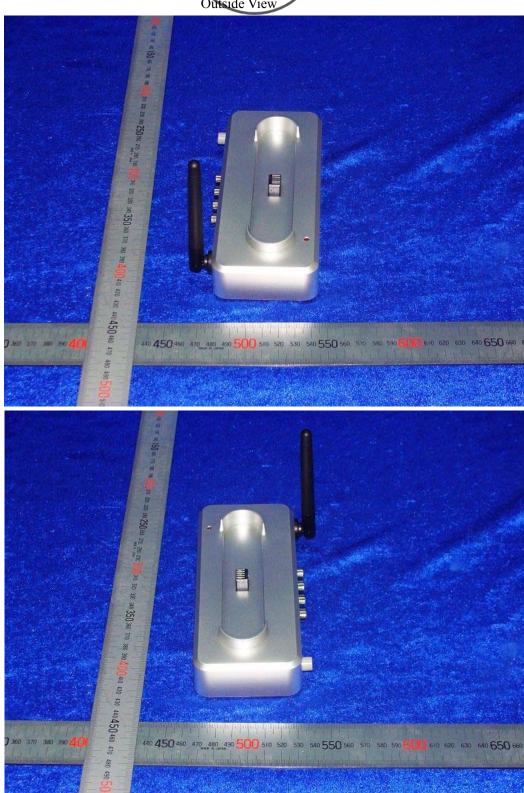

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 31 of 34

Report No: 1003251 Date: 2010-03-31







The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Page 32 of 34

Report No: 1003251 Date: 2010-03-31





Interior View-TX

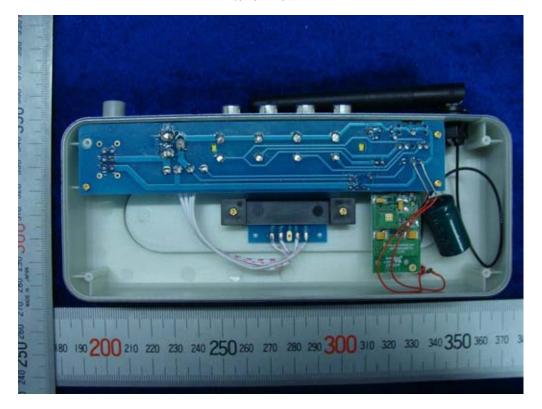

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 33 of 34



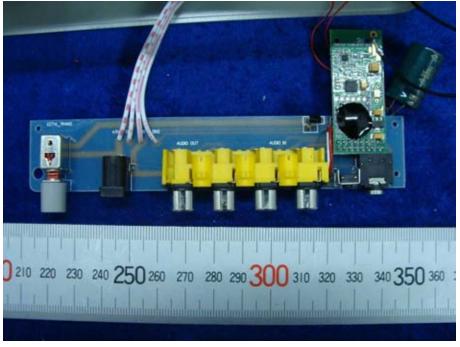


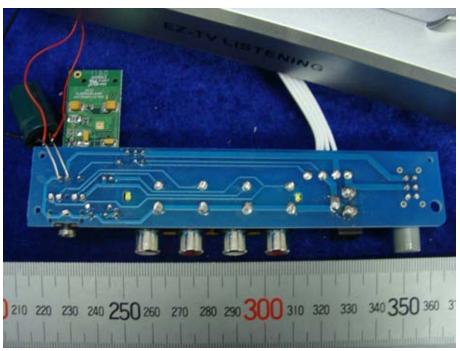

Page 34 of 34

Report No: 1003251 Date: 2010-03-31



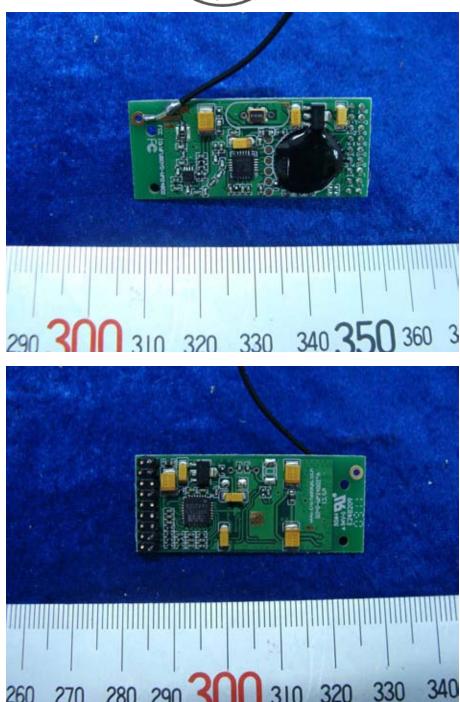

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to