



		A - Surf	ace Measureme	ent Points		
Number	Nominal Dimension			Tolerance		
	X	Y	Z	Χ	Y	Z
MP03	139.500	82.000	60.224			<u>+</u> 0.4
MP06	128.000	-42.000	60.462			<u>+</u> 0.4
MP10	-128.00	-42.000	60.462			± 0.4
MP13	-139.500	82.000	60.224			± 0.4
MP15	v O a O O O	81.765	65.000		<u>+</u> 0 . 4	
MP19	137.497	40.500	61.500	<u>+</u> 0.4		
MP24	° 0 ° 000	-44.810	63.500		<u>+</u> 0.4	
MP29	-137.497	40.500	61.500	± 0 a 4		

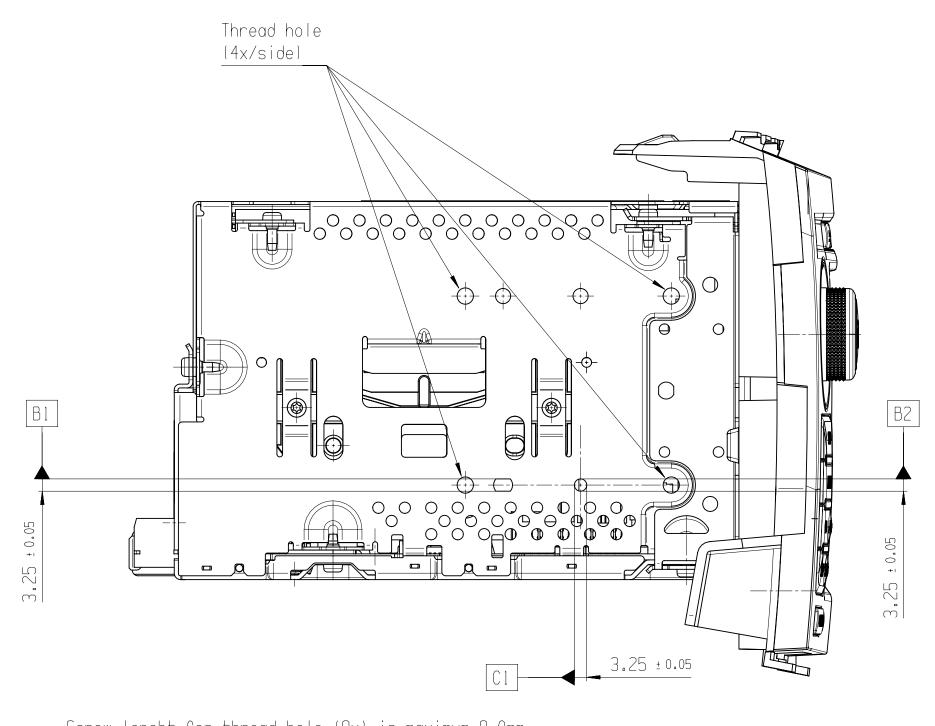

Screw lenght for thread hole (8x) is maximum 8.0mm Maximum torque 162 N.cm

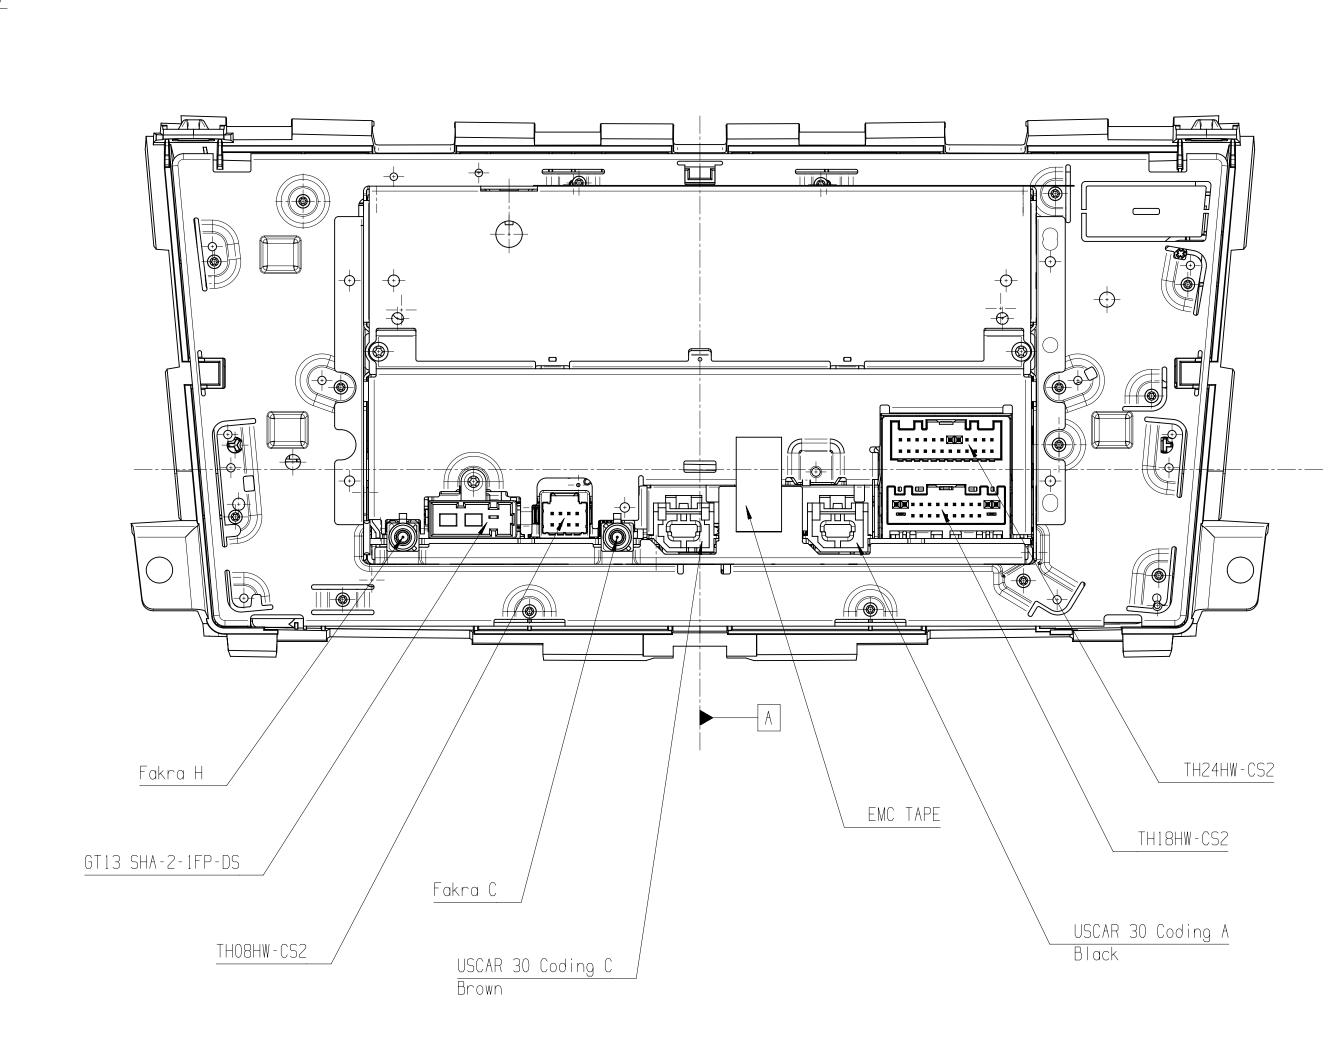

The component parts must be marked with the following notes: production date adjuster, cavity-no. (plastic parts), change-index, material, part-no.; position and way of marking in accordance with CM/dev. Dep.

Part has to correspond with the Bosch standard N 2580-1

Size acc. to / Masse nach

ISO 14405-1:2010-12