

TEST REPORT

No.: 18-1-0248301T06a_C1

According to:

CFR Title 47, Part 15, Subpart E
§15.407 (U-NII)

ISED-Regulations
RSS-Gen, Issue 5
RSS-247, Issue 2

for

Robert Bosch Car Multimedia GmbH

AIVIV10
Multimedia device with Bluetooth and WLAN

FCC ID: YBN-AIVIV10
ISED: 9595A-AIVIV10



Laboratory Accreditation
<div style="text-align: center;"><p>Deutsche Akkreditierungsstelle D-PL-12047-01-01 D-PL-12047-01-03 D-PL-12047-01-04</p></div>
accredited according to DIN EN ISO/IEC 17025
<p style="text-align: center;">CETECOM GmbH Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com</p>
Laboratory Accreditation

Table of Contents

1. SUMMARY OF TEST RESULTS.....	4
1.1. Tests measurement overview according to US CFR Title 47, Subpart 15E and Canada RSS-247	4
1.2. Attestation.....	7
2. ADMINISTRATIVE DATA	8
2.1. Identification of the testing laboratory	8
2.2. Test location	8
2.3. Organizational items	8
2.4. Applicant's details	8
2.5. Manufacturer's details	8
3. EQUIPMENT UNDER TEST (EUT).....	9
3.1. Certification Data of Main EUT declared by Applicant	9
3.2. WLAN 5 GHz 802.11a/n Technical Data Of Main EUT as Declared by Applicant	10
3.3. EUT: Type, S/N etc. and short descriptions used in this test report	11
3.4. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions	11
3.5. EUT set-ups	11
3.6. EUT operating modes	12
3.7. EUT Test Settings.....	13
3.8. Worst case identification	14
4. DESCRIPTION OF TEST SYSTEM SET-UP'S	15
4.1. Test system set-up for conducted measurements on antenna port	15
4.2. Test system set-up for radiated magnetic field measurements below 30 MHz.....	17
4.3. Test system set-up for radiated electric field measurement 30 MHz to 1 GHz	18
4.4. Test system set-up for radiated electric field measurement above 1 GHz	19
5. MEASUREMENTS	20
5.1. Duty-Cycle.....	20
5.2. General Limit – Maximum power output conducted and maximum EIRP power.....	21
5.3. RF Parameter – 6dB, 26 dB minimum Emission Bandwidth and 99% occupied Bandwidth.....	26
5.4. RF Parameter – Power Spectral Density (PSD).....	30
5.5. RF-Parameter – Frequency Stability.....	35
5.6. General Limit - Radiated field strength emissions below 30 MHz.....	37
5.7. General Limit - Radiated field strength emissions, 30 MHz - 1 GHz.....	40
5.8. General Limit - Radiated emissions, above 1 GHz.....	44
5.9. RF-Parameter - Radiated Band-Edge compliance measurements.....	48
5.10. Measurement uncertainties	51
6. ABBREVIATIONS USED IN THIS REPORT	52
7. ACCREDITATION DETAILS OF CETECOM'S LABORATORIES AND TEST SITES	52
8. INSTRUMENTS AND ANCILLARY	53
8.1. Used equipment "CTC"	53
9. VERSIONS OF TEST REPORTS (CHANGE HISTORY)	57
END OF TEST REPORT	57

Table of Annex			
Annex No.	Contents	Reference Description	Total Pages
Annex 1 (Part 1)	Test results	CETECOM_TR18_1_0248301T06a_A1_Part1	125
Annex 1 (Part 2)	Test results	CETECOM_TR18_1_0248301T06a_A1_Part2	79
Annex 1 (Part 3)	Test results	CETECOM_TR18_1_0248301T06a_A1_Part3	61
Annex 1 (Part 4)	Test results	CETECOM_TR18_1_0248301T06a_A1_Part4	52
Annex 2	External photographs of EUT *)	CETECOM_TR18_1_0248301T08a_A2	8
Annex 3	Test set-up photographs	CETECOM_TR18_1_0248301T08a_A3	7
The listed attachments are an integral part of this report. *) For Internal photographs of EUT, see applicant's documentation			

1. Summary of test results

The test results apply exclusively to the test samples as presented in this report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests. Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

The presented Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency technologies with WLAN technology and operating frequency range at 5.150 to 5.850 GHz according to IEE 802.11 a. The EUT integrates a WLAN transmitter. Other implemented wireless technologies were not considered within this test report.

Following test cases have been performed to show compliance with valid Part 15.407/15.209 of the FCC CFR Title 47 Rules, Edition 2018 and ISSED RSS-247 Issue 2/RSS-Gen Issue 5 standards.

1.1. Tests measurement overview according to US CFR Title 47, Subpart 15E and Canada RSS-247

Test cases	Port	References and Limits			EUT set-up	EUT op. mode	Result
		FCC Standard	RSS Standard	Test limit			
TX-Mode							
99% occupied bandwidth	Antenna terminal (conducted)	2.1049(h)	RSS-Gen, Issue 5 Chapter 6.6	99% Power bandwidth	2	1	Pass
26 dB bandwidth	Antenna terminal (conducted)	§15.303 + §15.407(a)(2)(5)	RSS-Gen, Issue 5 Chapter 6.6	26 dB spectral density bandwidth	2	1	Pass
Duty-Cycle	Antenna terminal (conducted)	KDB789033 + ANSI C63.10:2013	KDB789033 + ANSI C63.10:2013	No Limit Criteria	2	1	Pass
Transmitter frequency stability	Antenna terminal (conducted)	§ 2.1055 + §15.407(g)	RSS-Gen, Issue 5: Chapter 6.11	Operation within designated operational band	2	1	Pass

Maximum output power	Antenna terminal (conducted)	§15.407(a) (1)(iv) 5.15-5.25 GHz Client devices (2) 5.25-5.35 GHz & 5.47-5.725 GHz (3) 5.725-5.85 GHz	RSS-247, Issue 2 Chapter 6.2.1.1 6.2.2.1 6.2.3.1 6.2.4.1	Power Limits (if Antenna Gain < 6 dBi) 250 mW lesser of 250 mW or 11 dBm+10logB 1 W	2	1	Pass
Peak Power Spectral density	Antenna terminal (conducted)	§15.407(a) (1)(iv) 5.15-5.25 GHz Client devices (2) 5.25-5.35 GHz & 5.47-5.725 GHz (3) 5.725-5.85 GHz	RSS-247, Issue 2 Chapter 6.2.1.1 6.2.2.1 6.2.3.1 6.2.4.1	Power Spectral Density Limits (if Antenna Gain < 6 dBi) 11 dBm/MHz 11 dBm/MHz 30 dBm/500 kHz	2	1	Pass
Maximum e.i.r.p. power	Antenna terminal (conducted) + Antenna Gain	§15.407(a) (1)(iv) 5.15-5.25 GHz Client devices (2) 5.25-5.35 GHz & 5.47-5.725 GHz (3) 5.725-5.85 GHz	RSS-247, Issue 2 Chapter 6.2.1.1 6.2.2.1 6.2.3.1 6.2.4.1	e.i.r.p. Limits (if Antenna Gain < 6 dBi) 250 mW + 6 dBi lesser of 250 mW or 11 dBm+10logB + 6 dBi 1 W + 6 dBi	2	1	Pass
Antenna gain information	Antenna terminal (conducted)	§15.407(a) (1)(2)(3)	RSS-247, Issue 2 chapter 6.2.1.1 6.2.2.1 6.2.3.1 6.2.4.1	< 6 dBi or if Antenna directional Gain > 6 dBi reduction of Max. power & power spectral density by the amount in dB that the directional gain of the antenna exceeds 6 dBi	--	--	Measured Antenna Gain.*1)

General field strength emissions within restricted bands + Band-Edge compliance radiated	Enclosure + Inter-connecting cables (radiated)	§ 15.407(b) (1)(2)(3)(4)(5)(6) (7)(8) § 15.205 + § 15.209	RSS-Gen, Issue 5 + RSS-247, Issue 2 Chapter 6.2.1.2 , 6.2.2.2 6.2.3.2, + 6.2.4.2 RSS-Gen, Issue 5 + RSS-247, Issue 2 Chapter 6.2.1.2 , 6.2.2.2 6.2.3.2, + 6.2.4.2	5150-5250 MHz 5250-5350 MHz 5470-5725 MHz all emissions outside operating band shall not exceed -27 dBm/MHz e.i.r.p. 5725-5850 MHz Spectrum Mask acc. to (4)(i) Restricted band limits + General field strength limits	1-4	1-4	Pass
Transmit power control + Dynamic frequency selection (DFS)	Antenna terminal (conducted)	§ 15.407 (h1)(h2)	RSS-Gen, Issue 5 + RSS-247, Issue 2 Chapter 6.3	Requirements: Passive client	2	3	Pass *2)
Discontinuous transmissions + Device security	FIRMWARE	§ 15.407(c) + § 15.407(i)	RSS-247, Issue 2 Chapter 6.4 a + b + c	No transmissions in case of either absence of information to transmit or operational failure + Protection of firmware by unauthorized parties	--	--	Not tested Applicants declaration of implementation
AC-Power Lines Conducted Emissions	AC-Power lines or Battery Charger	§ 15.207(a)	RSS-Gen, Issue 5 : Chapter 8.8 Table 2	AC Power line conducted limits	--	--	Not applicable

Remark:

*1) Please refer to Test report TR18-1-0248301T11a

*2) Please refer to separate FCC RF Test Report CETECOM_18-1-0248302T03a

RF-Exposure Evaluation (separation distance user to RF-radiating element greater 20cm)							
Test cases	Port	References & Limits			EUT set-up	EUT Op mode	Result
		FCC Standard	RSS Section	Test Limit			
Radio frequency radiation exposure requirements	Cabinet + Inter-connecting cables (radiated)	§1.1310(b) §2.1091 §2.1093	RSS-102 Issue 5	SAR-Limits FCC: 1.1310(b)	1	1	See separate test reports CETECOM_ TR18-1- 0248301T09a
				RF-Field Strength Limits: FCC: “general population/uncontrolled” environment Table 1 ISED: Table 4	1	1	

1.2. Attestation

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Innovation , Science and Economic Development (ISED) Canada standards. All requirements as shown in above table are met in accordance with enumerated standards.

The current version of the Test Report CETECOM_TR18-1-0248301T06a_C1 replaces the Test Report CETECOM_TR18-1-0248301T06a dated 2019-10-24. The replaced test report is herewith invalid.

.....
Dipl. Ing. C. Lorenz
Responsible for test section

.....
B.Sc. M. Ahmed
Responsible for test report

2. Administrative Data

2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Volker Wittmann
Deputy:	Dipl.-Ing. Niels Jeß

2.2. Test location

2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	---

2.3. Organizational items

Responsible for test report and Project leader:	B.Sc. M. Ahmed
Receipt of EUT:	2019-06-20
Date(s) of test:	2019-07-01 - 2019-07-25
Date of report:	2019-10-31

Version of template:	13.02

2.4. Applicant's details

Applicant's name:	Robert Bosch Car Multimedia GmbH
Address:	Robert-Bosch-Straße 200 31139 Hildesheim Germany
Contact :	Mr. Dirk Zamow

2.5. Manufacturer's details

Manufacturer's name:	see applicant's details
Address:	see applicant's details

3. Equipment under test (EUT)

3.1. Certification Data of Main EUT declared by Applicant

Model No.	AIVIV10	
Type	Multimedia device with Bluetooth and WLAN	
FCC ID	YBN-AIVIV10	
IC/ ISED	9595A-AIVIV10	
Type of modulation	See chapter 3.2	
Antenna Type	<input checked="" type="checkbox"/> Integrated <input type="checkbox"/> External, no RF- connector <input type="checkbox"/> External, separate RF-connector	
Antenna Model	PCB Antenna	
Antenna Gain*1)	U-NII-1	2.8 dBi
	U-NII-2A	3.7 dBi
	U-NII-2C	-0.8 dBi
	U-NII-3	0.7 dBi
MIMO	<input checked="" type="checkbox"/> no: SISO <input type="checkbox"/> yes: --	
ISED device category	<input checked="" type="checkbox"/> OEM device installed in vehicles <input type="checkbox"/> Device for Indoor use only <input type="checkbox"/> Outdoor fixed device	
Max. Conducted Output Power	RMS [dBm]	
U-NII-1	802.11a: 8.1 802.11n20: 8.2 802.11ac20: 3.8 802.11n40: 7.6 802.11ac40: 3.4 802.11ac80: 2.8	
U-NII-2A	802.11a: 7.9 802.11n20: 8 802.11ac20: 3.6 802.11n40: 7.6 802.11ac40: 3.4 802.11ac80: 3	
U-NII-2C	802.11a: 8.7 802.11n20: 8.8 802.11ac20: 4.7 802.11n40: 8.98 802.11ac40: 4.8 802.11ac80: 4	
U-NII-3	802.11a: 9.09 802.11n20: 9.01 802.11ac20: 4.88 802.11n40: 8.5 802.11ac40: 4.6 802.11ac80: 4.5	
Additional Installed options	<input checked="" type="checkbox"/> 802.11 b/g/n (not tested within this report) <input checked="" type="checkbox"/> Bluetooth EDR (not tested within this report)	
Power supply	<input checked="" type="checkbox"/> Nominal Test Voltage : 13.5 V DC with external power supply	

*1) Please refer to Test report TR18-1-0248301T11a.

3.2. WLAN 5 GHz 802.11a/n Technical Data Of Main EUT as Declared by Applicant

Firmware Version	--		
Frequency Channel B.W. (USA and Canada bands)*	U-NII 1: 5150-5250 MHz	<input checked="" type="checkbox"/> Ch. 36 40 44 48	<input checked="" type="checkbox"/> Bandwidth 20 MHz
		<input checked="" type="checkbox"/> Ch. 38 46	<input checked="" type="checkbox"/> Bandwidth 40 MHz
		<input checked="" type="checkbox"/> Ch. 42	<input checked="" type="checkbox"/> Bandwidth 80 MHz
	U-NII2A: 5250-5350 MHz	<input checked="" type="checkbox"/> Ch. 52 56 60 64	<input checked="" type="checkbox"/> Bandwidth 20 MHz
		<input checked="" type="checkbox"/> Ch. 54 62	<input checked="" type="checkbox"/> Bandwidth 40 MHz
		<input checked="" type="checkbox"/> Ch. 58	<input checked="" type="checkbox"/> Bandwidth 80 MHz
	U-NII 2C: 5470-5725 MHz	<input checked="" type="checkbox"/> Ch. 100 104 108	<input checked="" type="checkbox"/> Bandwidth 20 MHz
		<input checked="" type="checkbox"/> Ch. 112 116 120	
		<input checked="" type="checkbox"/> Ch. 124 128 132	
		<input checked="" type="checkbox"/> Ch. 136 140	<input checked="" type="checkbox"/> Bandwidth 40 MHz
		<input checked="" type="checkbox"/> Ch. 102 110 118	
		<input checked="" type="checkbox"/> Ch. 126 134	
	U-NII 3: 5725 -5850 MHz	<input checked="" type="checkbox"/> Ch. 106 122	<input checked="" type="checkbox"/> Bandwidth 80 MHz
		<input checked="" type="checkbox"/> Ch. 149 153 157	<input checked="" type="checkbox"/> Bandwidth 20 MHz
		<input checked="" type="checkbox"/> Ch. 161 165	<input checked="" type="checkbox"/> Bandwidth 40 MHz
<input checked="" type="checkbox"/> Ch. 151 159		<input checked="" type="checkbox"/> Bandwidth 40 MHz	
<input checked="" type="checkbox"/> Ch. 155		<input checked="" type="checkbox"/> Bandwidth 80 MHz	
Canada Only RSS 247 - Section 6.2.3	*) Until further notice, devices subject to this section shall not be capable of transmitting in the band 5600-5650 MHz.		
Operational Mode of EUT regarding DFS	<input type="checkbox"/> Master <input checked="" type="checkbox"/> Client without RADAR detection <input type="checkbox"/> Client with radar detection		
802.11a – Mode OFDM Modulation Data Rates	<input checked="" type="checkbox"/> BPSK 6 Mbps / 9 Mbps <input checked="" type="checkbox"/> QPSK 12 Mbps / 18 Mbps <input checked="" type="checkbox"/> 16-QAM 24 Mbps / 36 Mbps <input checked="" type="checkbox"/> 64-QAM 48 Mbps / 54 Mbps		
802.11n – Mode OFDM Modulation Data Rates	<input checked="" type="checkbox"/> HT20 (MCS0 – MCS7) 7.2/14.4/21.7/28.9/43.3/57.8/65/72.2 Mbps <input checked="" type="checkbox"/> HT40 (MCS0 – MCS7) 15/30/45/60/90/120/135/150 Mbps		
802.11ac – Mode OFDM Modulation Data Rates	<input checked="" type="checkbox"/> HT20 (MCS0 – MCS9) 7.2/14.4/21.7/28.9/43.3/57.8/65/72.2 Mbps <input checked="" type="checkbox"/> HT40 (MCS0 – MCS9) 15/30/45/60/90/120/135/150 Mbps <input checked="" type="checkbox"/> HT80 (MCS0 – MCS9) 7.2/14.4/21.7/28.9/43.3/57.8/65/72.2 Mbps		
Power Supply	<input checked="" type="checkbox"/> Nominal Test Voltage : 13.5 V DC with external power supply		
Special EMI Components	--		
EUT sample type	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering
FCC label attached	<input type="checkbox"/> yes	<input checked="" type="checkbox"/> no	
ISED Certification Number attached:	<input type="checkbox"/> yes	<input checked="" type="checkbox"/> no	

*) Restricted Band of operation from 5600-5650 MHz.for Canada This restriction is for the protection of Environment. Canada's weather radars operating in this band.

3.3. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A S06	AIVIV10	Multimedia device with Bluetooth and WLAN	0005057	001	1049
EUT B S04	AIVIV10	Multimedia device with Bluetooth and WLAN	0005015	001	1049

*) EUT short description is used to simplify the identification of the EUT in this test report.

3.4. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	USB-cable (Dongle)	0.38 m	S7291GC000379	Version-D1	--
AE 2	Power Supply Cable	--	--	--	--
AE 3	Notebook	Lenovo X200S	LVZT1DG	--	--
AE 4	WLAN router	Nighthawk(R) X4S	5K5188590067B	R7800	V1.0.2.46
AE 5	Smartphone	Samsung S8	--	--	Android 9

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

3.5. EUT set-ups

EUT set-up no. *)	Combination of EUT and AE	Description
set. 1	EUT A + AE 1 + AE 2 + AE 3	Radiated measurement set-up
set. 2	EUT B + AE 1 + AE 2 + AE 3	Conducted measurement set-up
set. 3	EUT B + AE 1 + AE 2 + AE 3 + AE 4 + AE 5	Radiated measurement set-up for simultaneous transmissions mode

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

3.6. EUT operating modes

EUT operating mode no.*1)	Description of operating modes	Additional information
op. 1	TX-Mode Burst 20 MHz	With help of special test firmware WLAN is switched to a bandwidth of 20 MHz and a continuous traffic mode. (duty cycle >98%)
op. 2	TX-Mode Burst 40 MHz	With help of special test firmware WLAN is switched to a bandwidth of 40 MHz and a continuous traffic mode. (duty cycle >98%)
op. 3	TX-Mode Burst 80 MHz	With help of special test firmware WLAN is switched to a bandwidth of 80 MHz and a continuous traffic mode. (duty cycle >98%)
op. 4	WLAN and Bluetooth normal operating mode	WLAN Setup: With help of AE4 and iPerf a continuous transmission was established based on W-LAN 5GHz Channels. Bluetooth: with help of AE5 a music song was played in a continuous loop.

*1) EUT operating mode no. is used to simplify the test report.

*2) Please refer to document "Instructions_RadioTypeApproval_9_6_2017" dated 2017-06-09 for additional information regarding operating mode setup and output power levels.

3.7. EUT Test Settings.

3.7.1. Test tool information

Labtool version: 2.0.0.75


Labtool date: Mar 18 2015 (15:56:06)

The following settings have been done under SW Labtool:

Make the main settings which only have to be set once (per session):

30 0 (Choose the 2,4G band) or 30 1 (Choose the 5G band)

112 0 (20 MHz Bandwidth) or 112 1 (40 MHz Bandwidth) or 112 4 (80 MHz Bandwidth)

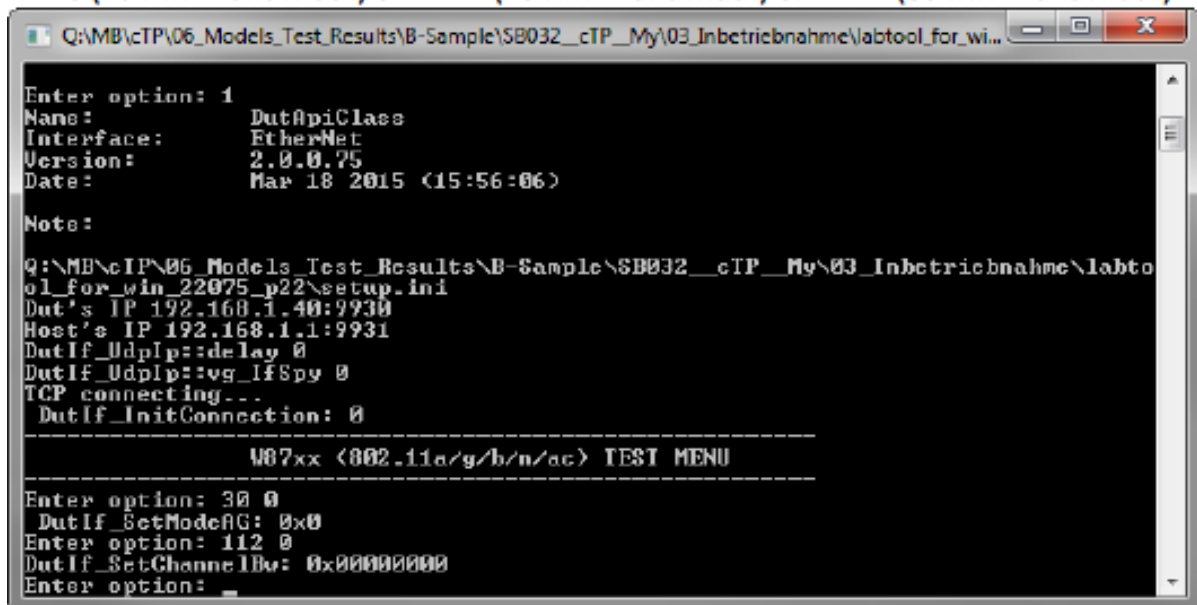

```

Q:\MB\cTP\06_Models_Test_Results\B-Sample\SB032_cTP_My\03_Inbetriebnahme\labtool_for_wi...
Enter option: 1
Name:          DutApiClass
Interface:     EtherNet
Version:       2.0.0.75
Date:         Mar 18 2015 (15:56:06)

Note:
Q:\MB\cTP\06_Models_Test_Results\B-Sample\SB032_cTP_My\03_Inbetriebnahme\labto
ol_for_win_22075_p22\setup.ini
Dut's IP 192.168.1.40:9930
Host's IP 192.168.1.1:9931
DutIf_UdpIp::delay 0
DutIf_UdpIp::vg_lfSpy 0
TCP connecting...
DutIf_InitConnection: 0

-----
W87xx (802.11a/g/b/n/ac) TEST MENU
-----
Enter option: 30 0
DutIf_SetModeAG: 0x0
Enter option: 112 0
DutIf_SetChannelBw: 0x00000000
Enter option: _
  
```

Now the parameters for Channel, Power level and modulation group has to be done:

22 1 14 0



```

Enter option: 22 1 17 0
DutIf_SetRfChannel: 0x0
DutIf_SetRfPowerCal: 0x0
Enter option:
  
```

For 802.11b the Power level is always 14 and the modulation group is 0

For 802.11g the Power level is always 11 and the modulation group is 1

For 802.11n (2,4GHz) the Power level is always 11 and the modulation group is 1

For 802.11n (5GHz) the Power level is always 10 and the modulation group is 1

For 802.11a the Power level is always 10 and the modulation group is 1

For 802.11ac the Power level is always 6 and the modulation group is 1

If a continuous burst is required use instead of the command 25 the command 17:

17 1 4

```
Enter option: 17 1 4
DutIf_SetTxDataRate: 0x00000000
TRPC ID: 2
DutIf_SetTxContMode: 0x00000000
Enter option:
```

11b		11g/a		11n		11ac	
ID	DataRate	ID	DataRate	ID	DataRate	ID	DataRate
1	1M	6	6M	15	MCS0	101	VHT_SS1_MCS0
2	2M	7	9M	16	MCS1	102	VHT_SS1_MCS1
3	5.5M	8	12M	17	MCS2	103	VHT_SS1_MCS2
4	11M	9	18M	18	MCS3	104	VHT_SS1_MCS3
		10	24M	19	MCS4	105	VHT_SS1_MCS4
		11	36M	20	MCS5	106	VHT_SS1_MCS5
		12	48M	21	MCS6	107	VHT_SS1_MCS6
		13	54M	22	MCS7	108	VHT_SS1_MCS7
						109	VHT_SS1_MCS8
						110	VHT_SS1_MCS9

In order to stop the TX:

17 0

```
Enter option: 17 0
DutIf_SetTxContMode: 0x00000000
Enter option:
```

3.8. Worst case identification

The following WLAN modes were selected as worst cases on the basis of Max transmitted power*.

WLAN Mode	Data Rate
802.11a	9 Mbps
802.11n, 20 MHz bandwidth	MCS3
802.11ac, 20 MHz bandwidth	MCS3
802.11n, 40 MHz bandwidth	MCS3
802.11ac, 40 MHz bandwidth	MCS9
802.11ac, 80 MHz bandwidth	MCS7

*) Please refer to Chapter 5.2 for the Power measurements results.

4. Description of test system set-up's

4.1. Test system set-up for conducted measurements on antenna port


Conducted Set-up W1

Conducted RF-Setup 1 (W1 Set-up)

General description:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to the power meter (3) for conducted power measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings.

Schematic:

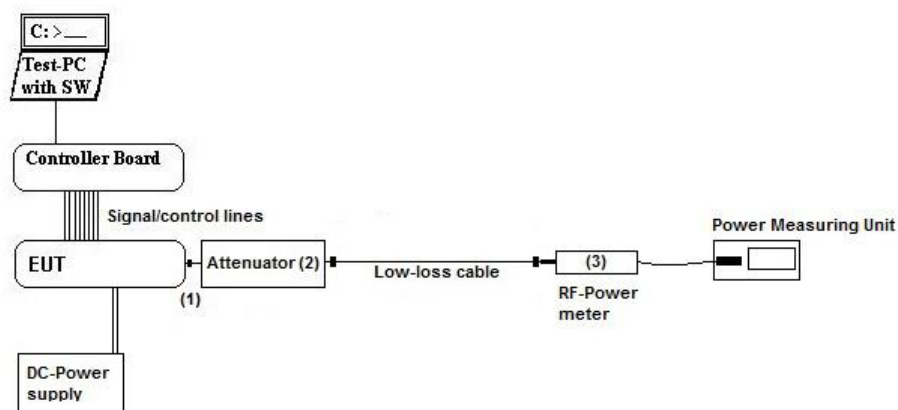

Testing method:

ANSI C63.10:2013,
KDB 789033 D02 General UNII Test Procedures New Rules v01r04

Used Equipment

Passive Elements	Test Equipment	Remark:
<input checked="" type="checkbox"/> 20 dB Attenuator	<input checked="" type="checkbox"/> Power Meter	See List of equipment under each test case and chapter 8 for calibration info
<input checked="" type="checkbox"/> Low loss RF-cables	<input checked="" type="checkbox"/> DC-Power Supply	
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Spectrum-Analyser	

Measurement uncertainty

See chapter 5.7


Conducted Set-up W2

Conducted RF-Setup 2 (W2 Set-up)

General description:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings of the spectrum-analyzer.

Schematic:

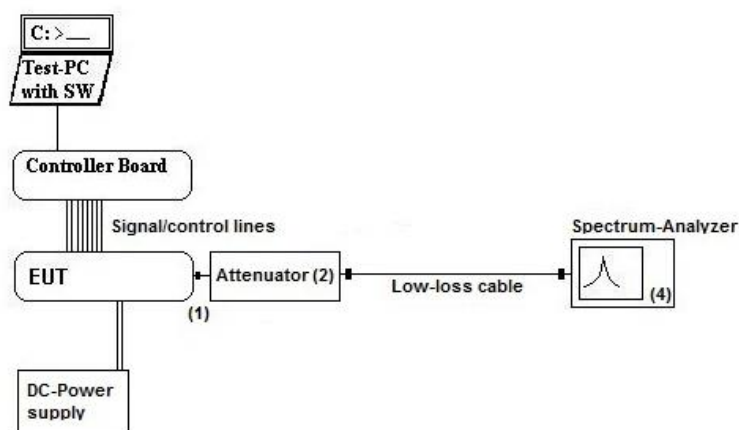

Testing method:

ANSI C63.10:2013,
KDB 789033 D02 General UNII Test Procedures New Rules v01r04

Used Equipment

Passive Elements	Test Equipment	Remark:
<input checked="" type="checkbox"/> 20 dB Attenuator	<input checked="" type="checkbox"/> Power Meter	See List of equipment under each test case and chapter 8 for calibration info
<input checked="" type="checkbox"/> Low loss RF-cables	<input checked="" type="checkbox"/> DC-Power Supply	
	<input checked="" type="checkbox"/> Spectrum-Analyzer	

Measurement uncertainty

See chapter 5.7


4.2. Test system set-up for radiated magnetic field measurements below 30 MHz

Specification: ANSI C63.4-2014 §5.3, §8.2.1, §8.3.1.1+§8.3.2.1 , ANSI C63.10-2013 chapter 6.4 (§6.4.4.2)

General Description: Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter “General Limit - Radiated field strength emissions below 30 MHz“. The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

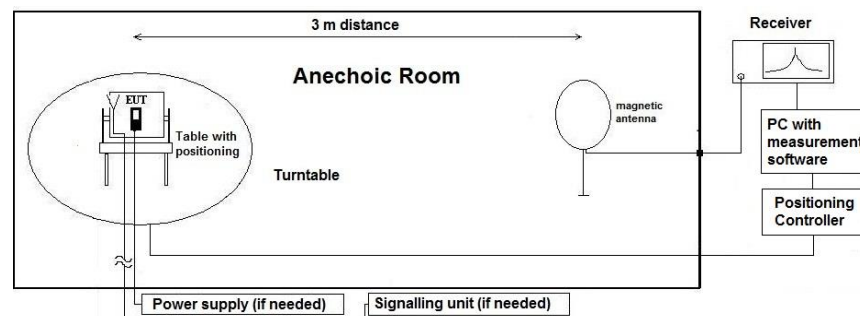

Testing method:

Exploratory, preliminary measurement

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded. The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

Distance correction:

Reference for applied correction (extrapolating) factors due to reduced measurement distance:


ANSI C63.10:2013, §6.4.4.2 - Equations (2) + (3) + (4)

4.3. Test system set-up for radiated electric field measurement 30 MHz to 1 GHz

Specification: ANSI C63.4-2014 chapter 8.2.3, ANSI C63.10-2013 chapter 6.5

General Description: Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a NSA-compliant semi anechoic room (SAR) recognized by the regulatory commissions.

Schematic:

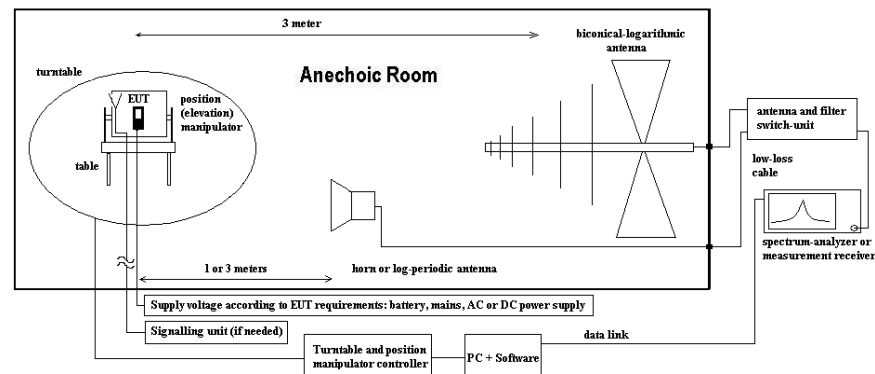

Testing method:

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin


All units are dB-units, positive margin means value is below limit.

4.4. Test system set-up for radiated electric field measurement above 1 GHz

Specification: ANSI C63.4-2014 chapter 8.3, ANSI C63.10-2013 chapter 6.6.3.3 & 6.6.4

General Description: Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 18-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

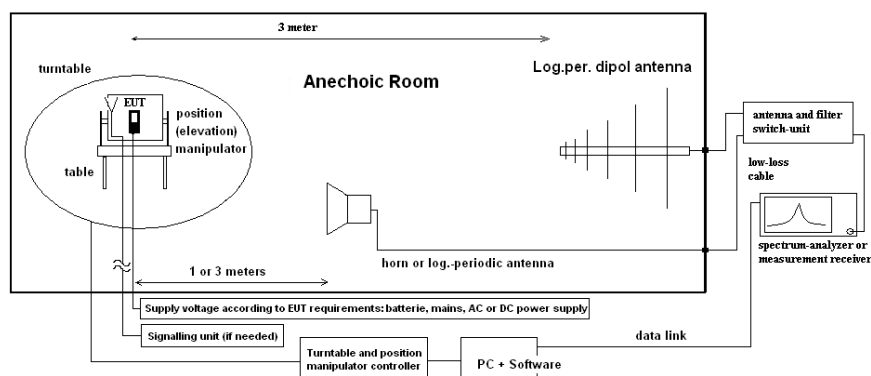

Testing method:

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 15°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and it's characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined. Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out. On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

E_C = Electrical field – corrected value

E_R = Receiver reading

M = Margin

L_T = Limit

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

G_A = Gain of pre-amplifier (if used)

All units are dB-units, positive margin means value is below limit.

5. Measurements

5.1. Duty-Cycle

5.1.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

Ambient Climatic conditions			Temperature: (22±2)° C		Rel. humidity: (45±15)%	
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 348 EMI cond.	<input type="checkbox"/> 443 EMI FAR	<input type="checkbox"/> 347 Radio.lab.	<input type="checkbox"/> 337 OATS	<input checked="" type="checkbox"/> TS 8997
equipment	<input type="checkbox"/> 331 HC 4055	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
spectr. analys.	<input checked="" type="checkbox"/> 683 FSU26	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
power meter	<input type="checkbox"/> 262 NRV-S	<input type="checkbox"/> 266 NRV-Z31	<input type="checkbox"/> 265 NRV-Z33	<input type="checkbox"/> 261 NRV-Z55	<input type="checkbox"/> 356 NRV-Z1	<input type="checkbox"/>
multimeter	<input type="checkbox"/> 341 Fluke 112	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DC power	<input type="checkbox"/> 086 LNG50-10	<input type="checkbox"/> 087 EA3013	<input type="checkbox"/> 354 NGPE 40	<input type="checkbox"/> 349 car battery	<input type="checkbox"/> 350 Car battery	<input checked="" type="checkbox"/> 463 HP3245A
line voltage	<input checked="" type="checkbox"/> 13.5 V DC		<input type="checkbox"/> 060 120 V 60 Hz via PAS 5000			
otherwise	<input type="checkbox"/> 530 Attenuator 10dB	<input checked="" type="checkbox"/> K4 Cable				

The necessary duty-cycle correction factor is determined on nominal conditions on one channel in each operable frequency-band. It is assumed that no noticeable changes occur when tested on other channels or climatic conditions. The Duty-Cycle was constant, means without variations.

WLAN 5	Marker 1	Marker 2	TX ON Marker 2 - Marker 1	TX OFF Marker 3 - Marker 2	Duty Cycle	Correction- Factor: 10log(1/DC)
Data Rate	ms	ms	ms	ms	(%)	(dB)
WLAN 5GHz_ Low Channel (CH-36)						
a-mode_9Mbps	575.28846	578.65385	575.28846	3.36538	0.99418	0.02533
ac-mode_MCS3	472.08333	475.64103	472.08333	3.55770	0.99252	0.03261
n-mode_MCS3	575.28800	578.84615	575.28800	3.55815	0.99385	0.02678

5.1.2. Results

Duty cycle calculations: $x = \frac{TX_{ON}}{TX_{ON} + TX_{OFF}}$	Duty cycle factor: DC=	Regarding power: $10 * \log\left(\frac{1}{x}\right)$ dB
		Regarding field strength: $20 * \log\left(\frac{1}{x}\right)$ dB

- ☐ The results were corrected in order to evaluate for worst-case result each time when average values are necessary for example average radiated emissions or similar
- ☒ No correction necessary: Duty-Cycle > 98%

5.2. General Limit – Maximum power output conducted and maximum EIRP power

5.2.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> 443 System CTC-FAR-EMI-	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 347 Radio.lab.
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input checked="" type="checkbox"/> TS 8997
spectr. analys.	<input checked="" type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 489 ESU 40
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input type="checkbox"/> 547 CMU
otherwise	<input type="checkbox"/> 266 NRV-Z31	<input type="checkbox"/> 600 NRVD	<input type="checkbox"/> 110 USB LWL
DC power	<input checked="" type="checkbox"/> 671 EA-3013S	<input type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 459 EA 2032-50
otherwise	<input type="checkbox"/> 331 HC 4055	<input type="checkbox"/> 248 6 dB Attenuator	<input type="checkbox"/> 529 Power divider
	<input type="checkbox"/> 530 10dB Attenuator	<input type="checkbox"/> K 4 Cable kit	<input type="checkbox"/> - cable OTA20
Supply voltage	<input checked="" type="checkbox"/> 13.5 V DC	<input type="checkbox"/> 060 110 V 60 Hz via PAS 5000	

5.2.2. Reference

FCC	<input checked="" type="checkbox"/> Part 15 Subpart C, §15.407(a)(1)(2)(3)(4)
ISED	<input checked="" type="checkbox"/> RSS-247, Issue 2
ANSI	<input checked="" type="checkbox"/> C63.10-2013
KDB Guidance no.	<input checked="" type="checkbox"/> 789033 D02 General UNII test procedures v01r03: Subchapter E, Method PM (3)(a)
Limits (For the band 5600–5650 MHz, no operation in Canada is permitted)	<input checked="" type="checkbox"/> U-NII 1: 5.15-5.25 GHz: FCC Outdoor access point: 1 W + antenna gain max. 6 dBi + Elevation > 30° 21 dBm EIRP FCC Indoor Access Point: 1 W + antenna gain max. 6 dBi FCC Mobile & Portable client: 250mW + antenna gain max. 6 dBi ISED: <input type="checkbox"/> E.I.R.P. max. 200mW or 10+10log ₁₀ (B) whichever power is less <input checked="" type="checkbox"/> OEM device installed on vehicles: 30mW EIRP or 1.76 + 10log ₁₀ (B) + TPC capability
	<input checked="" type="checkbox"/> U-NII2: 5.25-5.35 GHz: FCC: lesser of 250mW or 11 dBm+10log ₁₀ (B) ISED: <input type="checkbox"/> max. conducted output power: 250mW or 11 dBm+10log ₁₀ (B) + Antenna gain < 6 dBi <input type="checkbox"/> EIRP Elevation Mask requirements if max. EIRP>200mW <input type="checkbox"/> Max. EIRP 1Watt or 17+10log ₁₀ (B) whichever power less <input checked="" type="checkbox"/> OEM device installed on vehicles: 30mW EIRP or 1.76 + 10log ₁₀ (B) + TPC capability
	<input checked="" type="checkbox"/> U-NII2extension: 5.470-5.725 GHz: FCC: lesser of 250mW or 11 dBm+10log ₁₀ (B) + Antenna gain < 6 dBi ISED: <input checked="" type="checkbox"/> Lesser of: lesser of 250mW or 11 dBm+10log ₁₀ (B) <input checked="" type="checkbox"/> Max. EIRP 1Watt or 17+10log ₁₀ (B) whichever power less <input type="checkbox"/> TPC required if MAX. EIRP > 500mW
	<input checked="" type="checkbox"/> U-NII3: 5.725-5.850 GHz: FCC/ISED: <input checked="" type="checkbox"/> max. conducted power: 1 Watt (30 dBm) <input checked="" type="checkbox"/> Antenna gain less 6 dBi <input type="checkbox"/> Antenna gain more 6 dBi (-> reduction necessary)

5.2.3. EUT settings:

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

Three operating frequencies within each operating band have been selected.

5.2.4. Test condition and measurement test set-up

Signal link to test system (if used):	<input type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input checked="" type="checkbox"/> none
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top 1.5m height	<input type="checkbox"/> floor standing	
Climatic conditions	Temperature: (22±3° C)	Rel. humidity: (40±20)% rh	
General measurement procedures	Please see chapter "Test system set-up for conducted RF-measurement at antenna Port" (W1 Set-up)		

5.2.5. Results

APPLICANT'S DECLARED ANTENNA CHARACTERISTICS:

- ☒ Directional Gain < 6 dBi (measured: difference between measured conducted and radiated eirp. power)
☐ Directional Gain > 6 dBi (measured / applicant's declaration) -> conducted power reduction necessary

The PCB Antenna has the following gain:

Antenna Gain*1)	U-NII-1	2.8 dBi
	U-NII-2A	3.7 dBi
	U-NII-2C	-0.8 dBi
	U-NII-3	0.7 dBi

*1) Please refer to Test report TR18-1-0248301T11a

Different modulation types and data rates were tested in order to find the maximum peak conducted output power.
Enclosed are only the maximum values for each modulation format, pls. compare separate document A1 for all results.

The EUT complies to the band edge requirement under provision that the power level is adjusted.

The 5 GHz WLAN a mode power level for type approval is set to 10 dBm.

The 5 GHz WLAN n mode power level for type approval is set to 10 dBm.

The 5 GHz WLAN ac mode power level for type approval is set to 6 dBm.

5.2.5.1. FCC AND ISSED REQUIREMENTS

Power was calculated with the 99% Occupied Bandwidth.

a-mode 20 MHz

Operational bands:	U-NII 1	U-NII 2A	U-NII 2C	U-NII 3
FCC&IC-Limits output power [dBm]	24.00	24.00	24.00	30.00
FCC-Limits EIRP [dBm]	30.00	30.00	30.00	36.00
IC-Limits EIRP [dBm]	13.96	13.96	29.20	36.00
Limit Check:				
Highest conducted power value over channels and modulations in dBm:	8.10	7.90	8.70	9.09
Margin to Limit output power in dB	15.90	16.10	15.30	20.91
Declared antenna Gain max:	2.80	3.70	-0.80	0.70
EIRP in dBm	10.90	11.60	7.90	9.79
FCCMargin to Limit EIRP in dB	19.10	18.40	22.10	26.21
IC Margin to Limit EIRP in dB	3.06	2.36	21.30	26.21
Verdict:	pass	pass	pass	pass
Verdict:	pass	pass	pass	pass

n-mode 20 MHz

Operational bands:	U-NII 1			U-NII 2A			U-NII 2C			U-NII 3		
FCC&IC-Limits output power [dBm]	24.00			24.00			24.00			30.00		
FCC-Limits EIRP [dBm]	30.00			30.00			29.46			36.00		
IC-Limits EIRP [dBm]	14.26			14.24			29.48			36.00		
Limit Check:												
Highest conducted power value over channels and modulations in dBm:	8.20			8.00			8.80			9.01		
Margin to Limit output power in dB	15.80			16.00			15.20			20.99		
Declared antenna Gain max:	2.80			3.70			-0.80			0.70		
EIRP in dBm	11.00			11.70			8.00			9.71		
FCCMargin to Limit EIRP in dB	19.00			18.30			21.46			26.29		
IC Margin to Limit EIRP in dB	3.26			2.54			21.48			26.29		
Verdict:	pass			pass			pass			pass		
Verdict:	pass			pass			pass			pass		

ac-mode 20 MHz

Operational bands:	U-NII 1	U-NII 2A	U-NII 2C	U-NII 3
FCC&IC-Limits output power [dBm]	24.00	24.00	24.00	30.00
FCC-Limits EIRP [dBm]	30.00	30.00	29.46	36.00
IC-Limits EIRP [dBm]	14.24	14.26	29.50	36.00
Limit Check:				
Highest conducted power value over channels and modulations in dBm:	3.80	3.60	4.70	4.88
Margin to Limit output power in dB	20.20	20.40	19.30	25.12
Declared antenna Gain max:	2.80	3.70	-0.80	0.70
EIRP in dBm	6.60	7.30	3.90	5.58
FCCMargin to Limit EIRP in dB	23.40	22.70	25.56	30.42
IC Margin to Limit EIRP in dB	7.64	6.96	25.60	30.42
Verdict:	pass	pass	pass	pass
Verdict:	pass	pass	pass	pass

n-mode 40 MHz

Operational bands:	U-NII 1	U-NII-2A	U-NII 2C	U-NII-3
FCC&IC-Limits [dBm]	24.00	24.00	24.00	30.00
FCC-Limits [dBm]	36.00	30.00	30.00	36.00
IC-Limits [dBm]	14.77	14.77	30.00	36.00
Limit Check:				
Highest conducted power value over channels and modulations in dBm:	7.60	7.60	8.98	8.50
Margin to Limit output power in dB	16.40	16.40	15.02	21.50
Declared antenna Gain max:	2.80	3.70	-0.80	0.70
EIRP in dBm	10.40	11.30	8.18	9.20
FCCMargin to Limit EIRP in dB	13.60	18.70	21.82	26.80
IC Margin to Limit EIRP in dB	4.37	3.47	21.82	26.80
Verdict:	pass	pass	pass	pass
Verdict:	pass	pass	pass	pass

ac-mode 40 MHz

Operational bands:	U-NII 1	U-NII-2A	U-NII 2C	U-NII-3
FCC&IC-Limits [dBm]	24.00	24.00	24.00	30.00
FCC-Limits [dBm]	36.00	30.00	30.00	36.00
IC-Limits [dBm]	14.77	14.77	30.00	36.00
Limit Check:				
Highest conducted power value over channels and modulations in dBm:	3.40	3.40	4.80	4.60
Margin to Limit output power in dB	20.60	20.60	19.20	25.40
Declared antenna Gain max:	2.80	3.70	-0.80	0.70
EIRP in dBm	6.20	7.10	4.00	5.30
FCCMargin to Limit EIRP in dB	17.80	22.90	26.00	30.70
IC Margin to Limit EIRP in dB	8.57	7.67	26.00	30.70
Verdict:	pass	pass	pass	pass
Verdict:	pass	pass	pass	pass

ac-mode 80 MHz				
Operational bands:	U-NII 1	U-NII 2A	U-NII 2C	U-NII 3
FCC&IC-Limits output power [dBm]	24.00	24.00	24.00	30.00
FCC-Limits EIRP [dBm]	30.00	30.00	30.00	36.00
IC-Limits EIRP [dBm]	14.77	14.77	30.00	36.00
Limit Check:				
Highest conducted power value over channels and modulations in dBm:	2.80	3.00	4.00	4.50
Margin to Limit output power in dB	21.20	21.00	20.00	25.50
Declared antenna Gain max:	2.80	3.70	-0.80	0.70
EIRP in dBm	5.60	6.70	3.20	5.20
FCCMargin to Limit EIRP in dB	24.40	23.30	26.80	30.80
IC Margin to Limit EIRP in dB	9.17	8.07	26.80	30.80
Verdict:	pass	pass	pass	pass
Verdict:	pass	pass	pass	pass

Remark: in the table above only the highest values are reported, for all data rates please see separate Document Annex 1 to this Test report.

The IC limits are calculated according to RSS 247 , section 6.2.

All power results under TPC limit of 11.77 dBm for U-NII-1 and U-NII-2 bands.

5.2.6 Caution for Canada Operation:

No transmission on Frequency band 5600-5650 MHz allowed!

Under RSS 247 section 6.2.3

“Until further notice, devices subject to this section shall not be capable of transmitting in the band 5600-5650 MHz.”

This restriction is for the protection of Environment Canada’s weather radars operating in this band.

5.2.7 Verdict: Pass

5.3. RF Parameter – 6dB, 26 dB minimum Emission Bandwidth and 99% occupied Bandwidth

5.3.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> 443 System CTC-FAR-EMI	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 347 Radio.lab.
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU 40
spectr. analys.	<input checked="" type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input type="checkbox"/> 547 CMU
otherwise	<input type="checkbox"/> 266 NRV-Z31	<input type="checkbox"/> 600 NRVD	<input type="checkbox"/> 110 USB LWL
DC power	<input checked="" type="checkbox"/> 671 EA-3013S	<input type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 459 EA 2032-50
otherwise	<input type="checkbox"/> 331 HC 4055	<input type="checkbox"/> 248 6 dB Attenuator	<input type="checkbox"/> 529 Power divider
	<input type="checkbox"/> 530 10dB Attenuator	<input type="checkbox"/> K 4 Cable kit	<input type="checkbox"/> - cable OTA20
Supply voltage	<input checked="" type="checkbox"/> 13.5 V DC	<input type="checkbox"/> 060 110 V 60 Hz via PAS 5000	

5.3.2. Test condition and measurement test set-up

link to test system (if used):	<input type="checkbox"/> air link	<input checked="" type="checkbox"/> cable connection	<input type="checkbox"/>
Climatic conditions	Temperature: (22±3° C)	Rel. humidity: (40±20)% rH	

5.3.3. References of occupied and emission bandwidth

FCC	<input checked="" type="checkbox"/> FCC 2.202 for information <input checked="" type="checkbox"/> Part 15 Subpart C, §15.407(e)
ISED	RSS-Gen, Issue 5, chapter 4.6.1 RSS-247, Issue 2
ANSI	<input checked="" type="checkbox"/> C63.10-2013
KDB Guidance no.	<input checked="" type="checkbox"/> 789033 D02 General UNII test procedures v01r04, Subchapter C
Limits	<input checked="" type="checkbox"/> necessary for maximum power limits depending of B <input checked="" type="checkbox"/> FCC/ISED: decision if DFS necessary for decision if due 26dBc emissions falling in 5250-5350 MHz band <input checked="" type="checkbox"/> FCC §15.407(e)/ISED: minimum 500 kHz for band 5725-5850 MHz

5.3.4. EUT Settings:

The EUT was instructed to send with different power/ data rates (if adjustable) according applicants instructions. Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

5.3.5. Measurement method:

The measurement was performed with the RBW set to approximately 1% of the emission bandwidth. The span was set to cover the complete carrier. Three carrier frequencies were used for showing the compliance with this requirement. A DELTA Marker method was set to measure the bandwidth compared to the highest In-Band power. The operating modes have been varied for **26 dB and 6 dB bandwidth** (e.g. data rate, modulation scheme, etc.).

Also the **99% occupied bandwidth** was measured. Two markers are placed on frequency points such that left to lower f-marker and right to higher f-marker only 1% of the TX-power is contained. Between the markers, 99% of the power is laying. The RBW value is readjusted and the measurement repeated until the RBW/EBW ratio is around 1%. The operating modes have been taken the maximum data rates, which had been found out at the output power conducted measurements.

5.3.6. Spectrum-Analyzer Settings: (check if accord. KDB)

Span	Set as to fully display the emissions and at least 26 dB /6 dB below the PEAK level
Resolution Bandwidth (RBW)	Set to approx 1%
Video Bandwidth (VBW)	3 times the resolution bandwidth
Sweep time	Coupled and low enough to have no gaps within power envelope
Detector	PK (26 dB and 6dB BW)/Sample (99% OBW)
Sweep mode	Repetitive Mode, MAX-HOLD

5.3.7. Results:

Set-up no.:	1					
Op. Mode:	1 (WLAN 5 GHz a Mode B.W. 20 MHz Power Settings: 10)					
	Channel No.	Nominal bandwidth [MHz]	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]	6 dB Bandwidth [MHz]	Diagram no.
UN-II-1	36	20	19.6	16.60	16.5	Remark 1
UN-II-2A	64		19.6	16.60	16.5	Remark 1
UN-II-2C	100		19.9	16.60	16.55	Remark 1
UN-NII-3	149		19.7	16.60	16.5	Remark 1

Remark 1: See diagrams in separate annex TR18_1_0248301T06a_A1

Set-up no.:	1					
Op. Mode:	1 (WLAN 5 GHz n Mode B.W. 20 MHz Power Settings: 10)					
	Channel No.	Nominal bandwidth [MHz]	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]	6 dB Bandwidth [MHz]	Diagram no.
UN-II-1	40	20	20.3	17.8	17.8	Remark 1
UN-II-2A	52		20.3	17.7	17.8	Remark 1
UN-II-2C	116		20.3	17.7	17.8	Remark 1
UN-NII-3	157		20.3	17.8	17.8	Remark 1

Remark 1: See diagrams in separate annex TR18_1_0248301T06a_A1

Set-up no.:	1					
Op. Mode:	1 (WLAN 5 GHz ac Mode B.W. 20 MHz Power Settings: 6)					
	Channel No.	Nominal bandwidth	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]	6 dB Bandwidth [MHz]	Diagram no.
UN-II-1	48	20	20.3	17.7	17.8	Remark 1
UN-II-2A	56		20.2	17.8	17.8	Remark 1
UN-II-2C	140		20.2	17.8	17.8	Remark 1
UN-NII-3	149		20.3	17.8	17.8	Remark 1

Remark 1: See diagrams in separate annex TR18_1_0248301T06a_A1

Set-up no.:	2					
Op. Mode:	1 (WLAN 5 GHz n Mode B.W. 40 MHz Power Settings: 10)					
	Channel No.	Nominal bandwidth	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]	6 dB Bandwidth [MHz]	Diagram no.
UN-II-1	38	40	40.8	36.67	35.8	Remark 1
UN-II-2A	54		40.32	36.41	35.45	Remark 1
UN-II-2C	102		--	--	--	--
	110		41.28	36.41	35.8	Remark 1
	134		40.32	36.41	35.8	Remark 1
UN-NII-3	151		40.8	36.67	35.5	Remark 1

Remark 1: See diagrams in separate annex TR18_1_0248301T06a_A1

Set-up no.:	2					
Op. Mode:	1 (WLAN 5 GHz ac Mode B.W. 40 MHz Power Settings: 6)					
	Channel No.	Nominal bandwidth	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]	6 dB Bandwidth [MHz]	Diagram no.
UN-II-1	46	40	41.60	36.41	36.5	Remark 1
UN-II-2A	62		40.48	36.67	36.45	Remark 1
UN-II-2C	102		40.48	36.41	35.85	Remark 1
	110		40.32	36.41	36.1	Remark 1
	134		40.32	36.41	36.45	Remark 1
UN-NII-3	159		40	36.41	36.5	Remark 1

Remark 1: See diagrams in separate annex TR18_1_0248301T06a_A1

Set-up no.:	2					
Op. Mode:	1 (WLAN 5 GHz ac Mode B.W. 80 MHz Power Settings: 6)					
	Channel No.	Nominal bandwidth	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]	6 dB Bandwidth [MHz]	Diagram no.
UN-II-1	42	80	85.13	77.44	76.5	Remark 1
UN-II-2A	58		83.59	76.92	76.25	Remark 1
UN-II-2C	106		83.59	76.92	76.95	Remark 1
UN-NII-3	155		84.10	76.92	76.55	Remark 1

Remark 1: See diagrams in separate annex TR18_1_0248301T06a_A1

5.3.8. Verdict (assignment): pass

5.4. RF Parameter – Power Spectral Density (PSD)

5.4.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> 443 System CTC-FAR-EMI-	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 347 Radio.lab.
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input checked="" type="checkbox"/> TS 8997
spectr. analys.	<input checked="" type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 489 ESU 40
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 436 CMU	<input type="checkbox"/> 547 CMU
otherwise	<input type="checkbox"/> 266 NRV-Z31	<input type="checkbox"/> 600 NRVD	<input type="checkbox"/> 110 USB LWL
DC power	<input checked="" type="checkbox"/> 671 EA-3013S	<input type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 459 EA 2032-50
otherwise	<input type="checkbox"/> 331 HC 4055	<input type="checkbox"/> 248 6 dB Attenuator	<input type="checkbox"/> 529 Power divider
Supply voltage	<input checked="" type="checkbox"/> 13.5 V DC	<input type="checkbox"/> 060 110 V 60 Hz via PAS 5000	

5.4.2. Test condition and measurement test set-up

link to test system (if used):	<input type="checkbox"/> air link	<input checked="" type="checkbox"/> cable connection	<input type="checkbox"/>
Climatic conditions	Temperature: (22±3° C)	Rel. humidity: (40±20)% rH	

5.4.3. References

FCC	<input checked="" type="checkbox"/> Part 15 Subpart C, §15.407(a)(1)(2)(3)(4)
ISED	<input checked="" type="checkbox"/> RSS-247, Issue 2: chapter 6.2 and subchapters
ANSI	<input checked="" type="checkbox"/> C63.10-2013
KDB Guidances no.	<input checked="" type="checkbox"/> 789033 D02 General UNII test procedures v01r04: Subchapter F
Limits [dBm/MHz]	<input checked="" type="checkbox"/> U-NII 1: 5.15-5.25 GHz: FCC Outdoor access point: 17 dBm/MHz FCC Indoor Access Point: 17 dBm/MHz FCC Mobile & Portable client: 11 dBm/MHz ISED: <input checked="" type="checkbox"/> vehicle equipment by OEM <input type="checkbox"/> other device: 10 dBm/MHz
Limits [dBm/500 kHz]	<input checked="" type="checkbox"/> U-NII2: 5.25-5.35 GHz: FCC/ ISED: 11 dBm <input checked="" type="checkbox"/> U-NII2+extension: 5.47-5.725 GHz: FCC/ ISED: 11 dBm/MHz

Remark: --

5.4.4. EUT settings

- different channels have been measured for each transmitting sub-band
- The EUT was instructed to send with maximum power (if adjustable) according applicants instructions
- ☐ MIMO applicable measurement techniques (KDB 992611)
- ☒ no MIMO applicable

5.4.5. Measurement Method:

☒ SA-1: The procedures were followed for measuring the average power spectrum as described under chapter “maximum conducted output power”: steps (i) to (viii). The measurements have been performed for each output RF-port if applicable. A screenshot and data bins transfer for further calculations were recorded. If the device contains more than one RF-output port, MIMO calculation procedures have been followed according KDB662911, Chapter E.2 a) “Measure and sum spectra across the outputs”. Resulting maximum PSD is reported for the MIMO condition.

The measured value is corrected due to external measuring set-up path losses and the resulting value is compared with the standard requirement. If the limit is E.I.R.P limit the antenna gain is added, eventually the array gain for MIMO systems.

5.4.5.1. FCC Results:

Set-up no.:	2						
Op. Mode:	1 (20 MHz nominal bandwidth)						
Band	Channel No.	Nominal bandwidth	Power spectral density [dBm/MHz]			Limit	Diagram no.
			a-Mode	n20-Mode	ac20-Mode	[dBm/MHz]	
U-NII-1	36	20	-4.158	--	--	11	Remark 1
	40		--	-4.818	--	11	Remark 1
	48		--	--	-5.766	11	Remark 1
U-NII-2A	52		--	-4.709	--	11	Remark 1
	56		--	--	-8.434	11	Remark 1
	64		-6.189	--	--	11	Remark 1
U-NII-2C	100		-3.708	--	--	11	Remark 1
	116		--	-1.051	--	11	Remark 1
	140		--	--	-3.544	11	Remark 1
U-NII-3	149		-5.155	--	--	30	Remark 1
	157		--	-4.432	--	30	Remark 1
	165		--	--	-7.763	30	Remark 1

Remark 1: Only results for worst case modes are displayed, for additional information please refer to diagrams in separate annex TR18_1_0248301T06a_A1

Set-up no.:	2					
Op. Mode:	1 (40 MHz nominal bandwidth)					
Band	Channel No.	Nominal bandwidth [MHz]	Power spectral density [dBm/MHz]		Limit	Diagram no.
			n40-Mode	ac40-Mode	[dBm/MHz]	
U-NII-1	38	40	-7.777	--	11	Remark 1
	46		--	-13.809	11	Remark 1
U-NII-2A	54		-8.162	--	11	Remark 1
	62		--	-13.356	11	Remark 1
U-NII-2C	102			-10.852	11	Remark 1
	110		-5.581		11	Remark 1
U-NII-3	151		--	-11.839	30	Remark 1
	159		-8.427	--	30	Remark 1

Remark 1: Only results for worst case modes are displayed, for additional information please refer to diagrams in separate annex TR18_1_0248301T06a_A1

Set-up no.:	2				
Op. Mode:	1 (80 MHz nominal bandwidth)				
Band	Channel No.	Nominal bandwidth	Power spectral density [dBm/MHz]	Limit	Diagram no.
			AC80-Mode	[dBm/MHz]	
U-NII-1	42	80	-5.072	11	Remark 1
U-NII-2A	58		-5.088	11	Remark 1
U-NII-2C	106		-3.755	11	Remark 1
U-NII-3	155		-5.098	30	Remark 1

Remark 1: Only results for worst case modes are displayed, for additional information please refer to diagrams in separate annex TR18_1_0248301T06a_A1

5.4.5.2. ISED Results:

Set-up no.:	2						
Op. Mode:	1 (20 MHz nominal bandwidth)						
Band	Channel No.	Nominal bandwidth	Power spectral density [dBm/MHz]			Limit	Diagram no.
			a-Mode	n20-Mode	ac20-Mode	[dBm/MHz]	
U-NII-1 (E.I.R.P. results)	36	20	-1.358	--	--	10 (E.I.R.P.)	Remark 1
	40		--	-2.018	--	10 (E.I.R.P.)	Remark 1
	48		--	--	-2.966	10 (E.I.R.P.)	Remark 1
U-NII-2A	52		--	-4.709	--	11	Remark 1
	56		--	--	-8.434	11	Remark 1
	64		-6.189	--	--	11	Remark 1
U-NII-2C	100		-3.708	--	--	11	Remark 1
	116		--	-1.051	--	11	Remark 1
	140		--	--	-3.544	11	Remark 1
U-NII-3	149		-5.155	--	--	30	Remark 1
	157		--	-4.432	--	30	Remark 1
	165		--	--	-7.763	30	Remark 1

Remark 1: Only results for worst case modes are displayed, for additional information please refer to diagrams in separate annex TR18_1_0248301T06a_A1

- for U-NII-1 only E.I.R.P. results are reported

Set-up no.:	2					
Op. Mode:	1 (40 MHz nominal bandwidth)					
Band	Channel No.	Nominal bandwidth [MHz]	Power spectral density [dBm/MHz]		Limit	Diagram no.
			n40-Mode	ac40-Mode	[dBm/MHz]	
U-NII-1 (E.I.R.P. results)	38	40	-4.977	--	10 (E.I.R.P.)	Remark 1
	46		--	-11.009	10 (E.I.R.P.)	Remark 1
U-NII-2A	54		-8.162	--	11	Remark 1
	62		--	-13.356	11	Remark 1
U-NII-2C	102			-10.852	11	Remark 1
	110		-5.581		11	Remark 1
U-NII-3	151		--	-11.839	30	Remark 1
	159		-8.427	--	30	Remark 1

Remark 1: Only results for worst case modes are displayed, for additional information please refer to diagrams in separate annex TR18_1_0248301T06a_A1

Set-up no.:	2				
Op. Mode:	1 (80 MHz nominal bandwidth)				
Band	Channel No.	Nominal bandwidth	Power spectral density [dBm/MHz]	Limit	Diagram no.
			AC80-Mode	[dBm/MHz]	
U-NII-1 (E.I.R.P. results)	42	80	-2.272	10 (E.I.R.P.)	Remark 1
U-NII-2A	58		-5.088	11	Remark 1
U-NII-2C	106		-3.755	11	Remark 1
U-NII-3	155		-5.098	30	Remark 1

Remark 1: Only results for worst case modes are displayed, for additional information please refer to diagrams in separate annex TR18_1_0248301T06a_A1

5.4.6. Verdict: Passed

5.5. RF-Parameter – Frequency Stability

5.5.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)		<input type="checkbox"/> 443 System CTC-FAR-EMI-		<input type="checkbox"/> Please see Chapter. 2.2.3	
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 337 OATS	<input checked="" type="checkbox"/> 347 Radio.lab.	<input type="checkbox"/>	<input type="checkbox"/>
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input checked="" type="checkbox"/> 489 ESU 40	<input type="checkbox"/> 620 ESU 26	<input type="checkbox"/>	<input type="checkbox"/>
otherwise	<input type="checkbox"/> 600 NRVD	<input type="checkbox"/> 357 NRV-Z1	<input checked="" type="checkbox"/> 693 TS8997			
spectr. analys.	<input type="checkbox"/> 683 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK	<input type="checkbox"/> 714 FSW 67	<input type="checkbox"/>	<input type="checkbox"/>
power supply	<input type="checkbox"/> 456 EA 3013A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50	<input type="checkbox"/> 268 EA- 3050	<input type="checkbox"/> 494 AG6632A	<input type="checkbox"/> 354 NGPE 40
otherwise	<input checked="" type="checkbox"/> 331 HC4055	<input checked="" type="checkbox"/> 405 OPUS10	<input type="checkbox"/> 110 USB LWL	<input type="checkbox"/> 482 Filter Matrix	<input type="checkbox"/> 477 GPS	<input type="checkbox"/>
attenuator	<input checked="" type="checkbox"/> 613 20 dB Attenuator	<input type="checkbox"/> 248 6 dB Attenuator	<input type="checkbox"/> 529 Power divider	<input type="checkbox"/> cable OTA20	<input type="checkbox"/> 530 10dB Attenuator	<input type="checkbox"/> K5 Cable
Supply voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input checked="" type="checkbox"/> 13.5 V DC			

5.5.2. Test condition and measurement test set-up

link to test system (if used):	<input type="checkbox"/> air link	<input checked="" type="checkbox"/> cable connection	<input type="checkbox"/>
Climatic conditions	Temperature: (22±3° C)		Rel. humidity: (40±20)% rH

5.5.3. Requirements:

ISED	<input checked="" type="checkbox"/> RSS-Gen, Issue5 , Chapter 6.11
Remark	Frequency stability is a measure of frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at an appropriate reference temperature and the rated supply voltage.

5.5.4. EUT settings

For FHSS-systems hopping mode was switched-off so fixed two different channels could be measured.
The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

5.5.5. Measurement method

- The First Measurement was done at Normal Temperature +20° C and ±15% of the supply voltage.
- The Second Measurement was done at 3 different Temperatures -20° C (-4° F), +20° C (+68° F) and +50° C (+122° F), and the nominal supply Voltage
- Also the 99% emission bandwidth was measured. Two markers are placed on frequency points such that left to lower f-marker and right to higher f-marker only 1% of the TX-power is contained. Between the markers, 99% of the power is laying.

5.5.6. Spectrum-Analyzer Settings

Span	Set as to fully display the emissions and approximate 20dB below the PEAK level
Resolution Bandwidth (RBW)	Set to approx. 1% ...3% of the emission width
Video Bandwidth (VBW)	3 times the resolution bandwidth
Sweep time	Coupled and low enough to have no gaps within power envelope
Detector	Sample (if bin width: Span/no. of frequency points SA < 0.5*RBW SA otherwise Peak detector)
Sweep mode	Repetitive Mode, Max hold

5.5.7. Results Extreme Voltage

Mode	Limit Left [MHz]	Limit Right [MHz]	Center Frequency [MHz]	Vnom			Vmin			Vmax		
				Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict	Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict	Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict
a20	5150.00	5250.00	5180.00	5171.6	5188.2	PASS	5171.7	5188.3	PASS	5171.7	5188.3	PASS
	5250.00	5350.00	5320.00	5311.6	5328.2	PASS	5311.6	5328.3	PASS	5311.6	5328.3	PASS
	5470.00	5725.00	5500.00	5491.6	5508.2	PASS	5491.6	5508.3	PASS	5491.6	5508.3	PASS
	5725.00	5850.00	5745.00	5736.6	5753.2	PASS	5736.6	5753.2	PASS	5736.6	5753.2	PASS
n20	5150.00	5250.00	5200.00	5191.00	5208.80	PASS						
	5250.00	5350.00	5260.00	5251.10	5268.80	PASS						
	5470.00	5725.00	5580.00	5571.10	5588.80	PASS						
	5725.00	5850.00	5785.00	5776.00	5793.80	PASS						
ac20	5150.00	5250.00	5240.00	5231.10	5248.80	PASS						
	5250.00	5350.00	5280.00	5271.00	5288.80	PASS						
	5470.00	5725.00	5700.00	5691.00	5708.80	PASS						
	5725.00	5850.00	5825.00	5816.00	5833.80	PASS						

Mode	Limit Left [MHz]	Limit Right [MHz]	Center Frequency [MHz]	Vnom			Vmin			Vmax		
				Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict	Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict	Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict
n40	5150.00	5250.00	5190.00	5171.54	5208.21	PASS	5171.79	5208.21	PASS	5171.79	5208.21	PASS
	5250.00	5350.00	5270.00	5251.79	5288.21	PASS	5251.54	5287.95	PASS	5251.54	5287.95	PASS
	5470.00	5725.00	5510.00	5531.79	5568.21	PASS	5491.80	5528.21	PASS	5491.80	5528.21	PASS
	5725.00	5850.00	5795.00	5776.54	5813.21	PASS	5736.79	5773.21	PASS	5736.79	5773.21	PASS
ac40	5150.00	5250.00	5230.00	5211.79	5248.21	PASS						
	5250.00	5350.00	5310.00	5291.54	5328.21	PASS						
	5470.00	5725.00	5510.00	5491.79	5528.21	PASS						
	5725.00	5850.00	5755.00	5736.79	5773.21	PASS						

Mode	Limit Left [MHz]	Limit Right [MHz]	Center Frequency [MHz]	Vnom			Vmin			Vmax		
				Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict	Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict	Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict
ac80	5150.00	5250.00	5210	5171.03	5248.46	PASS	5171.54	5248.46	PASS	5171.54	5248.46	PASS
	5250.00	5350.00	5290	5251.54	5328.46	PASS	5251.03	5328.46	PASS	5251.03	5328.46	PASS
	5470.00	5725.00	5530	5491.54	5568.46	PASS	5491.54	5568.46	PASS	5491.54	5568.46	PASS
	5725.00	5850.00	5775	5736.54	5813.46	PASS	5736.54	5813.46	PASS	5736.54	5813.46	PASS

5.5.8. Results Extreme Temperature

Mode	Limit Left [MHz]	Limit Right [MHz]	Center Frequency [MHz]	Tnom			Tmin			Tmax		
				Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict	Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict	Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict
a20	5150.00	5250.00	5180.00	5171.6	5188.2	PASS	5171.7	5188.3	PASS	5171.6	5188.3	PASS
	5250.00	5350.00	5320.00	5311.6	5328.2	PASS	5311.7	5328.3	PASS	5311.6	5328.2	PASS
	5470.00	5725.00	5500.00	5491.6	5508.2	PASS	5491.7	5508.3	PASS	5491.6	5508.2	PASS
	5725.00	5850.00	5745.00	5736.6	5753.2	PASS	5736.7	5753.3	PASS	5736.6	5753.2	PASS
n20	5150.00	5250.00	5200.00	5191.00	5208.80	PASS						
	5250.00	5350.00	5260.00	5251.10	5268.80	PASS						
	5470.00	5725.00	5580.00	5571.10	5588.80	PASS						
	5725.00	5850.00	5785.00	5776.00	5793.80	PASS						
ac20	5150.00	5250.00	5240.00	5231.10	5248.80	PASS						
	5250.00	5350.00	5280.00	5271.00	5288.80	PASS						
	5470.00	5725.00	5700.00	5691.00	5708.80	PASS						
	5725.00	5850.00	5825.00	5816.00	5833.80	PASS						

Mode	Limit Left [MHz]	Limit Right [MHz]	Center Frequency [MHz]	Tnom			Tmin			Tmax		
				Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict	Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict	Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict
n40	5150.00	5250.00	5190.00	5171.54	5208.21	PASS	5171.79487	5208.20513	PASS	5171.79487	5208.20513	PASS
	5250.00	5350.00	5270.00	5251.79	5288.21	PASS	5251.53846	5288.20513	PASS	5251.53846	5287.94872	PASS
	5470.00	5725.00	5510.00	5531.79	5568.21	PASS	5491.79487	5528.46154	PASS	5491.53846	5528.46154	PASS
	5725.00	5850.00	5795.00	5776.54	5813.21	PASS	5736.79487	5773.20513	PASS	5736.79487	5773.20513	PASS
ac40	5150.00	5250.00	5230.00	5211.79	5248.21	PASS						
	5250.00	5350.00	5310.00	5291.54	5328.21	PASS						
	5470.00	5725.00	5510.00	5491.79	5528.21	PASS						
	5725.00	5850.00	5755.00	5736.79	5773.21	PASS						

Mode	Limit Left [MHz]	Limit Right [MHz]	Center Frequency [MHz]	Tnom / Vnom			Tmin			Tmax		
				Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict	Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict	Band Edge Left [MHz]	Band Edge Right [MHz]	Verdict
ac80	5150.00	5250.00	5210	5171.03	5248.46	PASS	5171.54	5248.46	PASS	5171.54	5248.46	PASS
	5250.00	5350.00	5290	5251.54	5328.46	PASS	5251.54	5328.46	PASS	5251.03	5328.46	PASS
	5470.00	5725.00	5530	5491.54	5568.46	PASS	5492.05	5568.46	PASS	5491.54	5568.46	PASS
	5725.00	5850.00	5775	5736.54	5813.46	PASS	5736.54	5813.46	PASS	5736.54	5813.46	PASS

5.6. General Limit - Radiated field strength emissions below 30 MHz

5.6.1. Test location and equipment

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input checked="" type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 347 Radio.lab.
receiver	<input type="checkbox"/> 377 ESCS30	<input checked="" type="checkbox"/> 001 ESS	<input type="checkbox"/>
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 371 CBT32	<input type="checkbox"/> 547 CMU
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL
DC power	<input type="checkbox"/> 671 EA-3013S	<input checked="" type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50
Supply voltage	<input type="checkbox"/> 230 V 50 Hz via public mains	<input checked="" type="checkbox"/> 13.5 V DC	

5.6.2. Test condition and measurement test set-up

link to test system (if used):	<input type="checkbox"/> air link	<input checked="" type="checkbox"/> cable connection	<input type="checkbox"/>
Climatic conditions	Temperature: (22±3° C)	Rel. humidity: (40±20)% rH	

5.6.3. Requirements

FCC	Part 15, Subpart C, §15.205 & §15.209			
ANSI	C63.10-2013			
Frequency [MHz]	Field strength limit		Distance [m]	Remarks
	[µV/m]	[dBµV/m]		
0.009 – 0.490	2400/f (kHz)	67.6 – 20Log(f) (kHz)	300	Correction factor used due to measurement distance of 3 m
0.490 – 1.705	24000/f (kHz)	87.6 – 20Log(f) (kHz)	30	Correction factor used due to measurement distance of 3 m
1.705 – 30	30	29.5	30	Correction factor used due to measurement distance of 3 m

5.6.4. Test condition and test set-up

Signal link to test system (if used):	<input type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input checked="" type="checkbox"/> none
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top	<input type="checkbox"/> floor standing	
Climatic conditions	Temperature: (22±3° C) Rel. humidity: (40±20)%		
EMI-Receiver or Analyzer Settings	Scan data	<input checked="" type="checkbox"/> 9 – 150 kHz RBW/VBW = 200 Hz Scan step = 80 Hz <input checked="" type="checkbox"/> 150 kHz – 30 MHz RBW/VBW = 9 kHz Scan step = 4 kHz <input type="checkbox"/> other:	
	Scan-Mode	<input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3dB Spectrum analyzer Mode	
	Detector	Peak (pre-measurement) and Quasi-PK/Average (final if applicable)	
	Mode:	Repetitive-Scan, max-hold	
Sweep-Time		Coupled – calibrated display if continuous signal otherwise adapted to EUT's individual transmission duty-cycle	
General measurement procedures		Please see chapter "Test system set-up radiated magnetic field measurements below 30 MHz"	

5.6.5. Radiated Field Strength Emissions – 9 kHz to 30 MHz Results

Radiated Field Strength Emissions – 9 kHz to 30 MHz							
Temperature :+21 ° C		Technology: WLAN 5 GHz 802.11a/n/ac		TX-Fixed Channel (Modulated)			
Diagr No. (Remark 1)	Test Settings Mode B.W. Data Rate Frequency Band - Channel (Frequency)	Set-up no.	OP-mode no.	Used detector			Verdict
				PK	AV	QP	
2.01a	a Mode 20 MHz 9 MBit/s U-NII-1-Ch 36 5180 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
2.01b	a Mode 20 MHz 9 MBit/s U-NII-1-Ch 36 5180 MHz laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
2.02a	a Mode 20 MHz 9 MBit/s U-NII-2A-Ch 64 5320 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
2.02b	a Mode 20 MHz 9 MBit/s U-NII-2A-Ch 64 5320 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
2.03a	a Mode 20 MHz 9 MBit/s U-NII-2C-Ch 100 5500 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
2.03b	a Mode 20 MHz 9 MBit/s U-NII-2C-Ch 100 5500 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
2.04a	a Mode 20 MHz 9 MBit/s U-NII-3-Ch 149 5745 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
2.04b	a Mode 20 MHz 9 MBit/s U-NII-3-Ch 149 5745 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
2.30a	normal mode W-LAN 5GHz and BT simultaneous transmissions	3	4	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
2.30b	normal mode W-LAN 5GHz and BT simultaneous transmissions	3	4	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
Remark 1: See diagrams in separate Annex 1 TR18_1_0248301T06_A1, only worst case modulation was tested.							

5.6.6. Correction factors due to reduced meas. distance (f< 30 MHz)

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of 0.625xLambda. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors.

Frequency -Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (dmeas < D _{near-field})	2 ^{te} Condition (Limit distance bigger d _{near-field})	Distance Correction accord. Formula
kHz	9,00E+03	33333,33	5305,17	300	fulfilled	not fulfilled	-80,00
	1,00E+04	30000,00	4774,65		fulfilled	not fulfilled	-80,00
	2,00E+04	15000,00	2387,33		fulfilled	not fulfilled	-80,00
	3,00E+04	10000,00	1591,55		fulfilled	not fulfilled	-80,00
	4,00E+04	7500,00	1193,66		fulfilled	not fulfilled	-80,00
	5,00E+04	6000,00	954,93		fulfilled	not fulfilled	-80,00
	6,00E+04	5000,00	795,78		fulfilled	not fulfilled	-80,00
	7,00E+04	4285,71	682,09		fulfilled	not fulfilled	-80,00
	8,00E+04	3750,00	596,83		fulfilled	not fulfilled	-80,00
	9,00E+04	3333,33	530,52		fulfilled	not fulfilled	-80,00
	1,00E+05	3000,00	477,47	30	fulfilled	not fulfilled	-80,00
	1,25E+05	2400,00	381,97		fulfilled	not fulfilled	-80,00
	2,00E+05	1500,00	238,73		fulfilled	fulfilled	-78,02
	3,00E+05	1000,00	159,16		fulfilled	fulfilled	-74,49
	4,00E+05	750,00	119,37		fulfilled	fulfilled	-72,00
	4,90E+05	612,24	97,44		fulfilled	fulfilled	-70,23
	5,00E+05	600,00	95,49		fulfilled	not fulfilled	-40,00
	6,00E+05	500,00	79,58		fulfilled	not fulfilled	-40,00
	7,00E+05	428,57	68,21		fulfilled	not fulfilled	-40,00
	8,00E+05	375,00	59,68		fulfilled	not fulfilled	-40,00
	9,00E+05	333,33	53,05		fulfilled	not fulfilled	-40,00
MHz	1,00	300,00	47,75	30	fulfilled	not fulfilled	-40,00
	1,59	188,50	30,00		fulfilled	not fulfilled	-40,00
	2,00	150,00	23,87		fulfilled	fulfilled	-38,02
	3,00	100,00	15,92		fulfilled	fulfilled	-34,49
	4,00	75,00	11,94		fulfilled	fulfilled	-32,00
	5,00	60,00	9,55		fulfilled	fulfilled	-30,06
	6,00	50,00	7,96		fulfilled	fulfilled	-28,47
	7,00	42,86	6,82		fulfilled	fulfilled	-27,13
	8,00	37,50	5,97		fulfilled	fulfilled	-25,97
	9,00	33,33	5,31		fulfilled	fulfilled	-24,95
	10,00	30,00	4,77		fulfilled	fulfilled	-24,04
	10,60	28,30	4,50		fulfilled	fulfilled	-23,53
	11,00	27,27	4,34		fulfilled	fulfilled	-23,21
	12,00	25,00	3,98		fulfilled	fulfilled	-22,45
	13,56	22,12	3,52		fulfilled	fulfilled	-21,39
	15,00	20,00	3,18		fulfilled	fulfilled	-20,51
	15,92	18,85	3,00		fulfilled	fulfilled	-20,00
	17,00	17,65	2,81		not fulfilled	fulfilled	-20,00
	18,00	16,67	2,65		not fulfilled	fulfilled	-20,00
	20,00	15,00	2,39		not fulfilled	fulfilled	-20,00
	21,00	14,29	2,27		not fulfilled	fulfilled	-20,00
	23,00	13,04	2,08		not fulfilled	fulfilled	-20,00
	25,00	12,00	1,91		not fulfilled	fulfilled	-20,00
	27,00	11,11	1,77		not fulfilled	fulfilled	-20,00
	29,00	10,34	1,65		not fulfilled	fulfilled	-20,00
	30,00	10,00	1,59		not fulfilled	fulfilled	-20,00

5.7. General Limit - Radiated field strength emissions, 30 MHz - 1 GHz

5.7.1. Test location and equipment

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input checked="" type="checkbox"/> 441 EMISAR <input checked="" type="checkbox"/> 487 SAR NSA		
receiver	<input type="checkbox"/> 377 ESCS30 <input checked="" type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU 40 <input type="checkbox"/> 620 ESU 26	
spectr. analys.	<input type="checkbox"/> 584 FSU <input type="checkbox"/> 120 FSEM <input type="checkbox"/> 264 FSEK		
antenna	<input checked="" type="checkbox"/> 574 BTA-L <input type="checkbox"/> 133 EMCO3115 <input type="checkbox"/> 302 BBHA9170 <input type="checkbox"/> 289 CBL 6141 <input type="checkbox"/> 030 HFH-Z2 <input type="checkbox"/> 477 GPS		
signaling	<input type="checkbox"/> 392 MT8820A <input type="checkbox"/> 371 CBT32 <input type="checkbox"/> 547 CMU <input type="checkbox"/> 594 CMW		
otherwise	<input type="checkbox"/> 400 FTC40x15E <input type="checkbox"/> 401 FTC40x15E <input type="checkbox"/> 110 USB LWL <input checked="" type="checkbox"/> 482 Filter Matrix		
DC power	<input type="checkbox"/> 671 EA-3013S <input checked="" type="checkbox"/> 457 EA 3013A <input type="checkbox"/> 459 EA 2032-50 <input type="checkbox"/> 268 EA- 3050 <input type="checkbox"/> 494 AG6632A <input type="checkbox"/> 498 NGPE		
Supply voltage	<input type="checkbox"/> 230 V 50 Hz via public mains <input checked="" type="checkbox"/> 13.5 V DC		

5.7.2. Requirements/Limits

FCC		<input type="checkbox"/> Part 15 Subpart B, §15.109, class B <input checked="" type="checkbox"/> Part 15 Subpart C, §15.209 @ frequencies defined in §15.205	
ANSI		<input type="checkbox"/> C63.4-2014 <input checked="" type="checkbox"/> C63.10-2013	
Limit	Frequency [MHz]	Radiated emissions limits, 3 meters	
		QUASI Peak [μ V/m]	QUASI-Peak [dB μ V/m]
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	above 960	500	54.0

5.7.3. Restricted bands of operation (FCC §15.205 / RSS-Gen, Issue 5)

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.20725-4.20775	37.5-38.25	1645.5-1646.5	9.3-9.5
6.215-6.218	73-74.6	1660-1710	10.6-12.7
6.26775-6.26825	74.8-75.2	1718.8-1722.2	13.25-13.4
6.31175-6.31225	108-121.94	2200-2300	14.47-14.5
8.291-8.294	123-138	2310-2390	15.35-16.2
8.362-8.366	149.9-150.05	2483.5-2500	17.7-21.4
8.37625-8.38675	156.52475-156.52525	2690-2900	22.01-23.12
8.41425-8.41475	156.7-156.9	3260-3267	23.6-24.0
12.29-12.293	162.0125-167.17	3332-3339	31.2-31.8
12.51975-12.52025	167.72-173.2	3345.8-3358	36.43-36.5
12.57675-12.57725	240-285	3600-4400	--
13.36-13.41	322-335.4	--	--

Remark: only spurious emissions are allowed within these frequency bands not exceeding the limits per §15.209

5.7.4. Test condition and measurement test set-up

Signal link to test system (if used):	<input type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input checked="" type="checkbox"/> none
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top 0.8m height	<input type="checkbox"/> floor standing	
Climatic conditions	Temperature: (22±3° C)	Rel. humidity: (40±20)%	
EMI-Receiver (Analyzer) Settings	Scan frequency range: <input checked="" type="checkbox"/> 30 – 1000 MHz <input type="checkbox"/> other: Scan-Mode: <input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB spectrum analyzer mode Detector: Peak / Quasi-peak RBW/VBW: 100 kHz/300 kHz Mode: Repetitive-Scan, max-hold Scan step: 80 kHz Sweep-Time: Coupled – calibrated display if continuous TX-signal otherwise adapted to EUT's individual duty-cycle		
General measurement procedures	Please see chapter "Test system set-up for electric field measurement in the range 30 MHz to 1 GHz"		

5.7.5. Radiated Field Strength Emissions – 30 MHz to 1 GHz Results

Radiated Field Strength Emissions – 30 MHz to 1 GHz								
Temperature :+21 ° C		Technology: WLAN 5 GHz 802.11a/n/ac		TX-Fixed Channel (Modulated)				
Diagr No. (Remark 1)	Test Settings		Set-up no.	OP-mode no.	Used detector			Verdict
	Mode	B.W. Data Rate Frequency Band - Channel (Frequency)			PK	AV	QP	
3.00	Noise Level of Set up		-	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Initial
3.01a	a Mode 20 MHz 9 MBit/s U-NII-1-Ch 36 5180 MHz laying		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.01b	a Mode 20 MHz 9 MBit/s U-NII-1-Ch 36 5180 MHz Standing		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.02a	a Mode 20 MHz 9 MBit/s U-NII-2A-Ch 64 5320 MHz Laying		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.02b	a Mode 20 MHz 9 MBit/s U-NII-2A-Ch 64 5320 MHz standing		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.03a	a Mode 20 MHz 9 MBit/s U-NII-2C-Ch 100 5500 MHz Laying		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.03b	a Mode 20 MHz 9 MBit/s U-NII-2C-Ch 100 5500 MHz Standing		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.04a	a Mode 20 MHz 9 MBit/s U-NII-3-Ch 149 5745 MHz Laying		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.04b	a Mode 20 MHz 9 MBit/s U-NII-3-Ch 149 5745 MHz standing		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.05a	n Mode 20 MHz MCS3 U-NII-1-Ch 40 5200 MHz laying		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.05b	n Mode 20 MHz MCS3 U-NII-1-Ch 40 5200 MHz Standing		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.06a	n Mode 20 MHz MCS3 U-NII-2A-Ch 52 5260 MHz Laying		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.06b	n Mode 20 MHz MCS3 U-NII-2A-Ch 52 5260 MHz Standing		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.07a	n Mode 20 MHz MCS3 U-NII-2C-Ch 116 5580 MHz Laying		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.07b	n Mode 20 MHz MCS3 U-NII-2C-Ch 116 5580 MHz Standing		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.08a	n Mode 20 MHz MCS3 U-NII-3-Ch 157 5785 MHz Laying		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.08b	n Mode 20 MHz MCS3 U-NII-3-Ch 157 5785 MHz Standing		1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass

3.09a	ac Mode 20 MHz MCS3 U-NII-1-Ch 48 5240 MHz laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.09b	ac Mode 20 MHz MCS3 U-NII-1-Ch 48 5240 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.10a	ac Mode 20 MHz MCS3 U-NII-2A-Ch 56 5280 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.10b	ac Mode 20 MHz MCS3 U-NII-2A-Ch 56 5280 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.11a	ac Mode 20 MHz MCS3 U-NII-2C-Ch 140 5700 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.11b	ac Mode 20 MHz MCS3 U-NII-2C-Ch 140 5700 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.12a	ac Mode 20 MHz MCS3 U-NII-3-Ch 165 5825 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.12b	ac Mode 20 MHz MCS3 U-NII-3-Ch 165 5825 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass

3.13a	n Mode 40 MHz MCS3 U-NII-1-Ch 38 5190 MHz laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.13b	n Mode 40 MHz MCS3 U-NII-1-Ch 38 5190 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.14a	n Mode 40 MHz MCS3 U-NII-2A-Ch 54 5270 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.14b	n Mode 40 MHz MCS3 U-NII-2A-Ch 54 5270 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.15a	n Mode 40 MHz MCS3 U-NII-2C-Ch 102 5510 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.15b	n Mode 40 MHz MCS3 U-NII-2C-Ch 102 5510 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.16a	n Mode 40 MHz MCS3 U-NII-3-Ch 151 5755 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.16b	n Mode 40 MHz MCS3 U-NII-3-Ch 151 5755 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass

3.17a	ac Mode 40 MHz MCS9 U-NII-1-Ch 46 5230 MHz laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.17b	ac Mode 40 MHz MCS9 U-NII-1-Ch 46 5230 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.18a	ac Mode 40 MHz MCS9 U-NII-2A-Ch 62 5310 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.18b	ac Mode 40 MHz MCS9 U-NII-2A-Ch 62 5310 MHz standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.19a	ac Mode 40 MHz MCS9 U-NII-2C-Ch 134 5670 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.19b	ac Mode 40 MHz MCS9 U-NII-2C-Ch 134 5670 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.20a	ac Mode 40 MHz MCS9 U-NII-3-Ch 159 5795 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.20b	ac Mode 40 MHz MCS9 U-NII-3-Ch 159 5795 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass

3.21a	ac Mode 80 MHz MCS7 U-NII-1-Ch 42 5210 MHz laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.21b	ac Mode 80 MHz MCS7 U-NII-1-Ch 42 5210 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.22a	ac Mode 80 MHz MCS7 U-NII-2A-Ch 58 5290 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.22b	ac Mode 80 MHz MCS7 U-NII-2A-Ch 58 5290 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.23a	ac Mode 80 MHz MCS7 U-NII-2C-Ch 106 5530 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.23b	ac Mode 80 MHz MCS7 U-NII-2C-Ch 106 5530 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.24a	ac Mode 80 MHz MCS7 U-NII-3-Ch 155 5775 MHz Laying	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.24b	ac Mode 80 MHz MCS7 U-NII-3-Ch 155 5775 MHz Standing	1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass

3.30a	W-LAN 5GHz and BT simultaneous transmission Standing	3	4	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass
3.30b	W-LAN 5GHz and BT simultaneous transmission Laying	3	4	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Pass

Remark 1: See diagrams in separate annex TR18_1_0248301T06a_A1.

➔ for Diagram 3.13a Frequency at 445.5MHz not critical according §15.205

5.8. General Limit - Radiated emissions, above 1 GHz

5.8.1. Test location and equipment FAR

test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 348 EMI cond.	<input checked="" type="checkbox"/> 443 EMI FAR	<input type="checkbox"/> 347 Radio.lab.	<input type="checkbox"/> 337 OATS	<input type="checkbox"/>
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK	<input checked="" type="checkbox"/> 489 ESU 40	<input type="checkbox"/>	<input type="checkbox"/>
antenna meas	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 289 CBL 6141	<input type="checkbox"/> 608 HL 562	<input checked="" type="checkbox"/> 549 HL025	<input checked="" type="checkbox"/> 302 BBHA9170	<input type="checkbox"/> 477 GPS
antenna meas	<input type="checkbox"/> 123 HUF-Z2	<input type="checkbox"/> 132 HUF-Z3	<input type="checkbox"/> 030 HFH-Z2	<input type="checkbox"/> 376 BBHA9120E		<input type="checkbox"/>
antenna subst	<input type="checkbox"/> 071 HUF-Z2	<input type="checkbox"/> 020 EMCO3115	<input type="checkbox"/> 063 LP 3146	<input type="checkbox"/> 303 BBHA9170	<input type="checkbox"/>	<input type="checkbox"/>
multimeter	<input type="checkbox"/> 341 Fluke 112	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 371 CBT32	<input type="checkbox"/> 547 CMU	<input type="checkbox"/> 594 CMW		
DCpower	<input type="checkbox"/> 611 E3632A	<input checked="" type="checkbox"/> 087 EA3013	<input type="checkbox"/> 354 NGPE 40	<input type="checkbox"/> 349 car battery	<input type="checkbox"/> 350 Car battery	<input type="checkbox"/>
Supply voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input checked="" type="checkbox"/> 13.5 V DC			

5.8.2. Requirements/Limits

FCC	<input type="checkbox"/> Part 15 Subpart B, §15.109 class B <input checked="" type="checkbox"/> Part 15 Subpart C, §15.209 for frequencies defined in §15.205 <input checked="" type="checkbox"/> Part 15 Subpart C, §15.407(b)(1)(2)(3)(4)(5)(6)(7)(8)			
ANSI	<input type="checkbox"/> C63.4-2014 <input checked="" type="checkbox"/> C63.10-2013			
Frequency [MHz]	Limits			
	AV [µV/m]	AV [dBµV/m]	Peak [µV/m]	Peak [dBµV/m] or [dBm/MHz]
above 1 GHz for frequencies as defined in §15.205	500	54.0	5000	74.0 dBµV/m
§15.407(b)(1)(2)(3)(4)	--	--	--	(b)(1): 5.15-5.25 GHz: -27 dBm eirp (b)(2): 5.25-5.35 GHz: -27 dBm eirp (b)(3): 5.47-5.725 GHz: -27 dBm eirp (b)(4): 5725-5.85 GHz: Spectrum mask

5.8.3. Test condition and measurement test set-up

Signal link to test system (if used):	<input type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input checked="" type="checkbox"/> none
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top 1.5m height		
Climatic conditions	Temperature: (22±3° C)		
	Rel. humidity: (40±20)%		
Spectrum-Analyzer settings	Scan frequency range: <input checked="" type="checkbox"/> 1 – 18 GHz <input type="checkbox"/> 18 – 25 GHz <input checked="" type="checkbox"/> 18 – 40 GHz <input type="checkbox"/> other: Scan-Mode: <input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB Spectrum analyzer Mode Detector: Peak and Average RBW/VBW: 1 MHz / 3 MHz Mode: Repetitive-Scan, max-hold Scan step: 400 kHz Sweep-Time: Coupled – calibrated display if CW signal otherwise adapted to EUT's individual duty-cycle		
General measurement procedures	Please see chapter "Test system set-up for radiated electric field measurements above 1 GHz"		

5.8.4. Radiated Field Strength Emissions – 1 GHz to 40 GHz Results

Radiated Field Strength Emissions – 1 GHz to 7 GHz							
Temperature :+21 ° C		Technology: WLAN 5 GHz 802.11a/n/ac		TX-Fixed Channel (Modulated)			
Diagr No. (Remark 1)	Test Settings Mode B.W. Data Rate Channel	Set-up no.	OP-mode no.	Used detector			Verdict
				PK	AV	QP	
4.00a	Noise Level of Set up	-	-	☒	☒	☐	Initial
4.01a	a Mode 20 MHz 9 MBit/s U-NII-1-Ch 36 5180 MHz	1	1	☒	☒	☐	Pass
4.02a	a Mode 20 MHz 9 MBit/s U-NII-2A-Ch 64 5320 MHz	1	1	☒	☒	☐	Pass
4.03a	a Mode 20 MHz 9 MBit/s U-NII-2C-Ch 100 5500 MHz	1	1	☒	☒	☐	Pass
4.04a	a Mode 20 MHz 9 MBit/s U-NII-3-Ch 149 5745 MHz	1	1	☒	☒	☐	Pass
4.05a	n Mode 20 MHz MCS3 U-NII-1-Ch 40 5200 MHz	1	1	☒	☒	☐	Pass
4.06a	n Mode 20 MHz MCS3 U-NII-2A-Ch 52 5260 MHz	1	1	☒	☒	☐	Pass
4.07a	n Mode 20 MHz MCS3 U-NII-2C-Ch 116 5580 MHz	1	1	☒	☒	☐	Pass
4.08a	n Mode 20 MHz MCS3 U-NII-3-Ch 157 5785 MHz	1	1	☒	☒	☐	Pass
4.09a	ac Mode 20 MHz MCS3 U-NII-1-Ch 48 5240 MHz	1	1	☒	☒	☐	Pass
4.10a	ac Mode 20 MHz MCS3 U-NII-2A-Ch 56 5280 MHz	1	1	☒	☒	☐	Pass
4.11a	ac Mode 20 MHz MCS3 U-NII-2C-Ch 140 5700 MHz	1	1	☒	☒	☐	Pass
4.12a	ac Mode 20 MHz MCS3 U-NII-3-Ch 165 5825 MHz	1	1	☒	☒	☐	Pass
4.13a	n Mode 40 MHz MCS3 U-NII-1-Ch 38 5190 MHz	1	1	☒	☒	☐	Pass
4.14a	n Mode 40 MHz MCS3 U-NII-2A-Ch 54 5270 MHz	1	1	☒	☒	☐	Pass
4.15a	n Mode 40 MHz MCS3 U-NII-2C-Ch 102 5510 MHz	1	1	☒	☒	☐	Pass
4.16a	n Mode 40 MHz MCS3 U-NII-3-Ch 151 5755 MHz	1	1	☒	☒	☐	Pass
4.17a	ac Mode 40 MHz MCS9 U-NII-1-Ch 46 5230 MHz	1	1	☒	☒	☐	Pass
4.18a	ac Mode 40 MHz MCS9 U-NII-2A-Ch 62 5310 MHz	1	1	☒	☒	☐	Pass
4.19a	ac Mode 40 MHz MCS9 U-NII-2C-Ch 134 5670 MHz	1	1	☒	☒	☐	Pass
4.20a	ac Mode 40 MHz MCS9 U-NII-3-Ch 159 5795 MHz	1	1	☒	☒	☐	Pass
4.21a	ac Mode 80 MHz MCS7 U-NII-1-Ch 42 5210 MHz	1	1	☒	☒	☐	Pass
4.22a	ac Mode 80 MHz MCS7 U-NII-2A-Ch 58 5290 MHz	1	1	☒	☒	☐	Pass
4.23a	ac Mode 80 MHz MCS7 U-NII-2C-Ch 106 5530 MHz	1	1	☒	☒	☐	Pass
4.24a	ac Mode 80 MHz MCS7 U-NII-3-Ch 155 5575 MHz	1	1	☒	☒	☐	Pass
4.30a	normal mode W-LAN 5GHz and BT simultaneous transmissions	3	4	☒	☒	☐	Pass

Remark 1: See diagrams in separate annex TR18_1_0248301T06a_A1

5.8.5. Radiated Field Strength Emissions – 7 GHz to 16 GHz Results

Radiated Field Strength Emissions – 7 GHz to 16 GHz							
Temperature :+21 ° C		Technology: WLAN 5 GHz 802.11a/n/ac		TX-Fixed Channel (Modulated)			
Diagram No. (Remark 1)	Test Settings Mode B.W. Data Rate Channel	Set-up no.	OP-mode no.	Used detector			Verdict
				PK	AV	QP	
4.00b	Noise Level of Set up	-	-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Initial
4.01b	a Mode 20 MHz 9 MBit/s U-NII-1-Ch 36 5180 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.02b	a Mode 20 MHz 9 MBit/s U-NII-2A-Ch 64 5320 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.03b	a Mode 20 MHz 9 MBit/s U-NII-2C-Ch 100 5500 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.04b	a Mode 20 MHz 9 MBit/s U-NII-3-Ch 149 5745 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.05b	n Mode 20 MHz MCS3 U-NII-1-Ch 40 5200 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.06b	n Mode 20 MHz MCS3 U-NII-2A-Ch 52 5260 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.07b	n Mode 20 MHz MCS3 U-NII-2C-Ch 116 5580 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.08b	n Mode 20 MHz MCS3 U-NII-3-Ch 157 5785 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.09b	ac Mode 20 MHz MCS3 U-NII-1-Ch 48 5240 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.10b	ac Mode 20 MHz MCS3 U-NII-2A-Ch 56 5280 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.11b	ac Mode 20 MHz MCS3 U-NII-2C-Ch 140 5700 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.12b	ac Mode 20 MHz MCS3 U-NII-3-Ch 165 5825 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.13b	n Mode 40 MHz MCS3 U-NII-1-Ch 38 5190 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.14b	n Mode 40 MHz MCS3 U-NII-2A-Ch 54 5270 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.15b	n Mode 40 MHz MCS3 U-NII-2C-Ch 102 5510 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.16b	n Mode 40 MHz MCS3 U-NII-3-Ch 151 5755 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.17b	ac Mode 40 MHz MCS9 U-NII-1-Ch 46 5230 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.18b	ac Mode 40 MHz MCS9 U-NII-2A-Ch 62 5310 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.19b	ac Mode 40 MHz MCS9 U-NII-2C-Ch 134 5670 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.20b	ac Mode 40 MHz MCS9 U-NII-3-Ch 159 5795 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.21b	ac Mode 80 MHz MCS7 U-NII-1-Ch 42 5210 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.22b	ac Mode 80 MHz MCS7 U-NII-2A-Ch 58 5290 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.23b	ac Mode 80 MHz MCS7 U-NII-2C-Ch 106 5530 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.24b	ac Mode 80 MHz MCS7 U-NII-3-Ch 155 5575 MHz	1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass
4.30b	normal mode W-LAN 5GHz and BT simultaneous transmissions	3	4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pass

Remark 1: See diagrams in separate annex TR18_1_0248301T06a_A1

5.8.6. Radiated Field Strength Emissions – 16 GHz to 40 GHz Results

Radiated Field Strength Emissions – 16 GHz to 40 GHz							
Temperature :+21° C		Technology: WLAN 5 GHz 802.11a/n/ac		TX-Fixed Channel (Modulated)			
Diagram No. (Remark 1)	Test Settings Mode B.W. Data Rate Channel	Set-up no.	OP-mode no.	Used detector			Verdict
				PK	AV	QP	
4.01c	a Mode 20 MHz 9 MBit/s U-NII-1-Ch 36 5180 MHz	1	1	☒	☒	☐	Pass
4.02c	a Mode 20 MHz 9 MBit/s U-NII-2A-Ch 64 5320 MHz	1	1	☒	☒	☐	Pass
4.03c	a Mode 20 MHz 9 MBit/s U-NII-2C-Ch 100 5500 MHz	1	1	☒	☒	☐	Pass
4.04c	a Mode 20 MHz 9 MBit/s U-NII-3-Ch 149 5745 MHz	1	1	☒	☒	☐	Pass
4.05c	n Mode 20 MHz MCS3 U-NII-1-Ch 40 5200 MHz	1	1	☒	☒	☐	Pass
4.06c	n Mode 20 MHz MCS3 U-NII-2A-Ch 52 5260 MHz	1	1	☒	☒	☐	Pass
4.07c	n Mode 20 MHz MCS3 U-NII-2C-Ch 116 5580 MHz	1	1	☒	☒	☐	Pass
4.08c	n Mode 20 MHz MCS3 U-NII-3-Ch 157 5785 MHz	1	1	☒	☒	☐	Pass
4.09c	ac Mode 20 MHz MCS3 U-NII-1-Ch 48 5240 MHz	1	1	☒	☒	☐	Pass
4.10c	ac Mode 20 MHz MCS3 U-NII-2A-Ch 56 5280 MHz	1	1	☒	☒	☐	Pass
4.11c	ac Mode 20 MHz MCS3 U-NII-2C-Ch 140 5700 MHz	1	1	☒	☒	☐	Pass
4.12c	ac Mode 20 MHz MCS3 U-NII-3-Ch 165 5825 MHz	1	1	☒	☒	☐	Pass
4.13c	n Mode 40 MHz MCS3 U-NII-1-Ch 38 5190 MHz	1	1	☒	☒	☐	Pass
4.14c	n Mode 40 MHz MCS3 U-NII-2A-Ch 54 5270 MHz	1	1	☒	☒	☐	Pass
4.15c	n Mode 40 MHz MCS3 U-NII-2C-Ch 102 5510 MHz	1	1	☒	☒	☐	Pass
4.16c	n Mode 40 MHz MCS3 U-NII-3-Ch 151 5755 MHz	1	1	☒	☒	☐	Pass
4.17c	ac Mode 40 MHz MCS9 U-NII-1-Ch 46 5230 MHz	1	1	☒	☒	☐	Pass
4.18c	ac Mode 40 MHz MCS9 U-NII-2A-Ch 62 5310 MHz	1	1	☒	☒	☐	Pass
4.19c	ac Mode 40 MHz MCS9 U-NII-2C-Ch 134 5670 MHz	1	1	☒	☒	☐	Pass
4.20c	ac Mode 40 MHz MCS9 U-NII-3-Ch 159 5795 MHz	1	1	☒	☒	☐	Pass
4.21c	ac Mode 80 MHz MCS7 U-NII-1-Ch 42 5210 MHz	1	1	☒	☒	☐	Pass
4.22c	ac Mode 80 MHz MCS7 U-NII-2A-Ch 58 5290 MHz	1	1	☒	☒	☐	Pass
4.23c	ac Mode 80 MHz MCS7 U-NII-2C-Ch 106 5530 MHz	1	1	☒	☒	☐	Pass
4.24c	ac Mode 80 MHz MCS7 U-NII-3-Ch 155 5575 MHz	1	1	☒	☒	☐	Pass
4.30c	normal mode W-LAN 5GHz and BT simultaneous transmissions	3	4	☒	☒	☐	Pass

5.9. RF-Parameter - Radiated Band-Edge compliance measurements

5.9.1. Test location and equipment FAR

test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 348 EMI cond.	<input checked="" type="checkbox"/> 443 EMI FAR	<input type="checkbox"/> 347 Radio.lab.	<input type="checkbox"/> 337 OATS	<input type="checkbox"/>
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input checked="" type="checkbox"/> 264 FSEK	<input checked="" type="checkbox"/> 714 FSW67	<input type="checkbox"/>	<input type="checkbox"/>
antenna meas	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 289 CBL 6141	<input type="checkbox"/> 608 HL 562	<input checked="" type="checkbox"/> 549 HL025	<input type="checkbox"/> 302 BBHA9170	<input type="checkbox"/> 477 GPS
antenna meas	<input type="checkbox"/> 123 HUF-Z2	<input type="checkbox"/> 132 HUF-Z3	<input type="checkbox"/> 030 HFH-Z2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
antenna subst	<input type="checkbox"/> 071 HUF-Z2	<input type="checkbox"/> 020 EMCO3115	<input type="checkbox"/> 063 LP 3146	<input type="checkbox"/> 303 BBHA9170	<input type="checkbox"/>	<input type="checkbox"/>
multimeter	<input type="checkbox"/> 341 Fluke 112	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 371 CBT32	<input type="checkbox"/> 547 CMU	<input type="checkbox"/> 594 CMW		
DC power	<input type="checkbox"/> 611 E3632A	<input checked="" type="checkbox"/> 087 EA3013	<input type="checkbox"/> 354 NGPE 40	<input type="checkbox"/> 349 car battery	<input type="checkbox"/> 350 Car battery	<input type="checkbox"/>
Supply voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input checked="" type="checkbox"/> 13.5 V DC			

5.9.2. Requirements/Limits

FCC	<input type="checkbox"/> Part 15 Subpart B, §15.109 class B <input checked="" type="checkbox"/> Part 15 Subpart C, §15.209 for frequencies defined in §15.205 <input type="checkbox"/> Part 15 Subpart C, §15.407(b)(1)(2)(3)(4)			
ISED	<input checked="" type="checkbox"/> RSS-Gen., Issue 5, Chapter 8.9, Table 5+7 (transmitter licence exempt) <input type="checkbox"/> RSS-Gen., Issue 5, Chapter 7.3, Table 3 (receiver) <input type="checkbox"/> ICES-003, Issue 6, Chapter 6.2.2, Table 7 (class B) <input type="checkbox"/> RSS-247, Issue 2, Chapter 5.5 <input checked="" type="checkbox"/> RSS-247, Issue 2, Chapter 6.2			
ANSI	<input type="checkbox"/> C63.4-2014 <input checked="" type="checkbox"/> C63.10-2013			
Frequency [MHz]	Limits			
	AV [µV/m]	AV [dBµV/m]	Peak [µV/m]	Peak [dBµV/m] or [dBm/MHz]
above 1 GHz for frequencies as defined in §15.205 or RSS-Gen., Issue 9, §8.9 - Table 5	500	54.0	5000	74.0 dBµV/m
§15.407(b)(1)(2)(3)(4)	--	--	--	(b)(1): 5.15-5.25 GHz: -27 dBm eirp (b)(2): 5.25-5.35 GHz: -27 dBm eirp (b)(3): 5.47-5.725 GHz: -27 dBm eirp (-17 dBm/MHz eirp) (b)(4): 5.725-5.85 GHz: Spectrum mask
RSS-247, Issue 2	--	--	--	§6.2.1.2 §6.2.2.2 §6.2.3.3 -27 dBm/MHz (68.2 dBµV/m)
				§6.2.4.2: Spectrum mask 27 to 15.6 dBm 15.6 dBm to 10 dBm

5.9.3. Test condition and measurement test set-up

Signal link to test system (if used):		<input type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input checked="" type="checkbox"/> none
EUT-grounding		<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up		<input checked="" type="checkbox"/> table top 1.5m height		<input type="checkbox"/> floor standing
Climatic conditions		Temperature: (22±3° C)		
Spectrum-Analyzer settings		Rel. humidity: (40±20)% Scan frequency range: <input type="checkbox"/> 1 – 18 GHz <input type="checkbox"/> 18 – 25 GHz <input type="checkbox"/> 18 – 40 GHz <input checked="" type="checkbox"/> other: see diagrams Scan-Mode: <input type="checkbox"/> 6 dB EMI-Receiver Mode <input checked="" type="checkbox"/> 3 dB Spectrum analyzer Mode Detector: Peak and Average RBW/VBW: Left band-edge: 100 kHz/300 kHz Right band-edge: 1 MHz / 3 MHz Mode: Repetitive-Scan, max-hold Scan step: 40 kHz or 400 kHz Sweep-Time: Coupled – calibrated display if CW signal otherwise adapted to EUT's individual duty-cycle		
General measurement procedures		Please see chapter "Test system set-up for radiated electric field measurements above 1 GHz" for general measurements procedures in anechoic chamber.		

5.9.4. Measurement Method

For uncritical results where a measurement resolution bandwidth of 1 MHz can clearly show the compliance without influencing the results, a field strength measurement was performed to show compliance.

For critical results a Marker-Delta marker method was used for showing compliance to restricted bands. The method is according ANSI C63.10:2013, Chapter 6.10.6 “Marker-Delta method”

5.9.5. EUT settings

The EUT was instructed to send with maximum power (if adjustable) according to applicants instructions.

5.9.6. Results for FCC and ISED

Tests have been performed conducted and results up-scaled to radiated values.

Results for non-restricted bands - limits according to FCC §15.407 /RSS-247, Issue 2

Results for restricted bands near-by - limits accord. FCC §15.205 / §15.209

U-NII-1+U-NII-2A:

Diagramm no.	Channel no.	Restricted band ?	Fundamental Value [dBuV/m]		Value at Band-Edge [dBuV/m]		Limits [dBuV/m]		Duty-Cycle Correction for AV-detector [dB]	Margin [dB]		Verdict	Remark:
			Peak-Value	Average-Value	Peak-Value	Average-Value	Peak-Value	Average-Value		Peak	Average		
9.01a_standing	36	yes	99,69	91,96	54,96	43,96	74	54	0	19,04	10,04	PASS	a-mode, PWR-LVL=10dBm
9.03a	100	yes	100,74	92,76	55,22	44,20	74	54	0	18,78	9,80	PASS	a-mode, PWR-LVL=10dBm
9.05a	36	yes	99,08	90,67	53,93	44,20	74	54	0	20,07	9,80	PASS	n20-mode, PWR-LVL=10dBm
9.07a	100	yes	101,50	92,38	55,90	44,83	74	54	0	18,10	9,17	PASS	n20-mode, PWR-LVL=10dBm
9.09a	36	yes	95,29	86,39	54,60	44,20	74	54	0	19,40	9,80	PASS	ac20-mode, PWR-LVL=6dBm
9.11a	100	yes	97,40	88,58	55,52	44,20	74	54	0	18,48	9,80	PASS	ac20-mode, PWR-LVL=6dBm
9.13a	38	yes	96,58	87,14	55,98	45,11	74	54	0	18,02	8,89	PASS	n40-mode, PWR-LVL=10dBm
9.15a	102	yes	97,32	87,94	57,55	47,28	74	54	0	16,45	6,72	PASS	n40-mode, PWR-LVL=10dBm
9.17a	38	yes	92,17	83,20	53,30	43,23	74	54	0	20,70	10,77	PASS	ac40-mode, PWR-LVL=6dBm
9.21a	42	yes	90,61	81,73	56,16	45,97	74	54	0	17,84	8,04	PASS	ac80-mode, PWR-LVL=6dBm
9.23a	106	yes	92,10	83,44	62,40	50,70	74	54	0	11,60	3,30	PASS	ac80-mode, PWR-LVL=6dBm

U-NII-2C:

Diagramm no.	Channel no.	Restricted band ?	Fundamental Value		Value at Band-Edge		Limits		Duty-Cycle [dB]	Margin		Verdict	Remark:
			Peak-Value	Average-Value	Peak-Value	Average-Value	Peak-Value	Average-Value		Peak	Average		
9.02b	64	yes	102,67	94,27	58,50	45,25	74	54	0	15,50	8,75	PASS	a-mode, PWR-LVL=10dBm
9.03b	140	yes	95,96	88,21	56,14	45,50	74	54	0	17,86	8,50	PASS	a-mode, PWR-LVL=10dBm
9.06b	64	yes	102,80	93,59	61,24	45,50	74	54	0	12,76	8,50	PASS	n20-mode, PWR-LVL=10dBm
9.07b	140	yes	96,55	87,84	56,27	45,01	74	54	0	17,73	8,99	PASS	n20-mode, PWR-LVL=10dBm
9.10b	64	yes	97,78	89,71	55,90	44,56	74	54	0	18,10	9,44	PASS	ac20-mode, PWR-LVL=6dBm
9.11b	140	yes	93,58	85,04	56,24	44,90	74	54	0	17,76	9,10	PASS	ac20-mode, PWR-LVL=6dBm
9.14b	62	yes	99,42	89,70	61,94	50,23	74	54	0	12,07	3,77	PASS	n40-mode, PWR-LVL=10dBm
9.18b	62	yes	95,09	85,46	55,71	45,77	74	54	0	18,29	8,23	PASS	ac40-mode, PWR-LVL=6dBm
9.19a	134	yes	91,38	81,11	56,12	45,50	74	54	0	17,88	8,50	PASS	ac40-mode, PWR-LVL=6dBm

U-NII-3:

Diagramm no.	Channel no.	Restricted band ?	Fundamental Value		UNII-3 Spectrum Mask		Remark:
			Peak-Value	Average-Value	Left -Value	Right -Value	
9.04a	149	no	94,95	87,16	PASS	PASS	a-mode, PWR-LVL=10dBm
9.04b	165	no	95,33	87,63	PASS	PASS	a-mode, PWR-LVL=10dBm
9.08a	149	no	96,08	87,08	PASS	PASS	n20-mode, PWR-LVL=10dBm
9.08b	165	no	95,92	86,99	PASS	PASS	n20-mode, PWR-LVL=10dBm
9.12a	149	no	91,35	82,86	PASS	PASS	ac20-mode, PWR-LVL=6dBm
9.12b	165	no	96,77	87,21	PASS	PASS	ac20-mode, PWR-LVL=6dBm
9.16a	151	no	91,74	82,50	PASS	PASS	n40-mode, PWR-LVL=10dBm
9.16b	159	no	93,33	84,16	PASS	PASS	n40-mode, PWR-LVL=10dBm
9.20a	151	no	92,10	82,76	PASS	PASS	ac40-mode, PWR-LVL=6dBm
9.20b	159	no	91,30	82,17	PASS	PASS	ac40-mode, PWR-LVL=6dBm
9.24a	155	no	89,33	79,52	PASS	PASS	ac80-mode, PWR-LVL=6dBm

Remark : The EUT complies to the band edge requirement under provision that the power level is adjusted to those listed in the table above under Remarks.

For Diagrams see annex 1.

Verdict: Pass

5.9.7. Results for restricted emissions in 5250-5350 MHz band when TX operable in 5150-5250 MHz band

Requirement Canada RSS-247, Issue 2, Chapter 6.2.1.2

Diagram No.	Mode	Channel No.	Occupied Bandwidth [MHz]	Channel Power [dBm]	Max. Power within band 5250 to 5350MHz (measured approx. 1% of OBW) [dBm]	Attenuation in regards to CH PWR [dBc]	Limit [dBc]	Verdict
35.01a 35.01b 35.01c	a	48	16,77	11,28	-29,59	40,87	26	pass
35.02a 35.02b 35.02c	n20	48	17,81	12,3	-27,43	39,73	26	pass
35.03a 35.03b 35.03c	ac20	48	17,76	7,7	-26,36	34,06	26	pass
35.04a 35.04b 35.04c	n40	46	36,14	11,49	-28,6	40,09	26	pass
35.05a 35.05b 35.05c	ac40	46	36,15	7,75	-31,87	39,62	26	pass
35.06a 35.06b 35.06c	ac80	42	76,68	11,42	-32,49	43,91	26	pass

Remark: for further details see annex 1

Verdict: Pass

5.9.8. Results for restricted emissions in 5150-5250 MHz band when TX operable in 5250-5350 MHz band

Requirement Canada RSS-247, Issue 2, Chapter 6.2.2.2 b

Diagram No:	Mode	Channel No.	Peak Value at Band Edge	Antenna Gain	Peak EIRP value at Band Edge	Limit	Verdict
			[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	
35.01d	a	52	-18.28	3.7	-14.58	10	Pass
35.02d	n_20	52	-13.25	3.7	-9.55	10	Pass
35.03d	ac_20	52	-17.67	3.7	-13.97	10	Pass
35.04d	n_40	54	-19.03	3.7	-15.33	10	Pass
35.05d	ac_40	54	-17.01	3.7	-13.31	10	Pass
35.06d	ac_80	58	-22.43	3.7	-18.73	10	Pass

Remark: for further details see annex 1

Verdict: Pass

5.10. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%							Remarks
Conducted emissions (U _{CISPR})	CISPR 16-2-1	9 kHz - 150 kHz 150 kHz - 30 MHz	4.0 dB 3.6 dB							-
Radiated emissions Enclosure	CISPR 16-2-3	30 MHz - 1 GHz 1 GHz - 18 GHz	4.2 dB 5.1 dB							E-Field
Disturbance power	CISPR 16-2-2	30 MHz - 300 MHz	-							-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB							Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	--	-	
		9 kHz - 12.75 GHz	N/A	0.60	0.7	0.25	N/A	--		
		12.75 - 26.5 GHz	N/A	0.82	--	N/A	N/A	--		
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	0.70	N/A	0.69	--	N/A - not applicable	
		2.8 GHz - 12.75 GHz	1.48	N/A	1.51	N/A	1.43	--		
		12.75 GHz - 18GHz	1.81	N/A	1.83	N/A	1.77	--		
		18 GHz - 26.5 GHz	1.83	N/A	1.85	N/A	1.79	--		
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)							Frequency error
			1.0 dB							Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)							Frequency error
	-		See above: 0.70 dB							Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm							-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.0 dB							Magnetic field E-field Substitution
		30 MHz - 1 GHz	4.2 dB							
		1 GHz - 20 GHz	3.17 dB							

Table: measurement uncertainties, valid for conducted/radiated measurements

6. Abbreviations used in this report

The abbreviations	
ANSI	American National Standards Institute
AV . AVG. CAV	Average detector
EIRP	Equivalent isotropically radiated power. determined within a separate measurement
EGPRS	Enhanced General Packet Radio Service
EUT	Equipment Under Test
FCC	Federal Communications Commission. USA
IC	Industry Canada
n.a.	not applicable
Op-Mode	Operating mode of the equipment
PK	Peak
RBW	resolution bandwidth
RF	Radio frequency
RSS	Radio Standards Specification. Documents from Industry Canada
Rx	Receiver
TCH	Traffic channel
Tx	Transmitter
QP	Quasi peak detector
VBW	Video bandwidth
ERP	Effective radiated power

7. Accreditation details of CETECOM's laboratories and test sites

Ref.-No.	Accreditation Certificate	Valid for laboratory area or test site	Accreditation Body
-	D-PL-12047-01-01	All laboratories and test sites of CETECOM GmbH. Essen	DAkkS. Deutsche Akkreditierungsstelle GmbH
337 487 558 348 348	(MRA US-EU 0003)	Radiated Measurements 30 MHz to 1 GHz. 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz. 3 m (SAR) Radiated Measurements above 1 GHz. 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	FCC. Federal Communications Commission Laboratory Division. USA
337 487 550 558	3462D-1 3462D-2 3462D-2 3462D-3	Radiated Measurements 30 MHz to 1 GHz. 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz. 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz. 3 m (SAR) Radiated Measurements above 1 GHz. 3 m (FAR)	ISED. Industry Canada Certification and Engineering Bureau
487 550 348 348	R-2666 G-301 C-2914 T-1967	Radiated Measurements 30 MHz to 1 GHz. 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz. 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	VCCI. Voluntary Control Council for Interference by Information Technology Equipment. Japan
OATS = Open Area Test Site. SAR = Semi Anechoic Room. FAR = Fully Anechoic Room			

8. Instruments and Ancillary

8.1. Used equipment “CTC”

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

8.1.1. Test software and firmware of equipment

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
012	Signal Generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02
013	Power Meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51
017	Digital Radiocommunication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	Firm.= V 3.1DHG
261	Thermal Power Sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B
262	Power Meter	NRV-S	825770/0010	Firm.= 2.6
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02
298	Univ. Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used
323	Digital Radiocommunication Tester	CMD 55	825878/0034	Firm.= 3.52 .22.01.99
335	CTC-EMS-Conducted	System EMS Conducted	-	EMC 32 V 8.52
340	Digital Radiocommunication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10
371	Bluetooth Tester	CBT32	100153	CBT V5.30+ SW-Option K55, K57
377	EMI Test Receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36
378	Broadband RF Field Monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13
389	Digital Multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)
392	Radio Communication Tester	MT8820A	6K00000788	Firm.= 4.50 #005, IPL=4.01#001,OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario=
436	Univ. Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR)	-	EMC 32 Version 8.52
442	CTC-SAR-EMS	System EMS field (SAR)	-	EMC 32 Version 8.40
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	Spuri 7.2.5 or EMC 32 Ver. 9.15.00
444	CTC-FAR-EMS field	System-EMS-Field (FAR)	-	EMC 32 Version 9.15.00
460	Univ. Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used,
489	EMI Test Receiver	ESU40	1000-30	Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00
491	ESD Simulator dito	ESD dito	dito307022	V 2.30
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr: 000037 Version V4.20a01
526	Burst Generator	EFT 200 A	0496-06	Software Nr. 000034 Version V2.32
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01
546	Univ. Radio Communication Tester	CMU 200	106436	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used
547	Univ. Radio Communication Tester	CMU 200	835390/014	R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14
584	Spectrum Analyzer	FSU 8	100248	2.82_SP3
597	Univ. Radio Communication Tester	CMU 200	100347	R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850
607	Signal Generator	SMR 20	832033/011	V1.25
620	EMI Test Receiver	ESU 26	100362	4.43_SP3
642	Wideband Radio Communication Tester	CMW 500	126089	Setup V03.26, Test programm component V03.02.20
670	Univ. Radio Communication Tester	CMU 200	106833	µP1 =V8.50, Firmware = V.20
689	Vector Signal Generator	SMU200	100970	02.20.360.142
692	Bluetooth Tester	CBT 32	100236	CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF)
693	Test System	TS8997	--	SW: EMC32/WMS32 version 10.50.00 HW: OSP120 Base unit (S/N=106833) ; FSU26 (Ref. Nr. 683) ; SMU 200 (Ref. Nr. 689) ; SMF 100A (Ref. Nr. 687)
699	Audio Analyzer	UPL16	833494/005	3.06

8.1.2. Single instruments and test systems

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz	12 M	-	23.05.2020
007	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz	12 M	-	23.05.2020
009	Power Meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz	24 M	-	23.05.2021
016	Line Impedance Simulating Network	Op. 24-D	B6366	Spitzenberger+Spies	36 M	-	22.05.2022
020	Horn Antenna 18 GHz (Subst 1)	3115	9107-3699	EMCO	36/12 M	-	31.07.2021
021	Loop Antenna (H-Field)	6502	9206-2770	EMCO	36 M	-	30.05.2021
033	RF-current probe (100 kHz-30 MHz)	ESH2-Z1	879581/18	Rohde & Schwarz	24 M	-	23.05.2021
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz	pre-m	1a	
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies	-	3	
066	notch filter (WCDMA; FDD1)	WRCT 1900/2200-5/40-10EEK	5	Wainwright GmbH	12 M	1g	16.11.2019
086	DC - power supply, 0 -10 A	LNG 50-10	-	Heinzinger Electronic	pre-m	2	
087	DC - power supply, 0 -5 A	EA-3013 S	-	Elektro Automatik	pre-m	2	
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba	-	4	
099	passive voltage probe	ESH2-Z3	299.7810.52	Rohde & Schwarz	36 M	-	30.05.2021
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck	36 M	-	30.05.2021
110	USB-LWL-Converter	OLS-1	-	Ing. Büro Scheiba	-	4	
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	BOCONSULT	36 M	-	22.05.2022
133	horn antenna 18 GHz (Meas 1)	3115	9012-3629	EMCO	36 M	1c	10.03.2020
134	horn antenna 18 GHz (Subst 2)	3115	9005-3414	EMCO	36 M	-	10.03.2020
248	attenuator	SMA 6dB 2W	-	Radiall	pre-m	2	
249	attenuator	SMA 10dB 10W	-	Radiall	pre-m	2	
252	attenuator	N 6dB 12W	-	Radiall	pre-m	2	
256	attenuator	SMA 3dB 2W	-	Radiall	pre-m	2	
257	hybrid	4031C	04491	Narda	pre-m	2	
260	hybrid coupler	4032C	11342	Narda	pre-m	2	
261	Thermal Power Sensor	NRV-Z55	825083/0008	Rohde & Schwarz	24 M	-	30.05.2020
262	Power Meter	NRV-S	825770/0010	Rohde & Schwarz	24 M	-	30.05.2020
265	peak power sensor	NRV-Z33, Model 04	840414/009	Rohde & Schwarz	24 M	-	30.05.2020
266	Peak Power Sensor	NRV-Z31, Model 04	843383/016	Rohde & Schwarz	24 M	-	30.05.2020
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH	pre-m	2	
270	termination	1418 N	BB6935	Weinschel	pre-m	2	
271	termination	1418 N	BE6384	Weinschel	pre-m	2	
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel	pre-m	2	
273	attenuator (10 dB) 100 W	Model 48	BF9229	Weinschel	pre-m	2	
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel	pre-m	2	
275	DC-Block	Model 7003 (N)	C5129	Weinschel	pre-m	2	
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel	pre-m	2	
279	power divider	1515 (SMA)	LH855	Weinschel	pre-m	2	
287	pre-amplifier 25 MHz – 4 GHz	AMF-2D-100M4G-35-10P	379418	Miteq	12 M	1c	16.11.2019
291	high pass filter GSM 850/900	WHJ 2200-4EE	14	Wainwright GmbH	12 M	1c	16.11.2019
298	Univ. Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz	pre-m	3	
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz	12 M	-	22.05.2020
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel	pre-m	2	
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck	36 M	-	14.03.2020
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck	36 M	-	20.03.2020
331	Climatic Test Chamber -40/+180 Grad	HC 4055	43146	Heraeus Vötsch	24 M	-	10.01.2021
341	Digital Multimeter	Fluke 112	81650455	Fluke	24 M	-	30.05.2020
342	Digital Multimeter	Voltcraft M-4660A	IB 255466	Voltcraft	24 M	-	23.05.2021
347	laboratory site	radio lab.	-	-	-	5	
348	laboratory site	EMI conducted	-	-	-	5	
354	DC - Power Supply 40A	NGPE 40/40	448	Rohde & Schwarz	pre-m	2	
357	power sensor	NRV-Z1	861761/002	Rohde & Schwarz	24 M	-	21.05.2021
373	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	100535	Rohde & Schwarz	12 M	-	22.05.2020
377	EMI Test Receiver	ESCS 30	100160	Rohde & Schwarz	12 M	-	22.05.2020
389	Digital Multimeter	Keithley 2000	0583926	Keithley	pre-m	-	
392	Radio Communication Tester	MT8820A	6K00000788	Anritsu	12 M	-	01.07.2020
396	Thermo/Hygrometer	Thermo/Hygrometer	-	Conrad	24 M	-	09.01.2021
405	Thermo/Hygrometer	OPUS 10 THI	126.0604.0003.3.3.3.22	LUFFT Mess u. Regeltechnik GmbH	24 M	-	30.05.2021
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO	-	4	
436	Univ. Radio Communication Tester	CMU 200	103083	Rohde & Schwarz	12 M	-	25.05.2020
439	UltraLog-Antenna	HL 562	100248	Rohde & Schwarz	36 M	-	10.03.2020
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	ETS-Lindgren / CETECOM	12 M	5	16.11.2019
448	notch filter WCDMA_FDD II	WRCT 1850.0/2170.0-5/40-10SSK	5	Wainwright Instruments GmbH	12 M	1c	16.11.2019
449	notch filter WCDMA FDD V	WRCT 824.0/894.0-5/40-8SSK	1	Wainwright	12 M	1c	16.11.2019
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg	-	4	

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of Calibration	Remark	Cal due
456	DC-Power supply 0-5 A	EA 3013 S	207810	Elektro Automatik	pre-m	2	
459	DC -Power supply 0-5 A , 0-32 V	EA-PS 2032-50	910722	Elektro Automatik	pre-m	2	
460	Univ. Radio Communication Tester	CMU 200	108901	Rohde & Schwarz	12 M	-	30.05.2020
463	Universal source	HP3245A	2831A03472	Agilent	-	4	
466	Digital Multimeter	Fluke 112	89210157	Fluke USA	24 M	-	30.05.2020
467	Digital Multimeter	Fluke 112	89680306	Fluke USA	36 M	-	30.05.2021
468	Digital Multimeter	Fluke 112	90090455	Fluke USA	36 M	-	30.04.2021
477	ReRadiating GPS-System	AS-47	-	Automotive Cons. Fink	-	3	
480	power meter (Fula)	NRVS	838392/031	Rohde & Schwarz	24 M	-	30.05.2021
482	filter matrix	Filter matrix SAR 1	-	CETECOM (Brl)	-	1d	
484	pre-amplifier 2,5 - 18 GHz	AMF-5D-02501800-25-10P	1244554	Miteq	12 M	-	16.11.2019
487	System CTC NSA-Verification SAR-EMI	System EMI field (SAR) NSA	-	ETS Lindgren / CETECOM	24 M	-	16.04.2021
489	EMI Test Receiver	ESU40	1000-30	Rohde & Schwarz	12 M	-	30.06.2020
502	band reject filter	WRCG 1709/1786-1699/1796-	SN 9	Wainwright	pre-m	2	
503	band reject filter	WRCG 824/849-814/859-60/10SS	SN 5	Wainwright	pre-m	2	
512	notch filter GSM 850	WRCA 800/960-02/40-6EEK	SN 24	Wainwright	12 M	1c	16.11.2019
517	relais switch matrix	HF Relais Box Keithley System	SE 04	Keithley	pre-m	2	
523	Digital Multimeter	L4411A	MY46000154	Agilent	24 M	-	23.05.2021
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel	pre-m	2	
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-	pre-m	2	
546	Univ. Radio Communication Tester	CMU 200	106436	R&S	12 M	-	30.08.2020
549	Log.Per-Antenna	HL025	1000060	Rohde & Schwarz	36/12 M	-	31.07.2021
550	System CTC S-VSWR Verification SAR-EMI	System EMI Field SAR S-VSWR	-	ETS Lindgren/CETECOM	24 M	-	30.10.2021
552	high pass filter 2,8-18GHz	WHKX 2.8/18G-10SS	4	Wainwright	12 M	1c	16.11.2019
557	System CTC-OTA-2	R&S TS8991	-	Rohde & Schwarz	12 M	5	24.01.2020
574	Biconilog Hybrid Antenna	BTA-L	980026L	Frankonia	36/12 M	-	03.05.2022
584	Spectrum Analyzer	FSU 8	100248	Rohde & Schwarz	pre-m	-	
594	Wideband Radio Communication Tester	CMW 500	101757	Rohde & Schwarz	12 M	-	26.06.2020
597	Univ. Radio Communication Tester	CMU 200	100347	Rohde & Schwarz	pre-m	-	
600	power meter	NRVD (Reserve)	834501/018	Rohde & Schwarz	24 M	-	30.05.2021
602	peak power sensor	NRV-Z32 (Reserve)	835080	Rohde & Schwarz	24 M	-	
611	DC power supply	E3632A	KR 75305854	Agilent	pre-m	2	
612	DC power supply	E3632A	MY 40001321	Agilent	pre-m	2	
613	Attenuator	R416120000 20dB 10W	Lot. 9828	Radiall	pre-m	2	
616	Digitalmultimeter	Fluke 177	88900339	Fluke	24 M	-	30.05.2020
617	Power Splitter/Combiner	ZFSC-2-2-S+	S F987001108	Mini Circuits	-	2	
618	Power Splitter/Combiner	50PD-634	600994	JFW Industries USA	-	2	
619	Power Splitter/Combiner	50PD-634	600995	JFW Industries, USA	-	3	
620	EMI Test Receiver	ESU 26	100362	Rohde-Schwarz	12 M	-	30.05.2020
621	Step Attenuator 0-139 dB	RSP	100017	Rohde & Schwarz	pre-m	2	
625	Generic Test Load USB	Generic Test Load USB	-	CETECOM	-	2	
634	Spectrum Analyzer	FSM (HF-Unit)	826188/010	Rohde & Schwarz	pre-m	2	
637	High Speed HDMI with Ethernet 1m	HDMI cable with Ethernet 1m	-	KogiLink	-	2	
638	HDMI Kabel with Ethernet 1,5 m flach	HDMI cable with Ethernet 1,5m	-	Reichelt	-	2	
640	HDMI cable 2m rund	HDMI cable 2m rund	-	Reichelt	-	2	
641	HDMI cable with Ethernet	Certified HDMI cable with	-	PureLink	-	2	
644	Amplifierer	ZX60-2534M+	SN865701299	Mini-Circuits	-	-	
670	Univ. Radio Communication Tester	CMU 200	106833	Rohde & Schwarz	24 M	-	30.05.2020
671	DC-power supply 0-5 A	EA-3013S	-	Elektro Automatik	pre-m	2	
678	Power Meter	NRP	101638	Rohde&Schwarz	pre-m	-	
683	Spectrum Analyzer	FSU 26	200571	Rohde & Schwarz	12 M	-	30.05.2020
687	Signal Generator	SMF 100A	102073	Rohde&Schwarz	12 M	-	30.05.2020
688	Pre Amp	JS-18004000-40-8P	1750117	Miteq	pre-m	-	
690	Spectrum Analyzer	FSU	100302/026	Rohde&Schwarz	24 M	-	30.05.2021
691	OSP120 Base Unit	OSP120	106833	Rohde & Schwarz	12 M	-	30.05.2020
692	Bluetooth Tester	CBT 32	100236	Rohde & Schwarz	36 M	-	29.05.2020
693	TS8997	CTC-Radio Lab 1_TS8997	-	Rohde&Schwarz	12 M	5	07.01.2020
697	Power Splitter	ZN4PD-642W-S+	165001445	Mini-Circuits	-	2	
701	CMW500 wide. Radio Comm.	CMW500	158150	Rohde & Schwarz	24 M	-	30.07.2020
703	INNCO Antennen Mast	MA 4010-KT080-XPET-ZSS3	MA4170-KT100-XPET-ZSS3	INNCO	pre-m	-	
704	INNCON Controller	CO 3000-4port	CO3000/933/384105 16/L	INNCO Systems GmBh	pre-m	-	

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of Calibration	Remark	Cal due
711	Harmonic Mixer 90 GHz – 140 GHz	RPG FS-Z140	101004	RPG	36 M	-	22.02.2020
712	Harmonic Mixer 75 GHz – 110 GHz	FS-Z110	101468	Rohde & Schwarz	36 M	-	22.02.2020
713	Harmonic Mixer, 50 GHz – 75 GHz	FS-Z75	101022	Rohde & Schwarz	24 M	-	05.07.2021
714	Signal Analyzer 67 GHz	FSW67	104023	Rohde & Schwarz	24 M	-	04.07.2021
715	Harmonic Mixer, 140 GHz – 220 GHz	FS-Z220	101009	RPG Radiometer Physics	36 M	-	03.08.2020
716	Harmonic Mixer 220 GHz to 325 GHz	FS-Z325	101005	RPG Radiometer Physics	36 M	-	13.02.2020
747	Spectrum Analyzer	FSU 26	200152	Rohde & Schwarz	12 M	-	30.07.2020
748	Pickett-Potter Horn Antenna	FH-PP 4060	010001	Radiometer Physics	36 M	-	
750	Pickett-Potter Horn Antenna	FH-PP 220	010011	Radiometer Physics	36 M	-	
751	Digital Optical System	optoCAN-FD Transceiver	17-010416	mk-messtechnik GmbH	-	-	
752	Digital Optical System	optoCAN-FD Transceiver	17-010083	mk-messtechnik GmbH	-	-	
753	Digital Optical System	optoCAN-FD Transceiver	17-010084	mk-messtechnik GmbH	-	-	
754	Digital Optical System	optoCAN-FD Transceiver	17-010415	mk-messtechnik GmbH	-	-	
755	Digital Optical System	optoLAN-100-MAX Transceiver	17-010795	mk-messtechnik GmbH	-	-	
757	WIDEBAND RADIO COMMUNICATION	CMW500	163673	Rohde&Schwarz	12 M	-	30.05.2020
758	Signal Generator	SMU 200A	100754	Rohde & Schwarz	24 M	-	11.10.2020
781	Power Supply	PS 2042-10 B	2815450369	Elektro-Automatik GmbH & Co.KG	-	-	
782	Power Supply	PS 2042-10 B	2815450348	Elektro-Automatik GmbH & Co.KG	-	-	
783	Spectrum Analyzer	FSU 26	100414	Rohde & Schwarz	12 M	-	30.05.2020
784	Power Supply	NGSM 32/10	00196	Rohde & Schwarz	12 M	-	
785	RSP	RF Step Attenuator 0...139.9dB	860712/012	Rohde & Schwarz	12 M	-	
786	SAR Probe	ES3DV3	3340	Speag	36 M	-	14.02.2021
787	OSP	OSP B157WX	101264	Rohde & Schwarz	24 M	-	30.05.2020
788	Precision Omnidirectional Dipole	POD 618	6182558/Q	Seibersdorf Laboratories	36 M	-	30.06.2021
789	Precision Omnidirectional Dipole	POD 16	162496/Q	Seibersdorf Laboratories	36 M	-	30.06.2021
790	Horn Antenna	ASY-SGH-124-SMA	29F14182337	Antenna System Solutions	36 M	-	08.10.2021
791	Pickett-Potter Horn Antenna	FH-PP-325	10024	Radiometer Physics	36 M	-	
792	Pickett-Potter Horn Antenna	FH-PP 075	10006	Radiometer Physics	36 M	-	
793	Pickett-Potter Horn Antenna	FH-PP 140	10008	Radiometer Physics	36 M	-	
794	Pickett-Potter Horn Antenna	FH-PP 110	10014	Radiometer Physics	36 M	-	
795	SGH Antenna	SGH-26-WR10	1144	Antenal S.L.	36 M	-	
798	WR-22 Rectangular Gain Horn	SAR-2309-22-S2	13254-01	SAGE Millimeter, Inc.	36 M	-	
799	Transceiver	optoLAN-Gb	18-014746	mk messtechnik	pre-m	-	
801	Spectrum Analyzer	FSP 13	100960	Rohde & Schwarz	24 M	-	14.01.2021
802	Exposure Level Tester	ELT-400	O-0026	NARDA Safety Solutions	24 M	-	30.01.2021
803	Probe	ELT probe 3cm²	O-0026	Narda Safety Test Solution	24 M	-	30.01.2021
805	Thermo-Hygrometer	Web-Thermo-Hygrometer	02749814	W&T	24 M	-	
806	AC2600 Smart Wifi Router	Netgear Nighthawk x4S	5K5188590067B	Netgear	-	-	
807	Direct Coupler	Direct Coupler C-05020-10	511	ET Industries	-	-	
808	Diode Power Sensor	NRV-Z1	829894/001	Rohde & Schwarz	24 M	-	24.05.2021
809	Standard gain Horn Antenna	WR-159 Horn Antenna	-	Pasternack Enterprises Inc.	-	-	

8.1.3. Legend

Note / remarks		Calibrated during system calibration:
	1a	System CTC-SAR-EMS (Ref.-No. 442)
	1b	System-CTC-EMS-Conducted (Ref.-No. 335)
	1c	System CTC-FAR-EMI-RSE (Ref.-No . 443)
	1d	System CTC-SAR-EMI (Ref.-No . 441)
	1e	System CTC-OATS (EMI radiated) (Ref.-No. 337)
	1 f	System CTC-CTIA-OTA (Ref.-No . 420)
	1 g	System CTC-FAR-EMS (Ref.-No . 444)
	2	Calibration or equipment check immediately before measurement
	3	Regulatory maintained equipment for functional check or support purpose
	4	Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment
	5	Test System

Interval of calibration	12 M	12 month
	24 M	24 month
	36 M	36 month
	24/12 M	Calibration every 24 months, between this every 12 months internal validation
	36/12 M	Calibration every 36 months, between this every 12 months internal validation
	Pre-m	Check before starting the measurement
	-	Without calibration

9. Versions of test reports (change history)

Version	Applied changes	Date of Release
--	Initial Release	2019-10-24
C1	Antenna Gain Information updated	2019-10-31

END OF TEST REPORT