




| Revision history | | |
|------------------|------------------|-------|
| Rev. | Change Order No. | Sign. |
| - | 100316 | OIS |
| A | 101110 | OIS |
| B | 101818 | OIS |
| C | 102301 | OIS |
| D | 102607 | AnL |

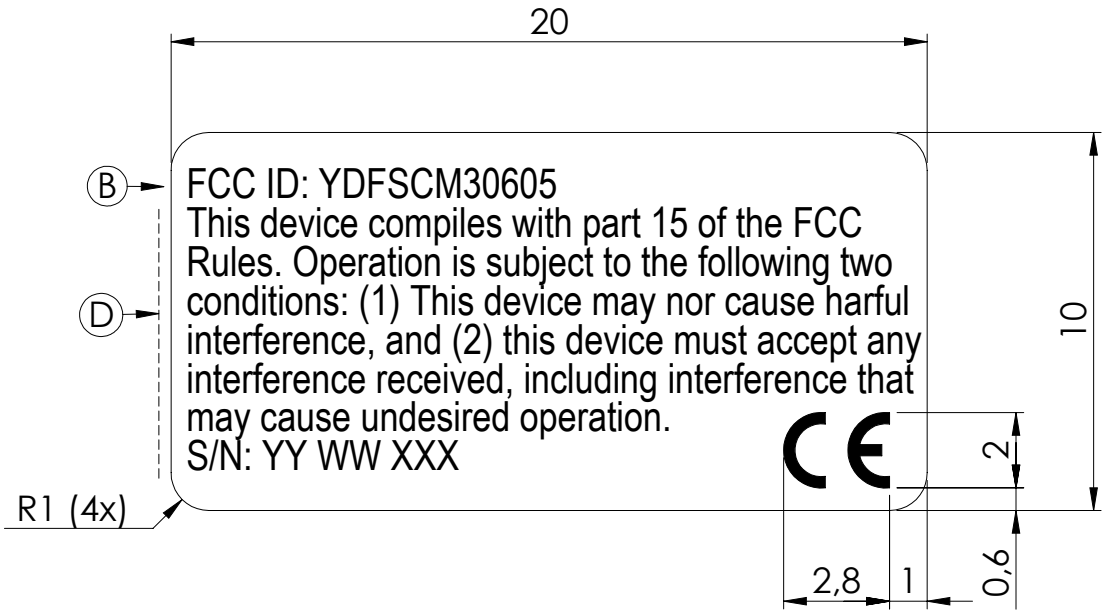

* **TEKRA PSA 0.002 Silver Matte Polyester, TC permanent Acrylic Adhesive.**

Ⓒ **Font: Arial Narrow / Fontheight: 0,77 mm**

Ⓓ **Screen printed, permanent black.**

| | | | | | | | | | | |
|---|---------------------------|----------|--------------------------|----------|-------------|---|---|-----------|-------|----------|
|  | Material | | | | | Finish/treatment (Dim. given to include surface treatment) | | | | |
| | Drawn | Engineer | Checked | Approved | Date | Solid model Y/N |  | A4 | | |
| | OIS | RoT | | RoT | 100315 | Y | | | | |
| | General surface roughness | | Unless otherwise stated: | | | | | Part No. | | |
| | R _a = | | remove sharp edges: | | | | | 31 157-01 | | |
| Denomination | | | | | Sheet | 1 | of | 1 | Scale | 5:1 |
| Label, SpiroCom | | | | | Drawing No. | | | | | 31 157 D |

Denna handling får inte utan vårt medgivande delges annan, kopieras eller eljest obehörigen användas. Överträdelse härav beivras med stöd av gällande lag.
INTERSPIRO AB, Box 10060, 181 10 LIDINGÖ


This document must not be copied, either completely or in part, without our permission.
Any infringement will lead to legal proceedings.
INTERSPIRO AB, Box 10060, S-181 10 LIDINGÖ, SWEDEN

| Revision history Revisionshistorik | | |
|---------------------------------------|------------------------------------|-------|
| Rev. | Change Order No. Ändr.order nr. | Sign. |
| - | 100316 | OLS |
| A | 101818 | OLS |

Ⓐ

31 155-01
Label USA

SpiroCom P/N 30 605-01
Conforms to UL913 6th edition Cl. I, Gr. A - D.
Certified to
CAN/CSA-E60079-0:02. CAN/CSA-E60079-11:02
(Tamb = -30° to + 60°C)
Intrinsically safe / Securite Intrinseque
Exia IIC T4

3050478

INTERSPIRO AB, LIDINGÖ SWEDEN


22

16

Ⓐ

31 155-10
Label Europa

SpiroCom P/N 30 605-10
Ga Ex ia IIC T4
(Tamb = -30° to + 60°C)



ITSEx08E25811


INTERSPIRO AB, LIDINGÖ SWEDEN

22

16

× TEKRA PSA 0.002 Silver Matte Polyester,
TC permanent Acrylic Adhesive.

| | | | | | | | | |
|---|--|--------------|---|----------------|---------------|----------------------------------|---|--------------------|
|  | Material | | | | | Finish/treatment Ytbehandling | | |
| | Drawn Ritad | Eng. Ing. | Check. Kontr. | Appr. Godk. | Date Datum | Solid model Y/N |  | A4 |
| | OLS | RoT | | RoT | 100122 | | | |
| | General surface roughness Generell ythjämnhet | | Unless otherwise stated: / Där ej annat angivits: | | | | Part No. / Art. No. | |
| | Ra = | | remove sharp edges brytes kanterna: | | | | max. radius kälär Rmax: | |
| Name / Benämning | | | | | | Sheet Blad | 1 of av 1 | Scale Skala 5:1 |
| Label, SpiroCom | | | | | | Drawing No. Ritn.nr. | | |
| Part of / Ingår i | | | | | | 31 155 A | | |



| Revision history Revisionshistorik | | |
|---------------------------------------|------------------------------------|-------|
| Rev. | Change Order No. Ändr.order nr. | Sign. |
| - | 100316 | OLS |
| A | 101818 | OLS |

A

WARNING!

Substitution of components may impair intrinsic safety.
Do not change battery in hazardous locations.
See user manual for further information.
Always use the specified AAA alkaline batteries
Duracell MN2400 and Energizer E92.
Interspiro assumes no liability for mechanical,
electrical or any other type of battery failure.
Do not mix battery manufacturers or old with new batteries.



AVERTISSEMENT:

La substitution de composants peut compromettre
la securite intrinseque.
Remplacer les piles uniquement en atmosphere non inflammable.
N'utilisez que les piles alcalines AAA
Duracell MN2400 et Energizer E92.
Interspiro ne saurait en aucun cas être tenu responsable
des problèmes mécaniques, électriques ou autres des piles.
N'utilisez pas des marques de piles différentes et ne
mélangez pas de vieilles piles avec des piles plus récentes.

15


15

× TEKRA PSA 0.002 Silver Matte Polyester,
TC permanent Acrylic Adhesive.

| | | | | | | | | |
|---|--|---------------------|---|-----------------------|-------------------------------------|--------------------|---|----|
|  | Material | | | | Finish/treatment Ytbehandling | | | |
| | Drawn Ritad OLS | Eng. Ing. RoT | Check. Kontr. | Appr. Godk. RoT | Date Datum 100122 | Solid model Y/N |  | A4 |
| | General surface roughness Generell ytjämnhet $R_a =$ | | Unless otherwise stated: / Där ej annat angivits: remove sharp edges brytes kanterna: max. radius kålar Rmax: | | | | Part No. / Art. No. 31 156-01 | |
| | Name / Benämning Label, SpiroCom | | | | Sheet Blad 1 of av 1 | | Scale Skala 5:1 | |
| Part of / Ingår i | | | | | Drawing No. Ritn.nr. 31 156 A | | | |


Label location SpiroCom

Radio Box

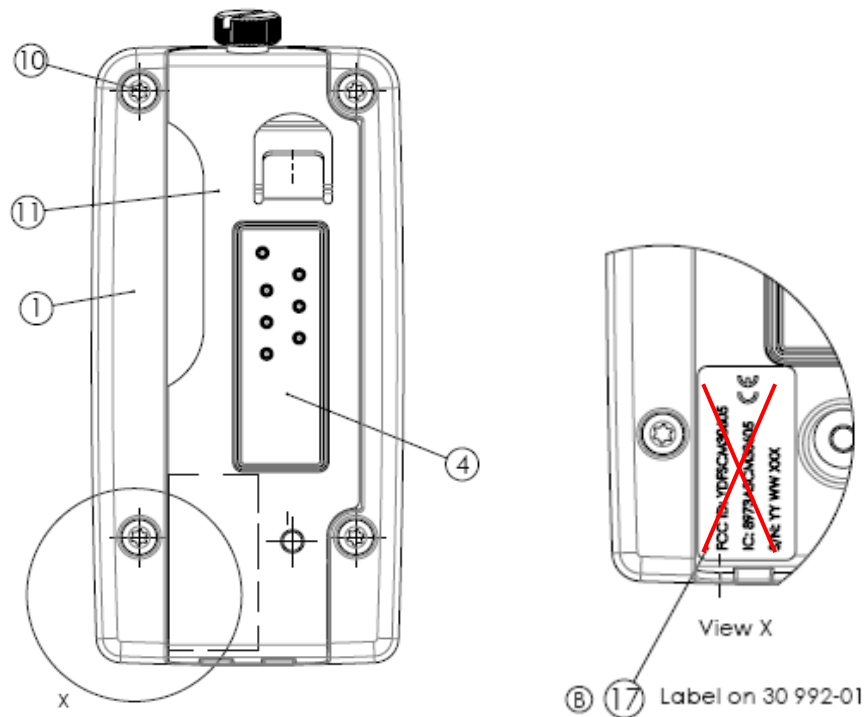

Note - The drawing is not showing the correct label, only location of label.

Mask Unit

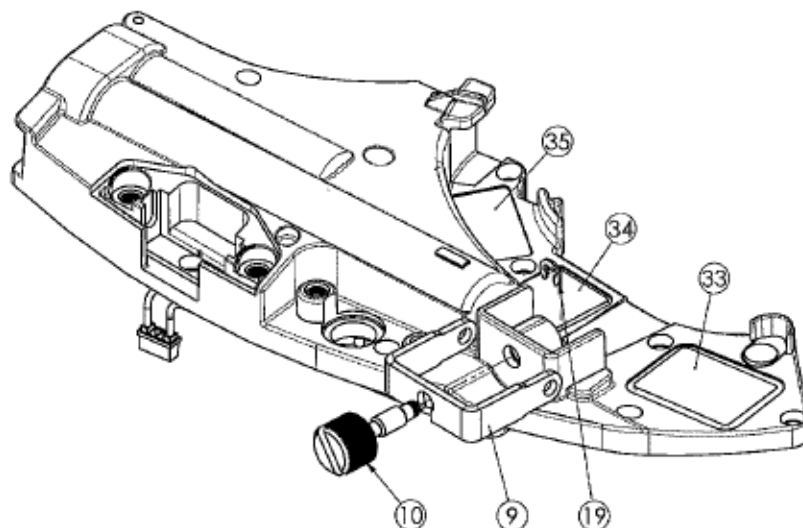

Note – Number 33 to 35 is showing label locations.