

FCC REPORT

Applicant: DINGOO DIGITAL TECHNOLOGY LIMITED

Address of Applicant: UNIT 2209, 22/F., WU CHUNG HSE., 213 QUEEN'S RD.
EAST, WANCHAI, Hong Kong

Equipment Under Test (EUT)

Product Name: MULTI-FUNCTION HANDHELD GAME PLAYER

Model No.: A380, A388, A800, A900, A330

FCC ID: YDKA380

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249:2011

Date of sample receipt: January 18, 2013

Date of Test: January 29-30, 2013

Date of report issued: January 31, 2013

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Version No.	Date	Description
00	January 31, 2013	Original

Prepared By:

hank. yan.

Date:

January 31, 2013

Project Engineer

Check By:

Hans. Hu

Date:

January 31, 2013

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS	6
5.5 TEST FACILITY.....	6
5.6 TEST LOCATION	6
5.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA.....	8
7.1 ANTENNA REQUIREMENT:.....	8
7.2 CONDUCTED EMISSIONS	9
7.3 RADIATED EMISSION METHOD.....	12
7.3.1 Field Strength of The Fundamental Signal	14
7.3.2 Spurious emissions.....	15
7.3.3 Bandedge emissions.....	19
7.4 20dB OCCUPY BANDWIDTH	20
8 TEST SETUP PHOTO	22
9 EUT CONSTRUCTIONAL DETAILS	24

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

N/A: not applicable.

5 General Information

5.1 Client Information

Applicant:	DINGOO DIGITAL TECHNOLOGY LIMITED
Address of Applicant:	UNIT 2209, 22/F., WU CHUNG HSE., 213 QUEEN'S RD. EAST, WANCHAI, Hong Kong
Manufacturer:	DINGOO DIGITAL TECHNOLOGY LIMITED
Address of Manufacturer:	UNIT 2209, 22/F., WU CHUNG HSE., 213 QUEEN'S RD. EAST, WANCHAI, Hong Kong

5.2 General Description of EUT

Product Name:	MULTI-FUNCTION HANDHELD GAME PLAYER
Model No.:	A380, A388, A800, A900, A330
Remark:	Only the model No. A380 was tested. A388, A800, A900 and A330 are identical in the same interior structure, electrical circuits, components and appearance. The only difference is the model name for the marketing requirement.
Operation Frequency:	2404MHz~2476MHz
Channel numbers:	16
Modulation type:	FSK
Antenna Type:	Integral
Antenna gain:	0dBi
Power supply:	Input: AC 100-240V, 50/60Hz, 0.1A Output: DC 5V, 500mA DC 3.7V by lithium battery

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2404MHz
The middle channel	2447MHz
The Highest channel	2476MHz

5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	83.25	85.64	84.37

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup":
Y axis (see the test setup photo)

5.4 Description of Support Units

None.

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.6 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China Tel: 0755-27798480 Fax: 0755-27798960

5.7 Other Information Requested by the Customer

None.


6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 30 2011	Mar. 29 2013
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Dec. 6, 2012	Dec. 5 2013
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 03 2012	Jul. 02 2013
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 25 2012	Feb. 24 2013
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2012	June 28 2013
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2011	Mar. 29 2013
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 31 2012	Mar. 30 2013
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 31 2012	Mar. 30 2013
11	Coaxial cable	GTS	N/A	GTS210	Mar. 31 2012	Mar. 30 2013
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 31 2012	Mar. 30 2013
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 03 2012	Jul. 02 2013
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 03 2012	Jul. 02 2013
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2012	June 28 2013
16	Band filter	Amindeon	82346	GTS219	Mar. 31 2012	Mar. 30 2013

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 08 2011	Sep. 07 2013
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 03 2012	Jul. 02 2013
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jul. 03 2012	Jul. 02 2013
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 03 2012	Jul. 02 2013
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jul. 03 2012	Jul. 02 2013
6	Coaxial Cable	GTS	N/A	GTS227	Jul. 03 2012	Jul. 02 2013
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

7 Test results and Measurement Data

7.1 Antenna requirement:

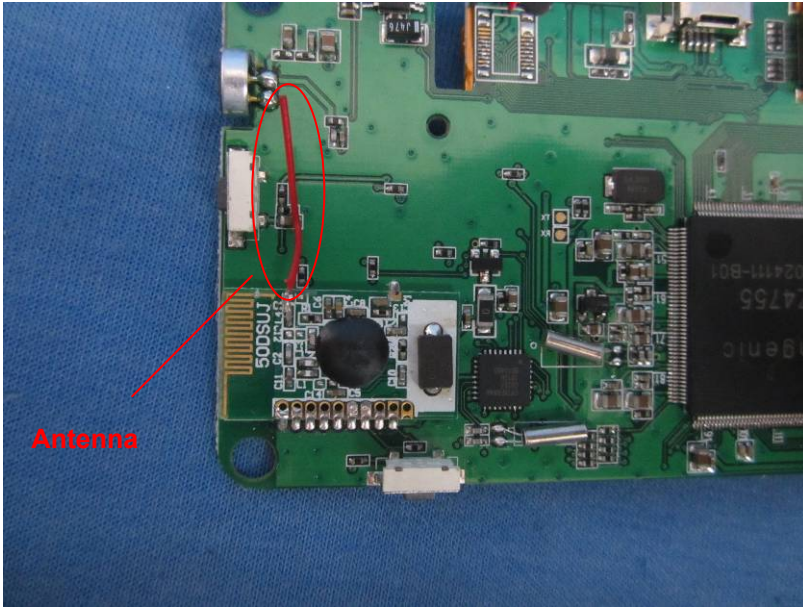
Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
E.U.T Antenna: <p><i>The antenna is Integral antenna, the best case gain of the antenna is 0dBi</i></p>	
	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.4:2003																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* Decreases with the logarithm of the frequency.</p>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
Test setup:	<div><p style="text-align: center;">Reference Plane</p><p style="text-align: center;">Test table/Insulation plane</p><p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p></div>																
Test procedure:	<div><div>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</div></div>																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.3 for details																
Test results:	Pass																

Measurement data:


Line:

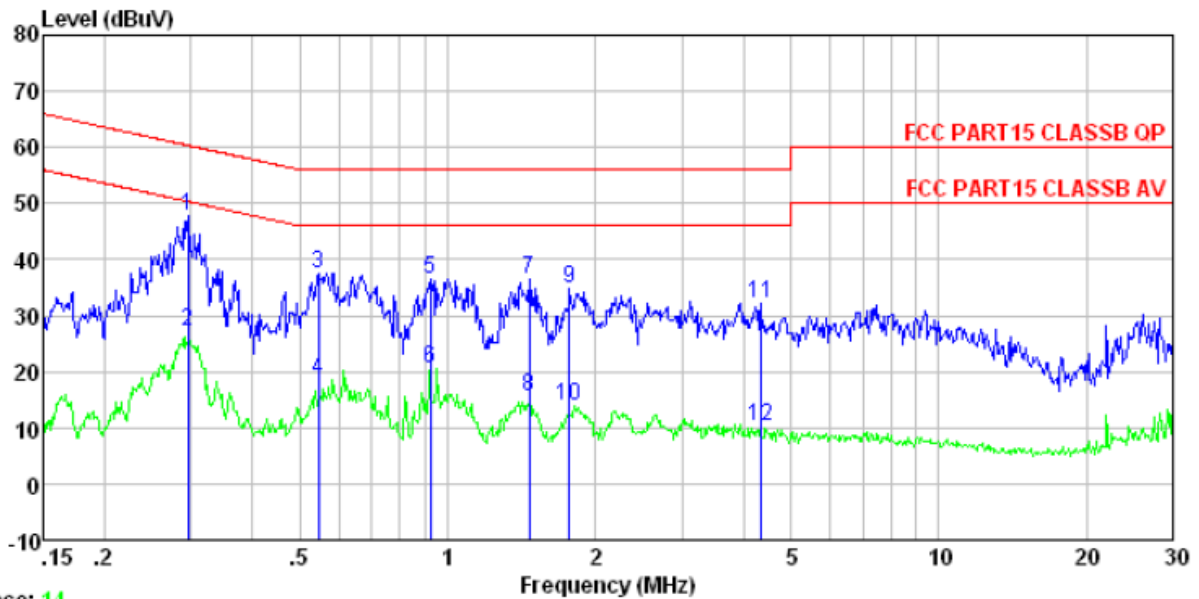

Condition : FCC PART15 CLASSB QP LISN-2012 LINE
Job No. : 0064RF
Test Mode : Transmitting mode
Test Engineer: Jim

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.296	48.06	-0.22	0.10	47.94	60.37	-12.43	QP
2	0.296	27.24	-0.22	0.10	27.12	50.37	-23.25	Average
3	0.546	37.73	-0.21	0.10	37.62	56.00	-18.38	QP
4	0.546	18.66	-0.21	0.10	18.55	46.00	-27.45	Average
5	0.923	36.64	-0.21	0.10	36.53	56.00	-19.47	QP
6	0.923	20.74	-0.21	0.10	20.63	46.00	-25.37	Average
7	1.464	36.65	-0.22	0.10	36.53	56.00	-19.47	QP
8	1.464	15.81	-0.22	0.10	15.69	46.00	-30.31	Average
9	1.772	34.84	-0.24	0.10	34.70	56.00	-21.30	QP
10	1.772	14.10	-0.24	0.10	13.96	46.00	-32.04	Average
11	4.338	32.44	-0.29	0.10	32.25	56.00	-23.75	QP
12	4.338	10.60	-0.29	0.10	10.41	46.00	-35.59	Average

Neutral:

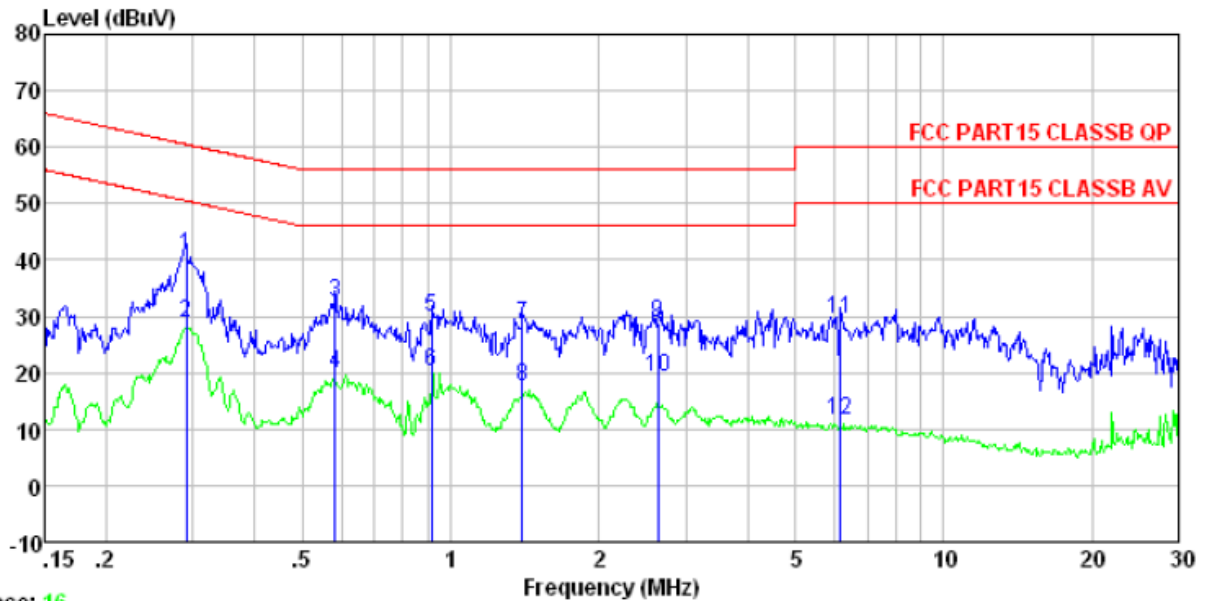

Trace: 16


Condition : FCC PART15 CLASSB QP LISN-2012 NEUTRAL
 Job No. : 0064RF
 Test Mode : Transmitting mode
 Test Engineer: Jim


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.291	40.65	-0.09	0.10	40.66	60.50	-19.84	QP
2	0.291	28.82	-0.09	0.10	28.83	50.50	-21.67	Average
3	0.582	32.61	-0.08	0.10	32.63	56.00	-23.37	QP
4	0.582	19.85	-0.08	0.10	19.87	46.00	-26.13	Average
5	0.914	29.93	-0.09	0.10	29.94	56.00	-26.06	QP
6	0.914	20.32	-0.09	0.10	20.33	46.00	-25.67	Average
7	1.396	28.40	-0.10	0.10	28.40	56.00	-27.60	QP
8	1.396	17.60	-0.10	0.10	17.60	46.00	-28.40	Average
9	2.636	28.95	-0.12	0.10	28.93	56.00	-27.07	QP
10	2.636	19.20	-0.12	0.10	19.18	46.00	-26.82	Average
11	6.186	29.45	-0.19	0.12	29.38	60.00	-30.62	QP
12	6.186	11.80	-0.19	0.12	11.73	50.00	-38.27	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

7.3 Radiated Emission Method

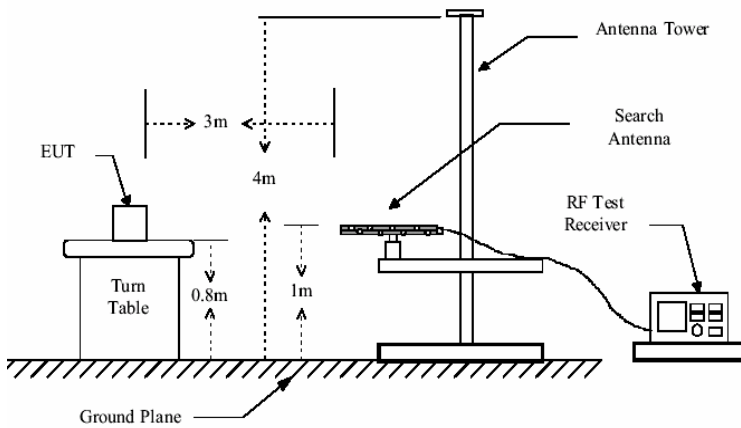Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4:2003				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	10Hz	Average Value
Remark: For the Field Strength of Fundamental test, the RBW and VBW were set to 2MHz and 6MHz, due to the max 20dB bandwidth is 1.121MHz					
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.00		Quasi-peak Value
	88MHz-216MHz		43.50		Quasi-peak Value
	216MHz-960MHz		46.00		Quasi-peak Value
	960MHz-1GHz		54.00		Quasi-peak Value
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	Below 1GHz				
					
	Above 1GHz				

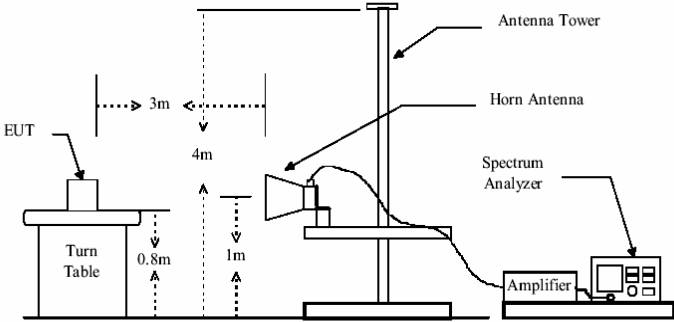	 <p>The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a Turn Table at a height of 0.8m. The Turn Table is 3m away from an Antenna Tower. The Antenna Tower has a Horn Antenna at a height of 1m to 4m. The Antenna Tower is connected to a Spectrum Analyzer via an Amplifier.</p>
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.3 for details</p>
<p>Test results:</p>	<p>Pass</p>

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2404.00	82.53	27.57	5.40	30.12	85.38	114.00	-28.62	Horizontal
2404.00	80.58	27.57	5.40	30.12	83.43	114.00	-30.57	Vertical
2447.00	81.11	27.48	5.43	30.06	83.96	114.00	-30.04	Horizontal
2447.00	79.95	27.48	5.43	30.06	82.80	114.00	-31.20	Vertical
2476.00	82.64	27.52	5.47	29.99	85.64	114.00	-28.36	Horizontal
2476.00	80.76	27.52	5.47	29.99	83.76	114.00	-30.24	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2404.00	73.24	27.57	5.40	30.12	76.09	94.00	-17.91	Horizontal
2404.00	71.25	27.57	5.40	30.12	74.10	94.00	-19.90	Vertical
2447.00	72.59	27.48	5.43	30.06	75.44	94.00	-18.56	Horizontal
2447.00	70.37	27.48	5.43	30.06	73.22	94.00	-20.78	Vertical
2476.00	73.48	27.52	5.47	29.99	76.48	94.00	-17.52	Horizontal
2476.00	71.82	27.52	5.47	29.99	74.82	94.00	-19.18	Vertical

7.3.2 Spurious emissions

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
40.56	48.26	16.58	0.67	32.05	33.46	40.00	-6.54	Vertical
77.05	52.79	11.86	1.00	31.80	33.85	40.00	-6.15	Vertical
152.66	56.48	11.45	1.59	31.99	37.53	43.50	-5.97	Vertical
220.62	56.52	14.26	1.96	32.15	40.59	46.00	-5.41	Vertical
313.28	50.21	16.25	2.43	32.13	36.76	46.00	-9.24	Vertical
576.64	48.55	20.09	3.63	31.15	41.12	46.00	-4.88	Vertical
56.00	50.88	16.04	0.83	31.95	35.80	40.00	-4.20	Horizontal
94.10	49.29	15.82	1.14	31.74	34.51	43.50	-8.99	Horizontal
399.03	52.02	17.10	2.85	31.90	40.07	46.00	-5.93	Horizontal
576.64	47.74	20.09	3.63	31.15	40.31	46.00	-5.69	Horizontal
675.21	46.81	21.46	4.00	31.16	41.11	46.00	-4.89	Horizontal
866.09	44.87	23.78	4.73	31.23	42.15	46.00	-3.85	Horizontal

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4808.00	31.19	31.78	8.60	24.17	47.40	74.00	-26.60	Vertical
7212.00	32.43	36.15	11.65	26.46	53.77	74.00	-20.23	Vertical
9616.00	27.79	38.01	14.14	25.45	54.49	74.00	-19.51	Vertical
12020.00	*					74.00		Vertical
14424.00	*					74.00		Vertical
4808.00	33.02	31.78	8.60	24.17	49.23	74.00	-24.77	Horizontal
7212.00	33.48	36.15	11.65	26.46	54.82	74.00	-19.18	Horizontal
9616.00	26.59	38.01	14.14	25.45	53.29	74.00	-20.71	Horizontal
12020.00	*					74.00		Horizontal
14424.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4808.00	22.32	31.78	8.60	24.17	38.53	54.00	-15.47	Vertical
7212.00	23.64	36.15	11.65	26.46	44.98	54.00	-9.02	Vertical
9616.00	18.98	38.01	14.14	25.45	45.68	54.00	-8.32	Vertical
12020.00	*					54.00		Vertical
14424.00	*					54.00		Vertical
4808.00	24.15	31.78	8.60	24.17	40.36	54.00	-13.64	Horizontal
7212.00	24.69	36.15	11.65	26.46	46.03	54.00	-7.97	Horizontal
9616.00	17.78	38.01	14.14	25.45	44.48	54.00	-9.52	Horizontal
12020.00	*					54.00		Horizontal
14424.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4894.00	31.60	31.86	8.68	24.10	48.04	74.00	-25.96	Vertical
7341.00	33.50	36.41	11.74	26.78	54.87	74.00	-19.13	Vertical
9788.00	25.79	38.43	14.27	25.35	53.14	74.00	-20.86	Vertical
12235.00	*					74.00		Vertical
14682.00	*					74.00		Vertical
4894.00	30.60	31.86	8.68	24.10	47.04	74.00	-26.96	Horizontal
7341.00	32.94	36.41	11.74	26.78	54.31	74.00	-19.69	Horizontal
9788.00	26.40	38.43	14.27	25.35	53.75	74.00	-20.25	Horizontal
12235.00	*					74.00		Horizontal
14682.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4894.00	22.73	31.86	8.68	24.10	39.17	54.00	-14.83	Vertical
7341.00	24.71	36.41	11.74	26.78	46.08	54.00	-7.92	Vertical
9788.00	16.98	38.43	14.27	25.35	44.33	54.00	-9.67	Vertical
12235.00	*					54.00		Vertical
14682.00	*					54.00		Vertical
4894.00	21.73	31.86	8.68	24.10	38.17	54.00	-15.83	Horizontal
7341.00	24.15	36.41	11.74	26.78	45.52	54.00	-8.48	Horizontal
9788.00	17.59	38.43	14.27	25.35	44.94	54.00	-9.06	Horizontal
12235.00	*					54.00		Horizontal
14682.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4952.00	30.48	31.91	8.71	24.03	47.07	74.00	-26.93	Vertical
7428.00	32.60	36.56	11.79	27.03	53.92	74.00	-20.08	Vertical
9904.00	26.17	38.81	14.35	25.27	54.06	74.00	-19.94	Vertical
12380.00	*					74.00		Vertical
14856.00	*					74.00		Vertical
4952.00	30.15	31.91	8.71	24.03	46.74	74.00	-27.26	Horizontal
7428.00	32.03	36.56	11.79	27.03	53.35	74.00	-20.65	Horizontal
9904.00	26.86	38.81	14.35	25.27	54.75	74.00	-19.25	Horizontal
12380.00	*					74.00		Horizontal
14856.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4952.00	21.61	31.91	8.71	24.03	38.20	54.00	-15.80	Vertical
7428.00	23.81	36.56	11.79	27.03	45.13	54.00	-8.87	Vertical
9904.00	17.36	38.81	14.35	25.27	45.25	54.00	-8.75	Vertical
12380.00	*					54.00		Vertical
14856.00	*					54.00		Vertical
4952.00	21.28	31.91	8.71	24.03	37.87	54.00	-16.13	Horizontal
7428.00	23.24	36.56	11.79	27.03	44.56	54.00	-9.44	Horizontal
9904.00	18.05	38.81	14.35	25.27	45.94	54.00	-8.06	Horizontal
12380.00	*					54.00		Horizontal
14856.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

7.3.3 Bandedge emissions

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	40.59	27.59	5.38	30.18	43.38	74.00	-30.62	Horizontal
2400.00	57.41	27.58	5.39	30.18	60.20	74.00	-13.80	Horizontal
2390.00	41.16	27.59	5.38	30.18	43.95	74.00	-30.05	Vertical
2400.00	59.47	27.58	5.39	30.18	62.26	74.00	-11.74	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	30.36	27.59	5.38	30.18	33.15	54.00	-20.85	Horizontal
2400.00	41.61	27.58	5.39	30.18	44.40	54.00	-9.60	Horizontal
2390.00	30.32	27.59	5.38	30.18	33.11	54.00	-20.89	Vertical
2400.00	43.28	27.58	5.39	30.18	46.07	54.00	-7.93	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	42.79	27.53	5.47	29.93	45.86	74.00	-28.14	Horizontal
2500.00	42.06	27.55	5.49	29.93	45.17	74.00	-28.83	Horizontal
2483.50	41.91	27.53	5.47	29.93	44.98	74.00	-29.02	Vertical
2500.00	41.04	27.55	5.49	29.93	44.15	74.00	-29.85	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	35.06	27.53	5.47	29.93	38.13	54.00	-15.87	Horizontal
2500.00	31.74	27.55	5.49	29.93	34.85	54.00	-19.15	Horizontal
2483.50	33.83	27.53	5.47	29.93	36.90	54.00	-17.10	Vertical
2500.00	31.80	27.55	5.49	29.93	34.91	54.00	-19.09	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor


7.4 20dB Occupy Bandwidth

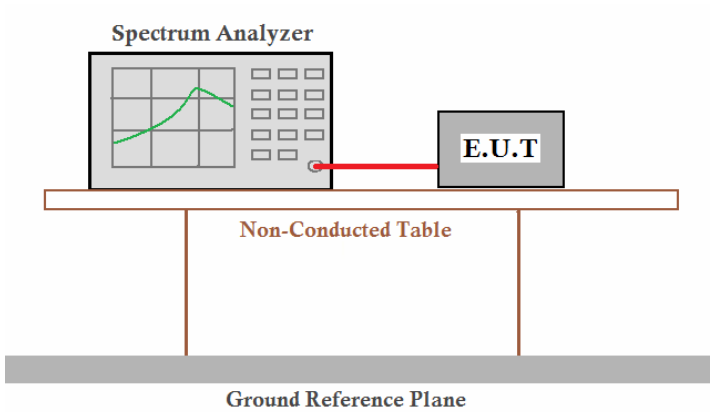Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.4:2003
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	2.252	Pass
Middle	2.392	Pass
Highest	2.366	Pass


Test plot as follows:

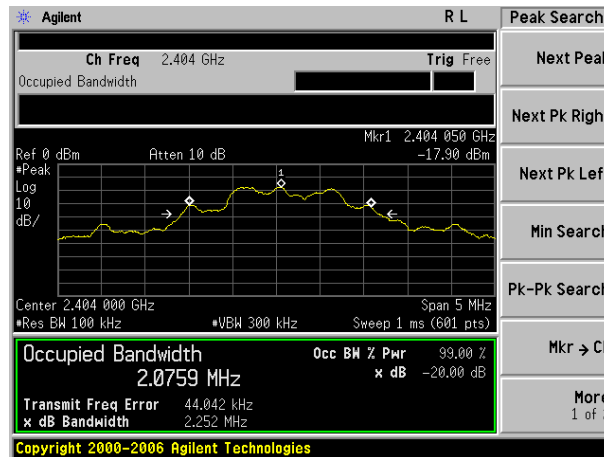

Lowest channel

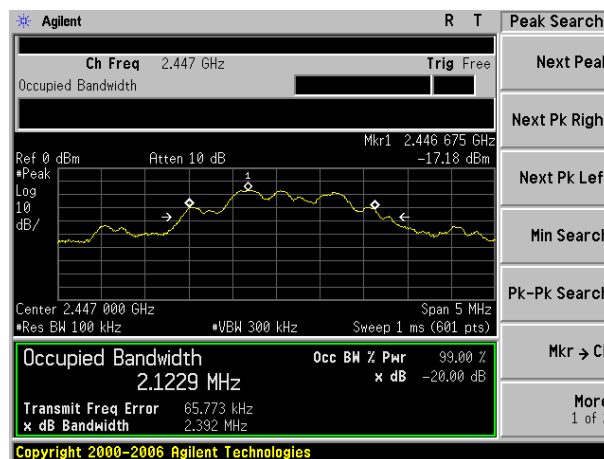



Middle channel

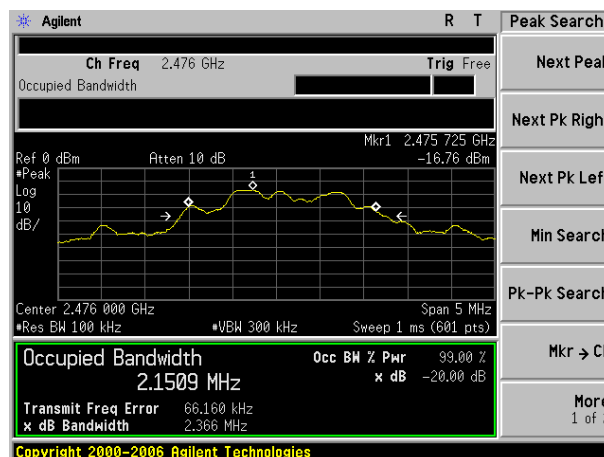

Highest channel

8 Test Setup Photo

Radiated Emission

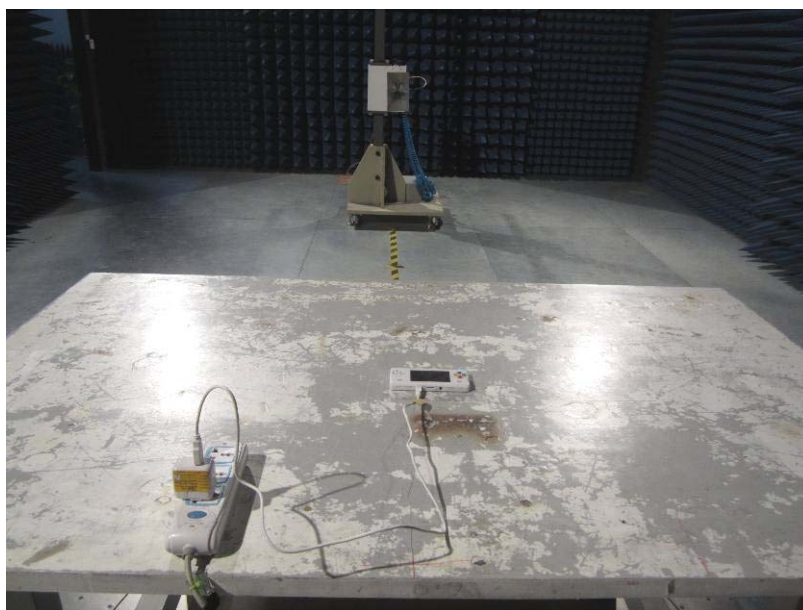
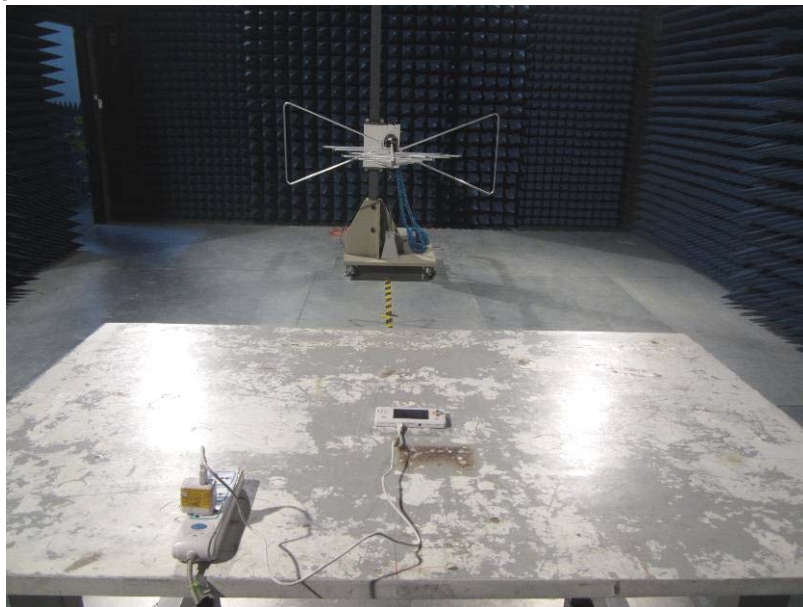


Conducted Emission






9 EUT Constructional Details





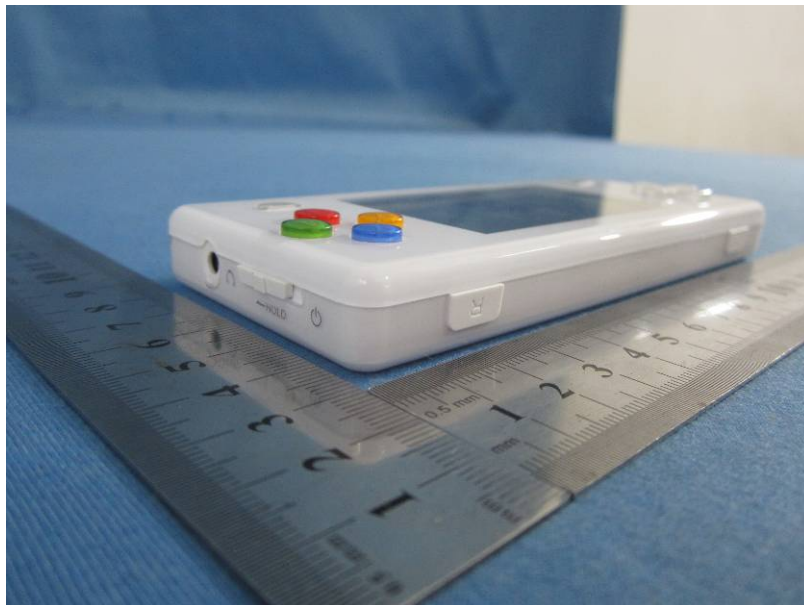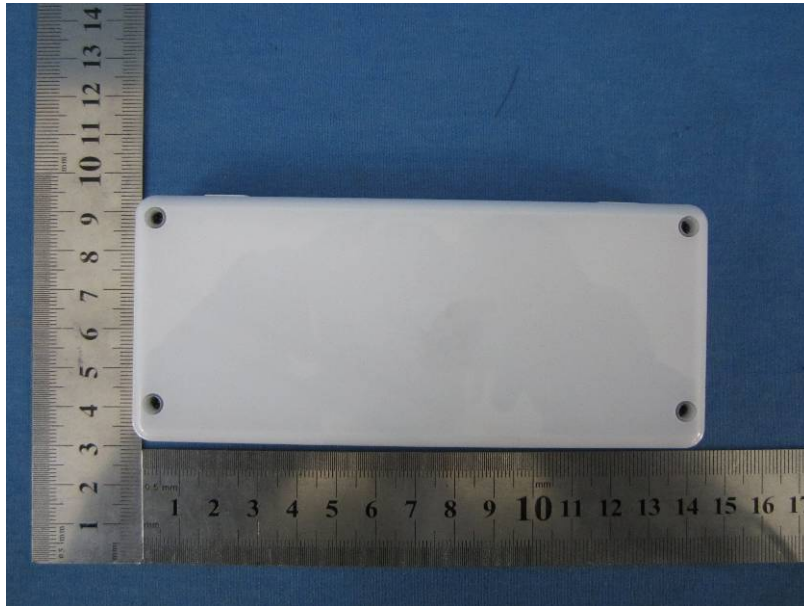



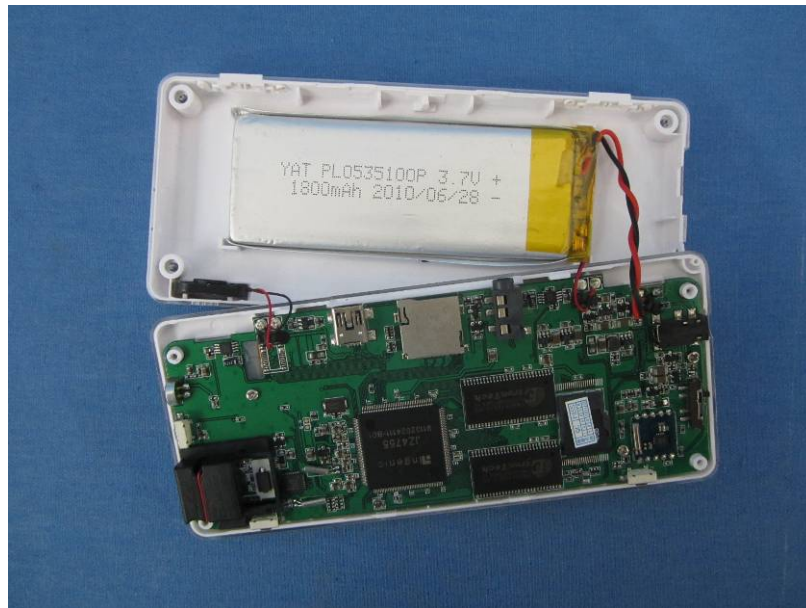

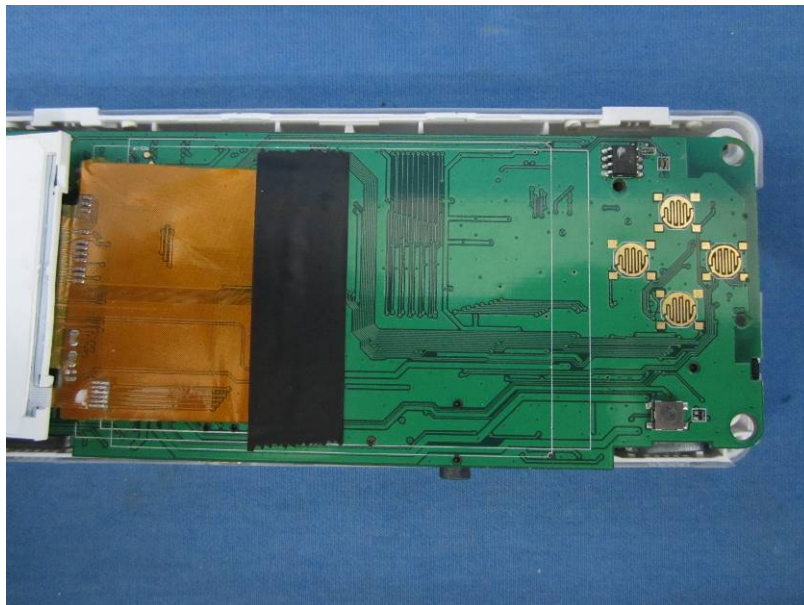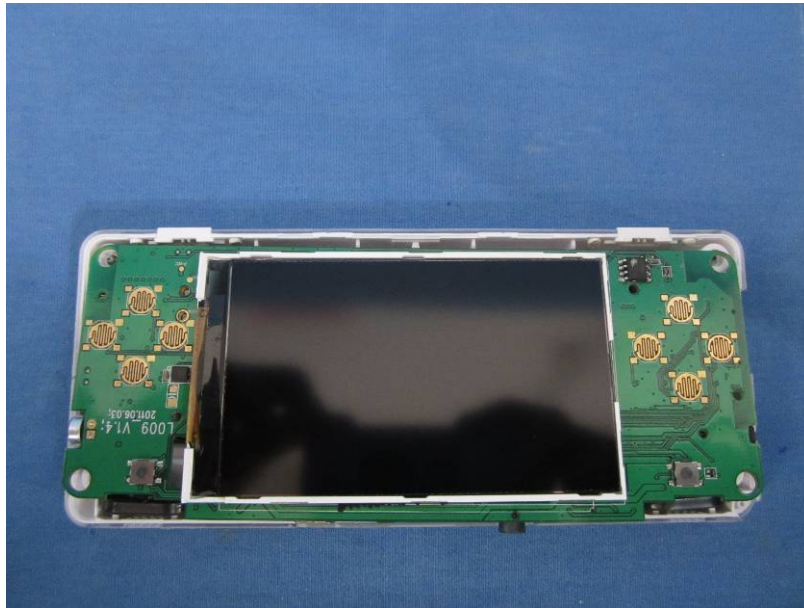

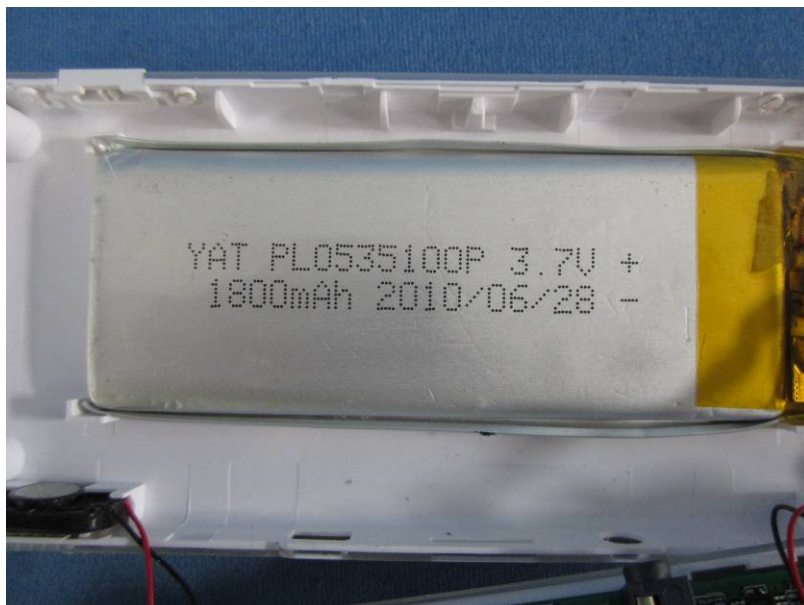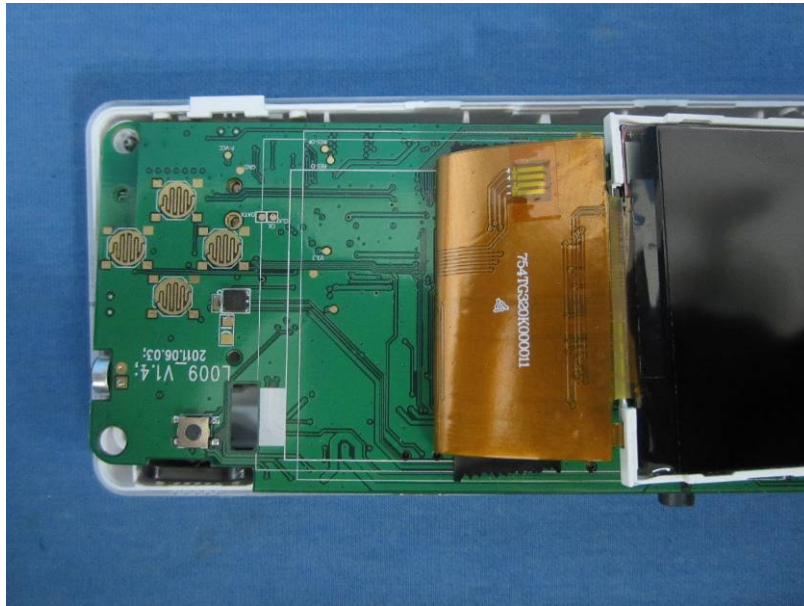



-----end-----