


Appendix 1

Test Results


20dB Bandwidth

Tx frequency: 2410MHz

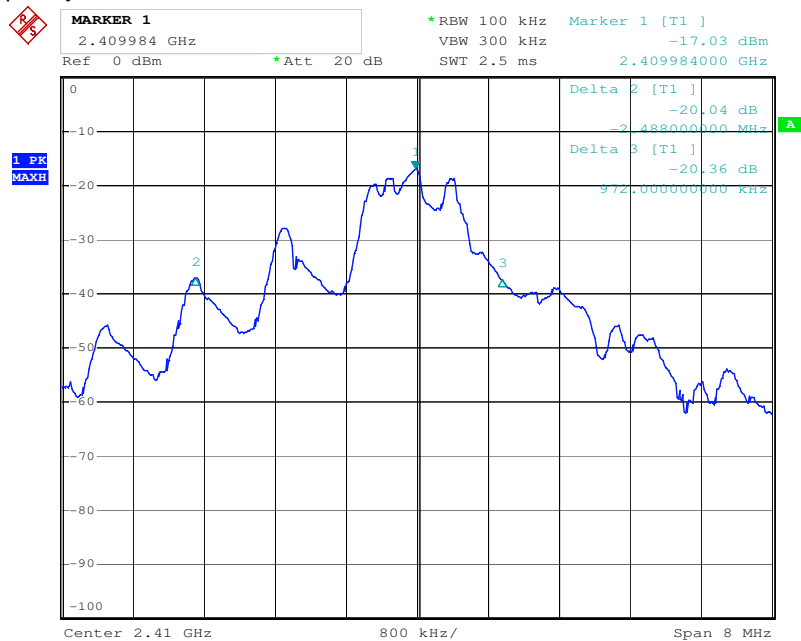


Comment: test print
Date: 4.DEC.2014 14:05:47

Tx frequency: 2440MHz

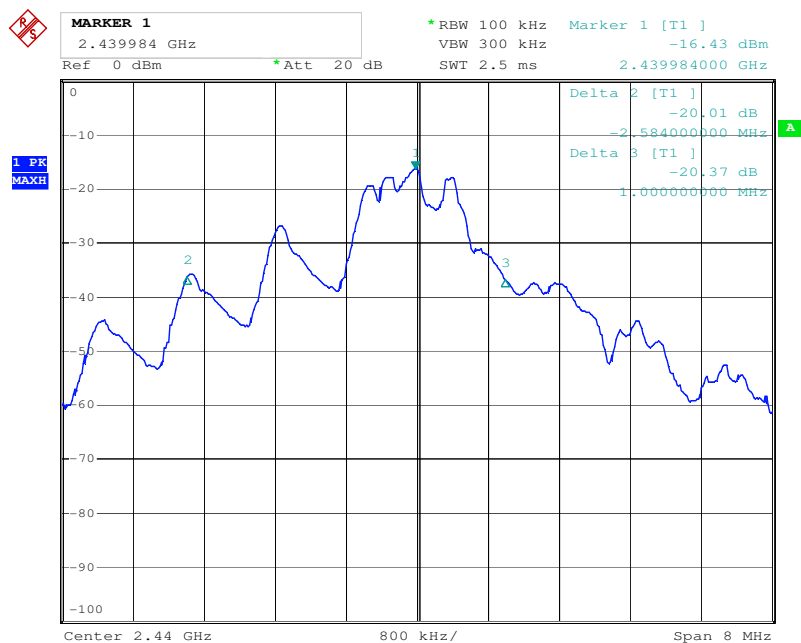

Comment: test print
Date: 4.DEC.2014 14:34:15


Tx frequency: 2470MHz

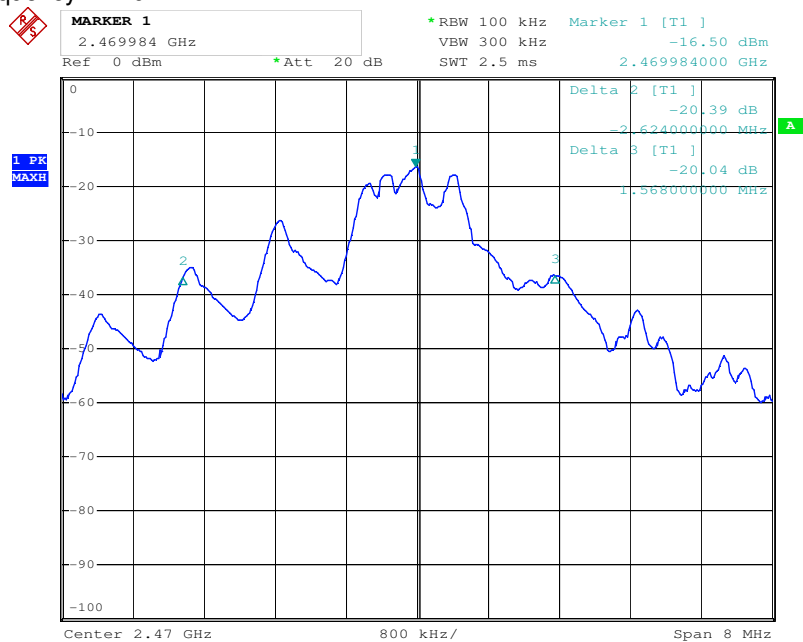

Comment: test print
Date: 4.DEC.2014 14:46:46

Band Edge Compliance


Tx frequency: 2410MHz (radiated measurement)

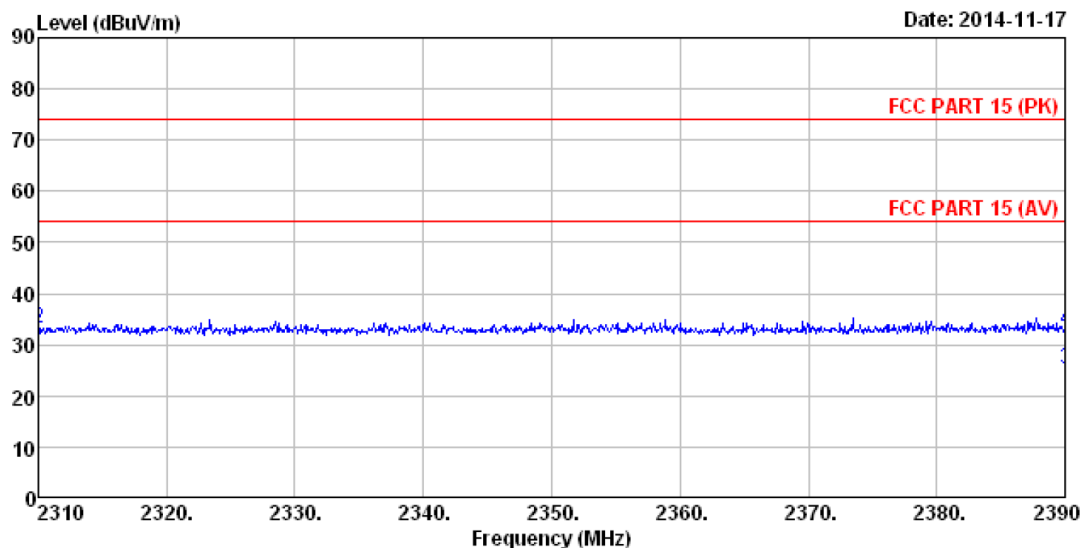

Site : 3m chamber , Project:
 Condition : FCC PART 15 (PK) 3m BBHA9120D(>1G)-2013 VERTICAL
 EUT : RC Toy(2.4GHz)
 Model No. : 503003
 Sample No. : TBA
 TUV Order No: 144036413
 Test Mode : TX on
 : 2410MHz

	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
		Level	Factor	Loss	Factor	Level	Line
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	2310.000	26.95	27.03	5.30	34.11	25.17	54.00
2	2310.000	35.05	27.03	5.30	34.11	33.27	74.00
3	2390.000	26.48	27.29	5.38	34.01	25.14	54.00
4	2390.000	34.33	27.29	5.38	34.01	32.99	74.00

Vertical polarization

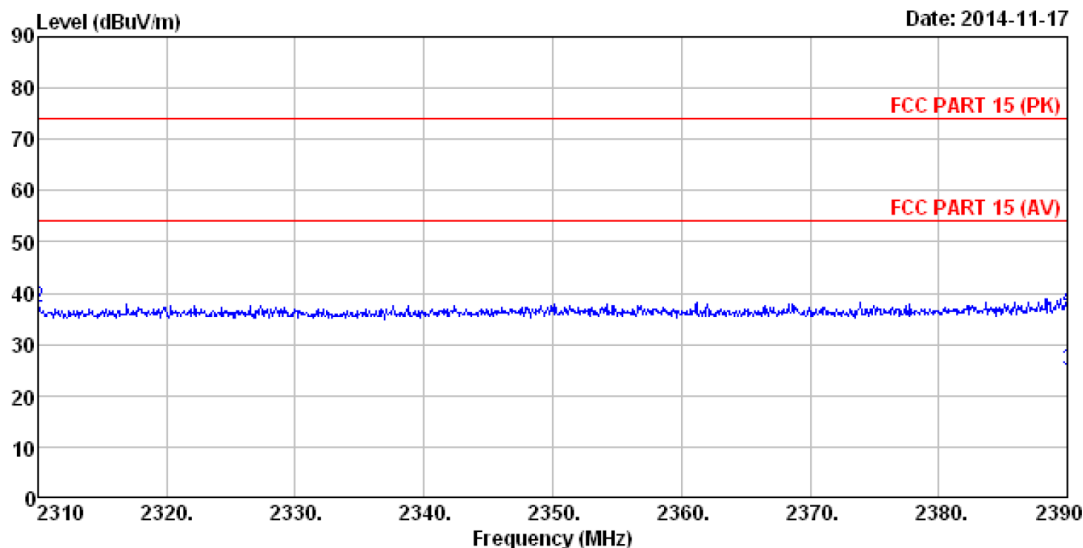


Site : 3m chamber , Project:
 Condition : FCC PART 15 (PK) 3m BBHA9120D(>1G)-2013 HORIZONTAL
 EUT : RC Toy(2.4GHz)
 Model No. : 503003
 Sample No. : TBA
 TUV Order No: 144036413
 Test Mode : TX on
 : 2410MHz

		ReadAntenna	Cable Preamp		Limit	Over	
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2310.000	26.51	27.03	5.30	34.11	24.73	54.00	-29.27 Average
2 2310.000	38.97	27.03	5.30	34.11	37.19	74.00	-36.81 Peak
3 2390.000	26.22	27.29	5.38	34.01	24.88	54.00	-29.12 Average
4 2390.000	38.20	27.29	5.38	34.01	36.86	74.00	-37.14 Peak

Horizontal polarization


Tx frequency: 2470MHz (radiated measurement)

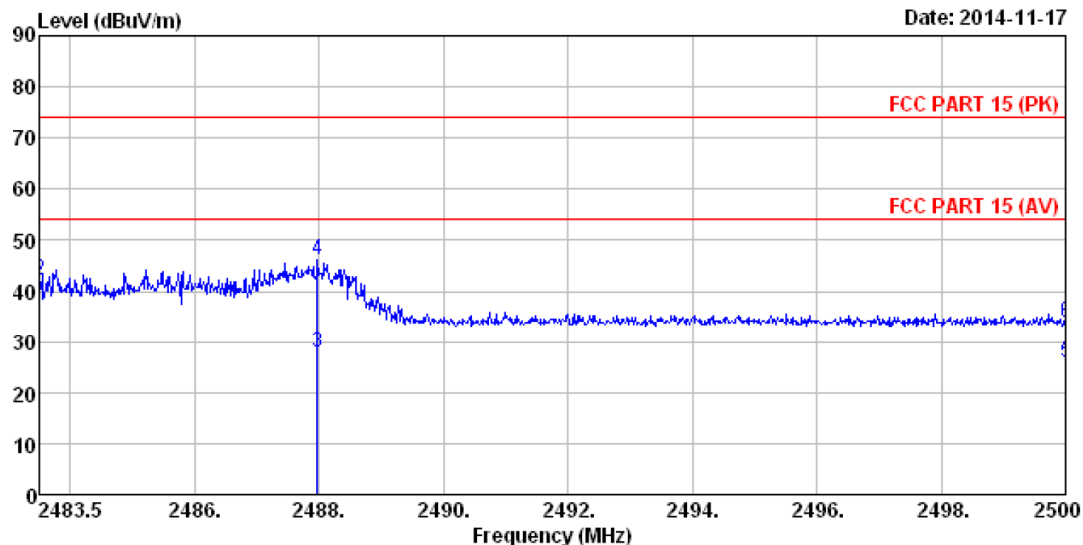

Site : 3m chamber , Project:
 Condition : FCC PART 15 (PK) 3m BBHA9120D(>1G)-2013 VERTICAL
 EUT : RC Toy(2.4GHz)
 Model No. : 503003
 Sample No. : TBA
 TUV Order No: 144036413
 Test Mode : TX on
 : 2470MHz

	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
		Level	Factor	Loss	Factor	Level	Line
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	2483.500	26.94	27.55	5.47	33.92	26.04	54.00
2	2483.500	43.09	27.55	5.47	33.92	42.19	74.00
3	2487.971	28.86	27.60	5.47	33.90	28.03	54.00
4	2487.971	47.08	27.60	5.47	33.90	46.25	74.00
5	2500.000	26.87	27.60	5.49	33.90	26.06	54.00
6	2500.000	34.75	27.60	5.49	33.90	33.94	74.00

Vertical polarization

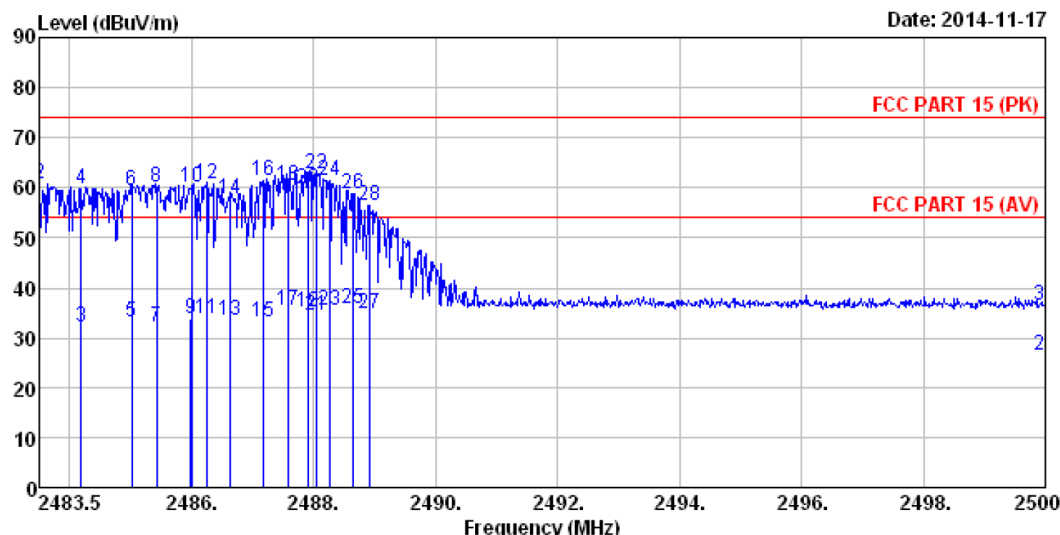

Site : 3m chamber , Project:
 Condition : FCC PART 15 (PK) 3m BBHA9120D(>1G)-2013 HORIZONTAL
 EUT : RC Toy(2.4GHz)
 Model No. : 503003
 Sample No. : TBA
 TUV Order No: 144036413
 Test Mode : TX on
 : 2470MHz

	Freq	ReadAntenna	Cable Preamp	Limit	Over	
		Level Factor	Loss Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m
1	2483.500	34.05	27.55	5.47	33.92	33.15
2	2483.500	61.59	27.55	5.47	33.92	60.69
3	2484.193	33.14	27.55	5.47	33.92	32.24
4	2484.193	60.52	27.55	5.47	33.92	59.62
5	2485.018	33.96	27.55	5.47	33.92	33.06
6	2485.018	60.28	27.55	5.47	33.92	59.38
7	2485.430	33.19	27.55	5.47	33.92	32.29
8	2485.430	60.87	27.55	5.47	33.92	59.97
9	2485.991	34.71	27.55	5.47	33.92	33.81
10	2485.991	61.01	27.55	5.47	33.92	60.11
11	2486.256	34.72	27.55	5.47	33.92	33.82
12	2486.256	61.57	27.55	5.47	33.92	60.67
13	2486.635	34.49	27.55	5.47	33.92	33.59
14	2486.635	58.64	27.55	5.47	33.92	57.74
15	2487.163	34.01	27.55	5.47	33.92	33.11
16	2487.163	62.25	27.55	5.47	33.92	61.35
17	2487.575	36.40	27.60	5.47	33.90	35.57
18	2487.575	61.16	27.60	5.47	33.90	60.33
19	2487.906	35.91	27.60	5.47	33.90	35.08
20	2487.906	60.59	27.60	5.47	33.90	59.76
21	2488.038	35.50	27.60	5.47	33.90	34.67
22	2488.038	63.74	27.60	5.47	33.90	62.91
23	2488.269	36.31	27.60	5.47	33.90	35.48
24	2488.269	62.29	27.60	5.47	33.90	61.46
25	2488.648	36.72	27.60	5.47	33.90	35.89
26	2488.648	59.66	27.60	5.47	33.90	58.83
27	2488.912	35.80	27.60	5.47	33.90	34.97
28	2488.912	57.23	27.60	5.47	33.90	56.40
29	2500.000	27.30	27.60	5.49	33.90	26.49
30	2500.000	37.19	27.60	5.49	33.90	36.38

Horizontal polarization