

Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 1 of 71

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT AND INDUSTRY CANADA RSS-210

**Product Name:** GM Holden VE & WM MY11 Series 3

**Brand Name:** GM Holden VE & WM MY11 Series 3

**Model Name:** FASCIA 10

**Model Difference:** N/A

IC: **9011A-FASCIA10** 

FCC ID: YGC-FASCIA10

**Report No.:** EF/2010/50004

**Issue Date:** Jul. 01, 2010

**Rule Part:** §15.247, Cat: DSS

RSS-210 issue 7:2007, Annex 8

**Prepared for: Continental Automotive Singapore Pte Ltd** 

Blk 28, Ayer Rajah Crescent, #08-02/08, S'pore

139959

**Prepared by:** SGS Taiwan Ltd.

**Electronics & Communication Laboratory** 

No. 134, Wu Kung Rd., Wuku Industrial Zone,

Taipei County, Taiwan.



*Note:* This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留/0天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com">www.sgs.com</a> electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 2 of 71

# CERTIFICATION OF COMPLIANCE

**Applicant:** Continental Automotive Singapore Pte Ltd

Blk 28, Ayer Rajah Crescent, #08-02/08, S'pore 139959

**Product Name:** GM Holden VE & WM MY11 Series 3 **Brand Name:** GM Holden VE & WM MY11 Series 3

IC: 9011A-FASCIA10 FCC ID: YGC-FASCIA10

Model No.: FASCIA 10

**Model Difference:** N/A

File Number: EF/2010/50004

Date of test: May 03, 2010 ~ Jun. 28, 2010

**Date of EUT Received:** May 03, 2010

# We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and RSS-Gen. issue 2:2007, the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15C:2007, §15.247 and RSS-210 issue 7: 2007 Annex 8.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Bondi Jin	Date:	Jul. 01, 2010	
Prepared By:	Bondi Liu / Engineer	Date:	Jul. 01, 2010	
Approved By:	Eva Kao / Asst. Supervisor  Vincent Su / Manager	Date:	Jul. 01, 2010	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms">www.sqs.com/terms</a> and electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 3 of 71

# Version

Version No.	Date	Description
00	Jul. 01, 2010	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms.and\_conditions.htm">www.sgs.com/terms.and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms.e-document.htm">www.sgs.com/terms.and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms.e-document.htm">www.sgs.com/terms.e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

\*\*Section\*\*

\*\*Section\*\*

\*\*Legist\*\*

\*\*Legi

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 4 of 71

### **Table of Contents**

1.	GEN	ERAL INFORMATION	7
	1.1.	Product Description	7
	1.2.	Related Submittal(s) / Grant (s)	8
	1.3.	Test Methodology	8
	1.4.	Test Facility	8
	1.5.	Special Accessories	8
	1.6.	Equipment Modifications	8
2.	SYST	TEM TEST CONFIGURATION	9
	2.1.	EUT Configuration	9
	2.2.	EUT Exercise	9
	2.3.	Test Procedure	9
	2.4.	Configuration of Tested System	10
3.	SUM	IMARY OF TEST RESULTS	11
4.	DES	CRIPTION OF TEST MODES	11
5.	AC P	POWER LINE CONDUCTED EMISSION TEST	12
	5.1.	Standard Applicable:	12
	5.2.	Measurement Equipment Used:	12
	5.3.	EUT Setup:	12
	5.4.	Measurement Procedure:	13
	5.5.	Measurement Result:	13
6.	PEA:	K OUTPUT POWER MEASUREMENT	14
	6.1.	Standard Applicable:	14
	6.2.	Measurement Equipment Used:	14
	6.3.	.Test Set-up:	15
	6.4.	Measurement Procedure:	15
	6.5.	Measurement Result:	16
7.	100K	Hz BANDWIDTH OF BAND EDGES MEASUREMENT	21
	7.1.	Standard Applicable:	21
	7.2.	Measurement Equipment Used:	22
	7.3.	Test SET-UP:	23
	7.4.	Measurement Procedure:	24
	7.5.	Field Strength Calculation	24
	7.6.	Measurement Result:	24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

\*\*SCENDEN LIVE\*\* IN A 124 Bis\*\*

\*\*This Tarma 124 Bis\*\*

\*\*This House In India 124 Bis\*\*

\*\*This House India 124 Bis\*\*



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 5 of 71

8.	<b>SPUF</b>	RIOUS EMISSION TEST	29
	8.1.	Standard Applicable:	29
	8.2.	Measurement Equipment Used:	29
	8.3.	Test SET-UP:	29
	8.4.	Measurement Procedure:	30
	8.5.	Field Strength Calculation	30
	8.6.	Measurement Result:	30
9.	FRE(	QUENCY SEPARATION	49
	9.1.	Standard Applicable:	
	9.2.	Measurement Equipment Used:	49
	9.3.	Test Set-up:	49
	9.4.	Measurement Procedure:	49
	9.5.	Measurement Result:	49
10.	NUM	BER OF HOPPING FREQUENCY	51
	10.1.		
	10.2.	Measurement Equipment Used:	51
	10.3.	Test Set-up:	51
	10.4.	Measurement Procedure:	51
	10.5.	Measurement Result:	51
11.	TIMI	E OF OCCUPANCY (DWELL TIME)	53
	11.1.	Standard Applicable:	
	11.2.	Measurement Equipment Used:	53
	11.3.	Test Set-up:	53
	11.4.	Measurement Procedure:	53
	11.5.	Measurement Result:	54
12.	Peak	Power Spectral Density	60
	12.1.	Standard Applicable:	60
	12.2.	Measurement Equipment Used:	60
	12.3.	Test Set-up:	60
	12.4.	Measurement Procedure:	60
	12.5.	Measurement Result:	61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms.and\_conditions.htm">www.sgs.com/terms.and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms.e-document.htm">www.sgs.com/terms.and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms.e-document.htm">www.sgs.com/terms.e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

\*\*Section\*\*

\*\*Section\*\*

\*\*Legist\*\*

\*\*Legi



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010 Page: 6 of 71

_
64
64
64
64
65
71
71



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 7 of 71

### 1. GENERAL INFORMATION

#### 1.1. Product Description

#### General:

Generali	
Product Name	GM Holden VE & WM MY11 Series 3
Brand Name	GM Holden VE & WM MY11 Series 3
Model Name	FASCIA 10
Model Difference	N/A
Power Supply	12 Vdc by Car Battery

#### Bluetooth:

	1
Frequency Range:	2402 – 2480MHz
Bluetooth Version:	$V2.0 + EDR (GFSK + \pi/4DQPSK + 8DPSK)$
Channel number:	79 channels
Modulation type:	Frequency Hopping Spread Spectrum
Transmit Power:	2.04 dBm
Dwell Time:	<= 0.4s
Operating Mode:	Point-to-Point
Antenna Designation:	Print Antenna, 3.3dBi.
Type of Emission:	1M24FXD

The EUT is compliance with Bluetooth 2.0 + EDR Standard.

This report applies for Bluetooth.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 

陈非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms-e-document.htm">www.sgs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

\*\*Notation\*\*

\*\*Intervention\*\*

\*\*This document\*\*

\*\*Notation\*\*

\*\*Not



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 8 of 71

#### 1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: YGC-FASCIA10 filing to comply with Section 15.247 of the FCC Part 15C, Subpart C Rules. And IC: 9011A-FASCIA10 filing to comply with Industry Canada RSS-210 issue 7: 2007 Annex 8.

#### 1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003) and RSS-Gen: 2007. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with FCC Public Notice DA 00-705

### 1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 & 10 meters) and FCC Registration Number: 94644.

#### 1.5. Special Accessories

Not available for this EUT intended for grant.

#### 1.6. Equipment Modifications

Not available for this EUT intended for grant.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 9 of 71

#### SYSTEM TEST CONFIGURATION

#### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2. EUT Exercise

The EUT (Transmitter) was tested with a test program to fix the Tx/RX frequency that was for the purpose of the measurements. For more information please see test data and APPENDIX 1 for set-up photographs.

#### 2.3. Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7, 13 of ANSI C63.4-2003 and RSS-Gen:2007. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

#### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max, emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 of ANSI C63.4-2003 and DA 00-705..

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and">www.sgs.com/terms\_and</a> electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 10 of 71

# 2.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed channel)

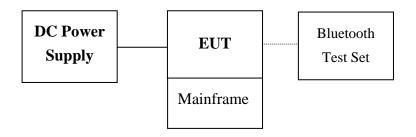

**Table 2-1 Equipment Used in Tested System** 

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.
1.	DC Power Supply	Topward	3303D	981327
2.	Bluetooth Test Set	Anritsu	MT8852B	N/A
3.	Mainframe	GM Holden VE & WM MY11 Series 3	AHU4a	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 

陈非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms-e-document.htm">www.sgs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

\*\*Notation\*\*

\*\*Intervention\*\*

\*\*This document\*\*

\*\*Notation\*\*

\*\*Not

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sas.com



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 11 of 71

### SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result	
§15.207(a)/	AC Paragraphics Constructed Engineers	Compliant	
RSS-Gen §7.2.2	AC Power line Conducted Emission		
§15.247(b)(1)/	Deals Output Dawar	Compliant	
RSS-210 issue 7,§A8.4(2)	Peak Output Power	Compliant	
§15.247(d)	100 KHz Bandwidth Of	Compliant	
RSS-210 issue 7,§A8.5	Frequency Band Edges	Compliant	
§15.247(c)			
RSS-Gen §7.2.3	TX/RX Spurious Emission	Compliant	
RSS-210 issue 7,§A2.9			
§15.247(a)(1)/	England of Company ties	Compliant	
RSS-210 issue 7,§A8.1(b)	Frequency Separation		
§15.247(a)(1)(iii)/	Number of housing for an array	G1:4	
RSS-210 issue 7,§A8.1(d)	Number of hopping frequency	Compliant	
§15.247(a)(1)(ii)/	Time of Occupancy	G 1' 4	
RSS-210 issue 7,§A8.1(d)	Time of Occupancy	Compliant	
§15.247/	D 1 D D '	G 11	
RSS-210 issue 7,§A8.2(b)	Peak Power Density	Compliant	
§15.247(a)(1)	20dB Bandwidth		
RSS210 issue ,§A8.1(b)	& OOO/ Payer Pandayiddh	Compliant	
	99% Power Bandwidth		
§15.203, §15.247(c)/			
RSS-GEN 7.1.4,	Antenna Requirement	Compliant	
RSS-210 issue 7,§A8.4			

#### DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Worst case EDR mode Channel low (2402MHz) · mid (2441MHz) and high (2480MHz) with highest data rate are chosen for full testing.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and the subject to the company of the subject to the within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 12 of 71

#### 5. AC POWER LINE CONDUCTED EMISSION TEST

### 5.1. Standard Applicable:

According to §15.207 and RSS-Gen §7.2.2, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range		mits (uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

#### Note

5.2. Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT MFR MODEL SERIAL LAST CA						
TYPE		NUMBER	NUMBER	CAL.		
EMI Test Receiver	R&S	ESCS30	828985/004	09/15/2009	09/14/2010	
LISN	Rolf-Heine	NNB-2/16Z	99012	02/02/2010	02/01/2011	
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	02/02/2010	02/01/2011	
Coaxial Cables	N/A	WK CE Cable	N/A	11/28/2009	11/27/2010	

### 5.3. EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and the subject to the company of the subject to the within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<sup>1.</sup> The lower limit shall apply at the transition frequencies

<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 13 of 71

#### **5.4.** Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

### 5.5. Measurement Result:

N/A, The power supply is 12Vde form car battery.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 14 of 71

#### 6. PEAK OUTPUT POWER MEASUREMENT

### 6.1. Standard Applicable:

According to §15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

According to RSS-210 issue 7,§A8.4(2), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, the maximum conducted output power shall not exceed 1 W. For all other frequency hopping systems, the maximum peak conducted output power shall not exceed 0.125 W.

**6.2.** Measurement Equipment Used:

. Weastrement Equipment escu.						
Conducted Emission Test Site						
EQUIPMENT	MFR	FR MODEL SERI		LAST	CAL DUE.	
ТҮРЕ		NUMBER	NUMBER	CAL.		
Power Sensor	Anritsu	MA2411B	917032	01/21/2010	01/20/2012	
Power Meter	Anritsu	ML2495A	1005007	02/17/2010	02/16/2012	
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012	
Spectrum Analyzer	Agilent	E4440A	MY45304525	01/25/2010	01/24/2011	
DC Block	Agilent	BLK-18	155452	07/05/2009	07/04/2010	
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2010	01/04/2011	
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2009	07/04/2010	
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2009	07/04/2010	
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2009	07/04/2010	
Splitter	Agilent	11636B	N/A	07/05/2009	07/04/2010	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and">www.sgs.com/terms\_and</a> electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 15 of 71

### 6.3. .Test Set-up:

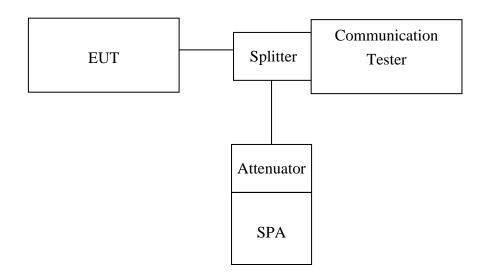

#### **6.4.** Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (max HOLD function, RBW, VBW > 20dB Bandwidth)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 16 of 71

#### **6.5.** Measurement Result:

#### **BDR Mode**

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	-0.13	0.00	-0.13	0.00097	1
2441.00	-1.03	0.00	-1.03	0.00079	1
2480.00	-1.18	0.00	-1.18	0.00076	1

#### **EDR Mode**

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	1.57	0.00	1.57	0.00144	1
2441.00	2.04	0.00	2.04	0.00160	1
2480.00	1.21	0.00	1.21	0.00132	1

offset: 7dB


Note: Refer to next page for plots.




Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 17 of 71

# Peak Power Output Data Plot (CH Low) (BDR mode)

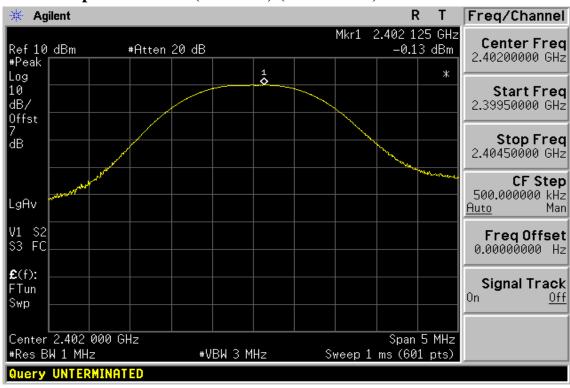

# Peak Power Output Data Plot (CH Mid) (BDR mode)

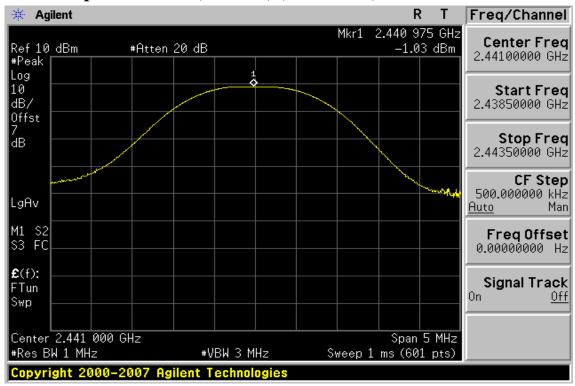

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留"90天。本報告去經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 18 of 71

# Peak Power Output Data Plot (CH High) (BDR mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Shear States the lesses states the lesses share the less within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 19 of 71

# Peak Power Output Data Plot (CH Low) (EDR mode)

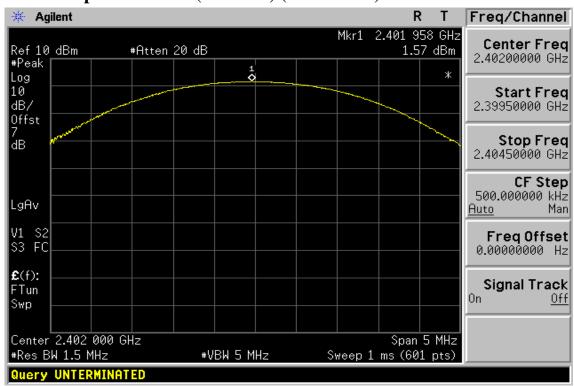

# Peak Power Output Data Plot (CH Mid) (EDR mode)

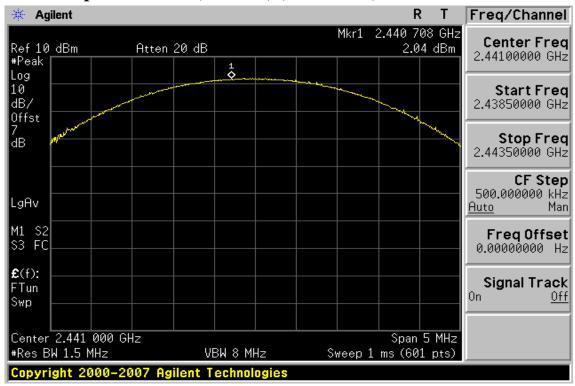

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留"90天。本報告去經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279


www.tw.sas.com



Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 20 of 71

# Peak Power Output Data Plot (CH High) (EDR mode)

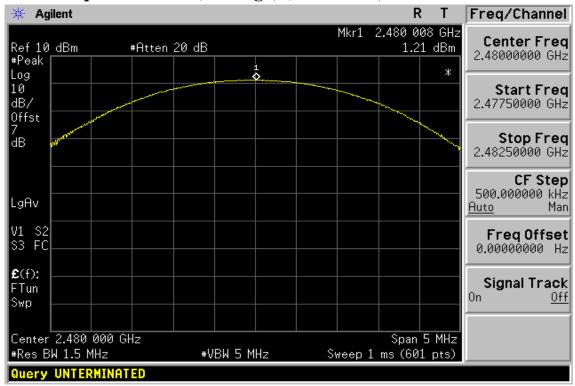

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Shear States the lesses states the lesses share the less within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 21 of 71

#### 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

### 7.1. Standard Applicable:

According to §15.247(d), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

According to RSS-210 issue 7,§A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 22 of 71

### 7.2. Measurement Equipment Used:

### 7.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

#### 7.2.2. Radiated emission:

966 Chamber									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
ТҮРЕ		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2010	02/11/2011				
Bilog Antenna	SCHWAZBECK	VULB9160	3136	11/19/2009	11/18/2010				
Horn antenna	SCHWAZBECK	BBHA 9120D	309/320	03/09/2009	03/08/2011				
Pre-Amplifier	Agilent	8447D	1937A02834	11/28/2009	11/28/2010				
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2010	01/04/2011				
Radio Communication Analyzer	R & S	CMU200	111787	10/31/2008	10/30/2010				
DC Block	Agilent	BLK-18	155452	07/05/2009	07/04/2010				
Turn Table	HD	DT420	N/A	N.C.R	N.C.R				
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R				
Controller	HD	HD100	N/A	N.C.R	N.C.R				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2010	01/04/2011				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2010	01/04/2011				
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010				



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 23 of 71


#### 7.3. Test SET-UP:

### 7.3.1. Conducted Emission at antenna port:


Refer to section 6.3 for details.

#### 7.3.2. Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

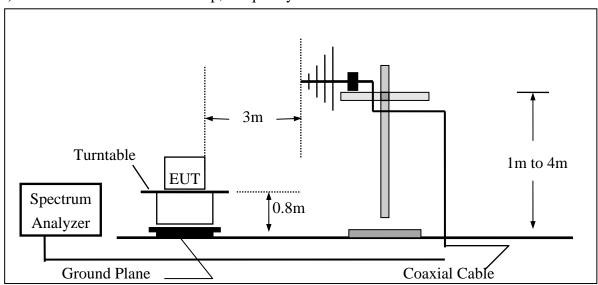

### (B) Radiated Emission Test Set-UP Frequency Over 1 GHz

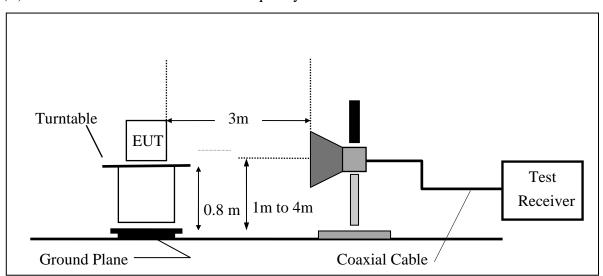

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and the subject to the company of the subject to the within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488 www.tw.sas.com



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 24 of 71

#### 7.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.

# 7.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

#### 7.6. Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and the subject to the company of the subject to the within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


Taiwan I td. 台灣檢驗科技股份有限公司 No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sas.com




Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 25 of 71

# EDR Mode Band Edges Test Data CH-Low

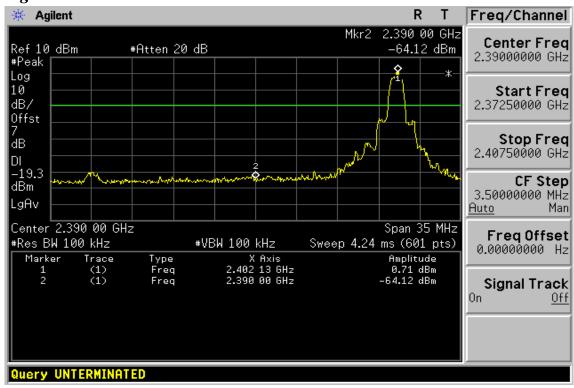

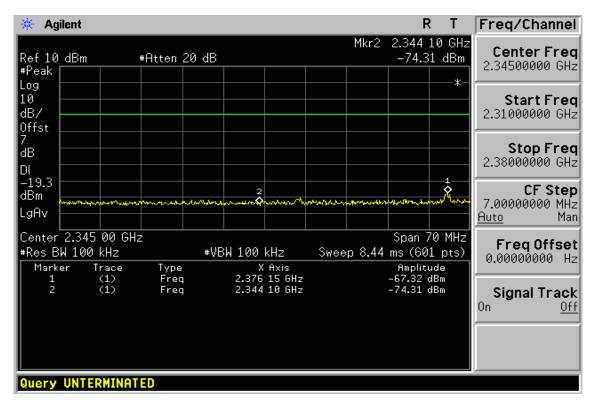

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留"90天。本報告去經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279


台灣檢驗科技股份有限公司



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 26 of 71

# Band Edges Test Data CH-High

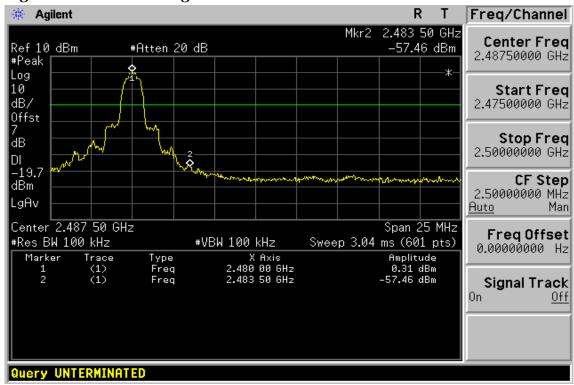

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Shear States the lesses states the lesses share the less within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 27 of 71

**Radiated Emission: (EDR mode)** 

Operation Mode Test Date Jun. 26, 2010 TX CH Low

Fundamental Frequency 2402 MHz Test By Bondi **Temperature** 25 °C Pol Ver.

Humidity 65 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	O		Peak	AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(dBuV)	CF(aB)	(dBuV/m)	(aBu V/m)	(aBu v/m)	(aBuv/m	(dB)	
2390.00	44.98		-1.39	43.59		74.00	54.00	-10.41	Peak
						_	_		
Operation :	Mode	TX C	CH Low			Tes	st Date	Jun. 26, 2	2010
Fundamen	tal Frequer	ncy 2402	MHz			Tes	st By	Bondi	
Temperatu	re	25 ℃				Pol	1	Hor.	
Humidity		65 %							
	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	(dB)	
2399.00	45.28		-1.39	43.89		74.00	54.00	-10.11	Peak

#### Remark:

(1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Member of SGS Group

- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column o
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms">www.sqs.com/terms</a> and electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 28 of 71

#### **Radiated Emission:**

TX CH High Operation Mode Test Date Jun. 26, 2010 Fundamental Frequency 2480 MHz Test By Bondi Pol Ver. Temperature 25 °C Humidity 65 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m	)(dBuV/m)	(dB)	
2483.56	55.10	50.46	-0.92	54.18	49.54	74.00	54.00	-4.46	AV

Operation Mode TX CH High Test Date Jun. 26, 2010 Fundamental Frequency 2480 MHz Test By Bondi Temperature Pol Hor. 25 °C Humidity 65 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m	)( <b>dB uV/m</b> )	(dB)	
2483.56	60.00	53.24	-0.92	59.08	52.32	74.00	54.00	-1.68	AV

#### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column o
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and">www.sgs.com/terms\_and</a> electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 台灣檢驗科技股份有限公司 www.tw.sas.com



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 29 of 71

#### 8. SPURIOUS EMISSION TEST

### 8.1. Standard Applicable:

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-Gen §7.2.3 and RSS-210 issue 7,§A2.9, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

#### 8.2. Measurement Equipment Used:

#### 8.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

### 8.2.2. Radiated emission:

Refer to section 7.2 for details.

#### 8.3. Test SET-UP:

#### 8.3.1. Conducted Emission at antenna port:

Refer to section 6.3 for details.

#### 8.3.2. Radiated emission:

Refer to section 7.3 for details.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 30 of 71

#### **8.4.** Measurement Procedure:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.

### 8.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

#### 8.6. Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and">www.sgs.com/terms\_and</a>

electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

aiwan I td

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 31 of 71

# EDR Mode Conducted Spurious Emission Measurement Result Ch Low 30MHz - 3GHz

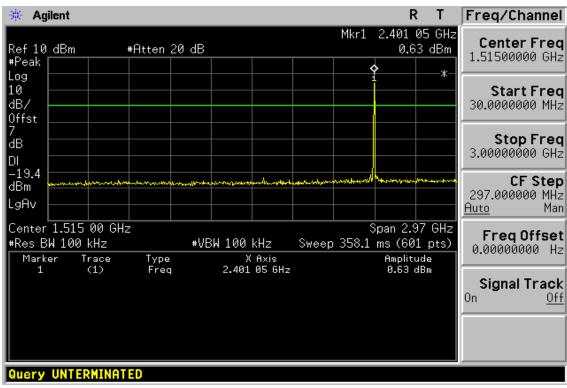

#### Ch Low 3GHz – 26.5GHz

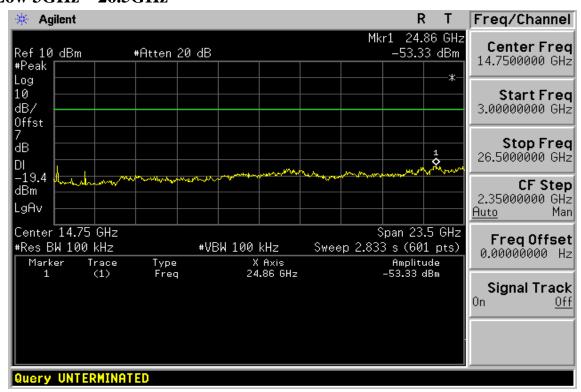

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279




Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 32 of 71

### Ch Mid 30MHz - 3GHz

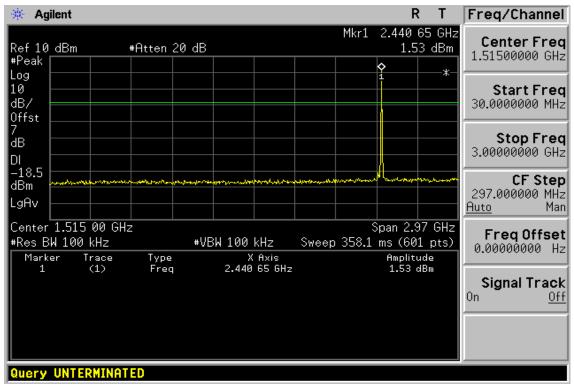

#### Ch Mid 3GHz – 26.5GHz

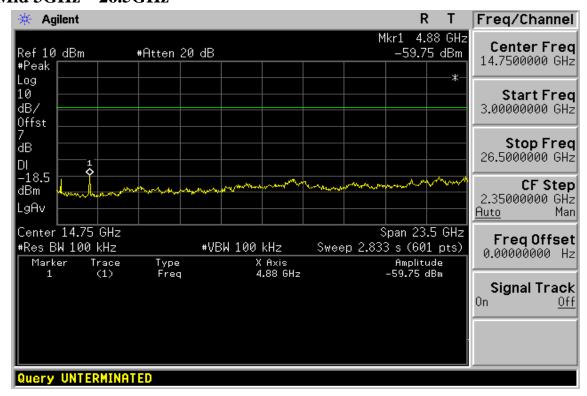

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279


台灣檢驗科技股份有限公司




Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 33 of 71

# Ch High 30MHz - 3GHz

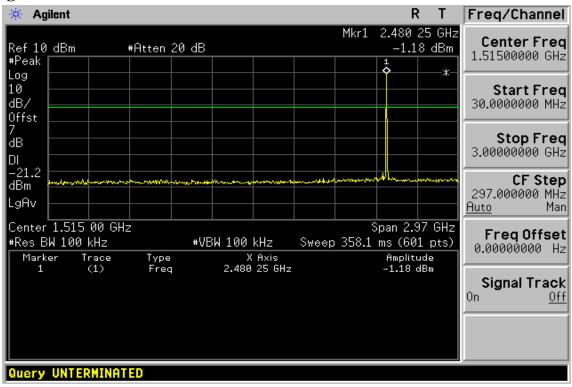

# Ch High 3GHz – 26.5GHz

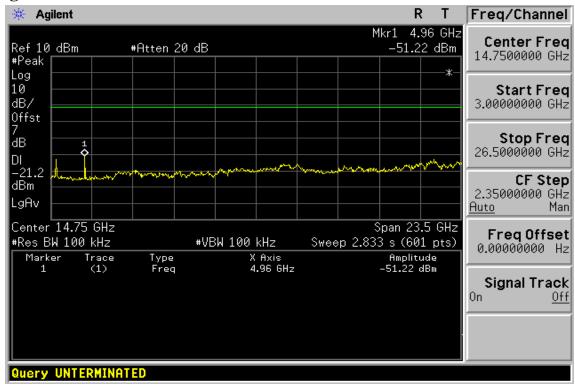

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and <a href="conditions.htm">conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 34 of 71

# Radiated Spurious Emission Measurement Result (below 1GHz) (EDR mode)

TX CH Low Operation Mode Test Date Jun. 26, 2010

Fundamental Frequency 2402MHz Test By Bondi Pol Temperature Ver./Hor. 25 °C

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
65.89	V	Peak	53.52	-15.09	38.43	40.00	-1.57
305.48	V	Peak	44.82	-12.89	31.93	46.00	-14.07
363.68	V	Peak	44.73	-11.27	33.46	46.00	-12.54
400.54	V	Peak	45.56	-9.99	35.57	46.00	-10.43
533.43	V	Peak	40.79	-7.96	32.83	46.00	-13.17
727.43	V	Peak	43.55	-4.58	38.97	46.00	-7.03
72.68	H	Peak	52.39	-16.62	35.77	40.00	-4.23
305.48	H	Peak	44.83	-12.89	31.94	46.00	-14.06
363.68	Н	Peak	43.82	-11.27	32.55	46.00	-13.45
400.54	H	Peak	43.96	-9.99	33.97	46.00	-12.03
749.74	Н	Peak	39.48	-4.30	35.18	46.00	-10.82

#### Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the light of Clients and this described interventions of two presentations from the presentation only and the described in the proportion of the presentation only and the described in the proportion of the presentation of the presentation only and the presentation of the presentation of the presentation of the presentation only and the described in the presentation of the presentation of the presentation only and the presentation of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 35 of 71

# Radiated Spurious Emission Measurement Result (below 1GHz)

TX CH Mid Operation Mode Test Date Jun. 26, 2010 Fundamental Frequency 2441MHz Test By Bondi Pol Temperature Ver./Hor. 25 °C

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
72.68	V	Peak	53.70	-16.62	37.08	40.00	-2.92
305.48	V	Peak	44.76	-12.89	31.87	46.00	-14.13
342.34	V	Peak	47.20	-11.97	35.23	46.00	-10.77
400.54	V	Peak	45.62	-9.99	35.63	46.00	-10.37
533.43	V	Peak	40.84	-7.96	32.88	46.00	-13.12
727.43	V	Peak	41.75	-4.58	37.17	46.00	-8.83
72.68	Н	Peak	51.55	-16.62	34.93	40.00	-5.07
305.48	Н	Peak	44.50	-12.89	31.61	46.00	-14.39
363.68	Н	Peak	44.65	-11.27	33.38	46.00	-12.62
400.54	Н	Peak	43.05	-9.99	33.06	46.00	-12.94
749.74	Н	Peak	38.35	-4.30	34.05	46.00	-11.95

#### Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the light of Clients and this described interventions of two presentations from the presentation only and the described in the proportion of the presentation only and the described in the proportion of the presentation of the presentation only and the presentation of the presentation of the presentation of the presentation only and the described in the presentation of the presentation of the presentation only and the presentation of within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 36 of 71

### Radiated Spurious Emission Measurement Result (below 1GHz)

TX CH High Operation Mode Test Date Jun. 26, 2010 Fundamental Frequency 2480MHz Test By Bondi Pol Temperature Ver./Hor. 25 °C

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	<b>Actual FS</b>	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
65.89	V	Peak	53.27	-15.09	38.18	40.00	-1.82
305.48	V	Peak	44.68	-12.89	31.79	46.00	-14.21
342.34	V	Peak	45.76	-11.97	33.79	46.00	-12.21
363.68	V	Peak	44.50	-11.27	33.23	46.00	-12.77
400.54	V	Peak	45.84	-9.99	35.85	46.00	-10.15
727.43	V	Peak	42.75	-4.58	38.17	46.00	-7.83
72.68	Н	Peak	52.19	-16.62	35.57	40.00	-4.43
305.48	Н	Peak	44.94	-12.89	32.05	46.00	-13.95
363.68	Н	Peak	46.75	-11.27	35.48	46.00	-10.52
400.54	Н	Peak	43.22	-9.99	33.23	46.00	-12.77
727.43	Н	Peak	38.78	-4.58	34.20	46.00	-11.80
749.74	Н	Peak	39.24	-4.30	34.94	46.00	-11.06

#### Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and the subject to the company of the subject to the within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 37 of 71

## Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Low Test Date Jun. 26, 2010 Fundamental Frequency 2402 MHz Test By Bondi Pol Ver. Temperature 25 °C

Humidity 65 %

	Peak	$\mathbf{AV}$		Actual FS		Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4804.0	49.19	46.43	5.99	55.18	52.42	74.00	54.00	-1.58	AV
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		
16814.0						74.00	54.00		
19216.0						74.00	54.00		
21618.0						74.00	54.00		
24020.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms">www.sqs.com/terms</a> and electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 38 of 71

#### Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Low Test Date Jun. 26, 2010 Fundamental Frequency 2402 MHz Test By Bondi Pol Temperature Hor. 25 °C

Humidity 65 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4804.0	41.69		5.99	47.68		74.00	54.00	-6.32	Peak
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		
16814.0						74.00	54.00		
19216.0						74.00	54.00		
21618.0						74.00	54.00		
24020.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms">www.sqs.com/terms</a> and electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 39 of 71

#### Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Mid Test Date Jun. 26, 2010 Fundamental Frequency 2441 MHz Test By Bondi Pol Ver. Temperature 25 °C

Humidity 65 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4882.0	41.75		6.17	47.92		74.00	54.00	-6.08	Peak
7323.0						74.00	54.00		
9764.0						74.00	54.00		
12205.0						74.00	54.00		
14646.0						74.00	54.00		
17087.0						74.00	54.00		
19528.0						74.00	54.00		
21969.0						74.00	54.00		
24410.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms">www.sqs.com/terms</a> and electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 40 of 71

## Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Mid Test Date Jun. 26, 2010 Fundamental Frequency 2441 MHz Test By Bondi Pol Temperature Hor. 25 °C

Humidity 65 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4882.0	36.73		6.17	42.90		74.00	54.00	-11.10	Peak
7323.0						74.00	54.00		
9764.0						74.00	54.00		
12205.0						74.00	54.00		
14646.0						74.00	54.00		
17087.0						74.00	54.00		
19528.0						74.00	54.00		
21969.0						74.00	54.00		
24410.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms">www.sqs.com/terms</a> and electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 41 of 71

## Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH High Test Date Jun. 26, 2010 Fundamental Frequency 2480 MHz Test By Bondi

Pol Ver. Temperature 25 °C

Humidity 65 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4960.0	41.69		6.36	48.05		74.00	54.00	-5.95	Peak
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		
17360.0						74.00	54.00		
19840.0						74.00	54.00		
22320.0						74.00	54.00		
24800.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms">www.sqs.com/terms</a> and electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 42 of 71

#### Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH High Test Date Jun. 26, 2010 Fundamental Frequency 2480 MHz Test By Bondi Pol Temperature Hor. 25 °C

Humidity 65 %

	Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4960.0	35.26		6.36	41.62		74.00	54.00	-12.38	Peak
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		
17360.0						74.00	54.00		
19840.0						74.00	54.00		
22320.0						74.00	54.00		
24800.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 43 of 71

## Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode RX CH Low Test Date Jun. 26, 2010 Fundamental Frequency 2402MHz Test By Bondi Temperature 25°C Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
39.70	V	Peak	48.57	-13.73	34.84	40.00	-5.16
65.89	V	Peak	49.27	-15.09	34.18	40.00	-5.82
305.48	V	Peak	43.42	-12.89	30.53	46.00	-15.47
363.68	V	Peak	41.82	-11.27	30.55	46.00	-15.45
727.43	V	Peak	38.17	-4.58	33.59	46.00	-12.41
40.67	Н	Peak	48.88	-13.74	35.14	40.00	-4.86
72.68	Н	Peak	52.13	-16.62	35.51	40.00	-4.49
305.48	Н	Peak	47.94	-12.89	35.05	46.00	-10.95
363.68	Н	Peak	45.92	-11.27	34.65	46.00	-11.35
727.43	Н	Peak	42.61	-4.58	38.03	46.00	-7.97
749.74	Н	Peak	43.03	-4.30	38.73	46.00	-7.27

#### Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 44 of 71

## Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode **RX CH Mid** Test Date Jun. 26, 2010 Fundamental Frequency 2441MHz Test By Bondi Pol Temperature Ver./Hor 25°C

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
65.89	V	Peak	49.51	-15.09	34.42	40.00	-5.58
305.48	V	Peak	44.72	-12.89	31.83	46.00	-14.17
363.68	V	Peak	43.22	-11.27	31.95	46.00	-14.05
630.43	V	Peak	36.41	-5.37	31.04	46.00	-14.96
727.43	V	Peak	40.36	-4.58	35.78	46.00	-10.22
749.74	V	Peak	40.20	-4.30	35.90	46.00	-10.10
40.67	Н	Peak	45.50	-13.74	31.76	40.00	-8.24
72.68	Н	Peak	48.86	-16.62	32.24	40.00	-7.76
305.48	Н	Peak	44.69	-12.89	31.80	46.00	-14.20
749.74	Н	Peak	40.01	-4.30	35.71	46.00	-10.29

#### Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and the subject to the company of the subject to the within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 45 of 71

## Radiated Spurious Emission Measurement Result (below 1GHz)

**RX CH High** Operation Mode Test Date Jun. 26, 2010

Fundamental Frequency 2480MHz Test By Bondi Pol Temperature Ver./Hor 25 °C

Humidity 65%

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	<b>Actual FS</b>	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
39.70	V	Peak	48.19	-13.73	34.46	40.00	-5.54
65.89	V	Peak	48.73	-15.09	33.64	40.00	-6.36
104.69	V	Peak	47.48	-16.63	30.85	43.50	-12.65
305.48	V	Peak	45.37	-12.89	32.48	46.00	-13.52
363.68	V	Peak	45.17	-11.27	33.90	46.00	-12.10
728.40	V	Peak	39.03	-4.56	34.47	46.00	-11.53
40.67	H	Peak	45.52	-13.74	31.78	40.00	-8.22
72.68	H	Peak	48.19	-16.62	31.57	40.00	-8.43
305.48	H	Peak	44.65	-12.89	31.76	46.00	-14.24
727.43	H	Peak	39.54	-4.58	34.96	46.00	-11.04
749.74	H	Peak	38.41	-4.30	34.11	46.00	-11.89

#### Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and the subject to the company of the subject to the within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 46 of 71

## Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode **RX CH Low Test Date** Jun. 26, 2010 Fundamental Frequency 2402 MHz Test By Bondi Pol Temperature Ver. 25°C

Humidity 65 %

		Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Ant.Pol.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2391.0	V	47.27		-1.39	45.88		74.00	54.00	-8.12	Peak
4804.0	V						74.00	54.00		
7206.0	V						74.00	54.00		
9608.0	V						74.00	54.00		
12010.0	V						74.00	54.00		
2391.0	H	48.61		-1.39	47.22		74.00	54.00	-6.78	Peak
4804.0	H						74.00	54.00		
7206.0	Н						74.00	54.00		
9608.0	Н						74.00	54.00		
12010.0	H						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and">www.sgs.com/terms\_and</a> electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 47 of 71

#### Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode **RX CH Mid Test Date** Jun. 26, 2010 Fundamental Frequency 2441 MHz Test By Bondi Ver. / Hor. Pol Temperature 25 °C

Humidity 65 %

		Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Ant.Pol.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2443.0	V	48.26		-1.12	47.14		74.00	54.00	-6.86	Peak
4882.0	V						74.00	54.00		
7323.0	V						74.00	54.00		
9764.0	V						74.00	54.00		
12205.0	V						74.00	54.00		
2443.0	Н	47.80		-1.12	46.68		74.00	54.00	-7.32	Peak
4882.0	H						74.00	54.00		
7323.0	Н						74.00	54.00		
9764.0	Н						74.00	54.00		
12205.0	Н						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and">www.sgs.com/terms\_and</a> electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 48 of 71

## Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode **RX CH High** Test Date Jun. 26, 2010 Fundamental Frequency 2480 MHz Test By Bondi Pol Temperature Ver. / Hor. 25 °C

Humidity 65 %

		Peak	$\mathbf{AV}$		Actu	al FS	Peak	$\mathbf{AV}$		
Freq.	Ant.Pol.	Reading	Reading	Ant./CL	Peak	$\mathbf{AV}$	Limit	Limit	Margin	Remark
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2475.5	V	47.82		-0.92	46.90		74.00	54.00	-7.10	Peak
4960.0	V						74.00	54.00		
7440.0	V						74.00	54.00		
9920.0	V						74.00	54.00		
12400.0	V						74.00	54.00		
2475.5	Н	46.84		-0.92	45.92		74.00	54.00	-8.08	Peak
4960.0	H						74.00	54.00		
7440.0	H						74.00	54.00		
9920.0	Н						74.00	54.00		
12400.0	Н						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and">www.sgs.com/terms\_and</a> electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 49 of 71

## 9. FREQUENCY SEPARATION

## 9.1. Standard Applicable:

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 20dB bandwidth of the hopping channel, whichever is greater.

According to RSS 210 issue 6, A8.1(b), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

## 9.2. Measurement Equipment Used:

Refer to section 6.2 for details.

#### 9.3. Test Set-up:

Refer to section 6.3 for details.

#### 9.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Adjust Span to 3.0 MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

#### 9.5. Measurement Result:

Channel separation		
(MHz)	Limit	Result
	>=25KHz or	
1	2/3 times 20dB bandwidth	PASS

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此郵告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留%天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 50 of 71

# **Frequency Separation Test Data**

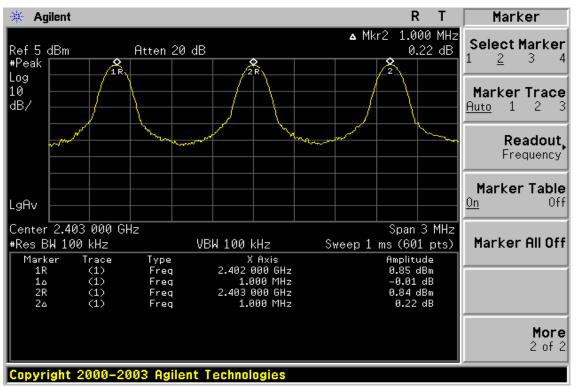

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Shear States the lesses states the lesses share the less within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 51 of 71

## 10. NUMBER OF HOPPING FREQUENCY

## 10.1. Standard Applicable:

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

According to RSS-210 issue 7,§A8.1(d), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, the maximum conducted output power shall not exceed 1 W. For all other frequency hopping systems, the maximum peak conducted output power shall not exceed 0.125 W.

## 10.2. Measurement Equipment Used:

Refer to section 6.2 for details.

## 10.3. Test Set-up:

Refer to section 6.3 for details.

#### 10.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW=430KHz, VBW=1.3MHz,
- 5. Max hold, view and count how many channel in the band.

#### 10.5. Measurement Result:

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and">www.sgs.com/terms\_and</a> electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 52 of 71

## Channel Number 2.4 GHz – 2.441GHz

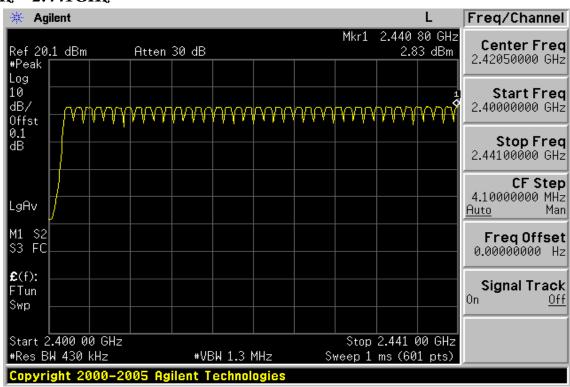

#### 2.441 GHz – 2.4835GHz

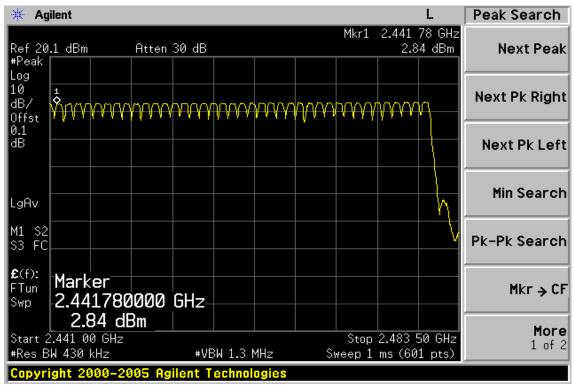

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留"90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 53 of 71

## 11. TIME OF OCCUPANCY (DWELL TIME)

## 11.1. Standard Applicable:

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

According to RSS-210 issue 7,§A8.1(d), Frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

#### 11.2. Measurement Equipment Used:

Refer to section 6.2 for details.

#### 11.3. Test Set-up:

Refer to section 6.3 for details.

#### 11.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW=1KHz, VBW=3MHz, Span = 0Hz, Adjust Sweep = 15s.
- 5. Repeat above procedures until all frequency measured were complete.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 54 of 71

#### 11.5. Measurement Result:

A period time = 0.4 (ms) \* 79 = 31.6 (s)

CH Low: DH1 time slot = 0.417 (ms) \* (1600/(2\*79)) \* 31.6 = 133.44 (ms)

DH3 time slot = 1.667 (ms) \* (1600/(4\*79)) \* 31.6 = 266.72 (ms)

DH5 time slot = 2.925 (ms) \* (1600/(6\*79)) \* 31.6 = 312.00 (ms)

DH1 time slot = 0.417 (ms) \* (1600/(2\*79)) \* 31.6 = 133.44 (ms)CH Mid:

DH3 time slot = 1.667 (ms) \* (1600/(4\*79)) \* 31.6 = 266.72 (ms)

DH5 time slot = 2.925 (ms) \* (1600/(6\*79)) \* 31.6 = 312.00 (ms)

DH1 time slot = 0.417 (ms) \* (1600/(2\*79)) \* 31.6 = 133.44 (ms)CH High:

DH3 time slot = 1.667 (ms) \* (1600/(4\*79)) \* 31.6 = 266.72 (ms)

DH5 time slot = 2.925 (ms) \* (1600/(6\*79)) \* 31.6 = 312.00 (ms)

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms">www.sqs.com/terms</a> and electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 55 of 71

## CH-Low DH1

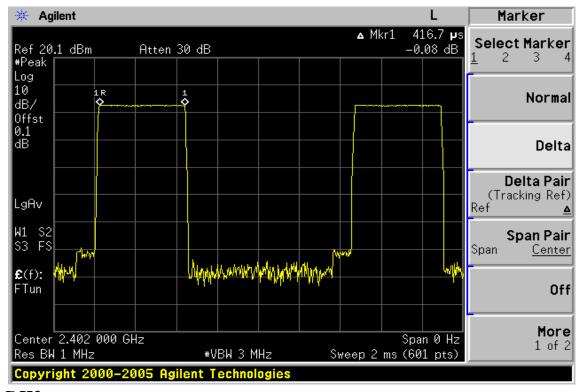

#### DH3

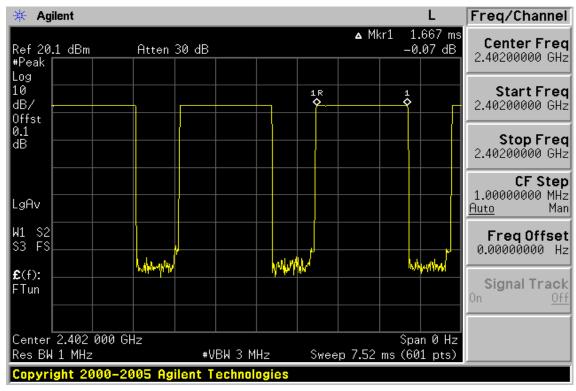

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and <a href="conditions-htm">conditions-htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279 f (886-2) 2298-0488




Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 56 of 71

#### DH5

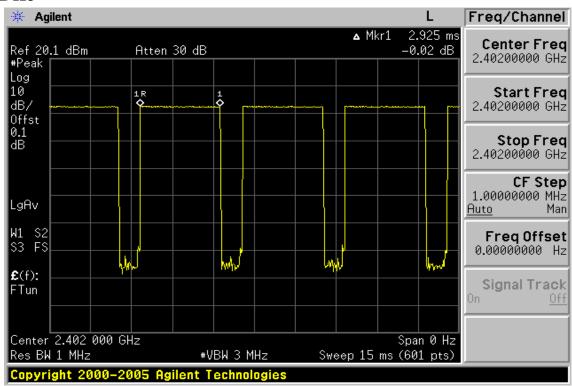

# CH-Mid

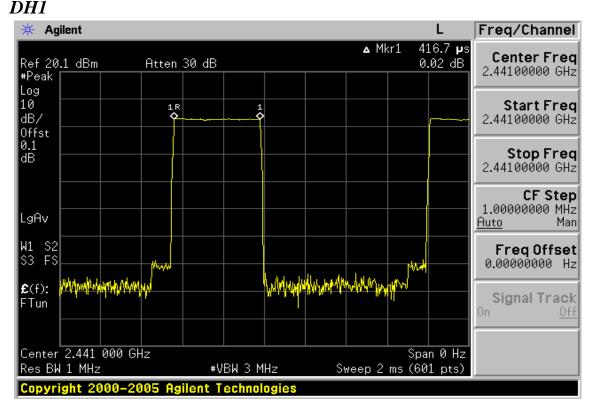

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司


f (886-2) 2298-0488




Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 57 of 71

#### DH3

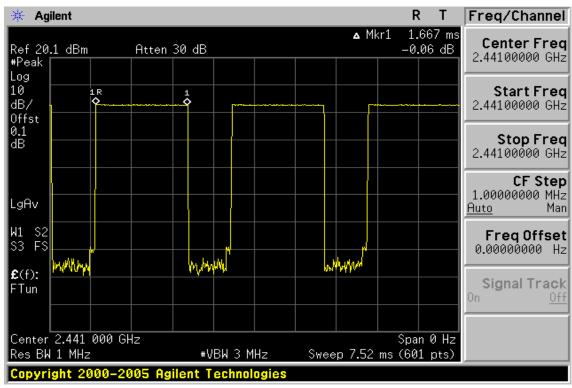

#### DH5

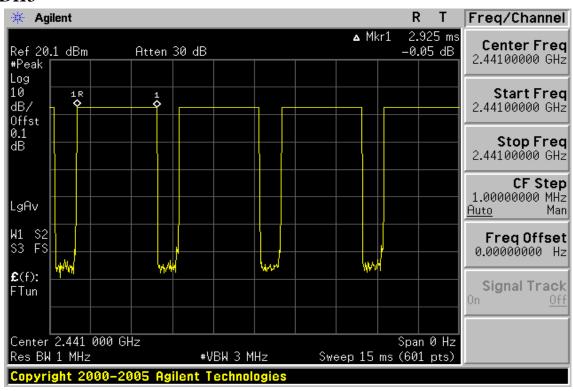

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488


台灣檢驗科技股份有限公司




Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 58 of 71

## CH-High DH1

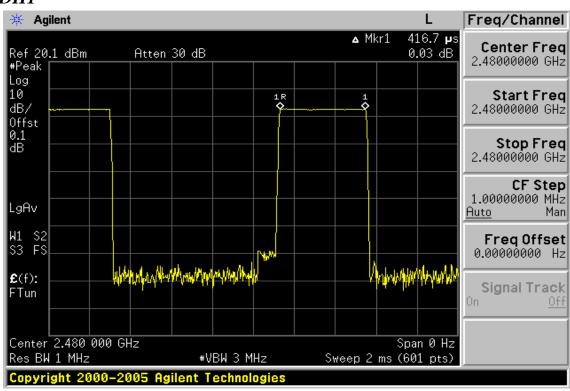

## DH3

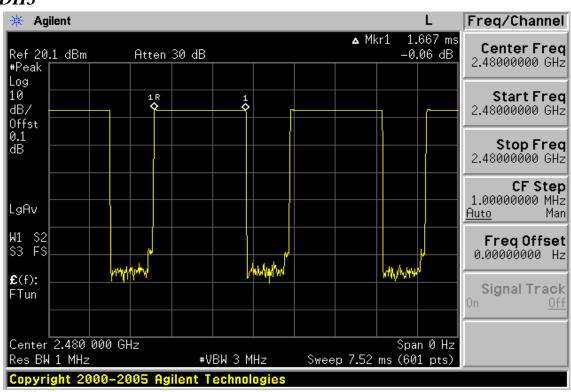

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 59 of 71

#### DH<sub>5</sub>

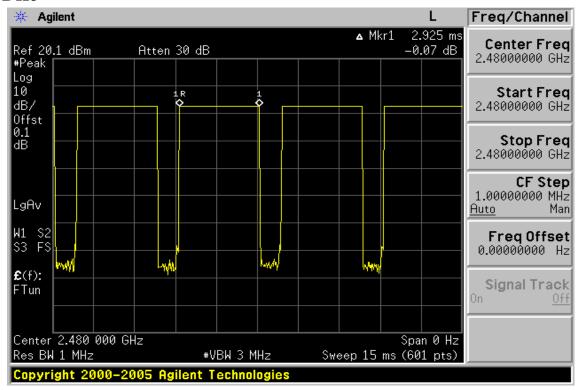



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 60 of 71

## 12. Peak Power Spectral Density

## 12.1. Standard Applicable:

According to §15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

According to RSS-210 issue 7, §A8.2(b) and §A8.3(2), The transmitter power spectral density (into the antenna) shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.

#### 12.2. Measurement Equipment Used:

Refer to section 6.2 for details.

#### 12.3. Test Set-up:

Refer to section 6.3 for details.

#### 12.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 1.5MHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 61 of 71

#### 12.5. Measurement Result:

#### EDR Mode

СН	RF Power Density	Cable loss	RF Power Density	Maximum Limit
	Reading (dBm)	(dB)	Level (dBm)	(dBm)
Low	-11.29	0.00	-11.29	8
Mid	-10.97	0.00	-10.97	8
High	-11.90	0.00	-11.90	8

offset 7dB


Note: Refer to next page for plots.




Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 62 of 71

## Power Spectral Density Test Plot (CH-Low) (EDR)

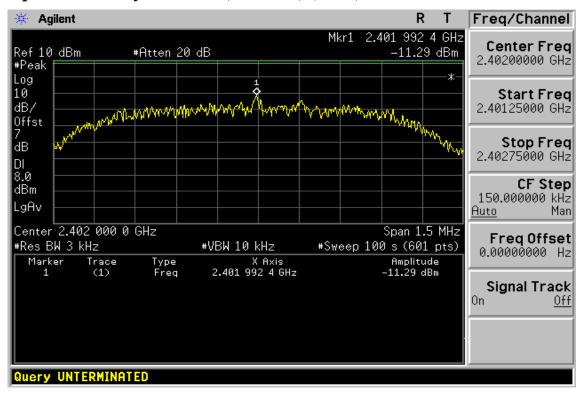

# Power Spectral Density Test Plot (CH-Mid) (EDR)

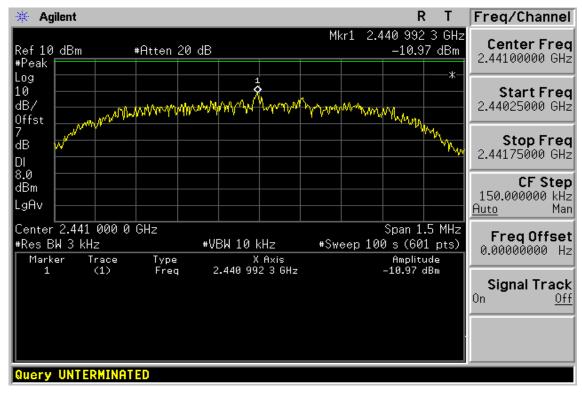

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留'0天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and">www.sgs.com/terms\_and</a> electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279


f (886-2) 2298-0488



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 63 of 71

## Power Spectral Density Test Plot (CH-High) (EDR)

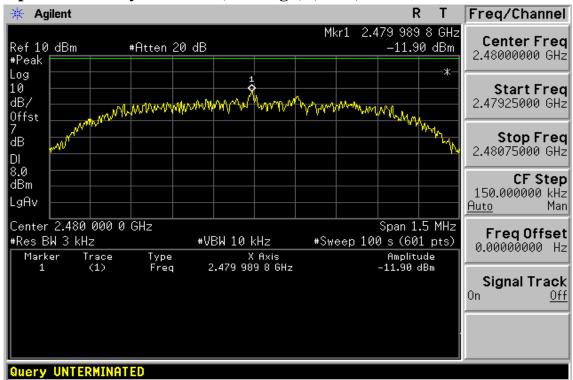

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Shear States the lesses states the lesses share the less within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 64 of 71

#### 13. 20dB Bandwidth & 99% Bandwidth

## 13.1. Standard Applicable:

According to §15.247(a)(1), and RSS210 A8.1(b) for frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

## 13.2. Measurement Equipment Used:

Refer to section 6.2 for details.

## 13.3. Test Set-up:

Refer to section 6.3 for details.

#### 13.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=10KHz (1 % of Bandwidth.), Span= 3MHz, Sweep=auto
- 4. Mark the peak frequency and –20dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 65 of 71

#### 13.5. Measurement Result:

#### 20dB Bandwidth:

#### **BDR Mode**

СН	Bandwidth	
	(MHz)	
Lower	0.926	
Mid	0.871	
Higher	0.926	

#### **EDR Mode**

СН	Bandwidth	2/3 Bandwidth
	(MHz)	(MHz)
Lower	1.242	0.828
Mid	1.332	0.888
Higher	1.241	0.827

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sas.com



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 66 of 71

#### 99% Bandwidth:

#### **BDR Mode**

СН	Bandwidth
	(MHz)
Lower	0.864
Mid	0.850
Higher	0.863

#### **EDR Mode**

СН	Bandwidth	
	(MHz)	
Lower	1.230	
Mid	1.235	
Higher	1.203	

Note: Refer to next page for plots.




Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 67 of 71

# BDR Mode 20dB Bandwidth & 99% Bandwidth Test Data CH-Low



## 20dB Bandwidth & 99% Bandwidth Test Data CH-Mid

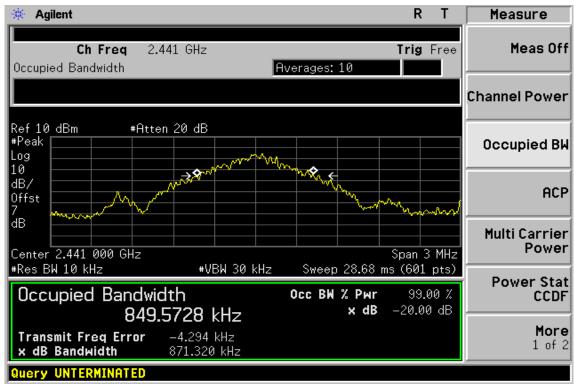

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留"90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 68 of 71

## 20dB Bandwidth & 99% Bandwidth Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Shear States the lesses states the lesses share the less within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279 f (886-2) 2298-0488




Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 69 of 71

# EDR Mode 20dB Bandwidth & 99% Bandwidth Test Data CH-Low

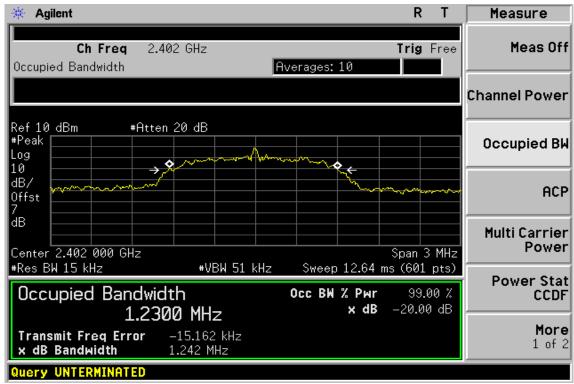

#### 20dB Bandwidth & 99% Bandwidth Test Data CH-Mid

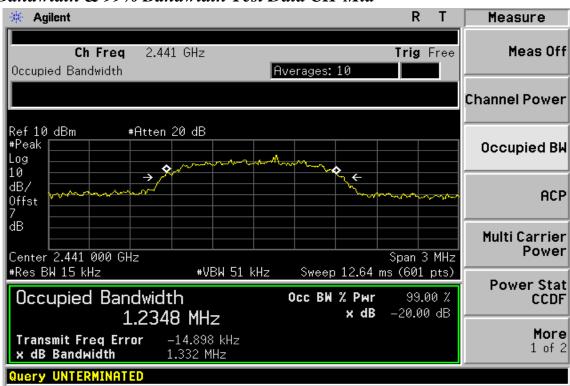

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面評可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sqs.com/terms\_and">www.sqs.com/terms\_and</a> electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488



Report No.: EF/2010/50004 **Issue Date: Jul. 01, 2010** 

Page: 70 of 71

## 20dB Bandwidth & 99% Bandwidth Test Data CH-High

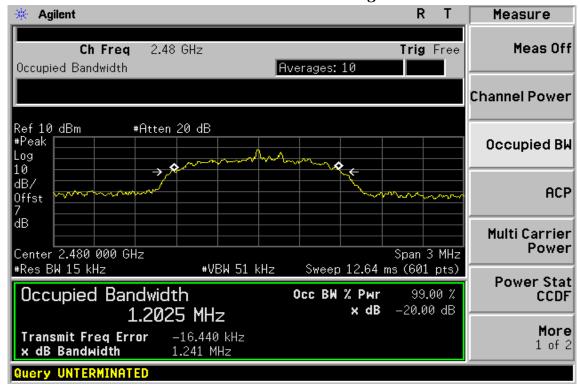

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Shear States the lesses states the lesses share the less within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EF/2010/50004 Issue Date: Jul. 01, 2010

Page: 71 of 71

## 14. ANTENNA REQUIREMENT

## 14.1. Standard Applicable:

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.246(1), if transmitting antennas of directional gain greater than 6dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS-GEN 7.1.4, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

#### 14.2. Antenna Connected Construction:

The directional gains of antenna used for transmitting is -3dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and">www.sgs.com/terms\_and</a> electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sqs.com/terms-e-document.htm">www.sqs.com/terms-e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.