FCC RF Test Report

APPLICANT : BLU Products, Inc.

EQUIPMENT: Mobile phone

BRAND NAME : BLU

MODEL NAME : DIVA FLEX

FCC ID : YHLBLUDIVAFLEX

STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)

CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Nov. 13, 2015 and testing was completed on Nov. 19, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Prepared by: Andy Yeh / Manager

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL (SHENZHEN) INC.

1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China

Page Number : 1 of 23
Report Issued Date : Jan. 07, 2016

: Rev. 01

Testing Laboratory

Report No.: FG5N1301

Report Template No.: BU5-FG22/24/27/90 Version 1.1

Report Version

TABLE OF CONTENTS

1	GEN	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	
	1.3	Product Feature of Equipment Under Test	5
	1.4	Product Specification of Equipment Under Test	6
	1.5	Modification of EUT	6
	1.6	Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
	1.7	Testing Location	7
	1.8	Applicable Standards	8
2	TES	T CONFIGURATION OF EQUIPMENT UNDER TEST	9
	2.1	Test Mode	9
	2.2	Connection Diagram of Test System	10
	2.3	Support Unit used in test configuration	11
	2.4	Measurement Results Explanation Example	11
3	CON	DUCTED TEST RESULT	12
	3.1	Measuring Instruments	12
	3.2	Test Setup	
	3.3	Test Result of Conducted Test	
	3.4	Conducted Output Power	
	3.5	Peak-to-Average Ratio	
	3.6	99% Occupied Bandwidth and 26dB Bandwidth Measurement	14
	3.7	Conducted Band Edge	15
	3.8	Conducted Spurious Emission	16
	3.9	Frequency Stability	17
4	RAD	IATED TEST ITEMS	18
	4.1	Measuring Instruments	18
	4.2	Test Setup	18
	4.3	Test Result of Radiated Test	18
	4.4	Effective Radiated Power and Effective Isotropic Radiated Power Measurement	19
	4.5	Field Strength of Spurious Radiation Measurement	21
5	LIST	OF MEASURING EQUIPMENT	22
6	UNC	ERTAINTY OF EVALUATION	23
AP	PEND	DIX A. TEST RESULTS OF CONDUCTED TEST	
ΑP	PEND	DIX B. TEST RESULTS OF RADIATED TEST	
ΑP	PEND	DIX C. TEST SETUP PHOTOGRAPHS	

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 2 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG5N1301	Rev. 01	Initial issue of report	Jan. 07, 2016

 ${\it SPORTON\ INTERNATIONAL\ (SHENZHEN)\ INC.}$

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 3 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

SUMMARY OF TEST RESULT

Report Section	FCC Rule IC Rule I		Description	Limit	Result	Remark
3.4	§2.1046	RSS-132 (5.4) RSS-133 (6.4)	Conducted Output Power	Reporting Only	PASS	-
3.5	§24.232(d)	RSS-132 (5.4) RSS-133 (6.4)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b)	RSS-GEN(6.6) RSS-132(3.1) RSS-133(3.1)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
2.0	§2.1055 §22.355	RSS-GEN(6.11) RSS-132 (5.3)	Frequency Stability for	< 2.5 ppm for Part 22H	PASS	
3.9	§2.1055 §24.235	RSS-GEN(6.11) RSS-133 (6.3)	Temperature & Voltage	Within Authorized Band	PASS	-
	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
4.4	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
4.5	§22.917(a)		Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 24.45 dB at 3819.600 MHz

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 4 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

1 General Description

1.1 Applicant

BLU Products, Inc.

10814 NW 33rd St # 100 Doral, FL 33172

1.2 Manufacturer

BLU Products, Inc.

10814 NW 33rd St # 100 Doral, FL 33172

1.3 Product Feature of Equipment Under Test

Product Feature					
Equipment	Mobile phone				
Brand Name	BLU				
Model Name	DIVA FLEX				
FCC ID	YHLBLUDIVAFLEX				
EUT supports Radios application	GSM/Bluetooth v3.0+EDR				
	Conducted: 351771053537834/351771053537842				
IMEI Code	Radiation: 351771053537750/351771053537768				
	ERP&EIRP: 351771053537750/351771053537768				
HW Version	S1711-MB-V1.2				
SW Version	BLU_T370_V11_GENERIC_ANATEL				
EUT Stage	Production Unit				

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

 ${\it SPORTON\ INTERNATIONAL\ (SHENZHEN)\ INC.}$

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 5 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.1

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification							
	GSM:						
Tx Frequency	850:	824.2 MHz ~ 848.8 MHz					
	1900:	1850.2 MHz ~ 1909.8MHz					
	GSM:						
Rx Frequency	850:	869.2 MHz ~ 893.8 MHz					
	1900:	1930.2 MHz ~ 1989.8 MHz					
	GSM:						
Maximum Output Power to Antenna	850:	32.09 dBm					
	1900:	29.54 dBm					
Antenna Type	IFA Anten	na					
Type of Modulation	GSM: GM	SK					

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 6 of 23 Report Issued Date: Jan. 07, 2016 Report Version : Rev. 01

Report No.: FG5N1301

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22H	GSM850 GSM	GMSK	0.3342	0.0299 ppm	246KGXW
Part 24E	GSM1900 GSM	GMSK	0.6622	0.0388 ppm	245KGXW

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.
	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili
Test Site Location	Town, Nanshan District, Shenzhen, Guangdong, P. R. China
lest Site Location	TEL: +86-755-8637-9589
	FAX: +86-755-8637-9595
Took Cita No	Sporton Site No.
Test Site No.	TH01-SZ

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.					
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China					
	TEL: +86-755- 3320-2398					
Took Cita No	Sporton Site No.	FCC/IC Registration No.				
Test Site No.	03CH01-SZ 831040/4086F					

Note: The test site complies with ANSI C63.4 2009 requirement.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 7 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- IC RSS-132 Issue 3
- IC RSS-133 Issue 6
- IC RSS-Gen Issue 4

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX

TEL: 86-755-8637-9589

Page Number : 8 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

- 1. 30 MHz to 10th harmonic for GSM850.
- 2. 30 MHz to 10th harmonic for GSM1900.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes								
Band Radiated TCs Conducted								
GSM 850	■ GSM Link	■ GSM Link						
GSM 1900	■ GSM Link	■ GSM Link						

 ${\it SPORTON\ INTERNATIONAL\ (SHENZHEN)\ INC.}$

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01


Page Number

Report Template No.: BU5-FG22/24/27/90 Version 1.1


: 9 of 23

2.2 Connection Diagram of Test System

For 22H

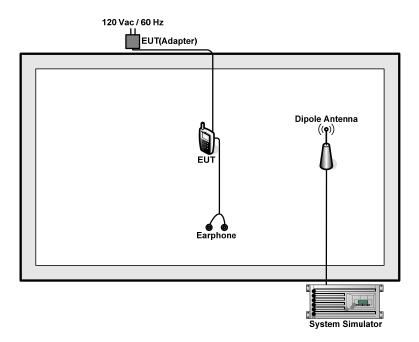

For 24E

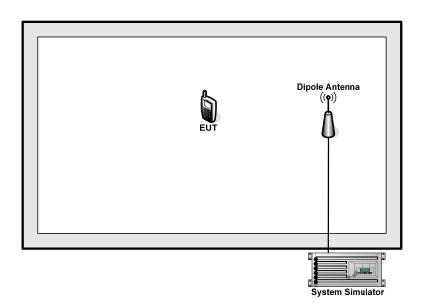

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 10 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.1

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	Lenovo	SH100	N/A	Unshielded,1.2m	N/A

Report No.: FG5N1301

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.5 dB and a 10dB attenuator.

Example:

Offset(dB) = RF cable loss(dB) + attenuator factor(dB). = 4.5 + 10 = 14.5 (dB)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 11 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

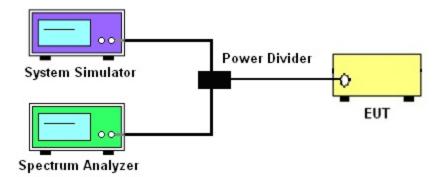

3.2.3 Frequency Stability

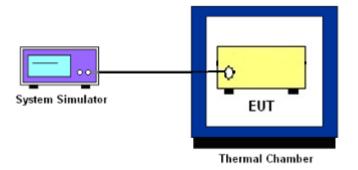

3.3 Test Result of Conducted Test

Please refer to Appendix A.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 12 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure the maximum burst average power for GSM.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 3. Set EUT to transmit at maximum output power.
- 4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
- 5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 13 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.1

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

Report No.: FG5N1301

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
 The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 5. Set the detection mode to peak, and the trace mode to max hold.
- Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
- 7. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

Report Issued Date: Jan. 07, 2016

: 14 of 23

Page Number

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

3.7.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.The path loss was compensated to the results for each measurement.
- 4. The band edges of low and high channels for the highest RF powers were measured.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
 - = P(W) [43 + 10log(P)] (dB)
 - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
 - = -13dBm.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 15 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.1

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

Report No.: FG5N1301

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4. The middle channel for the highest RF power within the transmitting frequency was measured.
- 5. The conducted spurious emission for the whole frequency range was taken.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
 - = P(W) [43 + 10log(P)] (dB)
- = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
- = -13dBm.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 16 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX

TEL: 86-755-8637-9589

Page Number : 17 of 23

Report Issued Date : Jan. 07, 2016

Report Version : Rev. 01

Report No.: FG5N1301

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz



4.2.2 For radiated test above 1GHz

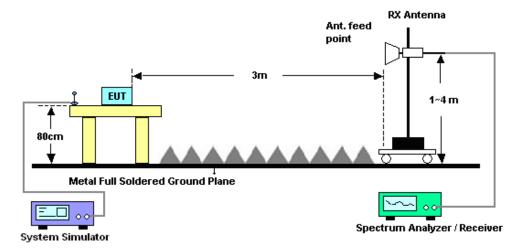

4.3 Test Result of Radiated Test

Please refer to Appendix B.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 18 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

4.4.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-D-2010, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

4.4.2 Test Procedures

- The testing follows FCC KDB 971168 D01 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-D-2010 Section 2.2.17.
- The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
- 3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
- 4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. Tx Cable loss + Substitution antenna gain Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, EIRP = LVL + Correction factor and ERP = EIRP 2.15. Take the record of the output power at substitution antenna.

FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX

TEL: 86-755-8637-9589

Page Number : 19 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.1

	GSM/GPRS/EDGE
SPAN	500kHz
RBW	10kHz
VBW	30kHz
Detector	RMS
Trace	Average
Average Type	Power
Sweep Count	100

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 20 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.1

4.5 Field Strength of Spurious Radiation Measurement

4.5.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
- 2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12. ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
 - = P(W) [43 + 10log(P)] (dB)
 - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
 - = -13dBm.

FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 21 of 23
Report Issued Date : Jan. 07, 2016

Report No.: FG5N1301

Report Version : Rev. 01

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Jan. 28, 2015	Nov. 16, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Aug. 07, 2015	Nov. 16, 2015	Aug. 06, 2016	Conducted (TH01-SZ)
Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz;Max 30dBm	Jun. 07, 2015	Nov. 19, 2015	Jun. 06, 2016	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz-2GHz	Oct. 17, 2015	Nov. 19, 2015	Oct. 16, 2016	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 17, 2015	Nov. 19, 2015	Oct. 16, 2016	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Aug.19, 2015	Nov. 19, 2015	Aug. 18, 2016	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz ~3000MHz / 30 dB	Jan. 28, 2015	Nov. 19, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 28, 2015	Nov. 19, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 05, 2015	Nov. 19, 2015	May 04, 2016	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	NCR	Nov. 19, 2015	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Nov. 19, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Nov. 19, 2015	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : 22 of 23
Report Issued Date : Jan. 07, 2016

Report No.: FG5N1301

Report Version : Rev. 01

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	4.8dB
Confidence of 95% (U = 2Uc(y))	4.0UD

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX

TEL: 86-755-8637-9589

Page Number : 23 of 23
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.1

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

SIM 1:

Conducted Power (*Unit: dBm)								
Band		GSM850			GSM1900			
Channel	128	189	251	512	661	810		
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8		
GSM	<mark>32.09</mark>	32.01	31.97	29.32	<mark>29.54</mark>	29.40		

SIM 2:

Conducted Power (*Unit: dBm)								
Band		GSM850		GSM1900				
Channel	128	189	251	512	661	810		
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8		
GSM	32.07	32.00	31.94	29.30	29.51	29.36		

SPORTON INTERNATIONAL (SHENZHEN) INC. TEL: 86-755-8637-9589

FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : A1 of A12
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

Peak-to-Average Ratio

Mode	GSM850	GSM1900	Limit: 13dB
Mod.	GSM	GSM	Result
Lowest CH	0.24	0.20	
Middle CH	0.20	0.20	PASS
Highest CH	0.24	0.20	1

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : A2 of A12
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

GSM1900 (GSM) GSM850 (GSM) Lowest Channel Lowest Channel * **%** Z dM/ Mean Por Z dm/ Mean Por Camilative Distribution Function (100000 samples)
Trace 1
29.58 dBm
0.24 dB Trace 1 32.42 dBm 32.64 dBm 0.22 dB 0.16 dB 0.24 dB 0.24 dB 0.24 dB 0.16 dB 0.20 dB 0.20 dB Date: 16.NOV.2015 14:19:55 Date: 16.NOV.2015 14:53:26 **Middle Channel Middle Channel % %** Trace 1 29.63 dBm 29.89 dBm 0.26 dB Trace 1 32.30 dBm 32.57 dBm 0.26 dB Peak Peak Crest Crest 10 % 1 % .1 % 0.20 dB 0.20 dB 0.20 dB 0.28 dB 10 % 1 % .1 % Date: 16.NOV.2015 14:20:28 Date: 16.NOV.2015 14:54:00 **Highest Channel Highest Channel %** * Trace 1 32.22 dBm 32.50 dBm 0.27 dB Trace 1 29.58 dBm 29.82 dBm 0.24 dB Mean 0.20 dB 0.20 dB 0.24 dB 0.24 dB 10 % 0.16 dB 0.20 dB 0.20 dB 0.24 dB

Date: 16.NOV.2015 14:20:55

Report No.: FG5N1301

Date: 16.NOV.2015 14:54:18


26dB Bandwidth

Mode	GSM850	GSM1900
Mod.	GSM	GSM
Lowest CH	0.301	0.310
Middle CH	0.308	0.309
Highest CH	0.301	0.281

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : A4 of A12
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.0

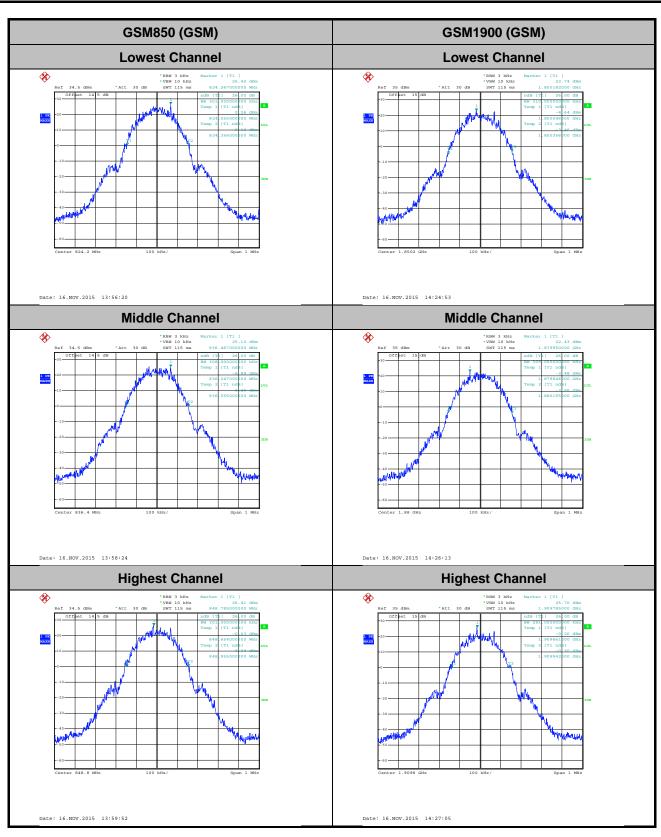

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : A5 of A12
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301


Occupied Bandwidth

Mode	GSM850	GSM1900
Mod.	GSM	GSM
Lowest CH	0.245	0.243
Middle CH	0.246	0.245
Highest CH	0.243	0.242

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : A6 of A12
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01


Report Template No.: BU5-FG22/24/27/90 Version 1.0

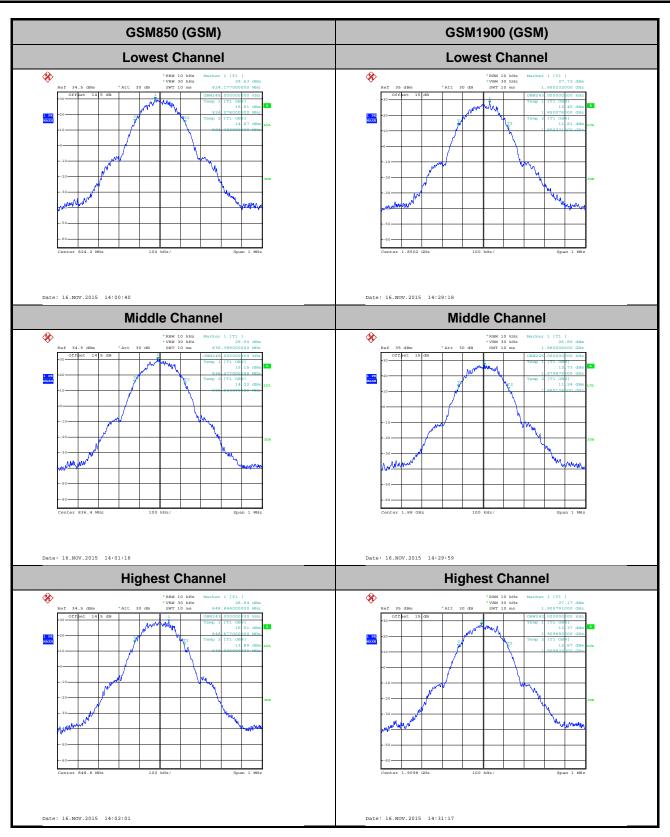

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : A7 of A12
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01


Report No.: FG5N1301

Conducted Band Edge

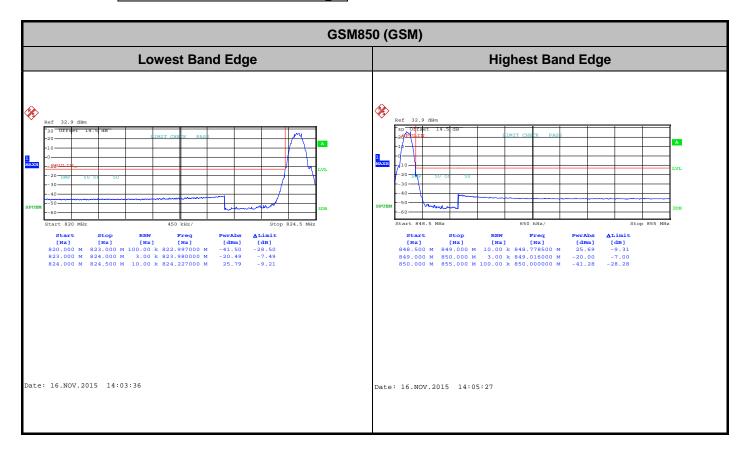

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : A8 of A12
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01


Report No.: FG5N1301

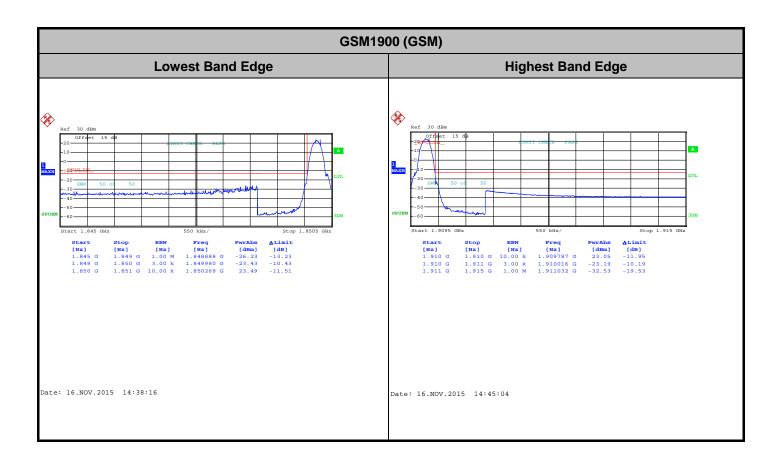

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : A9 of A12
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

Conducted Spurious Emission

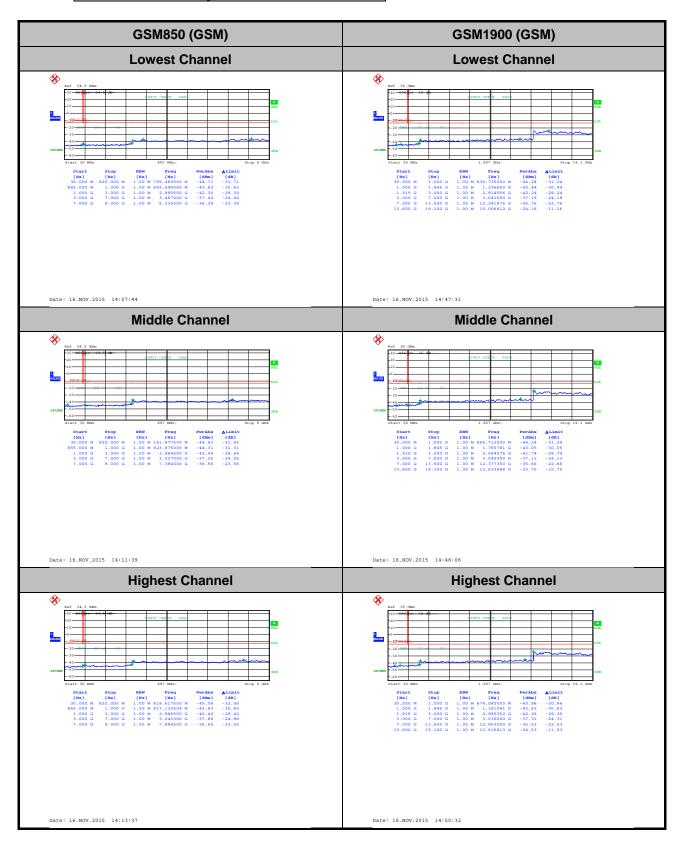

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : A10 of A12
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

Frequency Stability

Test Conditions	Middle Channel	Middle Channel GSM850 (GSM)	
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0239	
40	Normal Voltage	0.0167	
30	Normal Voltage	0.0072	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0084	
0	Normal Voltage	0.0143	
-10	Normal Voltage	0.0215	PASS
-20	Normal Voltage	0.0251	
-30	Normal Voltage	0.0299	
20	Maximum Voltage	0.0167	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0072	

Note: Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage =4.2 V

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : A11 of A12
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.0

Test Conditions	Middle Channel GSM1900 (GSM)		Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0202	
40	Normal Voltage	0.0117	
30	Normal Voltage	0.0048	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0069	
0	Normal Voltage	0.0176	
-10	Normal Voltage	0.0250	PASS
-20	Normal Voltage	0.0314	
-30	Normal Voltage	0.0388	
20	Maximum Voltage	0.0202	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0112	

Note:

- 1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage =4.2 V
- 2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : A12 of A12
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

Appendix B. Test Results of Radiated Test

ERP/EIRP

Channel	Mode	Horiz	ontal	Vertical		
	Wiode	ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)	
Lowest	GSM850 GSM	22.49	0.1774	11.28	0.0134	
Middle		24.23	0.2649	12.57	0.0181	
Highest		25.24	0.3342	14.28	0.0268	
Limit	ERP < 7W	Re	sult	PA	SS	

Channel	Mada	Horiz	ontal	Vertical		
	Mode	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)	
Lowest	GSM1900 GSM	28.21	0.6622	27.34	0.5420	
Middle		27.81	0.6039	26.56	0.4529	
Highest		26.27	0.4236	23.83	0.2415	
Limit	EIRP < 2W	Re	sult	PA	SS	

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX

TEL: 86-755-8637-9589

Page Number : B1 of B3
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

Radiated Spurious Emission

	GSM850 (GSM)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	
	1648.4	-45.12	-13	-32.12	-55.46	-51.80	0.57	9.40	Н	
	2472.6	-37.62	-13	-24.62	-54.08	-45.33	0.74	10.60	Н	
Lowoot	3296.8	-52.05	-13	-39.05	-67.65	-61.65	0.85	12.60	Н	
Lowest	1648.4	-45.64	-13	-32.64	-55.50	-52.32	0.57	9.40	V	
	2472.6	-51.35	-13	-38.35	-63.90	-59.06	0.74	10.60	V	
	3296.8	-56.61	-13	-43.61	-71.22	-66.21	0.85	12.60	V	
	1672	-44.66	-13	-31.66	-55.14	-51.34	0.57	9.40	Н	
	2510	-39.73	-13	-26.73	-55.77	-47.44	0.74	10.60	Н	
Middle	3346	-55.83	-13	-42.83	-71.43	-65.43	0.85	12.60	Н	
Middle	1672	-47.69	-13	-34.69	-57.06	-54.37	0.57	9.40	V	
	2510	-45.78	-13	-32.78	-60.50	-53.49	0.74	10.60	V	
	3346	-56.35	-13	-43.35	-70.96	-65.95	0.85	12.60	V	
	1697.6	-43.74	-13	-30.74	-54.46	-50.42	0.57	9.40	Н	
	2546.4	-48.01	-13	-35.01	-61.81	-55.72	0.74	10.60	Н	
Lliabost	3395.2	-56.13	-13	-43.13	-71.73	-65.73	0.85	12.60	Н	
Highest	1697.6	-51.96	-13	-38.96	-60.17	-58.64	0.57	9.40	V	
	2546.4	-47.29	-13	-34.29	-61.45	-55.00	0.74	10.60	V	
	3395.2	-56.52	-13	-43.52	-71.13	-66.12	0.85	12.60	V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : B2 of B3
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report No.: FG5N1301

	GSM1900 (GSM)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	
	3700.4	-44.04	-13	-31.04	-64.37	-55.77	0.87	12.60	Н	
	5550.6	-39.66	-13	-26.66	-62.56	-51.69	1.07	13.10	Н	
Lowest	7400.8	-50.66	-13	-37.66	-75.79	-60.27	1.69	11.30	Н	
Lowest	3700.4	-42.89	-13	-29.89	-64.45	-54.62	0.87	12.6	V	
	5550.6	-41.09	-13	-28.09	-63.84	-53.12	1.07	13.1	V	
	7400.8	-50.60	-13	-37.60	-75.51	-60.03	1.87	11.3	V	
	3760	-42.58	-13	-29.58	-62.91	-54.31	0.87	12.60	Н	
	5640	-43.90	-13	-30.90	-66.77	-55.93	1.07	13.10	Н	
Middle	7520	-47.40	-13	-34.40	-72.53	-57.01	1.69	11.30	Н	
Middle	3760	-39.18	-13	-26.18	-61.84	-50.91	0.87	12.6	V	
	5640	-43.47	-13	-30.47	-66.22	-55.50	1.07	13.1	V	
	7520	-50.93	-13	-37.93	-75.84	-60.36	1.87	11.3	V	
	3819.6	-39.30	-13	-26.30	-60.84	-51.03	0.87	12.60	Н	
	5729.4	-41.38	-13	-28.38	-64.25	-53.41	1.07	13.10	Н	
Lliaboot	7639.2	-50.74	-13	-37.74	-75.87	-60.35	1.69	11.30	Н	
Highest	3819.6	-37.45	-13	-24.45	-59.8	-49.18	0.87	12.6	V	
	5729.4	-42.92	-13	-29.92	-65.67	-54.95	1.07	13.1	V	
	7639.2	-49.51	-13	-36.51	-74.42	-58.94	1.87	11.3	V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUDIVAFLEX Page Number : B3 of B3
Report Issued Date : Jan. 07, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.0