

FCC PART 27 FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

BLU Products, Inc.

10814 NW 33rd St # 100 Doral, FL 33172, United States

FCC ID: YHLBLULIFEMAX

Report Type: **Product Type:** Original Report Mobile phone haigus li **Test Engineer:** Haiguo Li **Report Number:** RSZ160721004-00D **Report Date:** 2016-08-04 BeilHu Bell Hu **Reviewed By:** RF Engineer Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Prepared By: Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
JUSTIFICATION	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION	8
APPLICABLE STANDARD	
Test Result	
FCC §2.1047 - MODULATION CHARACTERISTIC	
§2.1046; § 22.913 (A); § 24.232 (C); §27.50 (D) (H) - RF OUTPUT POWER	
APPLICABLE STANDARDS	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH	
APPLICABLE STANDARDS	
TEST PROCEDURE	39
TEST EQUIPMENT LIST AND DETAILS TEST DATA	
§ 2.1051; § 22.917 (A); § 24.238 (A); §27.53 (H)(M)	98
SPURIOUS EMISSIONS AT ANTENNA TERMINALS	98
APPLICABLE STANDARDS	98
TEST PROCEDURE	98
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	99
FCC § 2.1053; § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) SPURIOUS RADIATED EMISSIONS	137
APPLICABLE STANDARDS	137
TEST PROCEDURE	137
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	138
FCC § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) - BAND EDGES	142
APPLICABLE STANDARDS	142
Test Procedure	
TEST EQUIPMENT LIST AND DETAILS.	
Test Data	143

FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY	201
APPLICABLE STANDARDS	
Test Procedure	
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	202

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *BLU Products, Inc.*'s product, model number: *LIFE MAX (FCC ID: YHLBLULIFEMAX)* or the "EUT" in this report was a *Mobile phone,* which was measured approximately: $77mm (L) \times 155 mm (W) \times 8 mm (H)$), rated with input voltage: DC 3.8V rechargeable Li-ion battery or DC 5.0V from adapter.

Adapter Information: Model: TPA-46050200UU

Input: AC 100-240V, 50/60Hz, 0.3A

Output: DC 5.0V, 1.5A

*All measurement and test data in this report was gathered from production sample serial number: 1602818. (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2016-07-21.

Objective

This type approval report is prepared on behalf of *BLU Products, Inc.* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commission's rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS & DTS submissions with FCC ID: YHLBLULIFEMAX.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.81 dB for 30MHz-1GHz.and 4.88 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2103. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

Manufacturer	rer Description		Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

Block Diagram of Test Setup

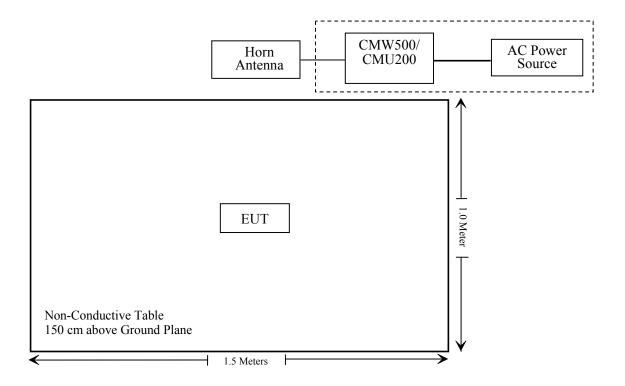

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)(1), §2.1093	RF Exposure Information	Compliance*
\$2.1046; \$ 22.913 (a); \$ 24.232 (c); \$27.50 (d) (h)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
\$ 2.1049; \$ 22.905; \$ 22.917; \$ 24.238; \$27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Radiated Emissions	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Compliance*: Please refer to SAR report released by BACL, report number: RSZ160721004-20.

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1307, §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ160721004-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC \S 2.1047(d) , Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (h) - RF OUTPUT POWER

Applicable Standards

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..


According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz. The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2500-2570MHz.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.



Radiated method:

TIA603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-12-15	2016-12-14
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
НР	Synthesized Sweeper	HP 8341B	2624A00116	2016-07-02	2017-07-01
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50- 146520-wh	2015-11-23	2016-11-23
Ducommun technologies	RF Cable	UFA210A-1- 4724-30050U	MFR64369 223410-001	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	104PEA	218124002	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	RG-214	1	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	RG-214	2	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	RG-214	3	2016-06-15	2017-06-15
WEINSCHEL	3dB Attenuator	5321	AU0709	2016-06-18	2017-06-18

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0kPa

The testing was performed by Haiguo Li on 2016-07-30.

Conducted Power

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	128	824.2	31.50	38.45
GSM	190	836.6	31.70	38.45
	251	848.8	31.74	38.45

Mode	Channel	Frequency	Average Output Power (dBm)				Limit
		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	128	824.2	31.50	30.78	29.58	28.44	38.45
GPRS	190	836.6	31.67	30.95	29.70	28.58	38.45
	251	848.8	31.78	30.99	29.79	28.69	38.45

Mode Channel		Frequency					
		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	128	824.2	26.74	25.12	23.01	21.80	38.45
EGPRS	190	836.6	26.82	25.28	23.12	21.90	38.45
	251	848.8	26.94	25.44	23.30	22.04	38.45

Test		Test	3GPP Sub	Average Output Power (dBm)			
Mode Con	Condition	Mode	Test	Low Frequency	Middle Frequency	High Frequency	
		RMC	12.2k	22.44	22.42	22.55	
			1	21.35	21.36	21.45	
		HSDPA	2	21.27	21.32	21.35	
			3	21.42	21.43	21.55	
			4	21.23	21.24	21.38	
WCDMA (Band V)	Normal	HSUPA	1	21.41	21.40	21.49	
(Buna 1)			2	21.33	21.32	21.41	
			3	21.50	21.51	21.59	
			4	21.38	21.32	21.38	
			5	21.46	21.45	21.58	
		HSPA+	1	21.40	21.39	21.50	

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	512	1850.2	28.88	33
GSM	661	1880.0	28.69	33
	810	1909.8	28.71	33

Mode Channe		Frequency	Average Output Power (dBm)				Limit
		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	512	1850.2	28.86	27.93	26.57	25.53	33
GPRS	661	1880.0	28.71	27.80	26.45	25.38	33
	810	1909.8	28.75	27.79	26.45	25.41	33

Mode	Channel	Frequency		Average Output Power (dBm)					
		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)		
	512	1850.2	26.54	25.69	23.83	22.83	33		
EGPRS	661	1880.0	26.34	25.49	23.67	22.67	33		
	810	1909.8	26.25	25.43	23.60	22.57	33		

Mode	Test	Test	3GPP Sub	Average Output Power (dBm)			
Wioue	Condition	Mode	Test	Low Frequency	Middle Frequency	High Frequency	
		RMC	12.2k	22.18	22.24	22.18	
			1	21.01	21.25	20.79	
		HSDPA	2	20.90	21.15	20.75	
			3	21.10	21.35	20.87	
			4	20.97	21.21	20.74	
WCDMA (Band II)	Normal		1	20.97	21.30	20.88	
(Build II)			2	20.91	21.21	20.82	
		HSUPA	3	21.04	21.36	20.93	
			4	20.84	21.19	20.83	
			5	21.04	21.38	20.97	
		HSPA+	1	20.98	21.31	20.90	

AWS Band (Part 27)

Mode	Test	Test	3GPP	Average Output Power (dBm)			
Mode	Condition	Mode	Low Frequency Frequency RMC12.2k 22.04 22.06 A	High Frequency			
		RMC	12.2k	22.04	22.06	22.06	
			1	21.01	21.02	21.05	
		HSDPA	2	20.90	20.97	20.96	
			3	21.07	21.08	21.13	
			4	20.91	20.99	20.96	
WCDMA (Band IV)	Normal	HSUPA	1	21.03	21.02	21.02	
(Build IV)			2	20.91	20.93	20.98	
			3	21.13	21.14	21.07	
			4	20.99	20.97	20.96	
			5	21.09	21.11	21.11	
		HSPA+	1	21.01	21.01	21.09	

Peak-to-average ratio (PAR)

Cellular Band

Mode	Channel	PAR (dB)	Limit (dB)
	Low	0.28	13
GSM	Middle	0.22	13
	High	0.27	13

Mode	Channel	PAR (dB)	Limit (dB)
	Low	2.59	13
EGPRS	Middle	2.35	13
	High	2.53	13

Mode	Channel	PAR (dB)	Limit (dB)
71.6	Low	3.25	13
RMC (BPSK)	Middle	3.19	13
(Bi sit)	High	3.32	13
	Low	3.27	13
HSDPA (16QAM)	Middle	3.21	13
(10(21111)	High	3.37	13
	Low	3.22	13
HSUPA (BPSK)	Middle	3.22	13
(Br Sik)	High	3.39	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
	Low	0.26	13
GSM	Middle	0.21	13
	High	0.28	13

Mode	Channel	PAR (dB)	Limit (dB)
	Low	2.39	13
EGPRS	Middle	2.32	13
	High	2.37	13

Mode	Channel	PAR (dB)	Limit (dB)
7116	Low	2.86	13
RMC (BPSK)	Middle	2.74	13
(BI SIK)	High	2.95	13
	Low	2.82	13
HSDPA (16QAM)	Middle	2.76	13
(100/11/1)	High	2.96	13
	Low	2.83	13
HSUPA (BPSK)	Middle	2.77	13
(BI SIK)	High	2.98	13

AWS Band

Mode	Channel	PAR (dB)	Limit (dB)
23.55	Low	3.24	13
RMC (BPSK)	Middle	3.10	13
	High	3.21	13
YYGDD I	Low	3.29	13
HSDPA (16QAM)	Middle	3.12	13
(100/11/1)	High	3.25	13
YYGY ID A	Low	3.27	13
HSUPA (BPSK)	Middle	3.13	13
(El Sit)	High	3.24	13

Report No.: RSZ160721004-00D

Radiated Power

GSM Mode:

Frequency	Receiver	Turntable	Rx Antenna		Substituted			Absolute			
	Reading (dBµV)	Reading	Reading	Angle Degree	Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
	ERP, Cellular Band (Part 22H), High Channel										
848.80	100.67	115	1.5	Н	30.2	0.69	0	29.48	38.45	8.97	
848.80	99.42	275	1.5	V	28.9	0.69	0	28.23	38.45	10.22	
	EIRP, PCS Band (Part 24E), Low Channel										
1850.20	90.53	149	2.2	Н	21.9	1.40	7.30	27.80	33	5.20	
1850.20	88.86	213	2.3	V	19.6	1.40	7.30	25.50	33	7.50	

EDGE Mode:

	Receiver	Receiver Turntable	Rx An	tenna	Substituted			Absolute		
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	ERP, Cellular Band (Part 22H), High Channel									
848.80	95.26	185	1.7	Н	25.8	0.69	0	25.07	38.45	13.38
848.80	93.27	165	1.5	V	22.8	0.69	0	22.08	38.45	16.37
	EIRP, PCS Band (Part 24E), Low Channel									
1850.20	89.32	215	1.7	Н	20.6	1.40	7.30	26.50	33	6.50
1850.20	88.35	304	1.1	V	19.1	1.40	7.30	25.00	33	8.00

WCDMA Mode:

Receiver		Turntable	Rx An	tenna	\$	Substituted				
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
		ER	P, WCDM	IA Band	V (Part 22	H), High	Channel			
846.60	91.67	58	1.5	Н	21.2	0.69	0	20.48	38.45	17.97
846.60	91.46	245	1.6	V	21.0	0.69	0	20.27	38.45	18.18
		EIF	RP, WCDI	MA Band	l II (Part 2	4E), Low	Channel			
1850.20	85.45	159	2.2	Н	16.8	1.40	7.30	22.70	33	10.3
1850.20	84.38	90	2.1	V	15.1	1.40	7.30	21.00	33	12.0
	EIRP, WCDMA Band IV (Part 27), Middle Channel									
1732.60	85.76	44	1.1	Н	17.0	1.60	6.90	22.30	30	7.7
1732.60	84.23	2	1.5	V	15.0	1.60	6.90	20.30	30	9.7

Note:

All above data were tested with no amplifier.
Absolute Level = SG Level - Cable loss + Antenna Gain
Margin = Limit- Absolute Level

LTE Band 2:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.26	22.55	22.29
		RB Size=1, RB Offset=2	22.42	22.70	22.52
		RB Size=1, RB Offset=5	22.32	22.59	22.30
	QPSK	RB Size=3, RB Offset=0	22.41	22.74	22.45
		RB Size=3, RB Offset=1	22.34	22.60	22.38
		RB Size=3, RB Offset=2	22.47	22.79	22.59
1.4		RB Size=6, RB Offset=0	22.42	22.72	22.34
1.4		RB Size=1, RB Offset=0	22.25	22.61	22.34
		RB Size=1, RB Offset=2	22.39	22.71	22.45
		RB Size=1, RB Offset=5	22.30	22.54	22.36
	16QAM	RB Size=3, RB Offset=0	22.42	22.76	22.44
		RB Size=3, RB Offset=1	22.30	22.69	22.45
		RB Size=3, RB Offset=2	22.44	22.79	22.55
		RB Size=6, RB Offset=0	22.43	22.58	22.45
		RB Size=1, RB Offset=0	22.31	22.59	22.35
		RB Size=1, RB Offset=7	22.43	22.70	22.53
		RB Size=1, RB Offset=14	22.29	22.62	22.37
	QPSK	RB Size=8, RB Offset=0	22.46	22.71	22.50
		RB Size=8, RB Offset=4	22.39	22.68	22.46
		RB Size=8, RB Offset=7	22.51	22.81	22.59
3.0		RB Size=15, RB Offset=0	22.38	22.66	22.46
3.0		RB Size=1, RB Offset=0	22.27	22.58	22.37
		RB Size=1, RB Offset=7	22.41	22.77	22.50
		RB Size=1, RB Offset=14	22.31	22.57	22.35
	16QAM	RB Size=8, RB Offset=0	22.43	22.69	22.47
		RB Size=8, RB Offset=4	22.36	22.66	22.43
		RB Size=8, RB Offset=7	22.46	22.90	22.63
		RB Size=15, RB Offset=0	22.43	22.61	22.43

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.29	22.54	22.30
		RB Size=1, RB Offset=37	22.44	22.69	22.47
		RB Size=1, RB Offset=74	22.25	22.54	22.34
	QPSK	RB Size=36, RB Offset=0	22.40	22.69	22.47
		RB Size=36, RB Offset=18	22.38	22.58	22.43
		RB Size=36, RB Offset=37	22.51	22.80	22.57
15.0		RB Size=75, RB Offset=0	22.35	22.66	22.45
13.0		RB Size=1, RB Offset=0	22.26	22.62	22.31
		RB Size=1, RB Offset=37	22.40	22.69	22.44
		RB Size=1, RB Offset=74	22.27	22.61	22.37
	16QAM	RB Size=36, RB Offset=0	22.47	22.75	22.53
		RB Size=36, RB Offset=18	22.35	22.74	22.38
		RB Size=36, RB Offset=37	22.53	22.74	22.49
		RB Size=75, RB Offset=0	22.37	22.70	22.44
		RB Size=1, RB Offset=0	22.26	22.53	22.33
		RB Size=1, RB Offset=49	22.41	22.70	22.52
		RB Size=1, RB Offset=99	22.26	22.54	22.37
	QPSK	RB Size=50, RB Offset=0	22.41	22.75	22.52
		RB Size=50, RB Offset=24	22.32	22.58	22.37
		RB Size=50, RB Offset=49	22.52	22.80	22.56
20.0		RB Size=100, RB Offset=0	22.36	22.60	22.48
20.0		RB Size=1, RB Offset=0	22.24	22.61	22.31
		RB Size=1, RB Offset=49	22.38	22.72	22.53
		RB Size=1, RB Offset=99	22.30	22.56	22.29
	16QAM	RB Size=50, RB Offset=0	22.38	22.71	22.46
		RB Size=50, RB Offset=24	22.27	22.69	22.43
		RB Size=50, RB Offset=49	22.43	22.80	22.62
		RB Size=100, RB Offset=0	22.38	22.64	22.40

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result	
QPSK(1RB Size)	5.65	13	Pass	
QPSK (100%RB Size)	6.84	13	Pass	
16QAM (1RB Size)	5.73	13	Pass	
16QAM (100%RB Size)	5.98	13	Pass	

QPSK:

	Receiver	Turn	Rx An	tenna	S	Substitut	ed	Absolute		
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	
	Middle Channel									
			1	.4 MHz l	Bandwidth					
1880.00	85.23	310	1.7	Н	16.6	1.40	7.30	22.50	33	
1880.00	84.85	265	1.7	V	15.6	1.40	7.30	21.50	33	
				3 MHz B	andwidth					
1880.00	85.37	71	1.1	Н	16.7	1.40	7.30	22.60	33	
1880.00	83.82	238	2.3	V	14.6	1.40	7.30	20.50	33	
			_	5 MHz B	andwidth	_				
1880.00	85.45	55	1.1	Н	16.8	1.40	7.30	22.70	33	
1880.00	84.73	98	1.5	V	15.5	1.40	7.30	21.40	33	
				10MHz E	Bandwidth					
1880.00	84.36	63	1.5	Н	15.7	1.40	7.30	21.60	33	
1880.00	84.77	194	1.7	V	15.5	1.40	7.30	21.40	33	
			1	5 MHz I	Bandwidth					
1880.00	83.03	180	1.8	Н	14.4	1.40	7.30	20.30	33	
1880.00	82.71	257	2.2	V	13.5	1.40	7.30	19.40	33	
			2	20 MHz I	Bandwidth					
1880.00	84.57	38	1.4	Н	15.9	1.40	7.30	21.80	33	
1880.00	84.56	161	1.2	V	15.3	1.40	7.30	21.20	33	

16QAM:

	Receiver	Turn	Rx An	tenna		Substitut	ed	Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
	Middle Channel								
			. 1	.4 MHz	Bandwidth				
1880.00	85.82	229	1.1	Н	17.1	1.40	7.30	23.00	33
1880.00	84.06	286	1.0	V	14.8	1.40	7.30	20.70	33
				3 MHz E	Bandwidth				
1880.00	85.08	97	2.3	Н	16.4	1.40	7.30	22.30	33
1880.00	84.33	354	1.5	V	15.1	1.40	7.30	21.00	33
				5 MHz E	Bandwidth				
1880.00	85.63	138	2.4	Н	17.0	1.40	7.30	22.90	33
1880.00	84.37	128	1.5	V	15.1	1.40	7.30	21.00	33
				10 MHz 1	Bandwidth				
1880.00	84.23	94	2.1	Н	15.6	1.40	7.30	21.50	33
1880.00	84.45	299	1.5	V	15.2	1.40	7.30	21.10	33
				15 MHz 1	Bandwidth				
1880.00	84.77	98	2.0	Н	16.1	1.40	7.30	22.00	33
1880.00	83.02	306	1.4	V	13.8	1.40	7.30	19.70	33
	20 MHz Bandwidth								
1880.00	83.74	79	2.2	Н	15.1	1.40	7.30	21.00	33
1880.00	82.46	312	1.7	V	13.2	1.40	7.30	19.10	33

LTE Band 4:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.11	22.43	22.27
		RB Size=1, RB Offset=2	22.30	22.64	22.42
		RB Size=1, RB Offset=5	22.11	22.43	22.22
	QPSK	RB Size=3, RB Offset=0	22.32	22.62	22.42
		RB Size=3, RB Offset=1	22.24	22.49	22.34
		RB Size=3, RB Offset=2	22.36	22.75	22.51
1.4		RB Size=6, RB Offset=0	22.23	22.52	22.32
1.4		RB Size=1, RB Offset=0	22.18	22.41	22.26
		RB Size=1, RB Offset=2	22.27	22.57	22.44
		RB Size=1, RB Offset=5	22.13	22.45	22.24
	16QAM	RB Size=3, RB Offset=0	22.30	22.56	22.42
		RB Size=3, RB Offset=1	22.29	22.45	22.30
		RB Size=3, RB Offset=2	22.35	22.66	22.48
		RB Size=6, RB Offset=0	22.24	22.57	22.33
		RB Size=1, RB Offset=0	22.11	22.48	22.24
		RB Size=1, RB Offset=7	22.32	22.58	22.39
		RB Size=1, RB Offset=14	22.19	22.46	22.31
	QPSK	RB Size=8, RB Offset=0	22.30	22.55	22.37
		RB Size=8, RB Offset=4	22.16	22.59	22.33
		RB Size=8, RB Offset=7	22.41	22.61	22.52
3.0		RB Size=15, RB Offset=0	22.26	22.54	22.41
3.0		RB Size=1, RB Offset=0	22.18	22.42	22.23
		RB Size=1, RB Offset=7	22.28	22.62	22.43
		RB Size=1, RB Offset=14	22.20	22.49	22.28
	16QAM	RB Size=8, RB Offset=0	22.31	22.56	22.41
		RB Size=8, RB Offset=4	22.24	22.48	22.34
		RB Size=8, RB Offset=7	22.40	22.65	22.55
		RB Size=15, RB Offset=0	22.33	22.52	22.36

RB Size=50, RB Offset=0

22.29

22.47

22.39

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.11	22.41	22.24
		RB Size=1, RB Offset=37	22.31	22.59	22.42
		RB Size=1, RB Offset=74	22.12	22.45	22.24
	QPSK	RB Size=36, RB Offset=0	22.30	22.65	22.40
		RB Size=36, RB Offset=18	22.15	22.46	22.35
		RB Size=36, RB Offset=37	22.41	22.66	22.47
15.0		RB Size=75, RB Offset=0	22.16	22.53	22.31
13.0		RB Size=1, RB Offset=0	22.17	22.45	22.26
		RB Size=1, RB Offset=37	22.29	22.57	22.45
		RB Size=1, RB Offset=74	22.11	22.40	22.30
	16QAM	RB Size=36, RB Offset=0	22.29	22.56	22.37
		RB Size=36, RB Offset=18	22.28	22.51	22.35
		RB Size=36, RB Offset=37	22.41	22.66	22.56
		RB Size=75, RB Offset=0	22.15	22.52	22.37
		RB Size=1, RB Offset=0	22.16	22.46	22.29
		RB Size=1, RB Offset=49	22.30	22.59	22.41
		RB Size=1, RB Offset=99	22.12	22.47	22.30
	QPSK	RB Size=50, RB Offset=0	22.30	22.61	22.44
		RB Size=50, RB Offset=24	22.27	22.54	22.41
		RB Size=50, RB Offset=49	22.42	22.64	22.50
20.0		RB Size=100, RB Offset=0	22.20	22.56	22.42
20.0		RB Size=1, RB Offset=0	22.12	22.47	22.25
		RB Size=1, RB Offset=49	22.31	22.56	22.43
		RB Size=1, RB Offset=99	22.16	22.47	22.26
	16QAM	RB Size=50, RB Offset=0	22.36	22.63	22.40
		RB Size=50, RB Offset=24	22.18	22.52	22.35
		RB Size=50, RB Offset=49	22.36	22.68	22.53
		RB Size=100, RB Offset=0	22.24	22.50	22.37

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result	
QPSK(1RB Size)	4.65	13	Pass	
QPSK (100%RB Size)	6.14	13	Pass	
16QAM (1RB Size)	4.96	13	Pass	
16QAM (100%RB Size)	6.20	13	Pass	

QPSK:

	Receiver	Turn	Rx An	tenna	S	Substitut	ed	Absolute		
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	
	Middle Channel									
			1	.4 MHz 1	Bandwidth					
1732.50	86.43	359	1.1	Н	17.6	1.60	6.90	22.90	30	
1732.50	83.92	59	1.0	V	14.7	1.60	6.90	20.00	30	
				3 MHz B	andwidth					
1732.50	85.45	144	2.0	Н	16.7	1.60	6.90	22.00	30	
1732.50	84.39	336	1.3	V	15.2	1.60	6.90	20.50	30	
			_	5 MHz B	andwidth					
1732.50	85.42	255	2.1	Н	16.6	1.60	6.90	21.90	30	
1732.50	83.36	189	1.3	V	14.1	1.60	6.90	19.40	30	
				10MHz E	Bandwidth					
1732.50	85.00	263	1.1	Н	16.2	1.60	6.90	21.50	30	
1732.50	84.33	193	1.3	V	15.1	1.60	6.90	20.40	30	
			1	5 MHz I	Bandwidth					
1732.50	84.41	85	1.5	Н	15.6	1.60	6.90	20.90	30	
1732.50	83.29	45	1.3	V	14.1	1.60	6.90	19.40	30	
			2	20 MHz I	Bandwidth					
1732.50	83.47	291	1.3	Н	14.7	1.60	6.90	20.00	30	
1732.50	82.23	222	1.3	V	13.0	1.60	6.90	18.30	30	

16QAM:

	D:	Turn	Rx An	tenna		Substitut	ed	Absolute		
Frequency (MHz)	Receiver Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	
	Middle Channel									
			. 1	.4 MHz	Bandwidth					
1732.50	86.43	301	1.0	Н	17.6	1.60	6.90	22.90	30	
1732.50	83.26	215	1.1	V	14.0	1.60	6.90	19.30	30	
				3 MHz E	Bandwidth					
1732.50	84.56	104	2.1	Н	15.8	1.60	6.90	21.10	30	
1732.50	82.34	13	1.6	V	13.1	1.60	6.90	18.40	30	
				5 MHz E	Bandwidth					
1732.50	84.03	14	1.5	Н	15.2	1.60	6.90	20.50	30	
1732.50	83.38	100	2.3	V	14.2	1.60	6.90	19.50	30	
				10 MHz 1	Bandwidth					
1732.50	84.63	265	2.2	Н	15.8	1.60	6.90	21.10	30	
1732.50	83.27	68	2.5	V	14.1	1.60	6.90	19.40	30	
				15 MHz I	Bandwidth					
1732.50	83.67	132	2.1	Н	14.9	1.60	6.90	20.20	30	
1732.50	82.37	315	1.4	V	13.2	1.60	6.90	18.50	30	
	20 MHz Bandwidth									
1732.50	83.59	85	2.5	Н	14.8	1.60	6.90	20.10	30	
1732.50	83.33	136	1.6	V	14.1	1.60	6.90	19.40	30	

LTE Band 7:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.17	22.48	22.30
		RB Size=1, RB Offset=12	22.35	22.64	22.47
		RB Size=1, RB Offset=24	22.12	22.45	22.24
	QPSK	RB Size=12, RB Offset=0	22.32	22.59	22.46
		RB Size=12, RB Offset=6	22.30	22.58	22.41
		RB Size=12, RB Offset=11	22.47	22.75	22.59
5.0		RB Size=25, RB Offset=0	22.18	22.50	22.29
5.0		RB Size=1, RB Offset=0	22.19	22.48	22.31
		RB Size=1, RB Offset=12	22.35	22.61	22.38
		RB Size=1, RB Offset=24	22.16	22.49	22.27
	16QAM	RB Size=12, RB Offset=0	22.31	22.65	22.42
		RB Size=12, RB Offset=6	22.24	22.61	22.42
		RB Size=12, RB Offset=11	22.41	22.70	22.51
		RB Size=25, RB Offset=0	22.27	22.52	22.38
		RB Size=1, RB Offset=0	22.18	22.43	22.26
		RB Size=1, RB Offset=24	22.29	22.57	22.42
		RB Size=1, RB Offset=49	22.13	22.40	22.27
	QPSK	RB Size=25, RB Offset=0	22.27	22.56	22.44
		RB Size=25, RB Offset=12	22.26	22.56	22.37
		RB Size=25, RB Offset=24	22.40	22.68	22.55
10.0		RB Size=50, RB Offset=0	22.22	22.47	22.35
10.0		RB Size=1, RB Offset=0	22.12	22.39	22.24
		RB Size=1, RB Offset=24	22.28	22.61	22.46
		RB Size=1, RB Offset=49	22.13	22.45	22.26
	16QAM	RB Size=25, RB Offset=0	22.34	22.63	22.40
		RB Size=25, RB Offset=12	22.20	22.50	22.31
		RB Size=25, RB Offset=24	22.37	22.74	22.52
		RB Size=50, RB Offset=0	22.21	22.52	22.33

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.14	22.42	22.30
		RB Size=1, RB Offset=37	22.27	22.59	22.47
		RB Size=1, RB Offset=74	22.12	22.48	22.24
	QPSK	RB Size=36, RB Offset=0	22.28	22.62	22.41
		RB Size=36, RB Offset=18	22.25	22.45	22.37
		RB Size=36, RB Offset=37	22.38	22.70	22.56
15.0		RB Size=75, RB Offset=0	22.18	22.57	22.31
13.0		RB Size=1, RB Offset=0	22.20	22.47	22.26
		RB Size=1, RB Offset=37	22.27	22.55	22.43
		RB Size=1, RB Offset=74	22.14	22.43	22.25
	16QAM	RB Size=36, RB Offset=0	22.28	22.60	22.44
		RB Size=36, RB Offset=18	22.30	22.53	22.30
		RB Size=36, RB Offset=37	22.38	22.67	22.48
		RB Size=75, RB Offset=0	22.17	22.51	22.37
	QPSK	RB Size=1, RB Offset=0	22.32	22.59	22.38
		RB Size=1, RB Offset=49	22.32	22.59	22.38
		RB Size=1, RB Offset=99	22.16	22.44	22.29
		RB Size=50, RB Offset=0	22.36	22.57	22.40
		RB Size=50, RB Offset=24	22.24	22.60	22.38
		RB Size=50, RB Offset=49	22.42	22.68	22.44
20.0		RB Size=100, RB Offset=0	22.21	22.51	22.36
20.0		RB Size=1, RB Offset=0	22.18	22.42	22.25
		RB Size=1, RB Offset=49	22.28	22.61	22.40
		RB Size=1, RB Offset=99	22.19	22.44	22.26
	16QAM	RB Size=50, RB Offset=0	22.27	22.64	22.47
		RB Size=50, RB Offset=24	22.31	22.46	22.34
		RB Size=50, RB Offset=49	22.39	22.70	22.52
		RB Size=100, RB Offset=0	22.27	22.55	22.32

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	4.73	13	Pass
QPSK (100%RB Size)	6.01	13	Pass
16QAM (1RB Size)	4.61	13	Pass
16QAM (100%RB Size)	5.91	13	Pass

EIRP:

QPSK:

	Receiver	Turn	Rx An	tenna	\$	Substitut	ed	Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
]	Middle C	hannel				
			5	MHz Ba	ndwidth				
2535.00	81.51	239	1.6	Н	15.1	1.70	8.60	22.00	33
2535.00	78.37	44	1.6	V	11.7	1.70	8.60	18.60	33
			10	MHz Ba	ndwidth				
2535.00	80.49	347	1.8	Н	14.1	1.70	8.60	21.00	33
2535.00	19.32	130	1.5	V	12.6	1.70	8.60	19.50	33
			15	MHz Ba	ındwidth	-			
2535.00	80.43	343	2.2	Н	14.0	1.70	8.60	20.90	33
2535.00	80.38	297	2.3	V	13.7	1.70	8.60	20.60	33
	20 MHz Bandwidth								
2535.00	78.59	116	1.6	Н	12.2	1.70	8.60	19.10	33
2535.00	77.34	295	1.5	V	10.6	1.70	8.60	17.50	33

16QAM:

	Receiver Reading (dRuV)	Turn	Rx An	tenna	Substituted			Absolute	
Frequency (MHz)		Reading table	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			_	5 MHz E	Bandwidth				
2535.00	81.02	322	1.6	Н	14.6	1.70	8.60	21.50	33
2535.00	79.38	189	1.8	V	12.7	1.70	8.60	19.60	33
				10 MHz 1	Bandwidth				
2535.00	81.54	299	1.7	Н	15.2	1.70	8.60	22.10	33
2535.00	80.27	264	1.6	V	13.6	1.70	8.60	20.50	33
				15 MHz I	Bandwidth				
2535.00	79.51	257	2.4	Н	13.1	1.70	8.60	20.00	33
2535.00	18.23	266	2.1	V	11.5	1.70	8.60	18.40	33
	20 MHz Bandwidth								
2535.00	79.37	69	1.6	Н	13.0	1.70	8.60	19.90	33
2535.00	79.29	129	2.3	V	12.6	1.70	8.60	19.50	33

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.12	22.42	22.29
		RB Size=1, RB Offset=2	22.28	22.64	22.45
		RB Size=1, RB Offset=5	22.19	22.39	22.21
	QPSK	RB Size=3, RB Offset=0	22.30	22.58	22.38
		RB Size=3, RB Offset=1	22.20	22.49	22.37
		RB Size=3, RB Offset=2	22.33	22.74	22.55
1.4		RB Size=6, RB Offset=0	22.26	22.49	22.25
1.4		RB Size=1, RB Offset=0	22.18	22.40	22.27
		RB Size=1, RB Offset=2	22.30	22.62	22.43
		RB Size=1, RB Offset=5	22.19	22.45	22.25
	16QAM	RB Size=3, RB Offset=0	22.31	22.55	22.41
		RB Size=3, RB Offset=1	22.22	22.48	22.34
		RB Size=3, RB Offset=2	22.39	22.71	22.54
		RB Size=6, RB Offset=0	22.25	22.51	22.29
		RB Size=1, RB Offset=0	22.18	22.42	22.21
		RB Size=1, RB Offset=7	22.32	22.63	22.43
		RB Size=1, RB Offset=14	22.15	22.41	22.28
	QPSK	RB Size=8, RB Offset=0	22.35	22.59	22.38
		RB Size=8, RB Offset=4	22.22	22.53	22.26
		RB Size=8, RB Offset=7	22.38	22.69	22.47
2		RB Size=15, RB Offset=0	22.25	22.53	22.39
3		RB Size=1, RB Offset=0	22.20	22.46	22.25
		RB Size=1, RB Offset=7	22.31	22.65	22.39
		RB Size=1, RB Offset=14	22.17	22.45	22.23
	16QAM	RB Size=8, RB Offset=0	22.26	22.57	22.38
		RB Size=8, RB Offset=4	22.33	22.57	22.30
		RB Size=8, RB Offset=7	22.34	22.76	22.44
		RB Size=15, RB Offset=0	22.28	22.52	22.33

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.14	22.41	22.23
		RB Size=1, RB Offset=12	22.32	22.59	22.38
		RB Size=1, RB Offset=24	22.11	22.41	22.23
	QPSK	RB Size=12, RB Offset=0	22.32	22.58	22.44
		RB Size=12, RB Offset=6	22.25	22.50	22.33
		RB Size=12, RB Offset=11	22.44	22.69	22.50
5		RB Size=25, RB Offset=0	22.22	22.52	22.35
3		RB Size=1, RB Offset=0	22.16	22.46	22.24
		RB Size=1, RB Offset=12	22.31	22.58	22.38
		RB Size=1, RB Offset=24	22.19	22.42	22.30
	16QAM	RB Size=12, RB Offset=0	22.35	22.58	22.41
		RB Size=12, RB Offset=6	22.25	22.51	22.29
		RB Size=12, RB Offset=11	22.40	22.71	22.44
		RB Size=25, RB Offset=0	22.29	22.46	22.37
		RB Size=1, RB Offset=0	22.15	22.46	22.29
		RB Size=1, RB Offset=24	22.32	22.61	22.41
		RB Size=1, RB Offset=49	22.10	22.41	22.27
	QPSK	RB Size=25, RB Offset=0	22.32	22.63	22.39
		RB Size=25, RB Offset=12	22.24	22.56	22.37
		RB Size=25, RB Offset=24	22.45	22.73	22.47
10		RB Size=50, RB Offset=0	22.17	22.48	22.30
10		RB Size=1, RB Offset=0	22.16	22.48	22.26
		RB Size=1, RB Offset=24	22.26	22.57	22.41
		RB Size=1, RB Offset=49	22.13	22.47	22.30
	16QAM	RB Size=25, RB Offset=0	22.28	22.58	22.42
		RB Size=25, RB Offset=12	22.28	22.52	22.34
		RB Size=25, RB Offset=24	22.29	22.63	22.46
		RB Size=50, RB Offset=0	22.22	22.51	22.38

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	4.12	13	Pass
QPSK (100%RB Size)	5.32	13	Pass
16QAM (1RB Size)	4.06	13	Pass
16QAM (100%RB Size)	5.44	13	Pass

EIRP:

QPSK:

	Receiver	Turn	Rx An	tenna	Substituted			Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
]	Middle C	hannel				
			1.4	MHz B	andwidth				
707.00	93.57	114	2.2	Н	23.1	0.62	0	22.48	34.77
707.00	90.79	127	1.8	V	20.3	0.62	0	19.68	34.77
			3	MHz Baı	ndwidth				
707.00	91.54	105	1.6	Н	21.0	0.62	0	20.38	34.77
707.00	91.37	58	2.1	V	20.9	0.62	0	20.28	34.77
			5	MHz Ba	ndwidth				
707.00	91.63	117	1.7	Н	21.1	0.62	0	20.48	34.77
707.00	90.74	129	2.1	V	20.2	0.62	0	19.58	34.77
	10 MHz Bandwidth								
707.00	92.73	147	2.0	Н	22.2	0.62	0	21.58	34.77
707.00	89.78	207	1.5	V	19.3	0.62	0	18.68	34.77

16QAM:

	Receiver Reading (dBµV)	Pagaiyar Turn		tenna	Substituted			Absolute	
Frequency (MHz)		table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			. 1	.4 MHz	Bandwidth				
707.00	93.77	112	1.5	Н	23.3	0.62	0	22.68	34.77
707.00	90.83	185	1.8	V	20.3	0.62	0	19.68	34.77
			_	3 MHz E	Bandwidth				
707.00	92.53	104	1.6	Н	22.0	0.62	0	21.38	34.77
707.00	89.88	153	1.7	V	19.4	0.62	0	18.78	34.77
				5 MHz E	Bandwidth				
707.00	91.67	117	1.7	Н	21.2	0.62	0	20.58	34.77
707.00	90.82	85	1.9	V	20.3	0.62	0	19.58	34.77
	10 MHz Bandwidth								
707.00	92.37	117	1.7	Н	21.92	0.62	0	21.49	34.77
707.00	89.73	245	1.5	V	19.2	0.62	0	18.58	34.77

LTE Band 17:

Maximum Output Power

Report No.: RSZ160721004-00D

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.16	22.48	22.21
		RB Size=1, RB Offset=12	22.34	22.62	22.39
		RB Size=1, RB Offset=24	22.18	22.42	22.23
	QPSK	RB Size=12, RB Offset=0	22.31	22.58	22.47
		RB Size=12, RB Offset=6	22.23	22.54	22.26
		RB Size=12, RB Offset=11	22.38	22.67	22.48
5.0		RB Size=25, RB Offset=0	22.27	22.55	22.30
3.0		RB Size=1, RB Offset=0	22.11	22.40	22.28
		RB Size=1, RB Offset=12	22.34	22.60	22.42
		RB Size=1, RB Offset=24	22.12	22.40	22.28
	16QAM	RB Size=12, RB Offset=0	22.29	22.57	22.41
		RB Size=12, RB Offset=6	22.17	22.48	22.36
		RB Size=12, RB Offset=11	22.37	22.72	22.51
		RB Size=25, RB Offset=0	22.17	22.45	22.37
		RB Size=1, RB Offset=0	22.19	22.39	22.22
	QPSK	RB Size=1, RB Offset=24	22.19	22.30	22.40
		RB Size=1, RB Offset=49	22.12	22.48	22.28
		RB Size=25, RB Offset=0	22.35	22.55	22.42
		RB Size=25, RB Offset=12	22.25	22.49	22.34
		RB Size=25, RB Offset=24	22.36	22.72	22.51
10.0		RB Size=50, RB Offset=0	22.16	22.56	22.37
10.0		RB Size=1, RB Offset=0	22.18	22.49	22.26
		RB Size=1, RB Offset=24	22.35	22.59	22.37
		RB Size=1, RB Offset=49	22.11	22.48	22.23
	16QAM	RB Size=25, RB Offset=0	22.33	22.63	22.42
		RB Size=25, RB Offset=12	22.24	22.58	22.30
		RB Size=25, RB Offset=24	22.47	22.69	22.42
		RB Size=50, RB Offset=0	22.18	22.61	22.36

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	4.11	13	Pass
QPSK (100%RB Size)	6.18	13	Pass
16QAM (1RB Size)	4.28	13	Pass
16QAM (100%RB Size)	6.24	13	Pass

QPSK:

	Receiver Turn Rx Antenna Substituted		ed	Absolute					
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
	Middle Channel								
			5	MHz Ba	ndwidth				
710.00	93.35	123	1.5	Н	22.9	0.62	0	22.23	34.77
710.00	90.72	185	1.6	V	20.2	0.62	0	19.60	34.77
	10MHz Bandwidth								
710.00	92.92	85	1.5	Н	22.4	0.62	0	21.78	34.77
710.00	90.86	102	1.7	V	20.4	0.62	0	19.78	34.77

16QAM:

	Receiver	Turn Rx Antenna		tenna	Substituted			Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
	5 MHz Bandwidth								
710.00	93.57	115	1.7	Н	23.1	0.62	0	22.48	34.77
710.00	92.76	75	1.6	V	22.3	0.62	0	21.68	34.77
	10 MHz Bandwidth								
710.00	92.62	103	1.5	Н	22.11	0.62	0	21.49	34.77
710.00	90.89	203	1.7	V	20.4	0.62	0	19.78	34.77

Note:

All above data were tested with no amplifier Absolute Level = SG Level - Cable loss + Antenna Gain Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standards

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50- 146520-wh	2015-11-23	2016-11-23
HONOVA	Power Splitter	HPDL- 2W-B-NF	N/A	2016-06-12	2017-06-12
Ducommun technologies	RF Cable	RG-214	4	2016-06-15	2017-06-15
WEINSCHEL	6dB Attenuator	5321	AU0709	2016-06-18	2017-06-18

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Report No.: RSZ160721004-00D

Test Data

Environmental Conditions

Temperature:	24~27°C
Relative Humidity:	50~53 %
ATM Pressure:	100.0~101.0kPa

The testing was performed by Haiguo Li from 2016-07-29to 2016-08-04.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	244.49	316.63
EGPRS(8PSK)	836.6	244.49	320.64

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.188	4.850
HSUPA (BPSK)	836.6	4.188	4.830
HSDPA (16QAM)	836.6	4.208	4.890

PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)	
GSM(GMSK)	1880.0	244.49	316.63	
EGPRS(8PSK)	1880.0	252.51	324.65	


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.208	4.810
HSUPA (BPSK)	1880.0	4.208	4.870
HSDPA (16QAM)	1880.0	4.188	4.890

Report No.: RSZ160721004-00D


AWS Band (Part 27)

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1732.6	4.208	4.870
HSUPA (BPSK)	1732.6	4.208	4.850
HSDPA (16QAM)	1732.6	4.208	4.890

Cellular Band (Part 22H) 99% Occupied Bandwidth for GSM (GMSK) Mode

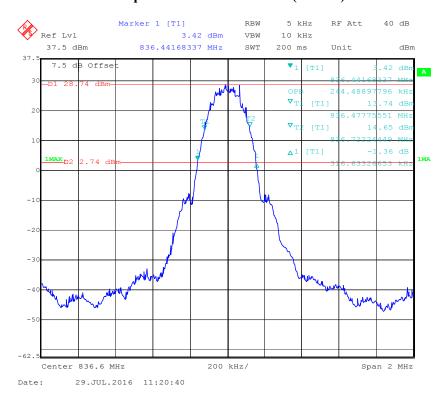


99% Occupied & 26 dB Emissions Bandwidth for EDGE Mode

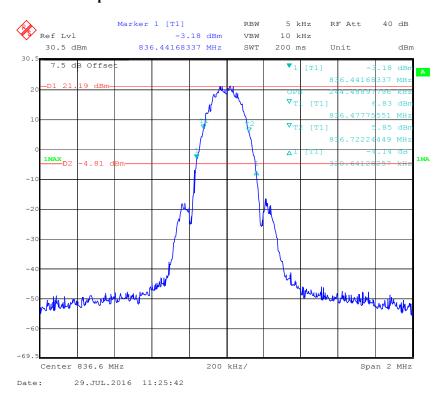


Report No.: RSZ160721004-00D

99% Occupied & 26 dB Emissions Bandwidth for RMC (BPSK) Mode

Report No.: RSZ160721004-00D

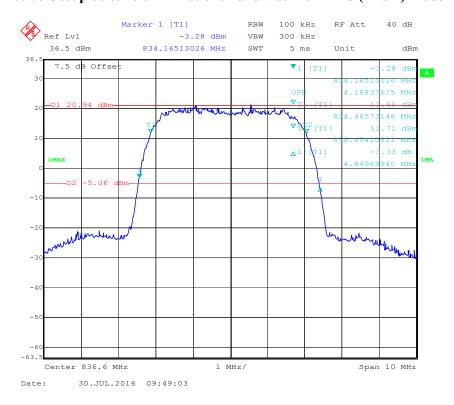


99% Occupied&26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

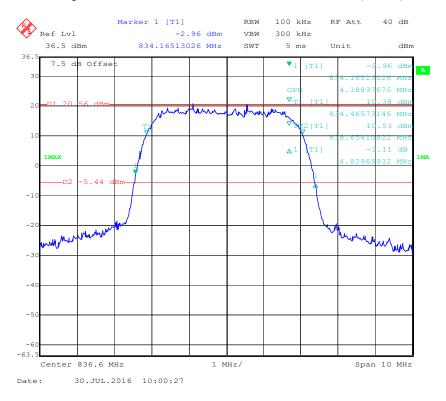


99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

Report No.: RSZ160721004-00D

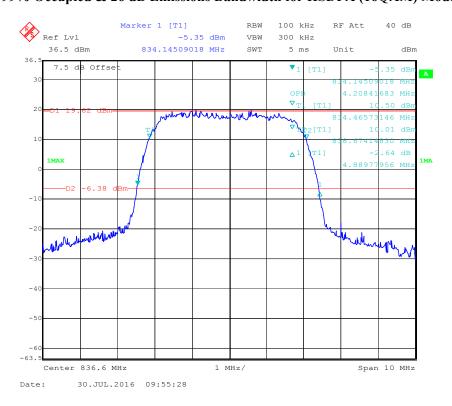


PCS Band (Part 24E) 99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

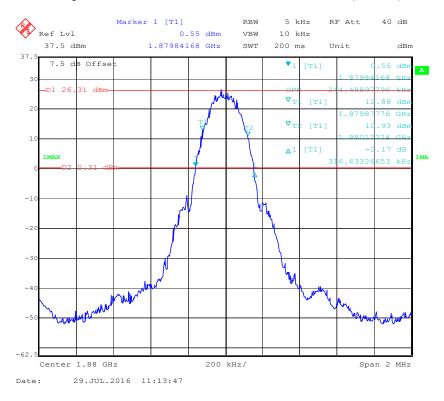

99% Occupied & 26 dB Emissions Bandwidth for EGPRS Mode

Report No.: RSZ160721004-00D

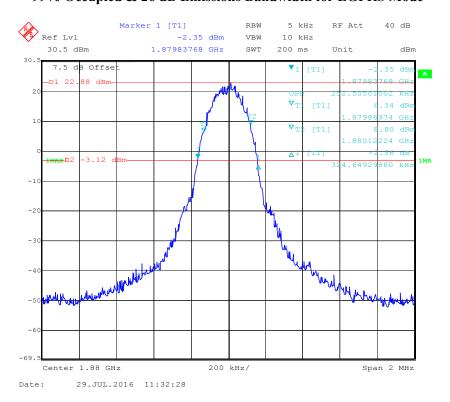


999% Occupied & 26 dB Emissions Bandwidth for RMC (BPSK) Mode




99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode


Report No.: RSZ160721004-00D

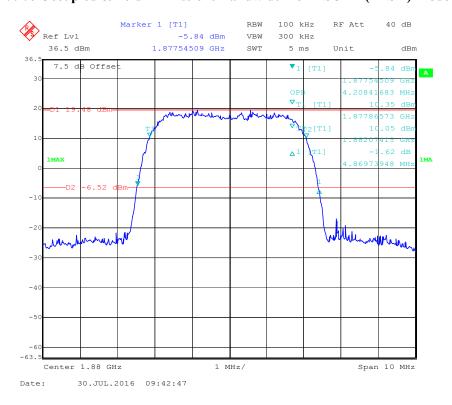

99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

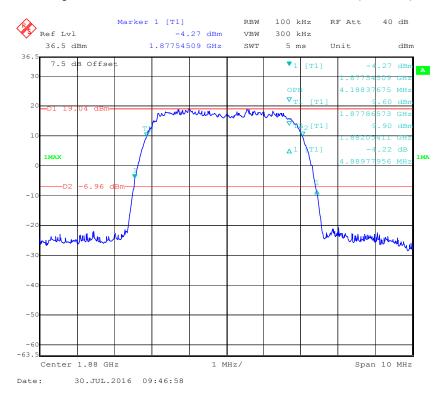

AWS Band (Part 27)
99% Occupied & 26 dB Emissions Bandwidth for RMC (BPSK) Mode

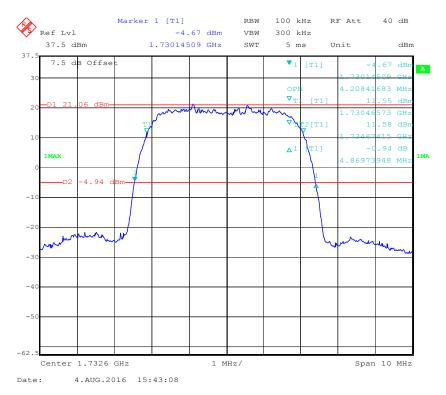


99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode



Report No.: RSZ160721004-00D


99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

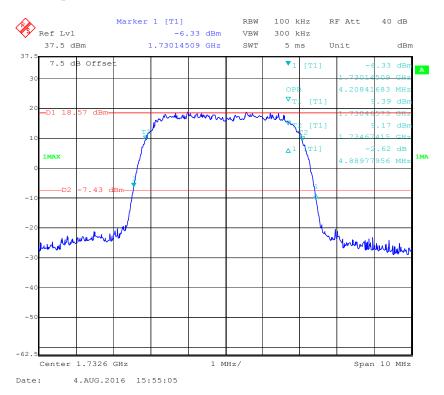

LTE Band 2: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.105	1.280
1.4	16QAM	1.105	1.263
2.0	QPSK	2.693	2.886
3.0	16QAM	2.693	2.934
5.0	QPSK	4.549	5.050
3.0	16QAM	4.529	5.050
10.0	QPSK	8.938	9.699
10.0	16QAM	8.938	9.699
15.0	QPSK	13.527	14.850
15.0	16QAM	13.527	14.910
20.0	QPSK	18.036	19.238
20.0	16QAM	17.956	19.238


QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

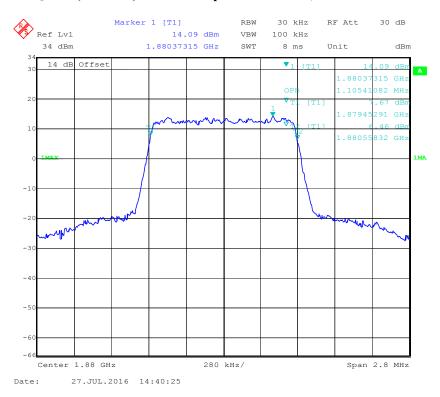


QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel



16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

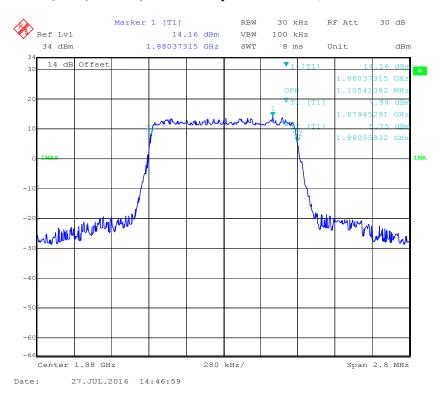


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

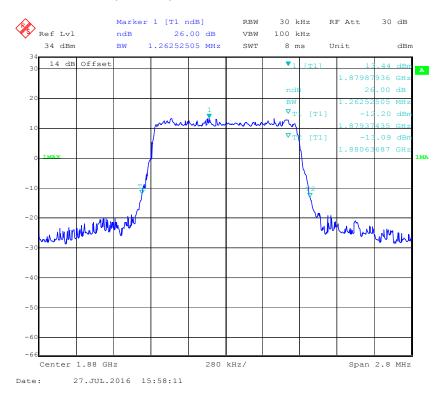


QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel


Report No.: RSZ160721004-00D

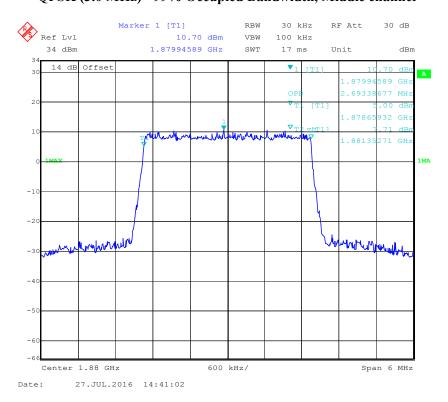


QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel

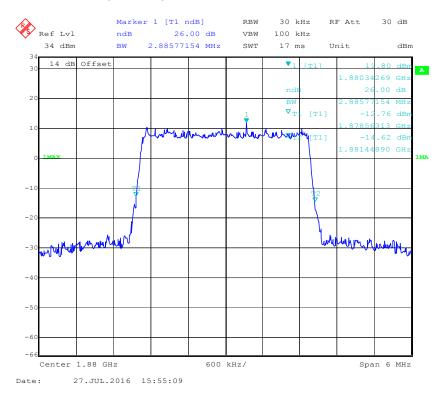

Report No.: RSZ160721004-00D

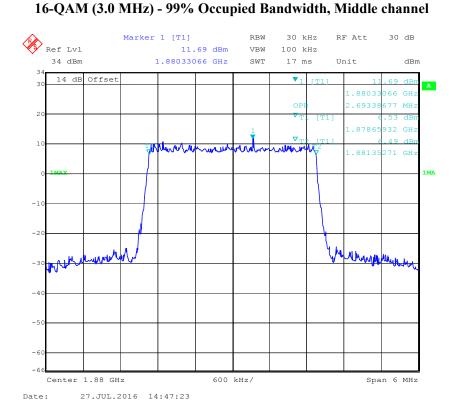


16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel

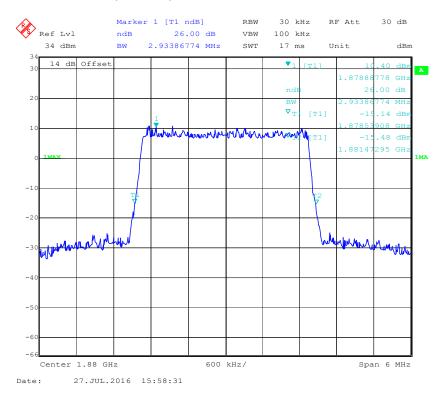


QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

Report No.: RSZ160721004-00D

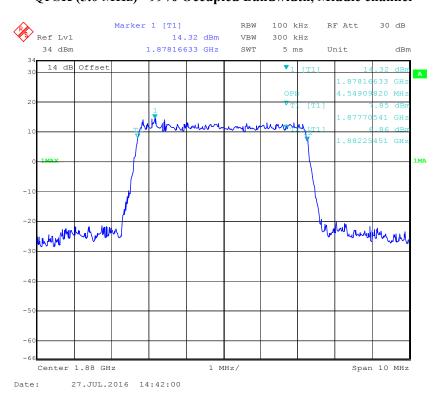


QPSK (5.0 MHz) -26 dB Bandwidth, Middle channel

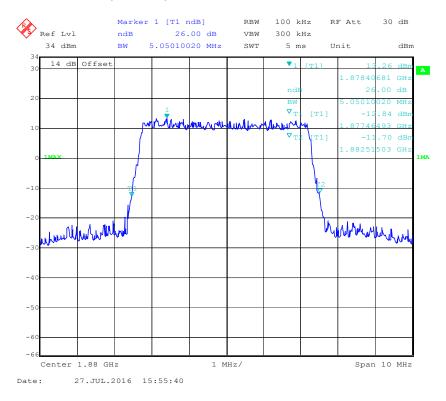


Report No.: RSZ160721004-00D

16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

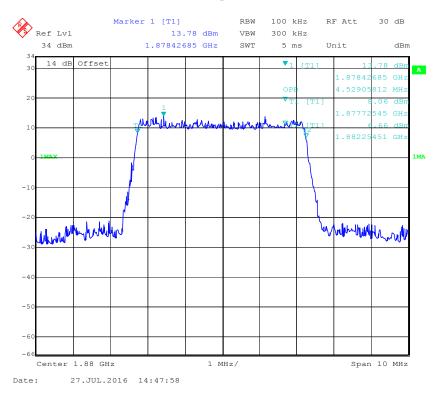


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

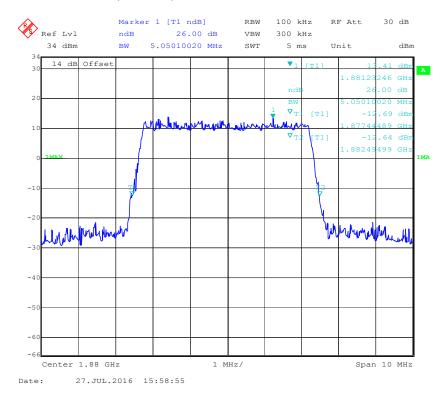


Report No.: RSZ160721004-00D

QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

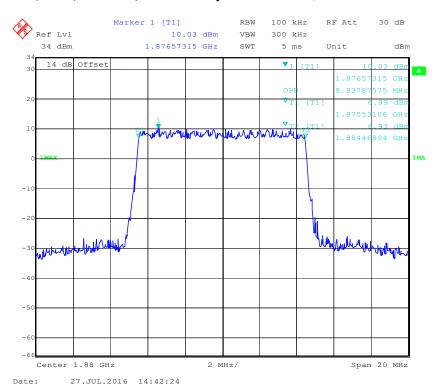


QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

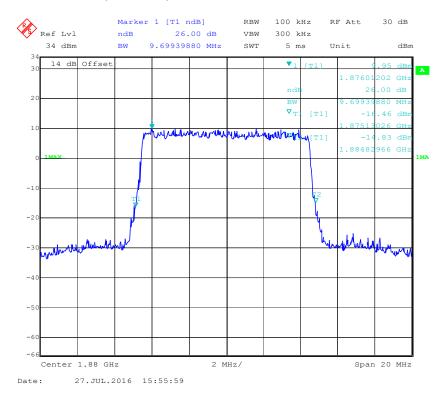


16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

Report No.: RSZ160721004-00D

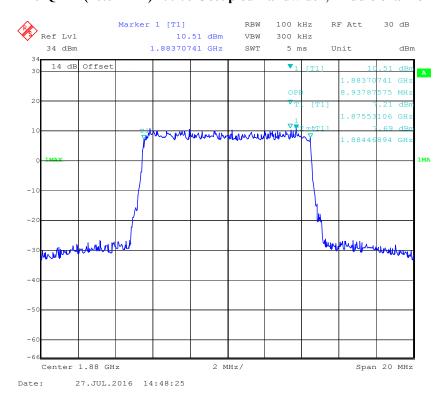


16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

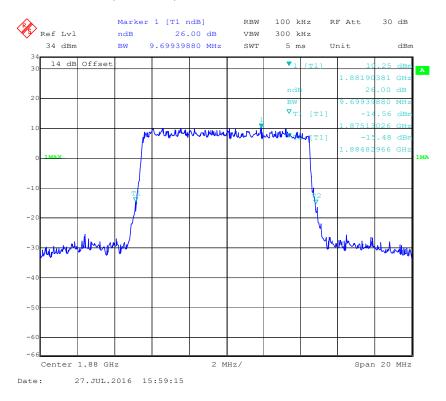


Report No.: RSZ160721004-00D

QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

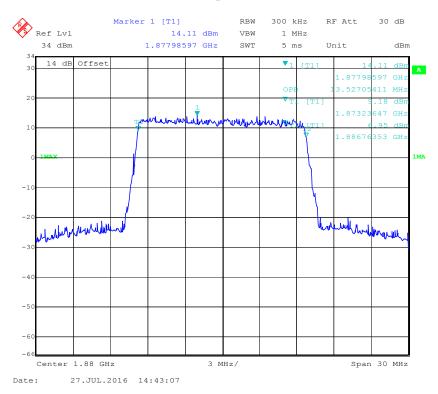


QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel

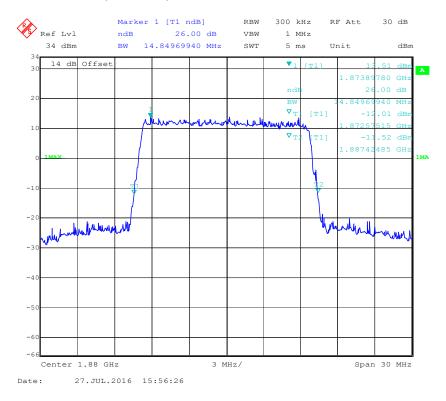

16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel


Report No.: RSZ160721004-00D

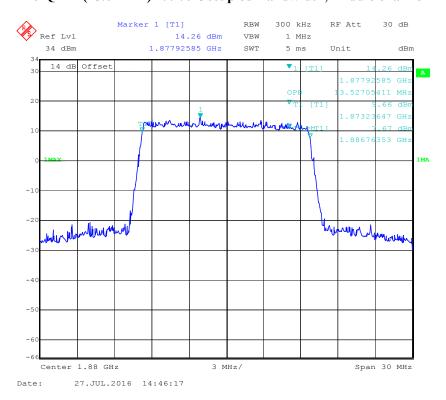


16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel



QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

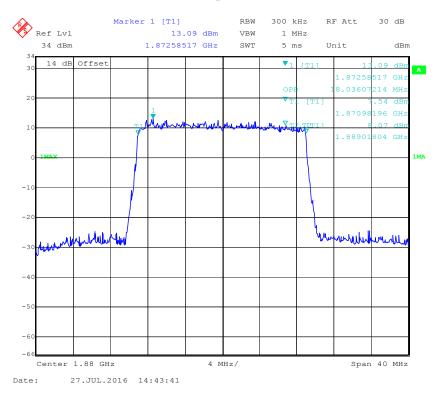


QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel

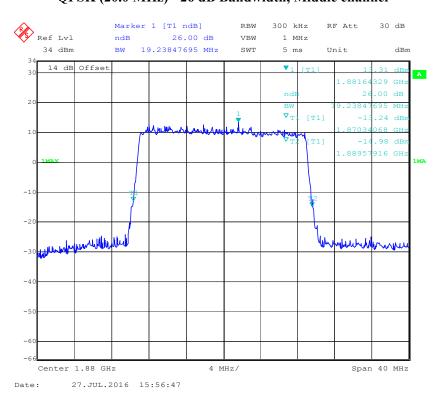


Report No.: RSZ160721004-00D

16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

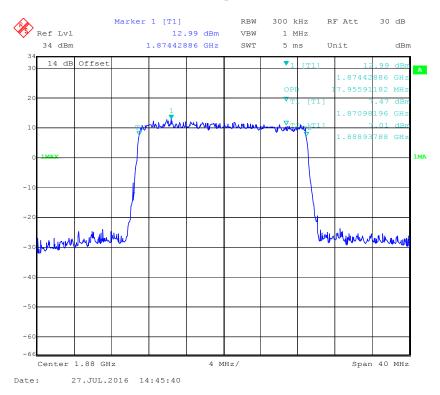


16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel

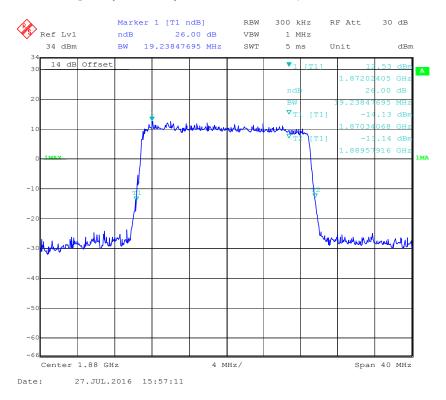


LTE Band 4: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.100	1.274
	16QAM	1.100	1.279
3.0	QPSK	2.693	2.922
	16QAM	2.693	2.946
5.0	QPSK	4.549	5.010
	16QAM	4.529	5.030
10.0	QPSK	8.938	9.820
	16QAM	8.938	9.699
15.0	QPSK	13.527	14.910
	16QAM	13.527	14.790
20.0	QPSK	17.956	19.319
	16QAM	17.956	19.399


QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

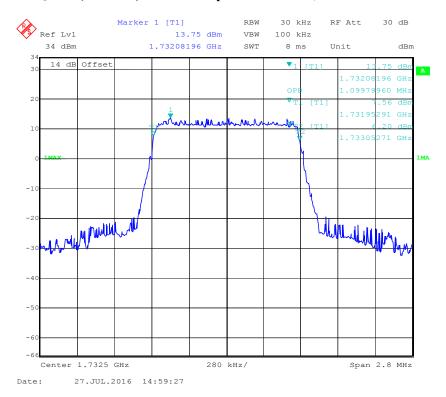


QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

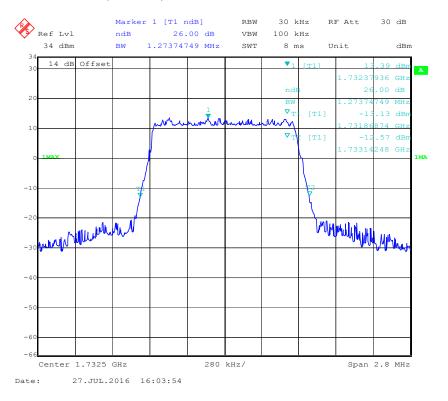


16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

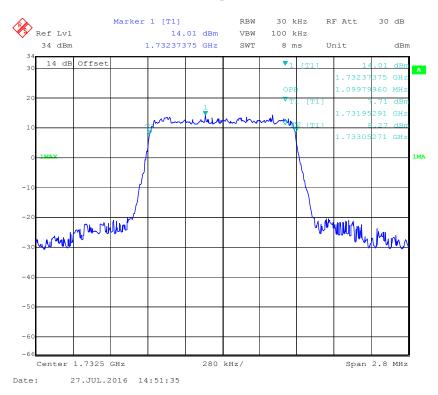


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

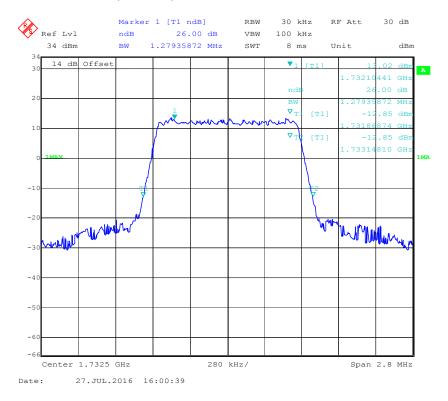


Report No.: RSZ160721004-00D

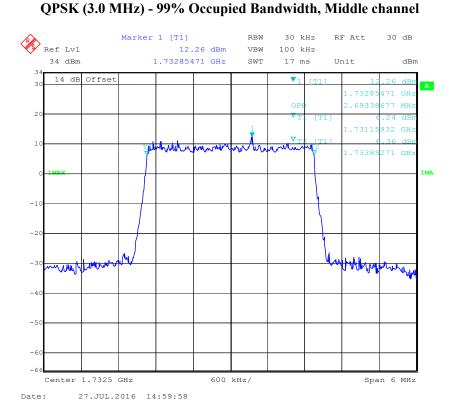


QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel

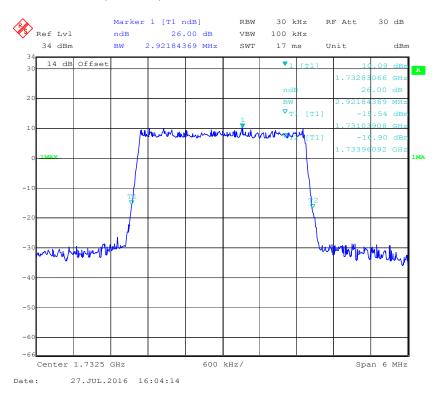

16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

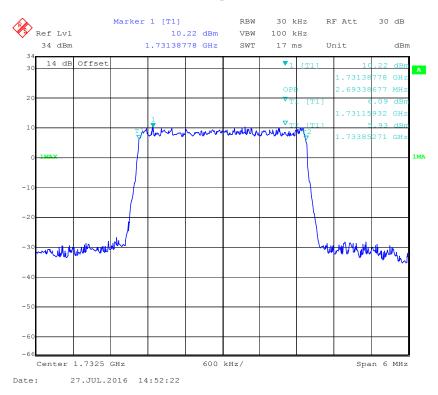


16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel

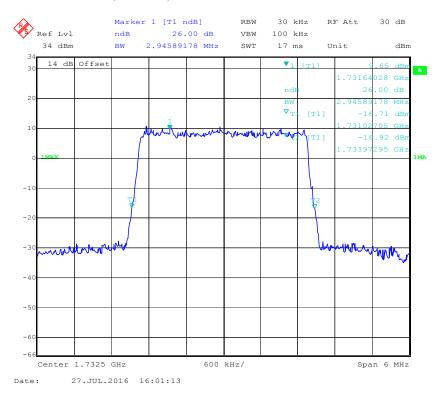


QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

Report No.: RSZ160721004-00D

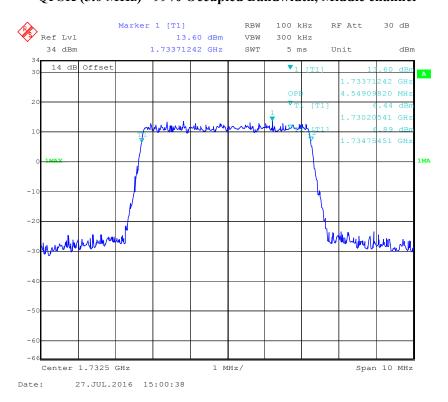


QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

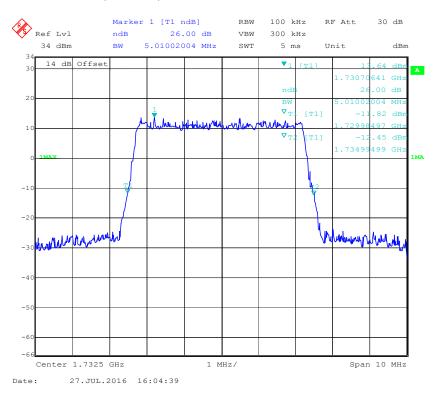


Report No.: RSZ160721004-00D


16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

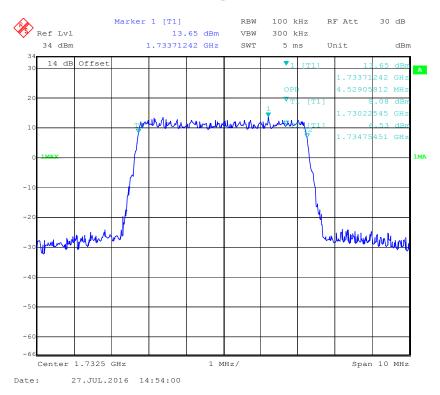


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

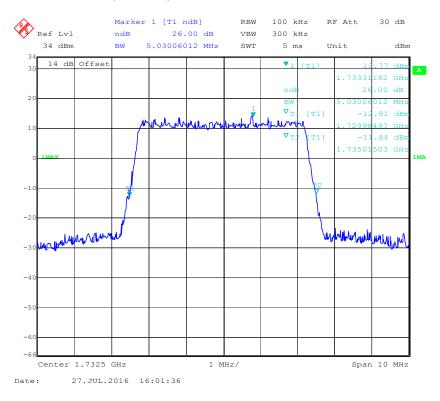

QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

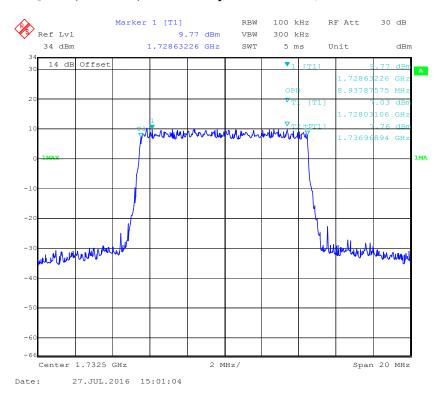


QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

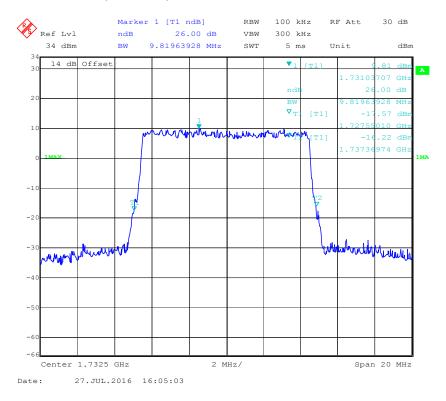


16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel


Report No.: RSZ160721004-00D

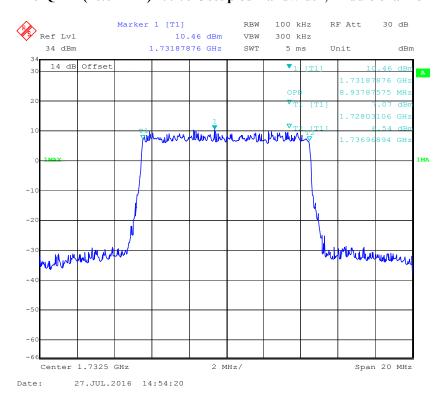


16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

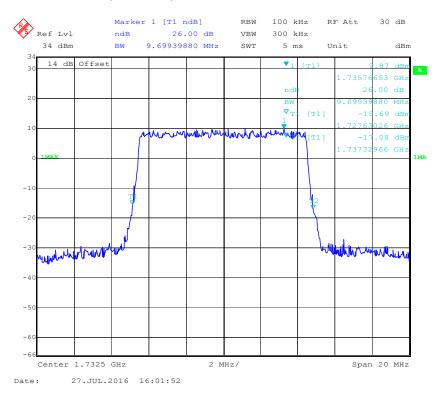

QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

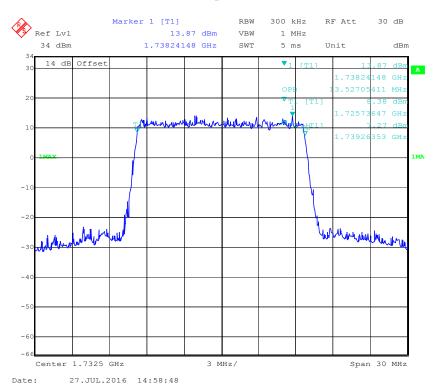


QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel

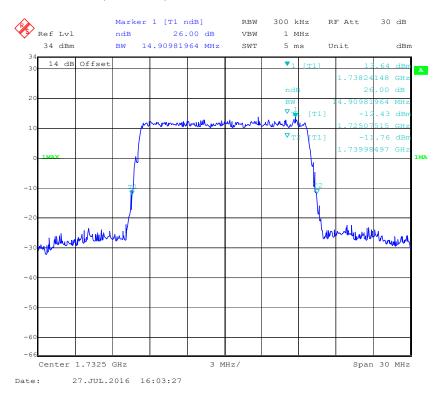


16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel


Report No.: RSZ160721004-00D

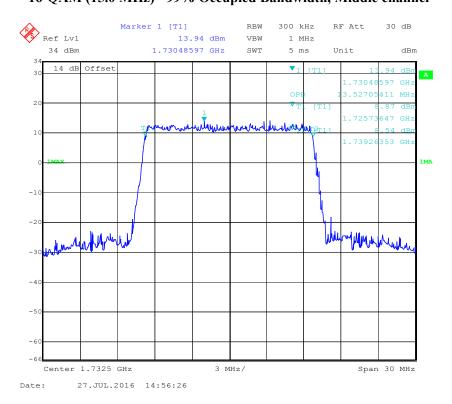


16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel

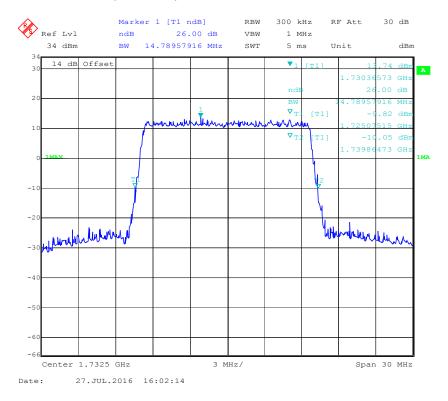

QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

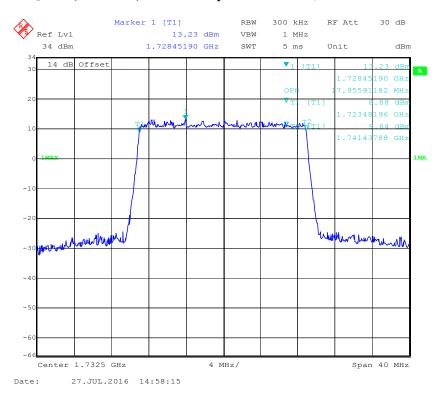


QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel

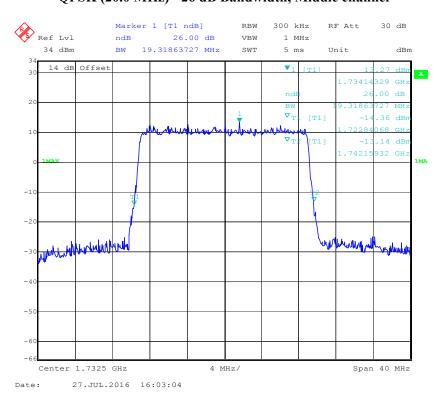


16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

Report No.: RSZ160721004-00D

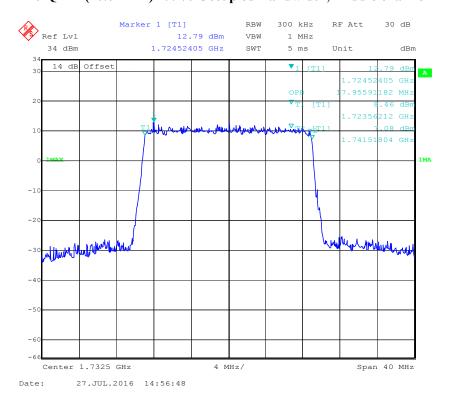

16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel

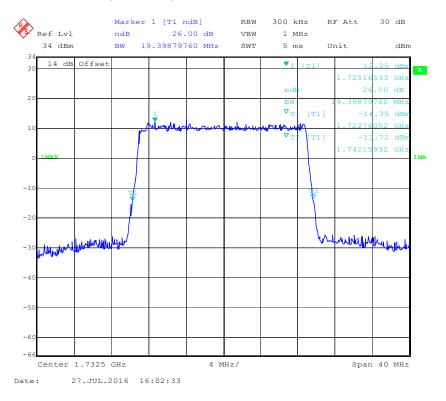

LTE Band 7: (Middle Channel)


Bandwidth (MHz)	Modulation	99% Occupied 26 dB Emission Bandwidth Bandwidth (MHz) (MHz)	
5.0	QPSK	4.549	5.110
5.0	16QAM	4.509	5.030
10.0	QPSK	8.938	9.739
10.0	16QAM	8.938	9.739
15.0	QPSK	13.527	15.030
15.0	16QAM	13.527	14.910
20.0	QPSK	17.876	19.238
	16QAM	17.876	19.319

QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

Report No.: RSZ160721004-00D




QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

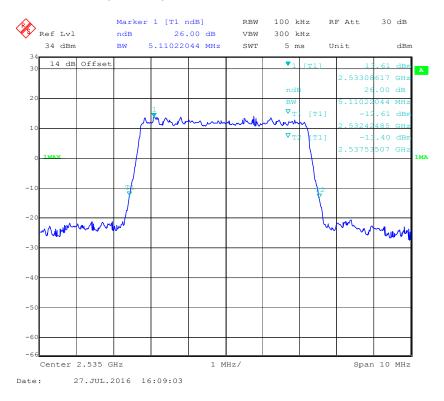


16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel


Report No.: RSZ160721004-00D

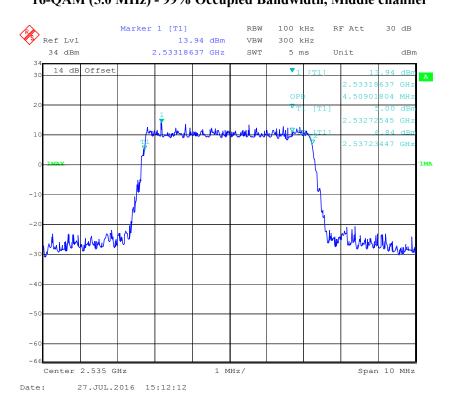


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

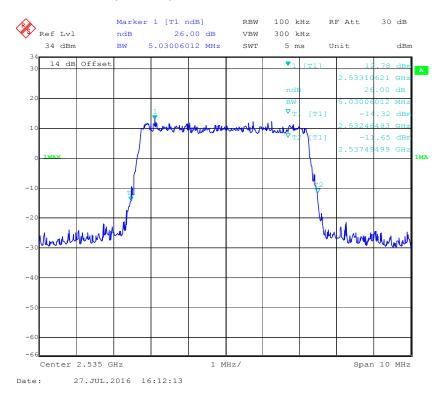

QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

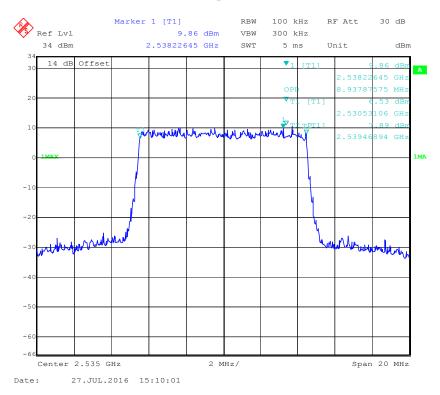


QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

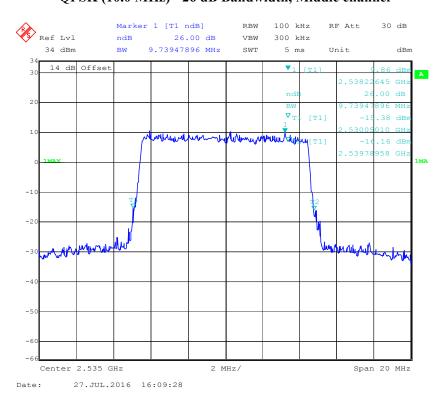


16-QAM (10.0MHz) - 99% Occupied Bandwidth, Middle channel


Report No.: RSZ160721004-00D

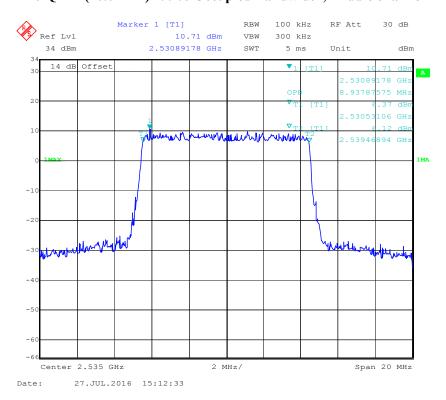


16-QAM (10.0MHz) - 26 dB Bandwidth, Middle channel

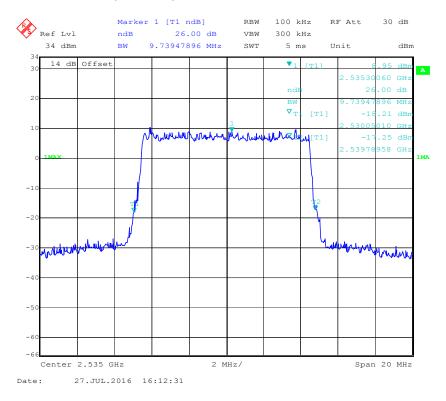

QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

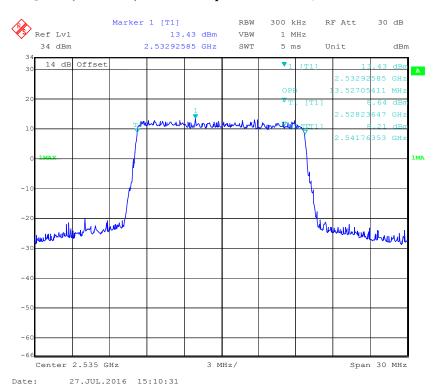


QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel

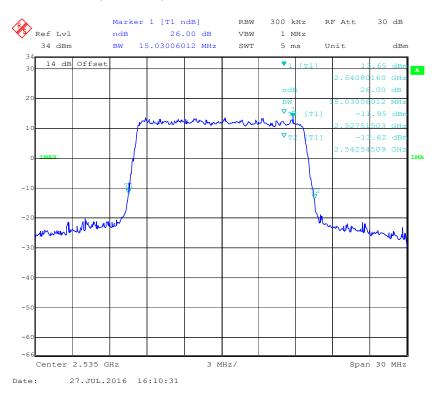


16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

Report No.: RSZ160721004-00D

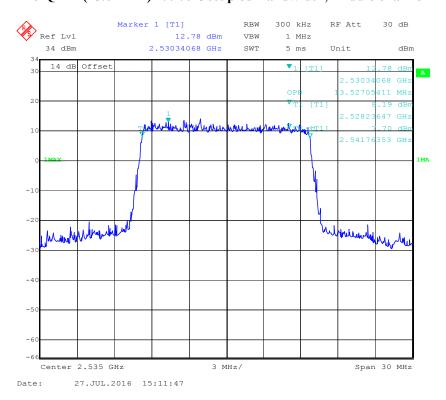


16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel

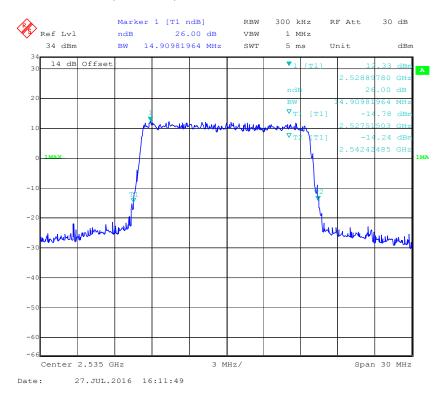


QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

Report No.: RSZ160721004-00D

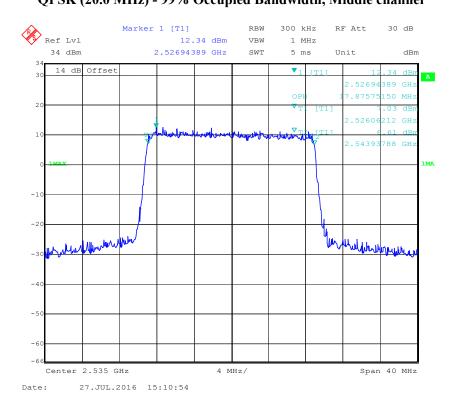


QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel

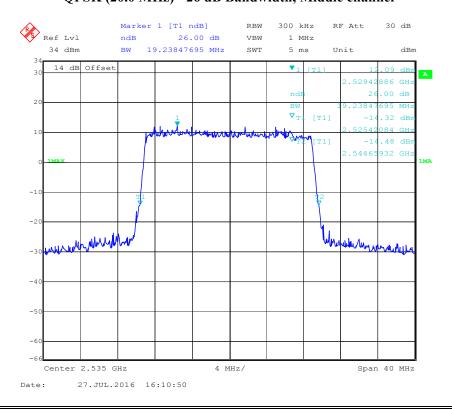


16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

Report No.: RSZ160721004-00D

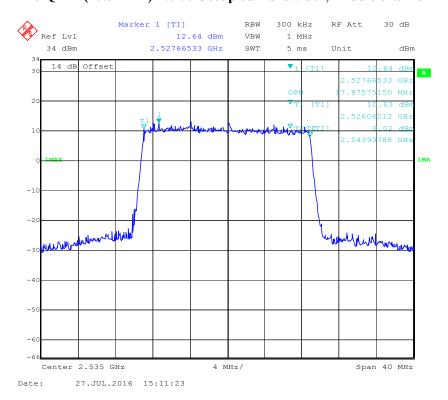

16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel

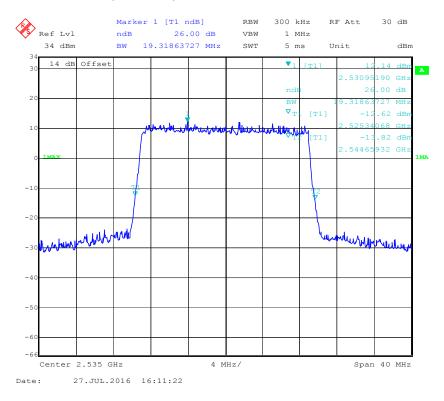


LTE Band 12: (Middle Channel)


Bandwidth (MHz)	Modulation	99% Occupied 26 dB Emission Bandwidth Bandwidth (MHz) (MHz)	
1.4	QPSK	1.094	1.274
1.4	16QAM	1.094	1.279
2.0	QPSK	2.681	2.910
3.0	16QAM	2.681	2.910
5.0	QPSK	4.529	5.050
5.0	16QAM	4.549	5.030
10.0	QPSK	8.978	9.659
	16QAM	8.978	9.659

Report No.: RSZ160721004-00D

QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

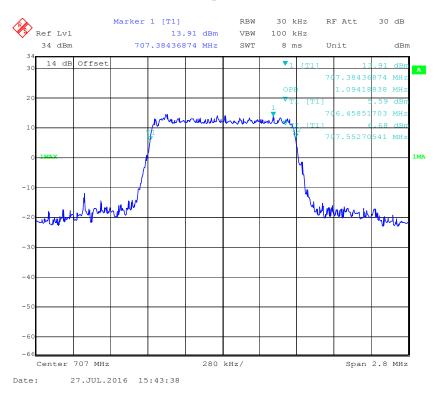


QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel

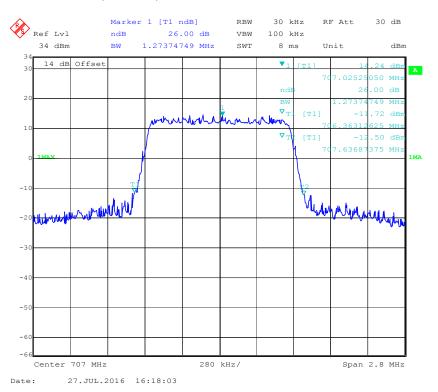


Report No.: RSZ160721004-00D

16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

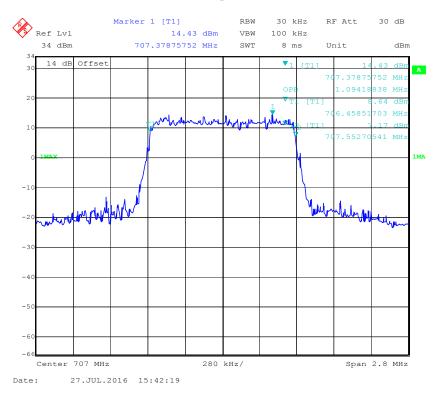


16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel

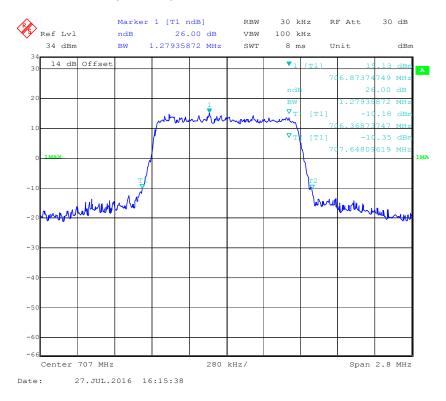


QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

Report No.: RSZ160721004-00D

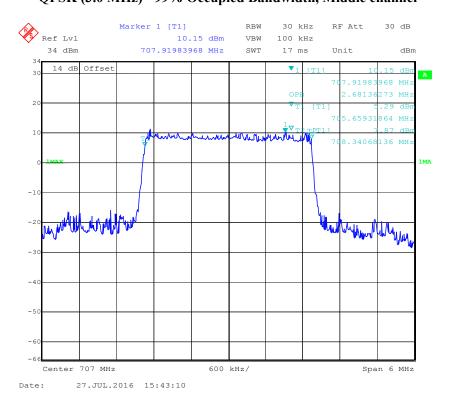


QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel

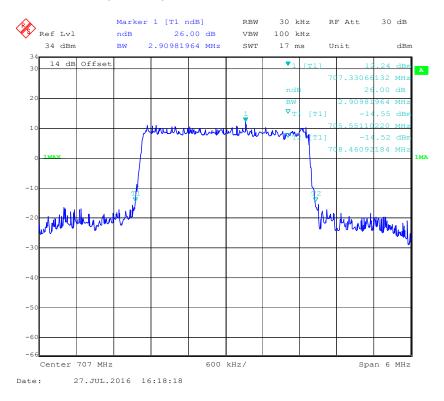


16-QAM (3.0MHz) - 99% Occupied Bandwidth, Middle channel

Report No.: RSZ160721004-00D

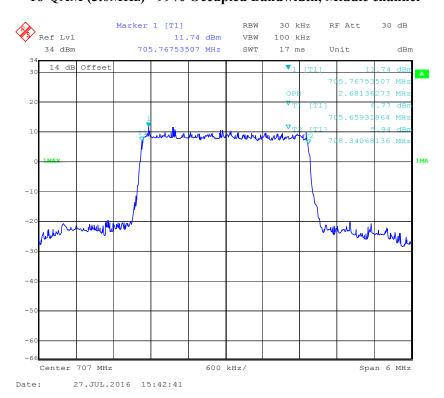


16-QAM (3.0MHz) - 26 dB Bandwidth, Middle channel

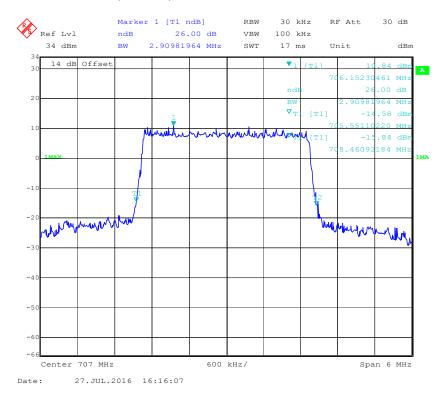


QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel


Report No.: RSZ160721004-00D

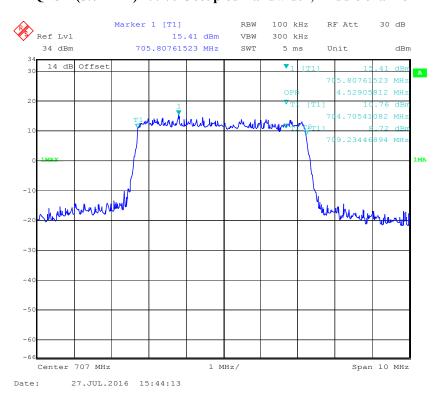


QPSK (5.0 MHz) -26 dB Bandwidth, Middle channel

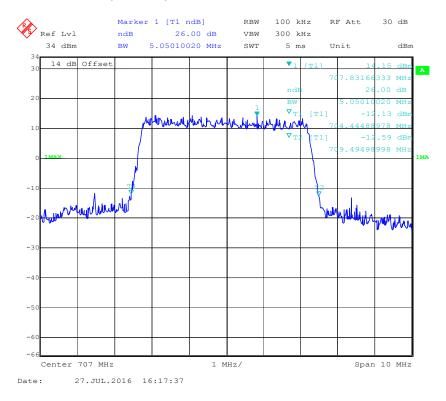


16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

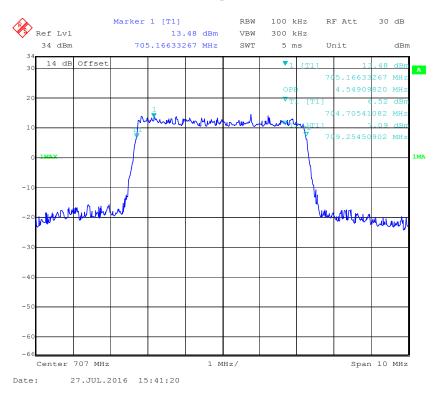


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

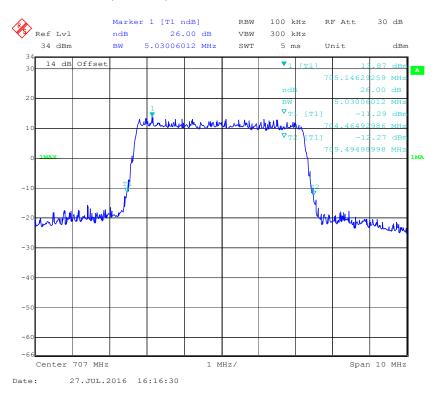

QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

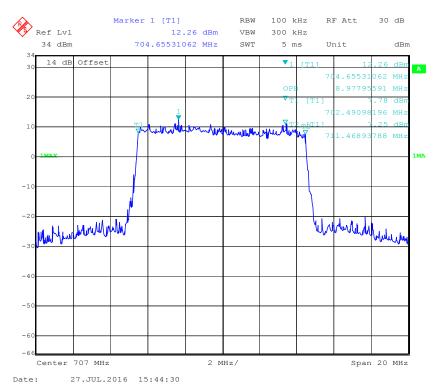


QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

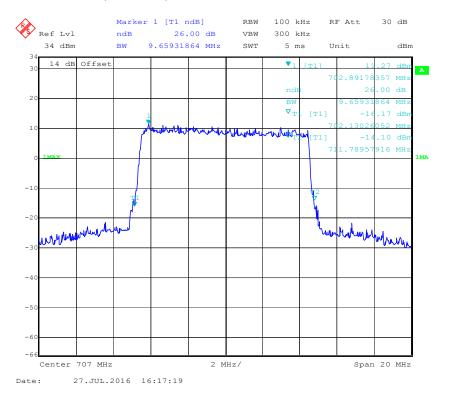


16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

Report No.: RSZ160721004-00D

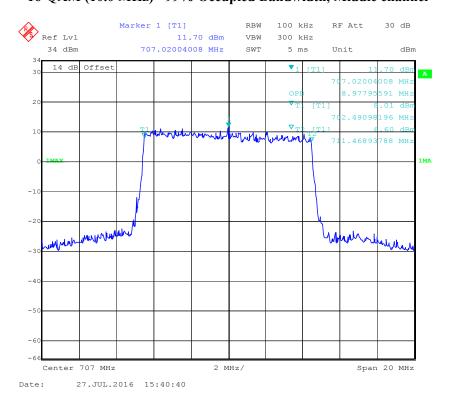

16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel

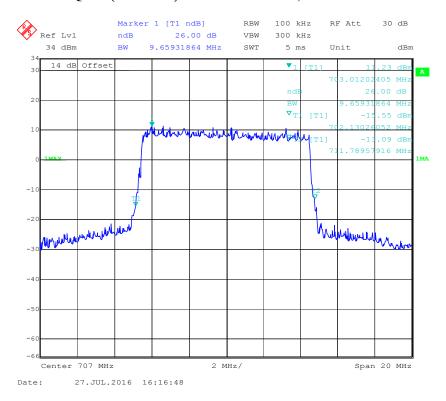


LTE Band 17: (Middle Channel)


Bandwidth (MHz)	Modulation	99% Occupied 26 dB Emission Bandwidth Bandwidth (MHz) (MHz)	
5.0	QPSK	4.549	5.090
5.0	16QAM	4.549	5.030
10.0	QPSK	8.978	9.699
	16QAM	8.978	9.619

QPSK (5.0 MHz) - 99% Occupied, Middle channel

Report No.: RSZ160721004-00D

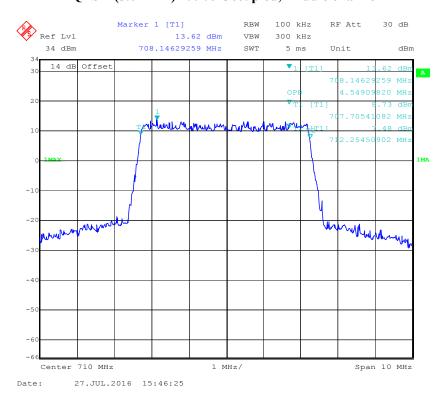


QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel

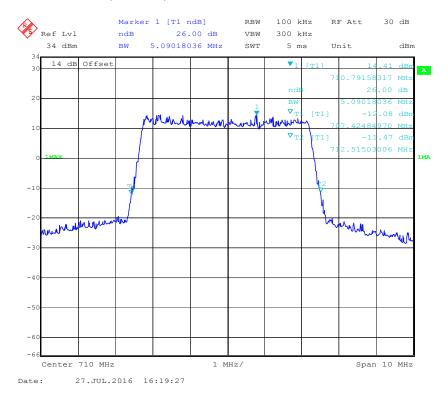


16-QAM (5.0 MHz) - 99% Occupied, Middle channel

Report No.: RSZ160721004-00D

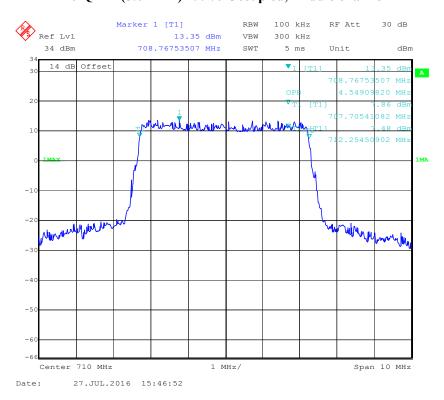


16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel

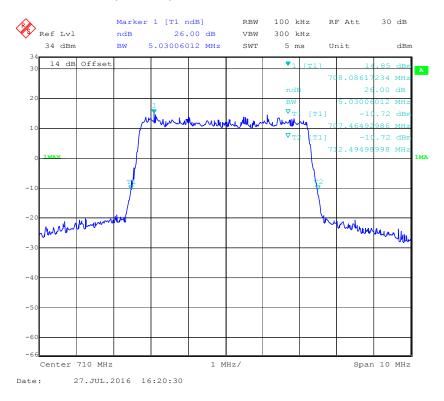


QPSK (10.0 MHz) - 99% Occupied, Middle channel

Report No.: RSZ160721004-00D

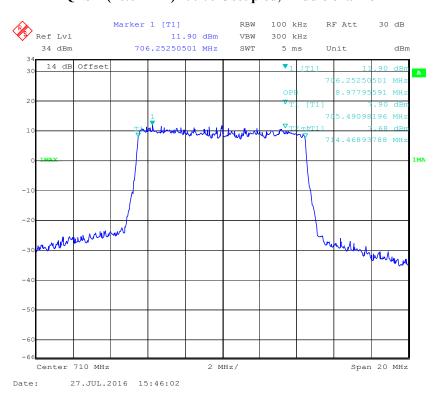


QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel

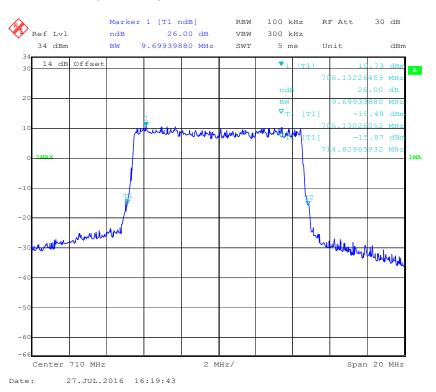


16-QAM (10.0MHz) - 99% Occupied, Middle channel

Report No.: RSZ160721004-00D

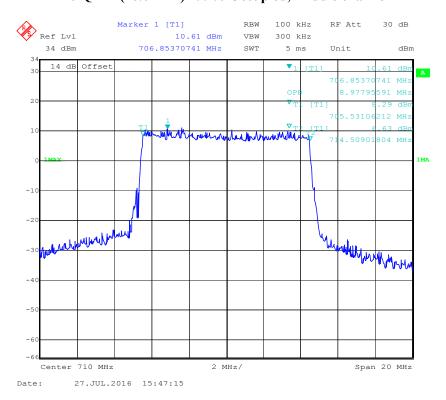

16-QAM (10.0MHz) - 26 dB Bandwidth, Middle channel

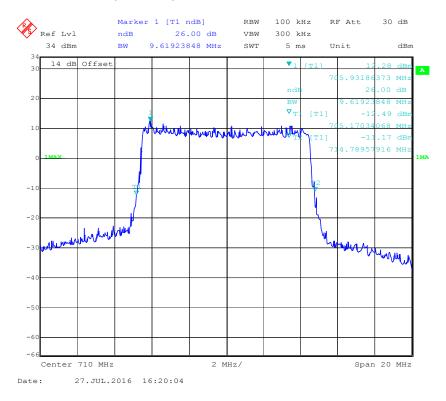

§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m) SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h)(m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50- 146520-wh	2015-11-23	2016-11-23
HONOVA	Power Splitter	HPDL-2W-B-NF	N/A	2016-06-12	2017-06-12
Ducommun technologies	RF Cable	RG-214	4	2016-06-15	2017-06-15
WEINSCHEL	6dB Attenuator	5321	AU0709	2016-06-18	2017-06-18

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	20~26 °C
Relative Humidity:	48~51 %
ATM Pressure:	100.5~101.0kPa


The testing was performed by Haiguo Li from 2016-07-27 to 2016-08-04.

Please refer to the following plots.


Report No.: RSZ160721004-00D

Cellular Band (Part 22H)


30 MHz – 1 GHz (GSM Mode)

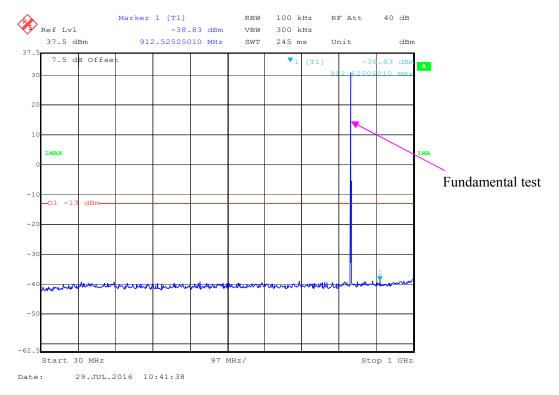


1 GHz – 10 GHz (GSM Mode)

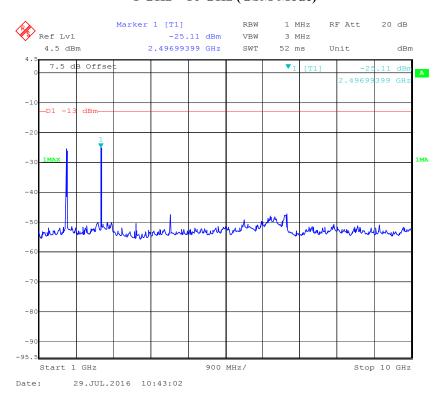

30 MHz – 1 GHz (WCDMA Mode)

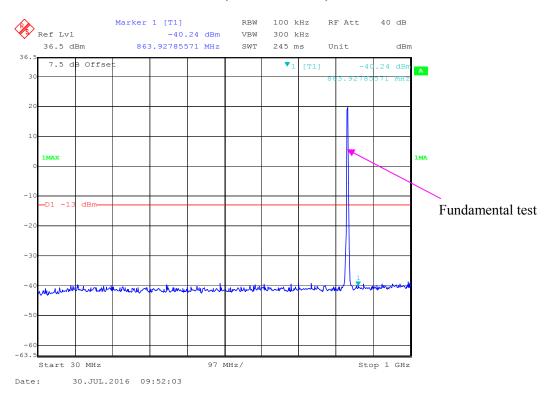


1 GHz – 10 GHz (WCDMA Mode)

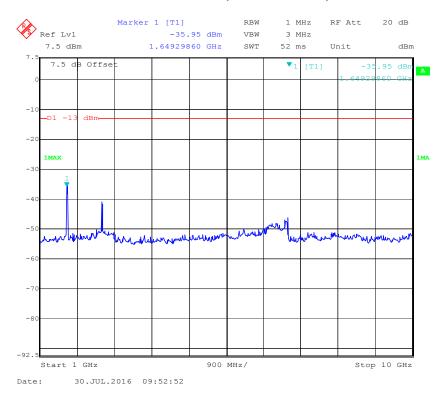


PCS Band (Part 24E)

30 MHz – 1 GHz (GSM Mode)


Report No.: RSZ160721004-00D

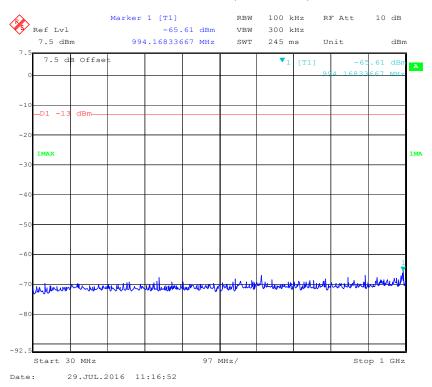


1 GHz – 2 GHz (GSM Mode)

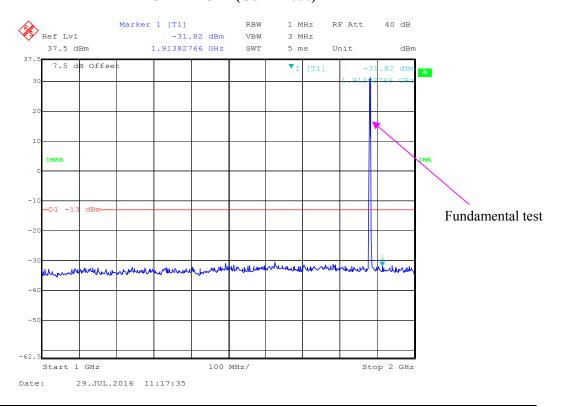


Report No.: RSZ160721004-00D

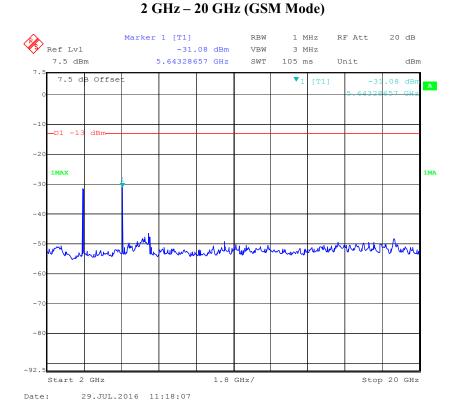


30 MHz - 1 GHz (WCDMA Mode)

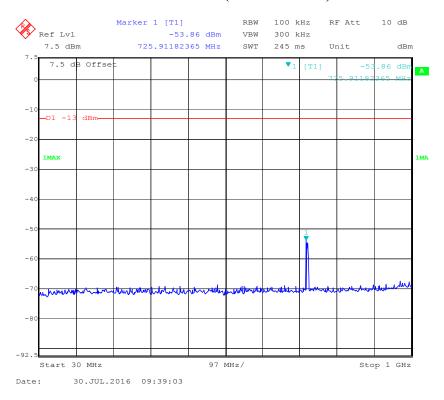

1 GHz – 2 GHz (WCDMA Mode)

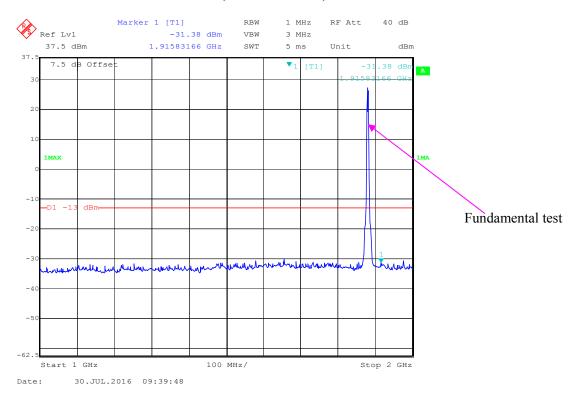


2 GHz - 20 GHz (WCDMA Mode)

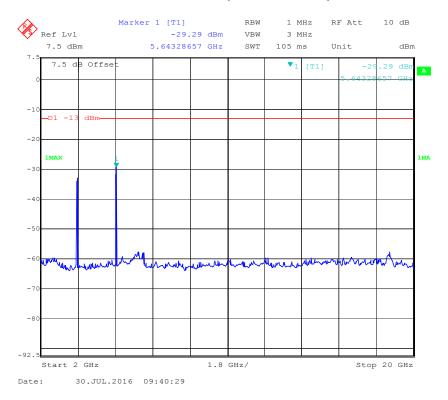

AWS Band (Part 27)

30 MHz - 1 GHz (WCDMA Mode)


Report No.: RSZ160721004-00D

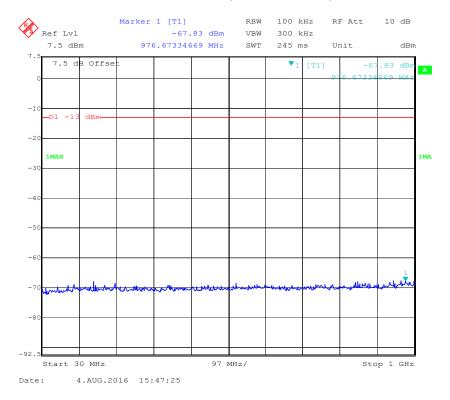

1 GHz – 2 GHz (WCDMA Mode)




2 GHz – 20 GHz (WCDMA Mode)

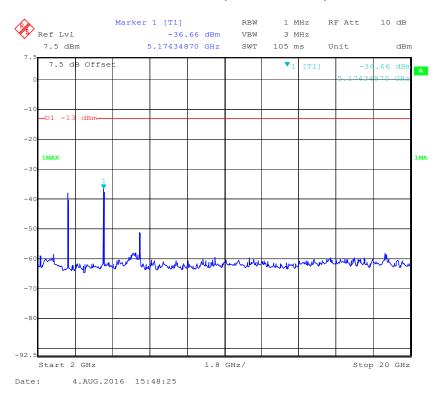


LTE Band 2:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)


Report No.: RSZ160721004-00D

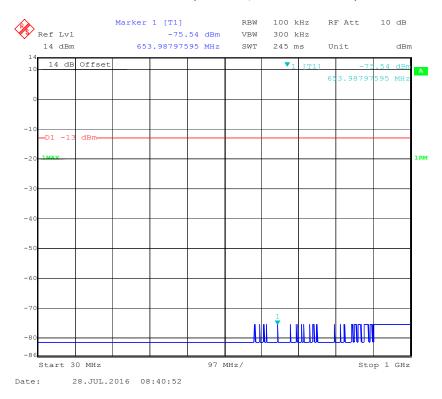


1 GHz – 2 GHz (1.4 MHz, Middle Channel)

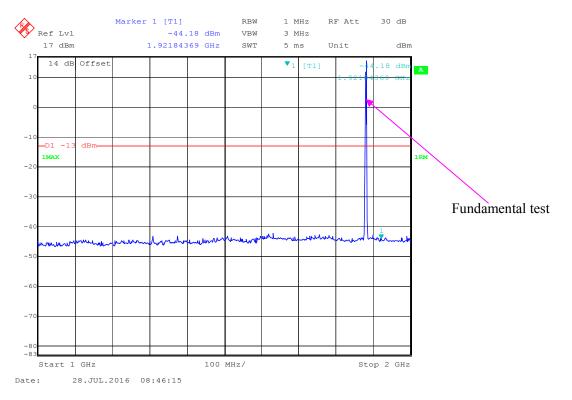


2 GHz – 20 GHz (1.4 MHz, Middle Channel)

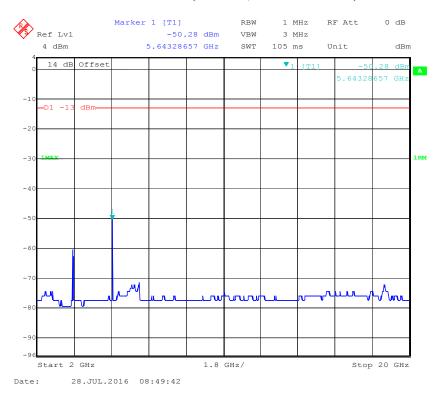


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

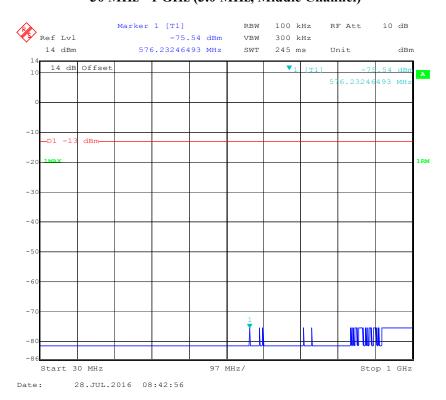


1 GHz - 2 GHz (3.0 MHz, Middle Channel)

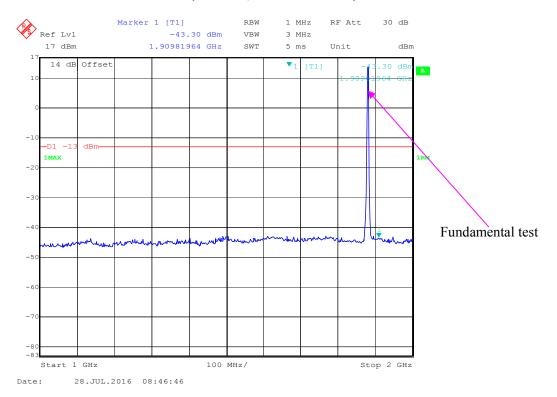


2 GHz - 20 GHz (3.0 MHz, Middle Channel)

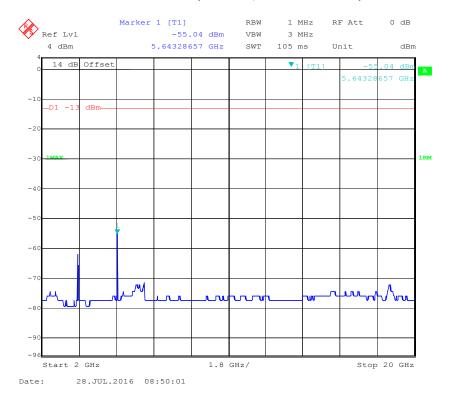


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

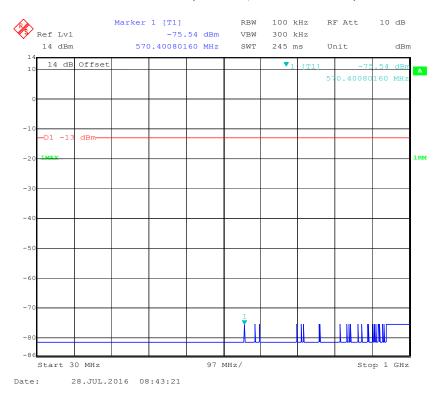


1 GHz - 2 GHz (5.0 MHz, Middle Channel)

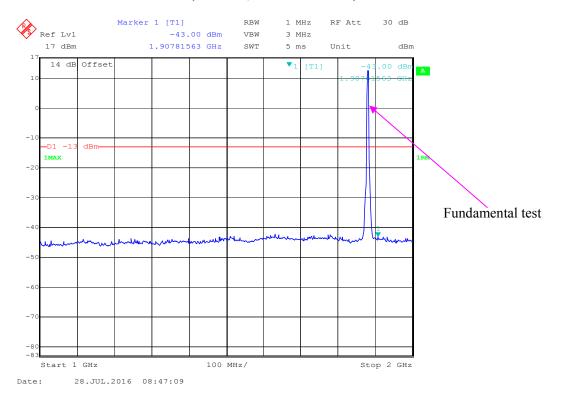

2 GHz - 20 GHz (5.0 MHz, Middle Channel)

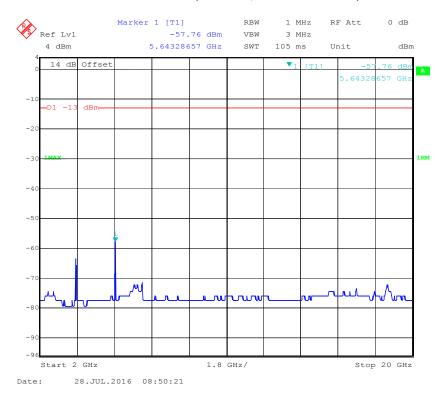


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

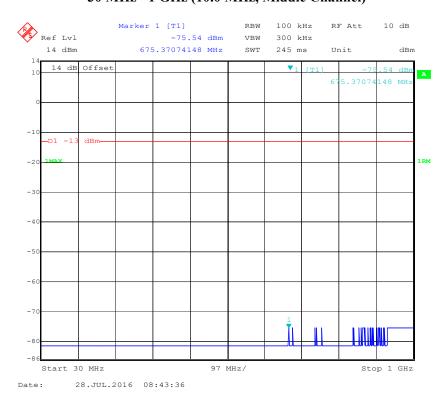


1 GHz – 2 GHz (10.0 MHz, Middle Channel)




2 GHz - 20 GHz (10.0 MHz, Middle Channel)

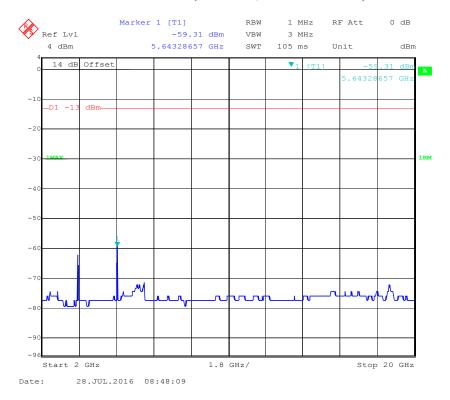


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

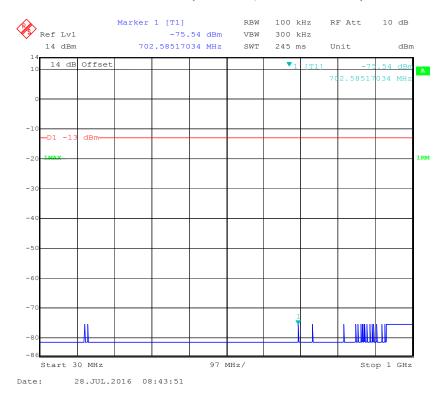


1 GHz -2 GHz (15.0 MHz, Middle Channel)

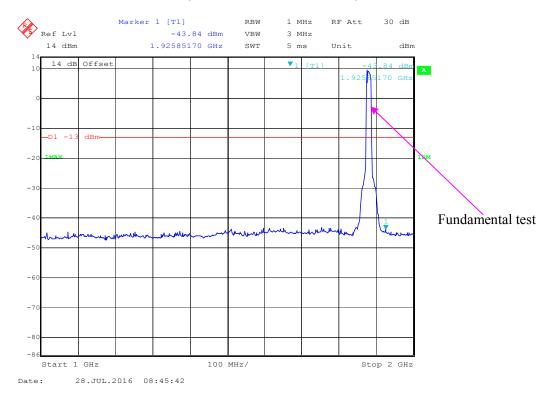


2 GHz -20 GHz (15.0 MHz, Middle Channel)

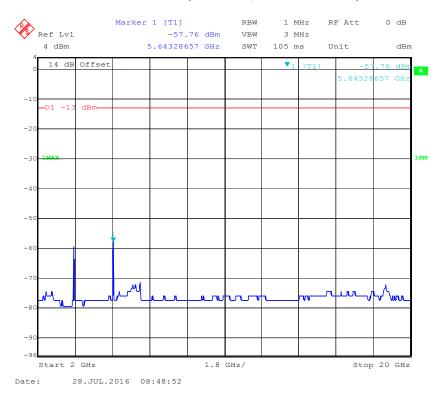


30 MHz - 1 GHz (20.0 MHz, Middle Channel)

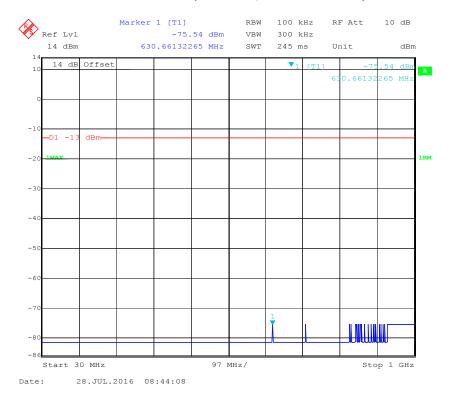

1 GHz -2 GHz (20.0 MHz, Middle Channel)

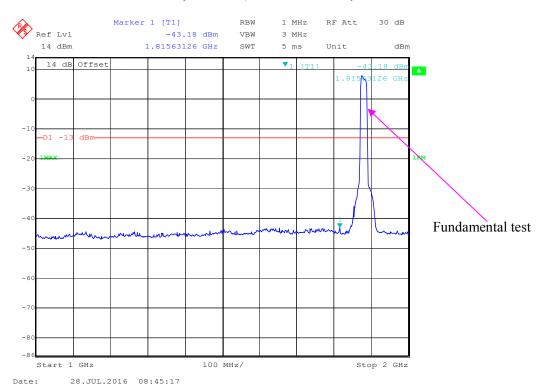


2 GHz -20 GHz (20.0 MHz, Middle Channel)

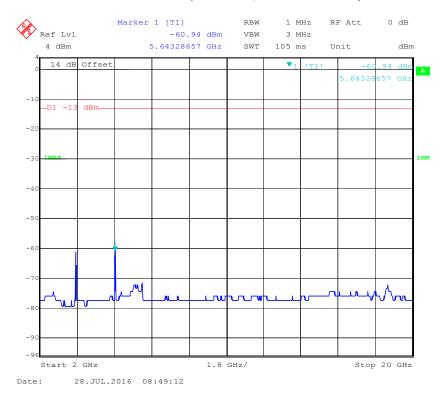


LTE Band 4:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

Report No.: RSZ160721004-00D

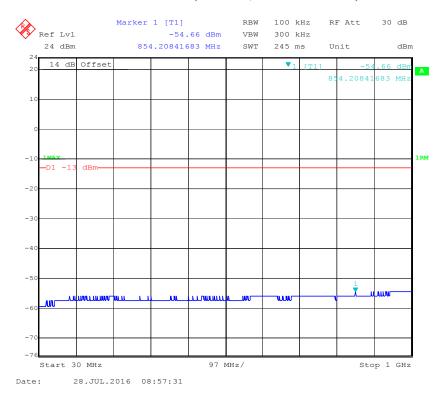


1 GHz – 2 GHz (1.4 MHz, Middle Channel)

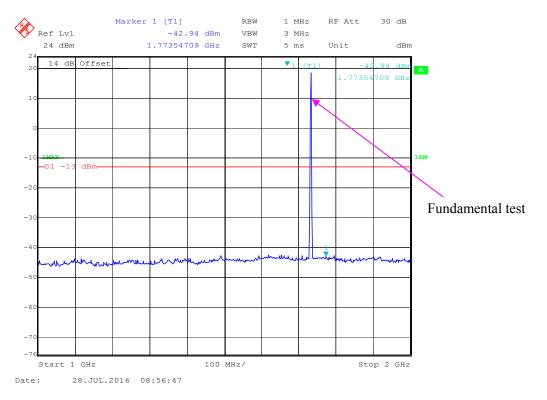


2 GHz – 20 GHz (1.4 MHz, Middle Channel)


Report No.: RSZ160721004-00D

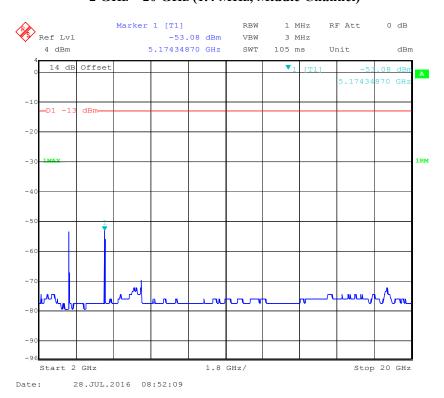


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

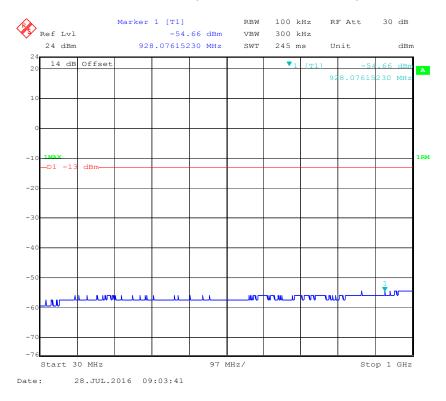


1 GHz - 2 GHz (3.0 MHz, Middle Channel)

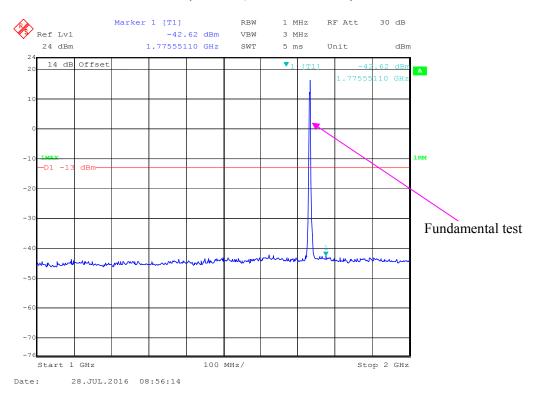


2 GHz - 20 GHz (3.0 MHz, Middle Channel)

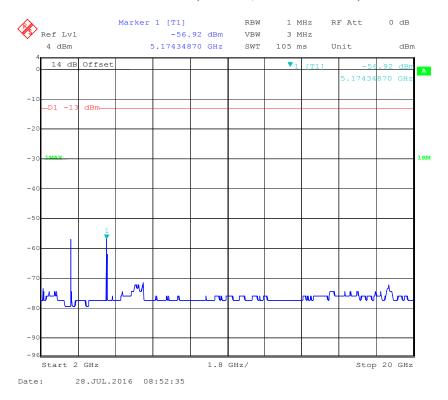

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

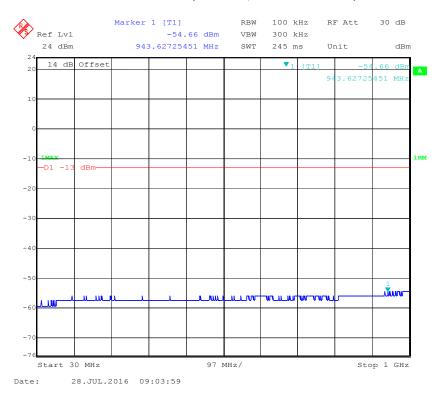


1 GHz – 2 GHz (5.0 MHz, Middle Channel)

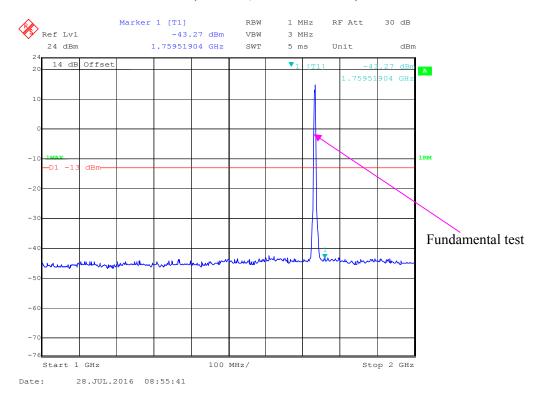


2 GHz – 20 GHz (5.0 MHz, Middle Channel)


Report No.: RSZ160721004-00D

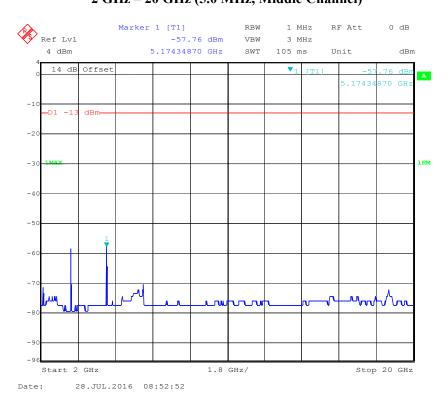


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

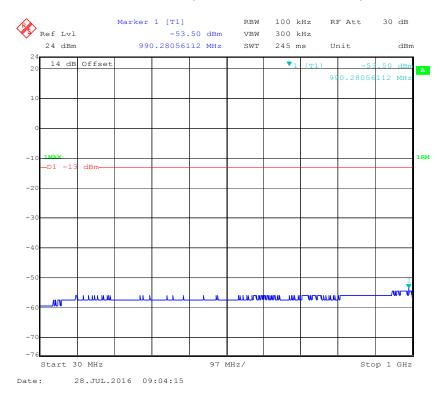


1 GHz - 2 GHz (10.0 MHz, Middle Channel)

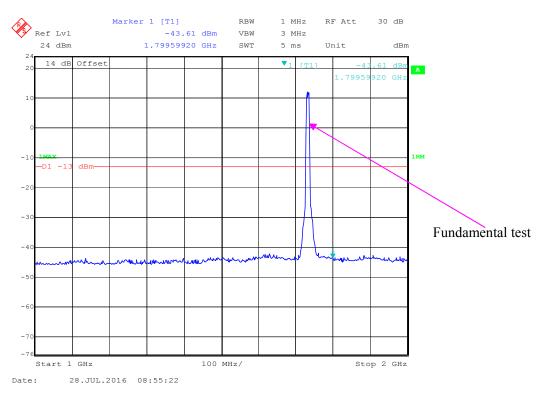


2 GHz - 20 GHz (10.0 MHz, Middle Channel)

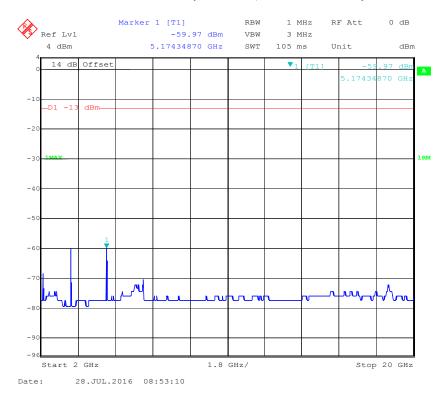


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

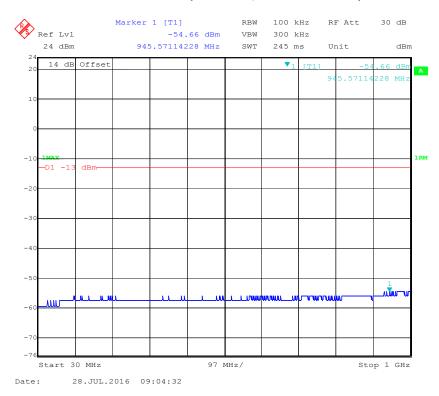


1 GHz -2 GHz (15.0 MHz, Middle Channel)

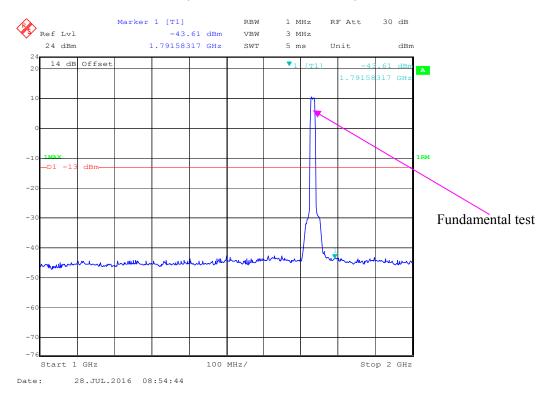


2 GHz -20 GHz (15.0 MHz, Middle Channel)

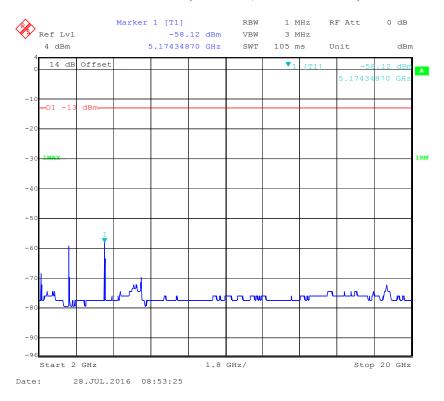


30 MHz - 1 GHz (20.0 MHz, Middle Channel)

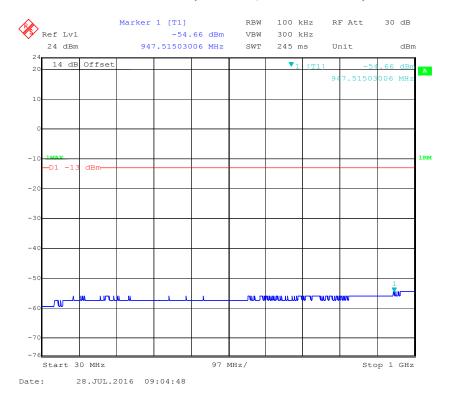

1 GHz -2 GHz (20.0 MHz, Middle Channel)

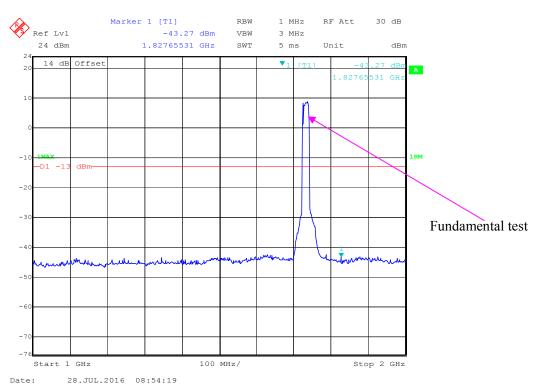


2 GHz -20 GHz (20.0 MHz, Middle Channel)

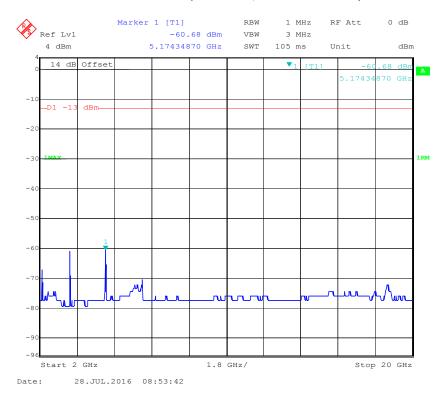


LTE Band 7:

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

Report No.: RSZ160721004-00D

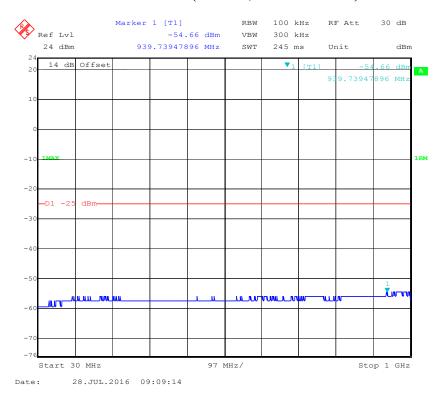


1 GHz - 3 GHz (5.0 MHz, Middle Channel)

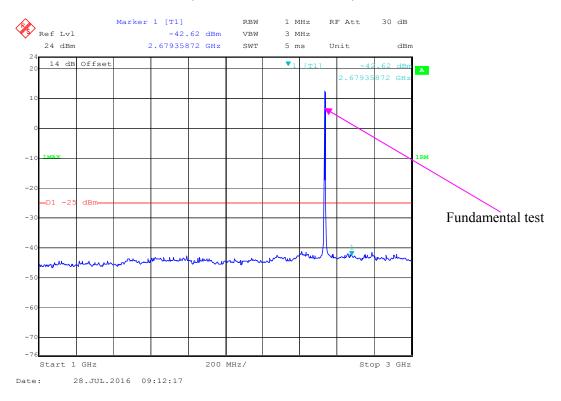


3 GHz – 26 GHz (5.0 MHz, Middle Channel)


Report No.: RSZ160721004-00D

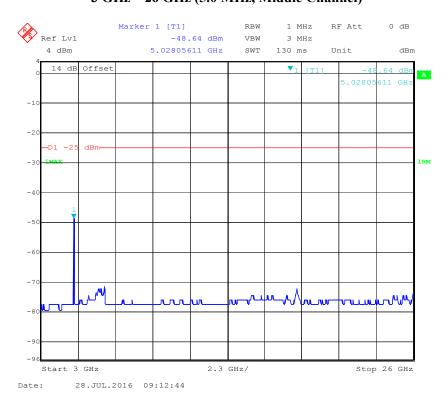


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

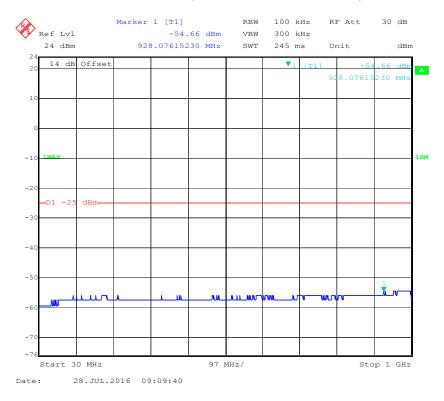


1 GHz – 3 GHz (10.0 MHz, Middle Channel)

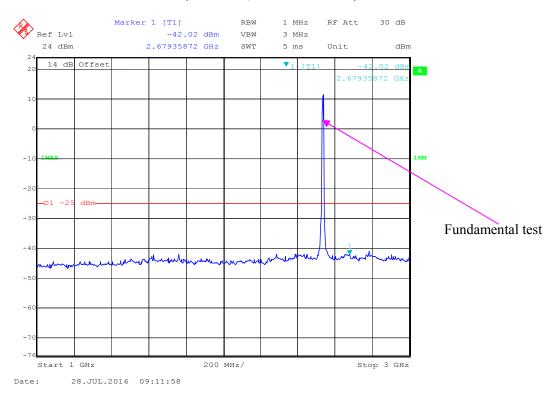


3 GHz - 26 GHz (10.0 MHz, Middle Channel)

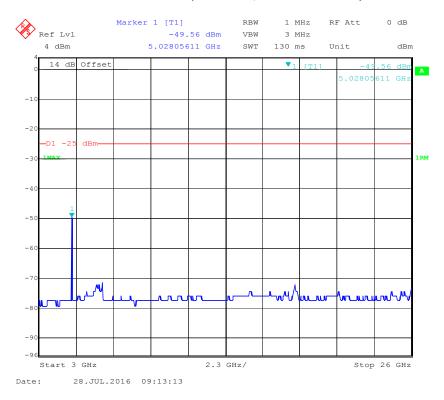

Report No.: RSZ160721004-00D

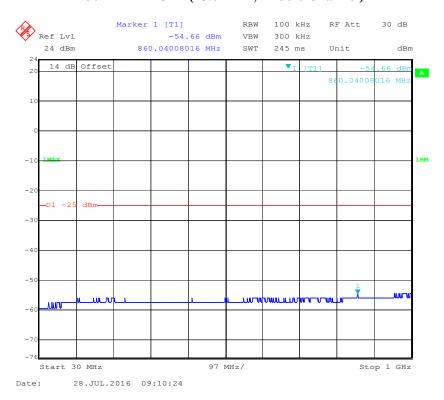


1 GHz - 3 GHz (15.0 MHz, Middle Channel)

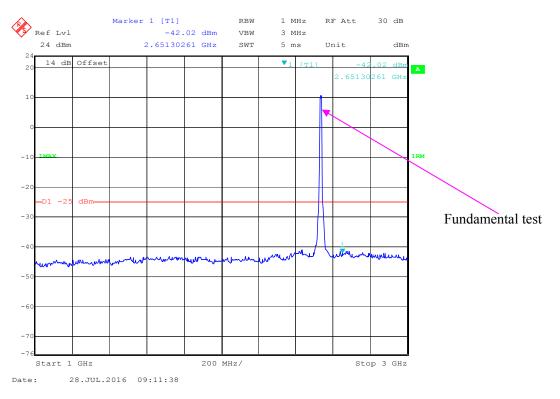


3 GHz -26 GHz (15.0 MHz, Middle Channel)


Report No.: RSZ160721004-00D

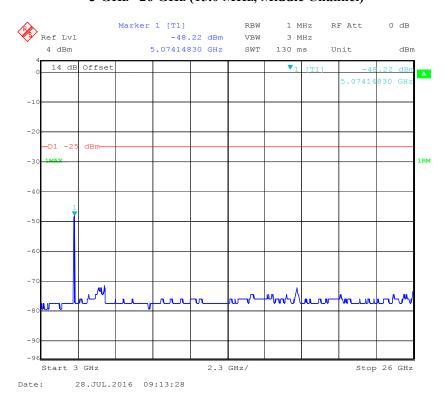


30 MHz - 1 GHz (20.0 MHz, Middle Channel)

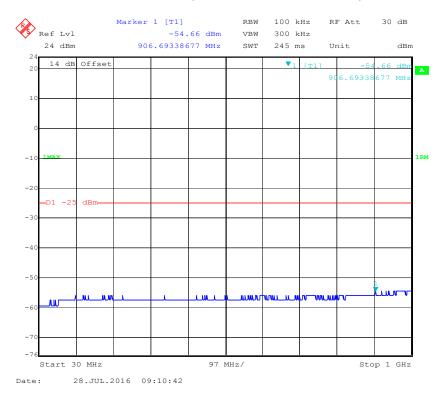

1 GHz -3 GHz (20.0 MHz, Middle Channel)

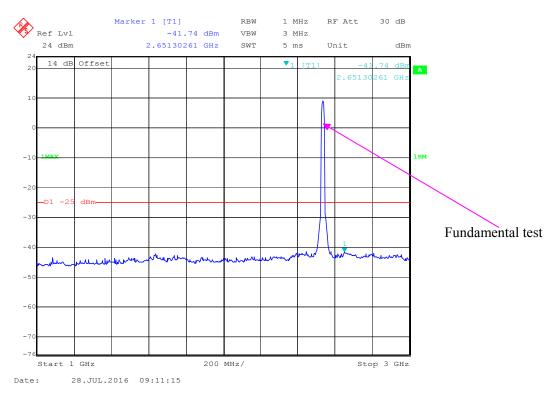

3 GHz -26 GHz (20.0 MHz, Middle Channel)

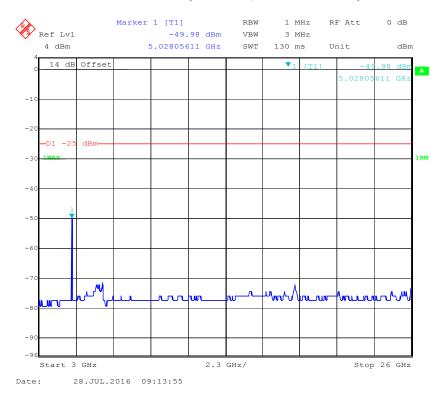


LTE Band 12:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)




Report No.: RSZ160721004-00D

1 GHz – 10 GHz (1.4 MHz, Middle Channel)

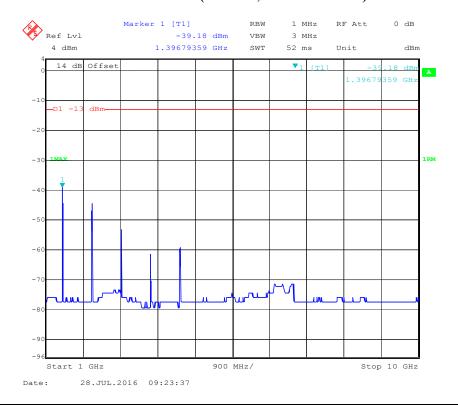


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

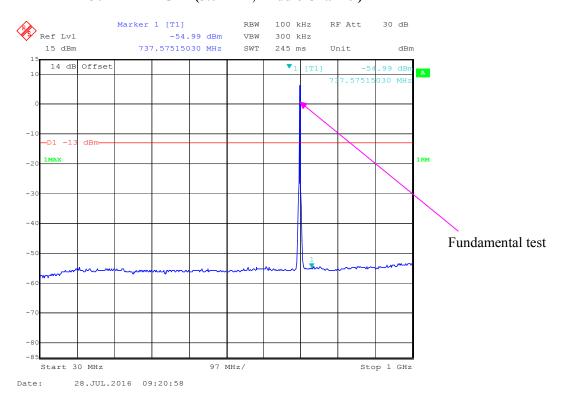


Report No.: RSZ160721004-00D

1 GHz – 10 GHz (3.0 MHz, Middle Channel)

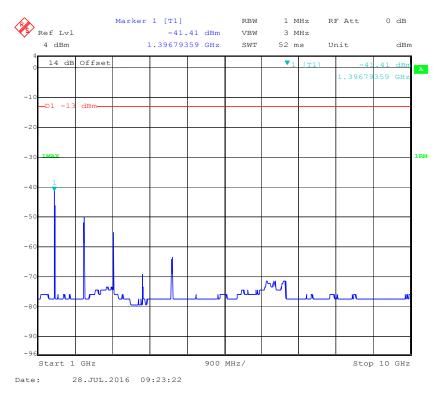


30 MHz – 1 GHz (5.0 MHz, Middle Channel)

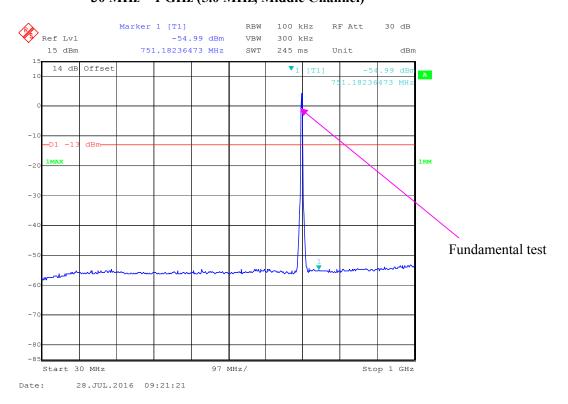


Report No.: RSZ160721004-00D

1 GHz – 10 GHz (5.0 MHz, Middle Channel)

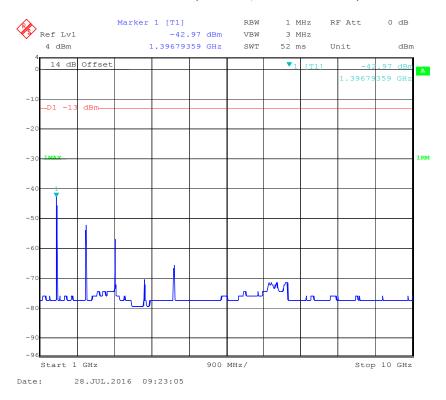


30 MHz – 1 GHz (10.0 MHz, Middle Channel)

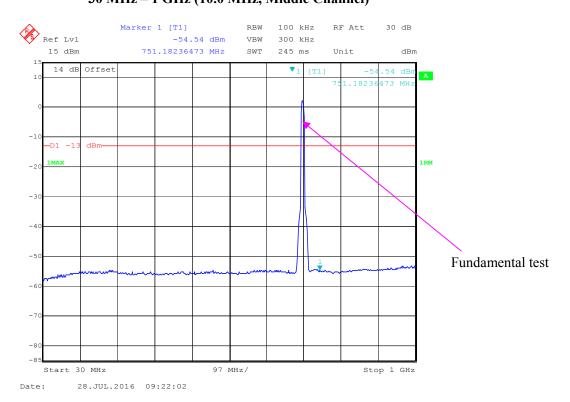


Report No.: RSZ160721004-00D

1 GHz – 10 GHz (10.0 MHz, Middle Channel)

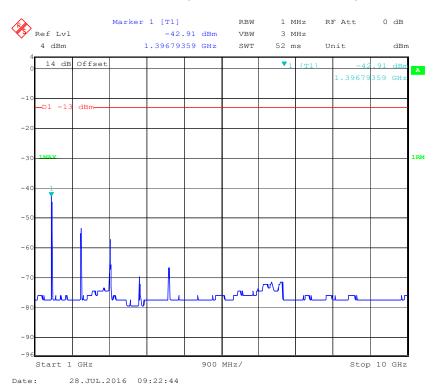


LTE Band 17:

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

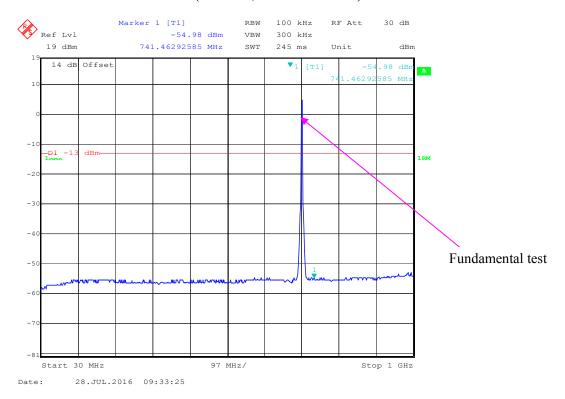


Report No.: RSZ160721004-00D


1 GHz – 10 GHz (5.0 MHz, Middle Channel)

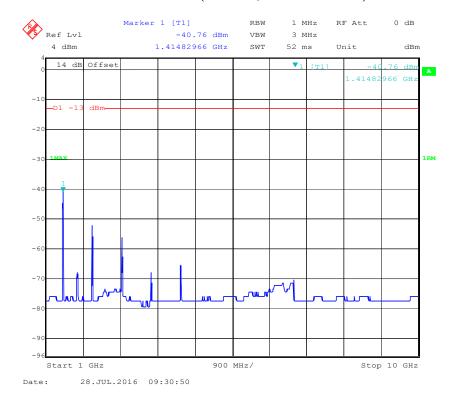

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

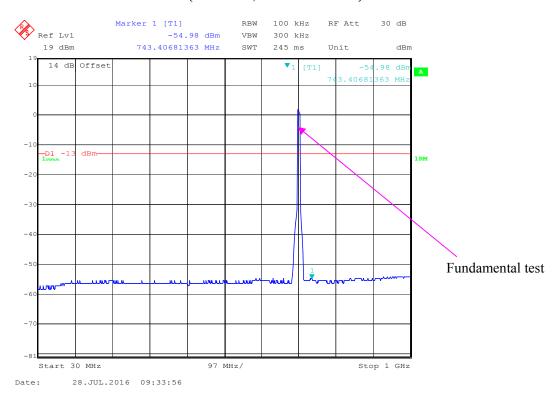

1 GHz – 10 GHz (10.0 MHz, Middle Channel)

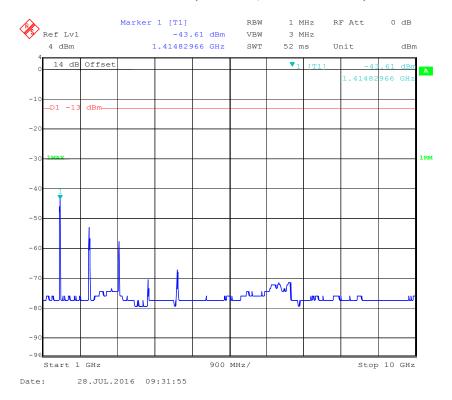

Report No.: RSZ160721004-00D

FCC § 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m) SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, §22.917(a) and § 24.238(a) and § 27.53(h)(m)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P) dB$ on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P) dB$ on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P) dB$ on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P) dB$ on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P) dB$ at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in $dB = 10 \lg (TX pwr in Watts/0.001) - the absolute level$

Spurious attenuation limit in $dB = 43 + 10 \text{ Log}_{10}$ (power out in Watts)

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2016-04-23	2017-04-23
НР	Amplifier	HP8447E	1937A01046	2016-05-06	2017-05-06
НР	Signal Generator	HP 8341B	2624A00116	2016-07-02	2017-07-01
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-12-15	2016-12-14
Electro-Mechanics	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50- 146520-wh	2015-11-23	2016-11-23
Ducommun technologies	RF Cable	UFA210A-1- 4724-30050U	MFR64369 223410-001	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	104PEA	218124002	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	RG-214	1	2016-06-15	2017-06-15
Ducommun technologies	RF Cable	RG-214	2	2016-06-15	2017-06-15

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	48 %
ATM Pressure:	101.0kPa

The testing was performed by Haiguo Li on 2016-07-30.

Test mode: Transmitting

Report No.: RSZ160721004-00D

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and the worse case data as below)

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

	Receiver	Turntable	Rx An	tenna	Substituted			Absolute		
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	GSM Mode									
231.25	38.96	130	2.5	Н	-58.0	0.31	0	-58.31	-13	45.31
231.25	37.86	238	1.9	V	-59.1	0.31	0	-59.41	-13	46.41
1697.60	60.11	70	2.1	Н	-35.6	1.60	6.90	-30.30	-13	17.30
1697.60	58.51	190	1.0	V	-37.6	1.60	6.90	-32.30	-13	19.30
2546.40	52.82	280	2.4	Н	-40.7	1.70	8.60	-33.80	-13	20.80
2546.40	49.39	326	1.0	V	-44.5	1.70	8.60	-37.60	-13	24.60
				WCD	MA Mod	e				
231.78	38.57	40	2.2	Н	-58.4	0.31	0	-58.71	-13	45.71
231.78	37.34	351	1.1	V	-59.7	0.31	0	-60.01	-13	47.01
1652.80	46.22	171	2.5	Н	-49.5	1.60	6.90	-44.20	-13	31.20
1652.80	43.81	32	1.5	V	-52.3	1.60	6.90	-47.00	-13	34.00
2479.20	43.47	209	1.2	Н	-50.1	1.70	8.60	-43.20	-13	30.20
2479.20	42.34	40	2.0	V	-51.5	1.70	8.60	-44.60	-13	31.60

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Report No.: RSZ160721004-00D

	Receiver	Turntable	Turntable Rx Antenna		;	Substitut	ed	Absolute		
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
				(GSM Mod	le				
231.25	38.91	85	2.0	Н	-58.1	0.31	0	-58.41	-13	45.41
231.25	37.79	241	1.2	V	-59.2	0.31	0	-59.51	-13	46.51
3700.40	51.76	347	2.3	Н	-30.6	1.80	10.00	-22.40	-13	9.40
3700.40	48.33	105	1.4	V	-34.4	1.80	10.00	-26.20	-13	13.20
				W	CDMA M	ode				
231.78	38.52	87	1.1	Н	-58.5	0.31	0	-58.81	-13	45.81
231.78	37.37	66	2.0	V	-59.6	0.31	0	-59.91	-13	46.91
3760.00	41.52	295	1.5	Н	-45.5	1.90	9.90	-37.50	-13	24.50
3760.00	41.88	47	2.1	V	-44.8	1.90	9.90	-36.80	-13	23.80
5640.00	42.12	33	1.6	Н	-40.4	2.10	10.30	-32.20	-13	19.20
5640.00	42.42	278	1.5	V	-39.5	2.10	10.30	-31.30	-13	18.30

30 MHz ~ 18 GHz:

AWS Band (Part 27)

	Receiver	Turntable	Rx An	Rx Antenna		Substituted				
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
	WCDMA Mode									
231.78	38.69	174	2.3	Н	-58.3	0.31	0	-58.61	-13	45.61
231.78	37.62	349	1.6	V	-59.4	0.31	0	-59.71	-13	46.71
3465.20	45.32	140	1.6	Н	-44.6	1.90	10.00	-36.50	-13	23.50
3465.20	44.37	351	1.9	V	-45.7	1.90	10.00	-37.60	-13	24.60
5197.80	43.21	176	1.8	Н	-42.8	1.80	10.10	-34.50	-13	21.50
5197.80	42.73	17	2.1	V	-42.6	1.80	10.10	-34.30	-13	21.30

Frequency	Receiver	Turntable	Rx Antenna			Substitute	d	Absolute		
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
Band 2										
			Test free	quency 1	range:30 I	MHz ~ 20	GHz			
174.55	38.52	8	1.9	Н	-58.5	0.28	0	-58.78	-13	45.78
174.55	37.69	224	1.5	V	-59.3	0.28	0	-59.58	-13	46.58
3760.00	40.37	140	1.3	Н	-46.7	1.90	9.90	-38.70	-13	25.70
3760.00	38.62	181	2.2	V	-48.0	1.90	9.90	-40.00	-13	27.00
					Band 4					
			Test free	quency i	range:30 I	MHz ~ 18	GHz			
174.55	38.85	318	1.4	Н	-58.1	0.28	0	-58.38	-13	45.38
174.55	37.62	109	2.2	V	-59.4	0.28	0	-59.68	-13	46.68
3465.00	40.52	280	1.2	Н	-43.3	1.90	10.00	-35.20	-13	22.20
3465.00	38.41	116	2.0	V	-45.6	1.90	10.00	-37.50	-13	24.50
					Band 7					
			Test free	quency i	range:30 I	MHz ~ 26	GHz			
174.55	38.47	120	1.5	Н	-58.5	0.28	0	-58.78	-25	33.78
174.55	37.52	9	1.0	V	-59.5	0.28	0	-59.78	-25	34.78
5070.00	40.74	226	1.5	Н	-43.3	2.30	10.10	-35.50	-25	10.5
5070.00	39.85	214	1.0	V	-43.4	2.30	10.10	-35.60	-25	10.6
	Band 12									
			Test fre	quency	range:30	MHz ~ 8	GHz		_	
174.55	38.42	34	2.1	Н	-58.6	0.28	0	-58.88	-13	45.88
174.55	37.86	123	1.2	V	-59.1	0.28	0	-59.38	-13	46.38
1414.00	44.36	33	2.3	Н	-52.3	1.20	6.40	-47.10	-13	34.10
1414.00	43.67	146	1.3	V	-53.0	1.20	6.40	-47.80	-13	34.80
					Band 17			-		-
	 	i			range:30			i		+
174.55	38.83	327	1.5	Н	-58.2	0.28	0	-58.48	-13	45.48
174.55	37.73	144	2.0	V	-59.3	0.28	0	-59.58	-13	46.58
1420.00	45.32	250	2.3	Н	-51.3	1.20	6.40	-46.10	-13	33.10
1420.00	43.72	302	1.4	V	-52.9	1.20	6.40	-47.70	-13	34.70

Report No.: RSZ160721004-00D

Absolute Level = SG Level - Cable loss + Antenna Gain
 Margin = Limit- Absolute Level

FCC § 22.917 (a); § 24.238 (a); §27.53 (h)(m) - BAND EDGES

Applicable Standards

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to $\S24.238(a)$, the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to FCC §27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P) dB$ on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P) dB$ on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P) dB$ on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P) dB$ on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P) dB$ at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50- 146520-wh	2015-11-23	2016-11-23
HONOVA	Power Splitter	HPDL-2W- B-NF	N/A	2016-06-12	2017-06-12
Ducommun technologies	RF Cable	RG-214	4	2016-06-15	2017-06-15
WEINSCHEL	6dB Attenuator	1012	30187	2016-06-18	2017-06-18
WEINSCHEL	10dB Attenuator	5324	AU0709	2016/7/18	2017/7/18

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	20~23 °C
Relative Humidity:	48~52 %
ATM Pressure:	100.5~101.0kPa


The testing was performed by Haiguo Li from 2016-07-28 to 2016-08-04.

EUT operation mode: Transmitting


 ${\it Test Result: Compliance. Please \ refer \ to \ the following \ plots.}$

Report No.: RSZ160721004-00D


Cellular Band, Left Band Edge for GSM (GMSK) Mode

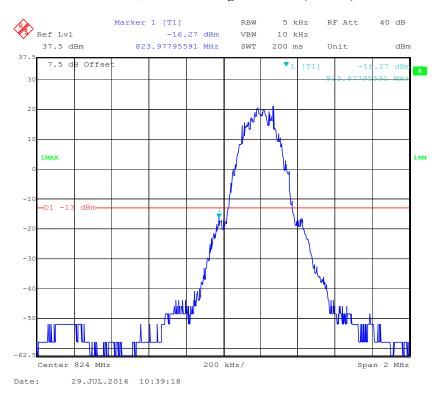


Cellular Band, Right Band Edge for GSM (GMSK) Mode

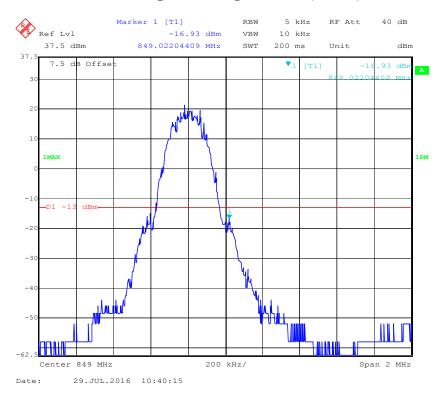

Cellular Band, Left Band Edge for EGPRS (8PSK) Mode

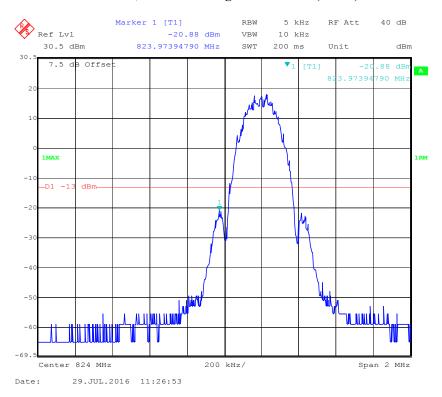


Cellular Band, Right Band Edge for EGPRS (8PSK) Mode

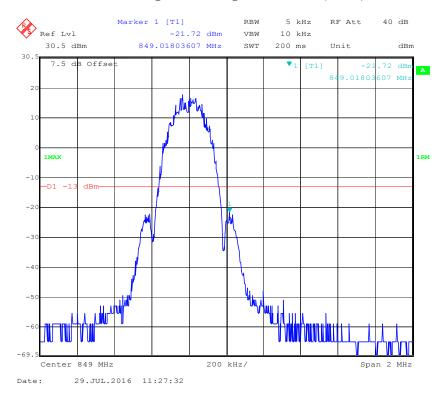


Cellular Band, Left Band Edge for RMC (BPSK) Mode

Report No.: RSZ160721004-00D

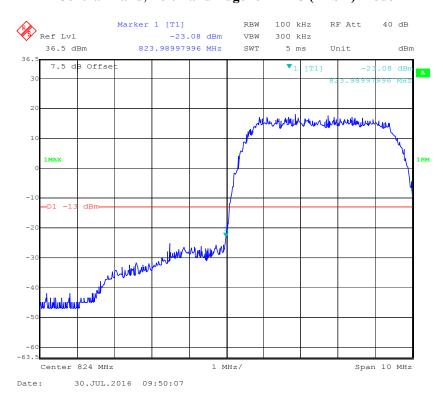


Cellular Band, Right Band Edge for RMC (BPSK) Mode

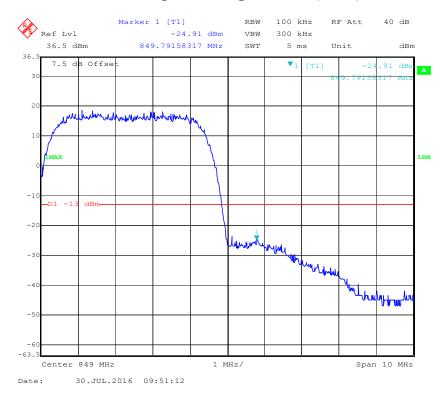


Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

Report No.: RSZ160721004-00D

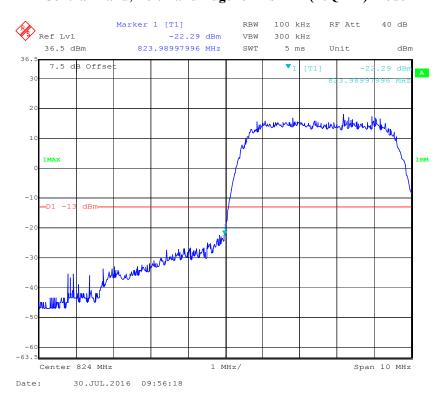


Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

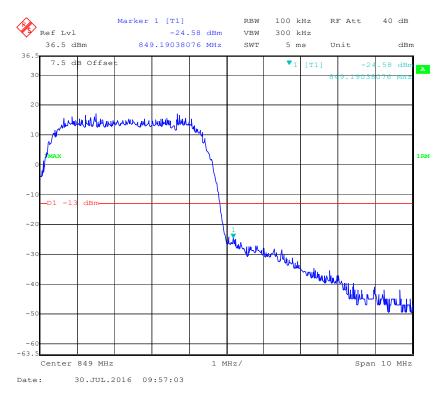


Cellular Band, Left Band Edge for HSUPA (BPSK) Mode


Report No.: RSZ160721004-00D

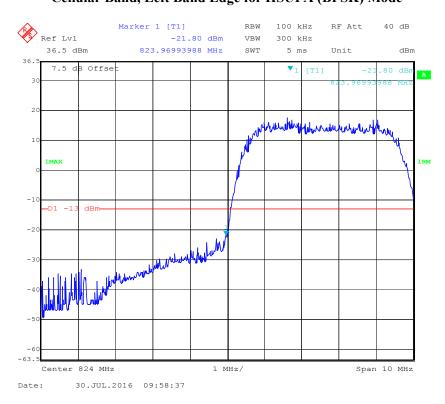


Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

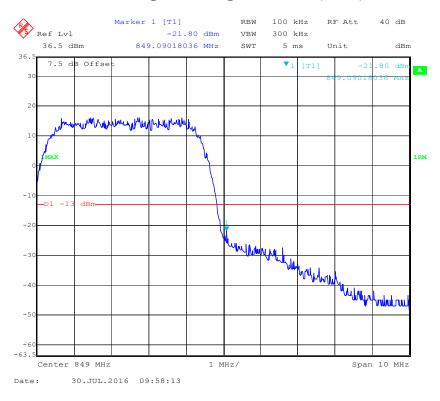


PCS Band, Left Band Edge for GSM (GMSK) Mode

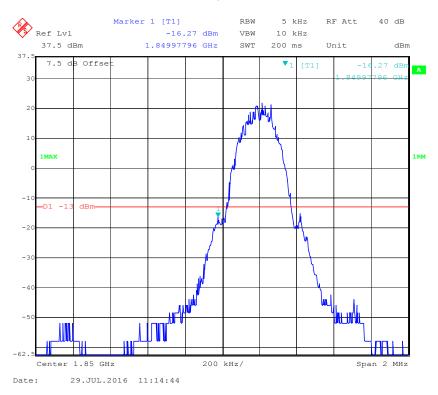


PCS Band, Right Band Edge for GSM (GMSK) Mode

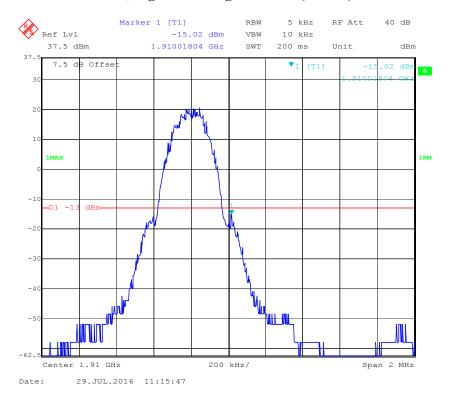

PCS Band, Left Band Edge for EGPRS (8PSK) Mode

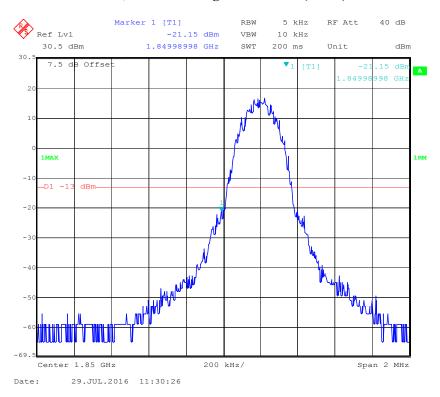


PCS Band, Right Band Edge for EGPRS (8PSK) Mode

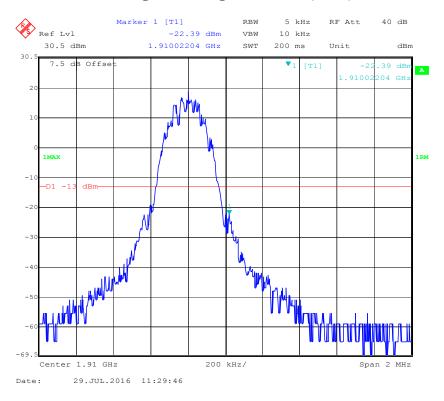


PCS Band, Left Band Edge for RMC (BPSK) Mode

Report No.: RSZ160721004-00D

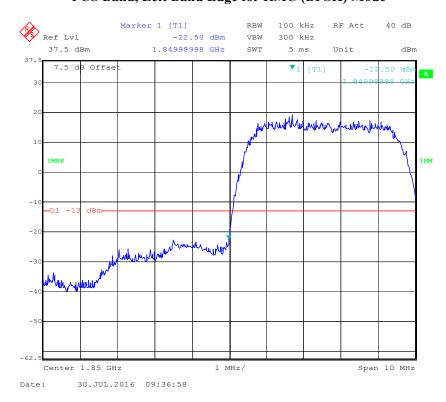


PCS Band, Right Band Edge for RMC (BPSK) Mode

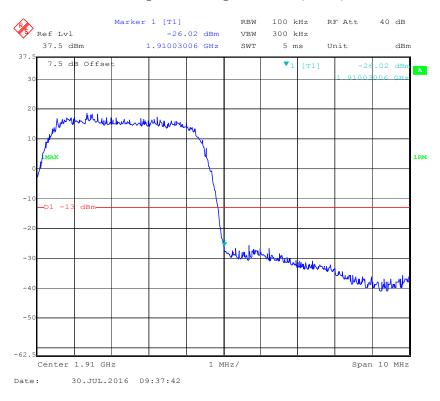


PCS Band, Left Band Edge for HSDPA (16QAM) Mode


Report No.: RSZ160721004-00D

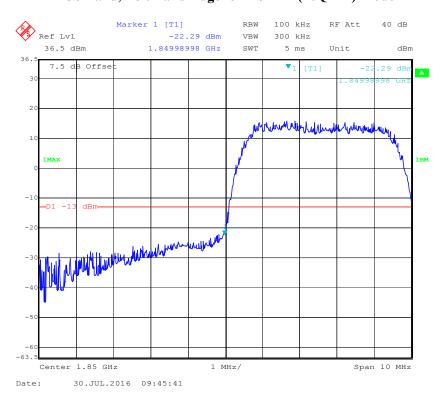


PCS Band, Right Band Edge for HSDPA (16QAM) Mode

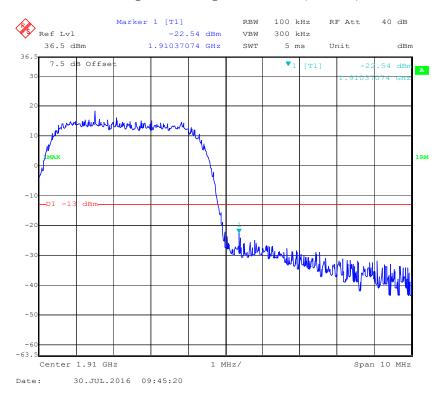

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

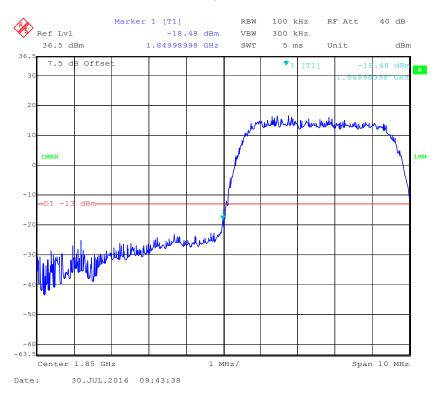


PCS Band, Right Band Edge for HSUPA (BPSK) Mode

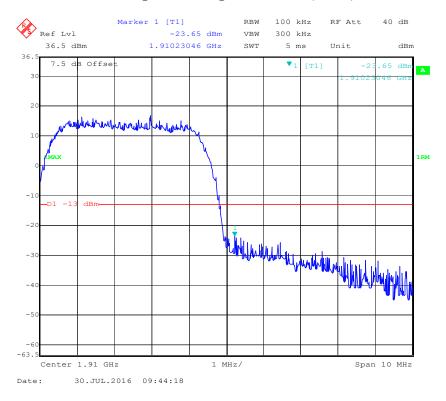


AWS Band, Left Band Edge for RMC (BPSK) Mode


Report No.: RSZ160721004-00D

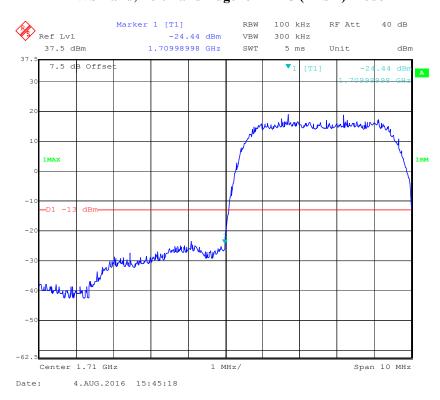


AWS Band, Right Band Edge for RMC (BPSK) Mode

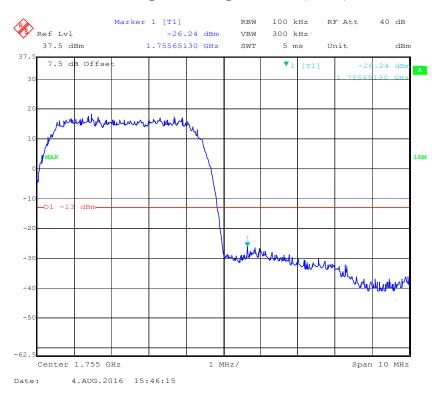


AWS Band, Left Band Edge for HSDPA (16QAM) Mode

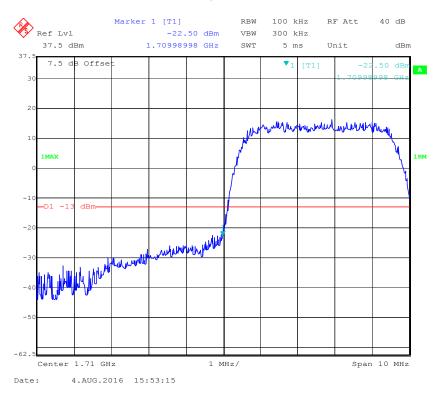


AWS Band, Right Band Edge for HSDPA (16QAM) Mode

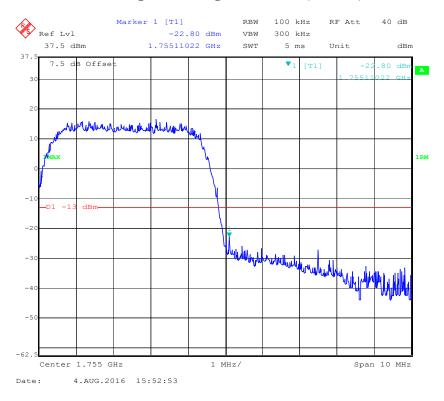

AWS Band, Left Band Edge for HSUPA (BPSK) Mode

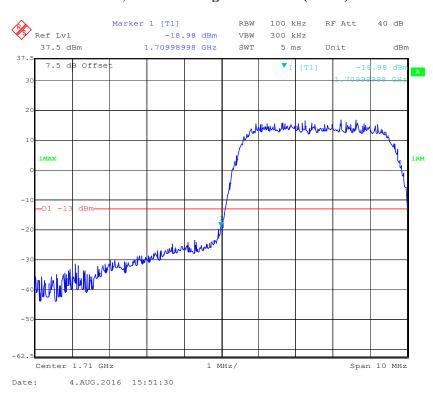


AWS Band, Right Band Edge for HSUPA (BPSK) Mode

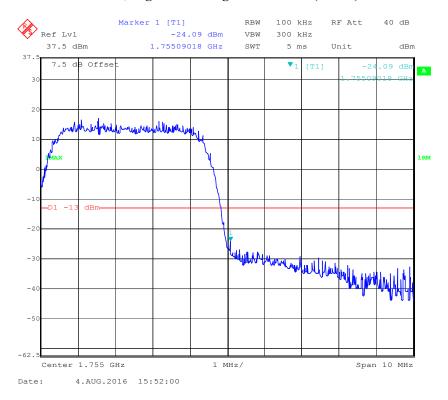


Band 2:

QPSK (1.4 MHz, FULL RB) - Left Band Edge


Report No.: RSZ160721004-00D

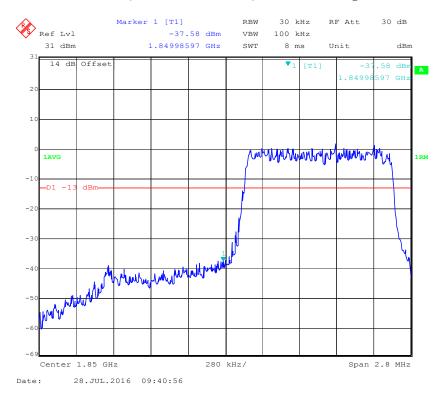


QPSK (1.4 MHz, FULL RB) - Right Band Edge

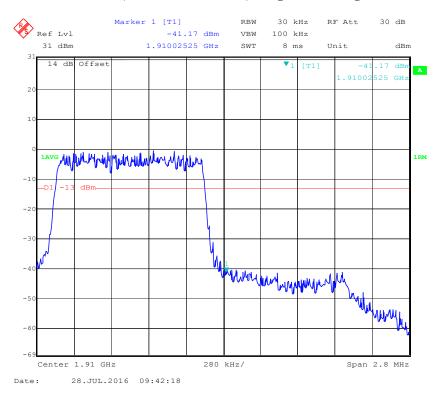

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

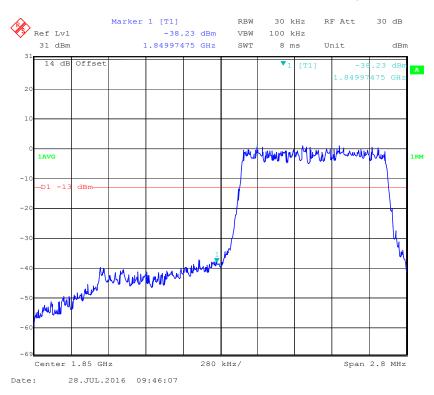


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

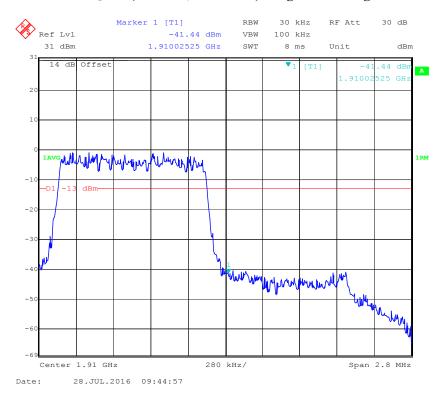


QPSK (3.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

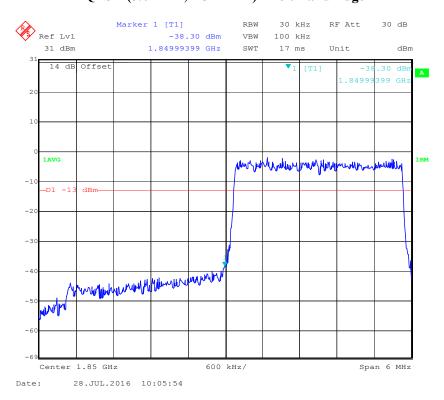


QPSK (3.0 MHz, FULL RB) - Right Band Edge

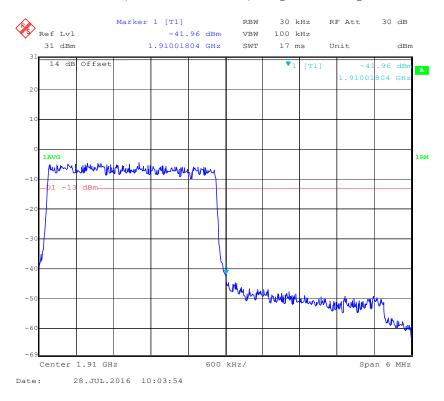


16-QAM (3.0 MHz, FULL RB) - Left Band Edge


Report No.: RSZ160721004-00D

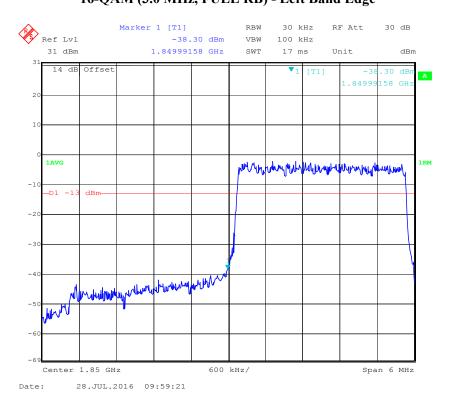


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

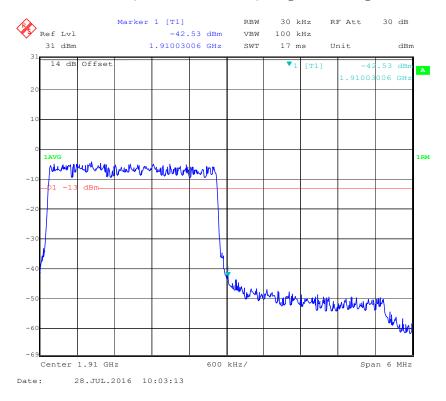

QPSK (5.0 MHz, FULL RB) - Left Band Edge

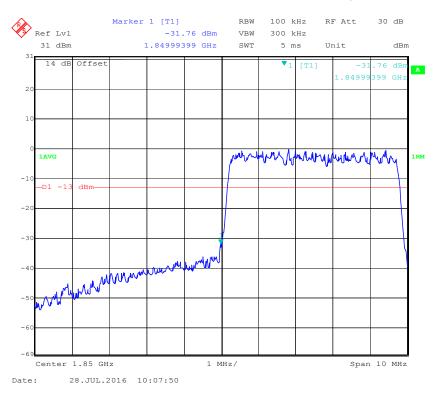


QPSK (5.0 MHz, FULL RB) - Right Band Edge

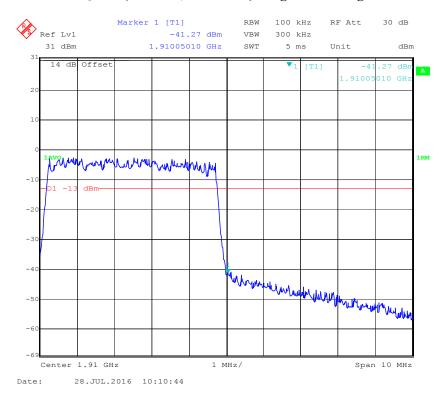


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

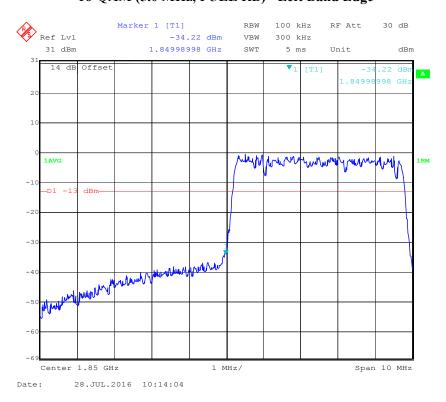


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

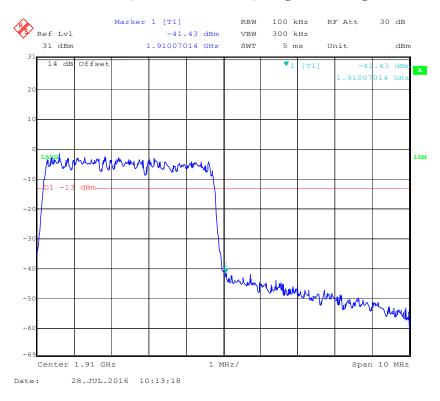


QPSK (10.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

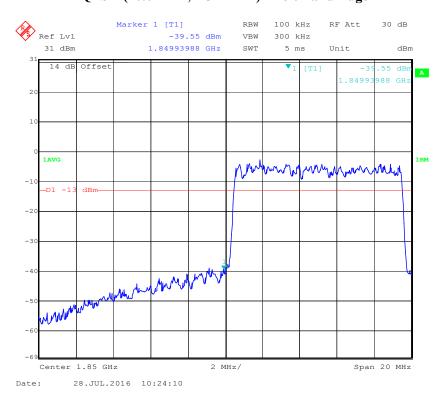


QPSK (10.0 MHz, FULL RB) - Right Band Edge

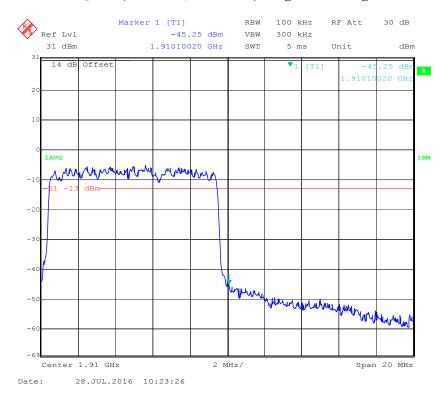


16-QAM (10.0 MHz, FULL RB) - Left Band Edge


Report No.: RSZ160721004-00D

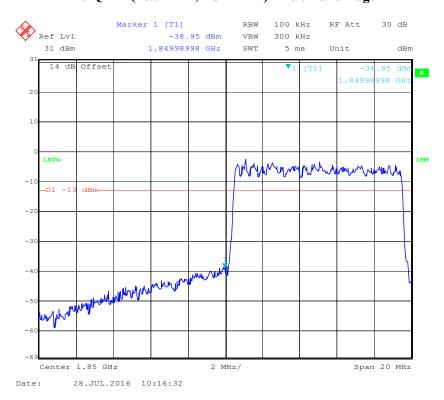


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

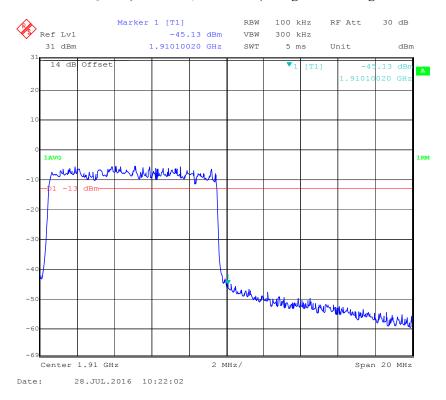

QPSK (15.0 MHz, FULL RB) - Left Band Edge

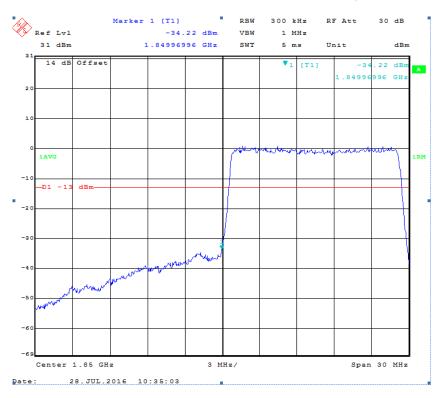


QPSK (15.0 MHz, FULL RB) - Right Band Edge

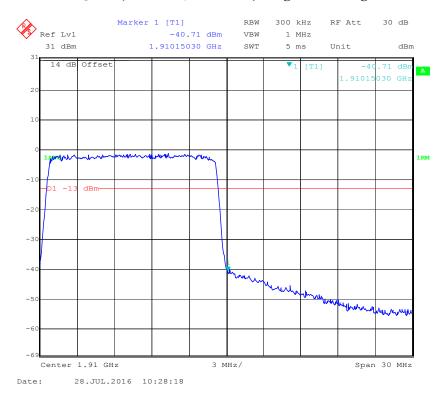


16-QAM (15.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

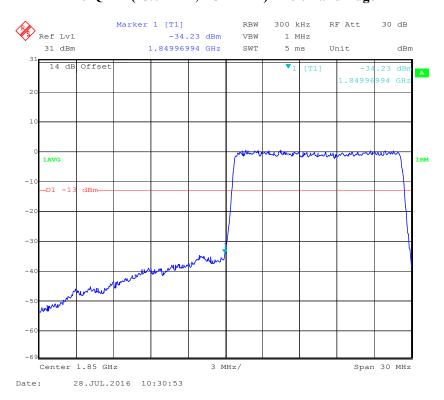


16-QAM (15.0 MHz, FULL RB) - Right Band Edge

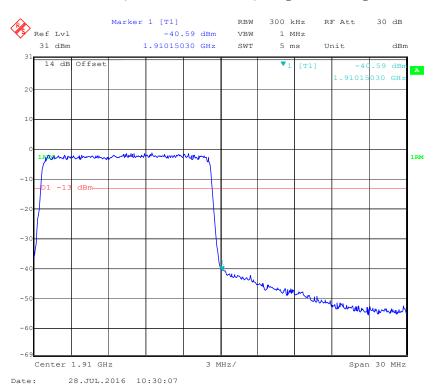


QPSK (20.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

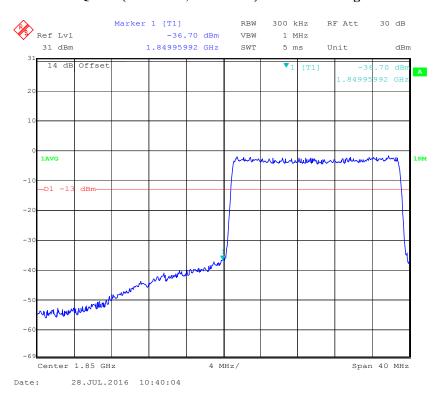


QPSK (20.0 MHz, FULL RB) - Right Band Edge

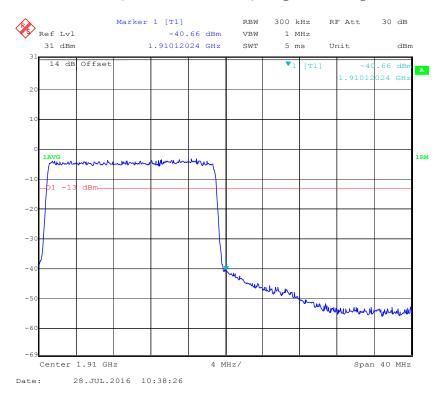


16-QAM (20.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

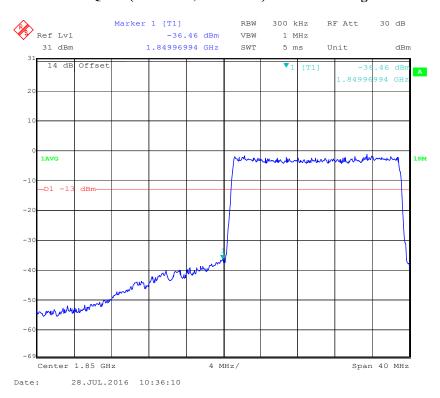


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

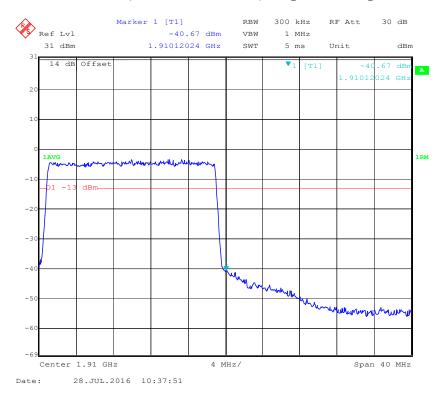


QPSK (1.4 MHz, FULL RB) - Left Band Edge


Report No.: RSZ160721004-00D

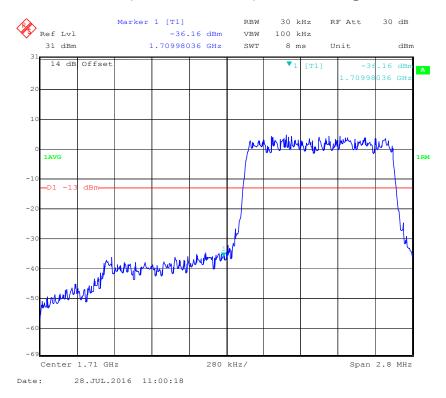


QPSK (1.4 MHz, FULL RB) - Right Band Edge

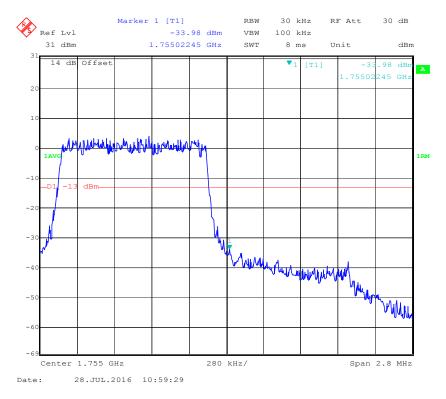

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

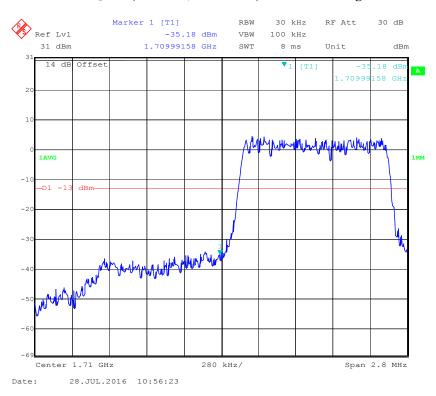


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

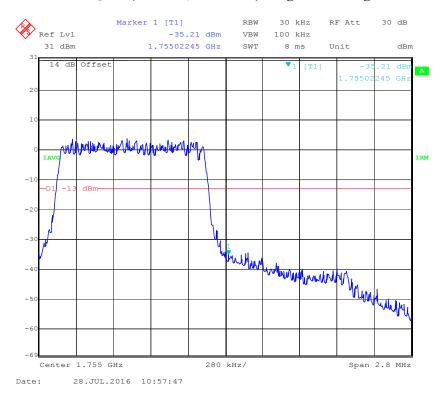


QPSK (3.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

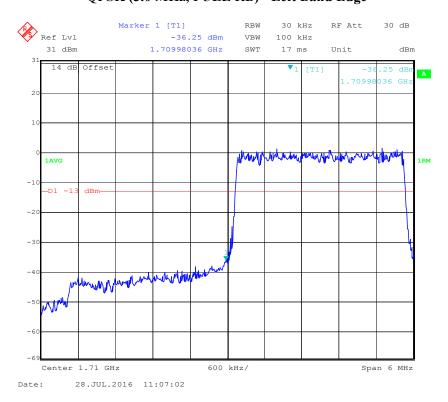


QPSK (3.0 MHz, FULL RB) - Right Band Edge

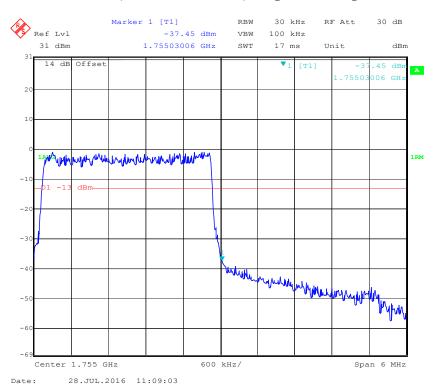


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

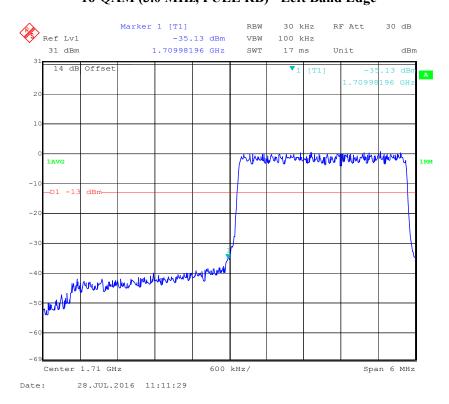


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

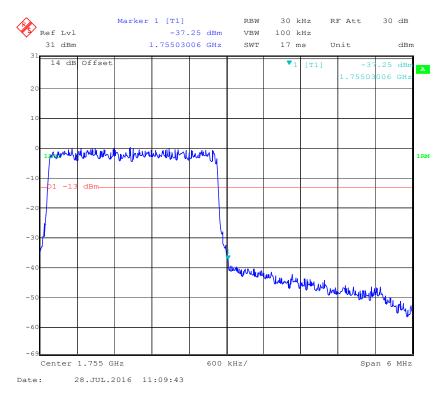


QPSK (5.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

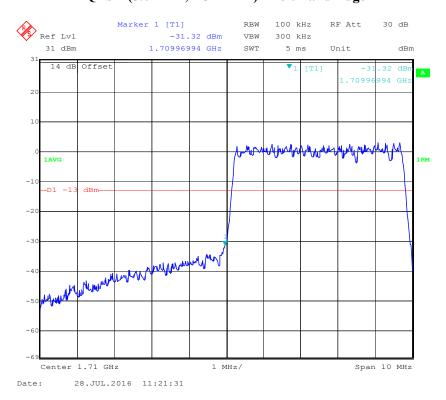


QPSK (5.0 MHz, FULL RB) - Right Band Edge

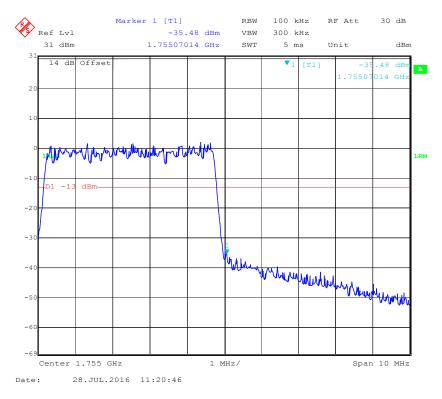


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

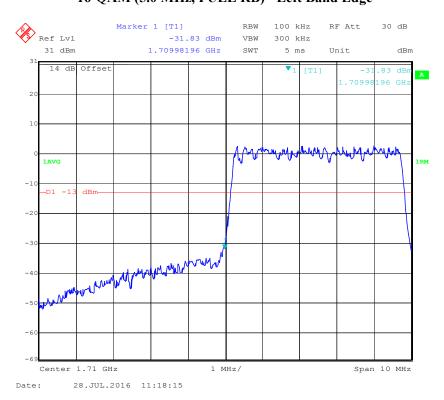


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

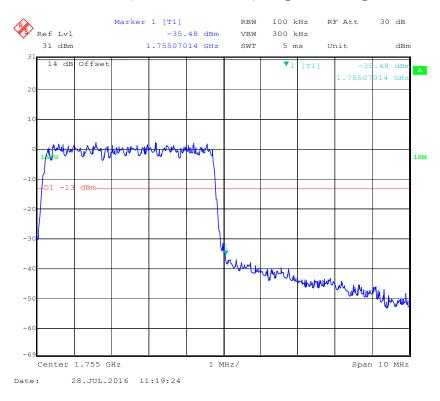


QPSK (10.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

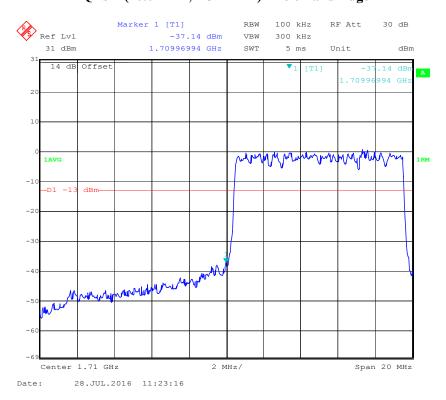


QPSK (10.0 MHz, FULL RB) - Right Band Edge

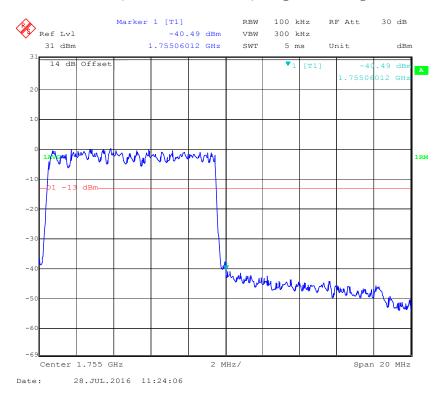


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

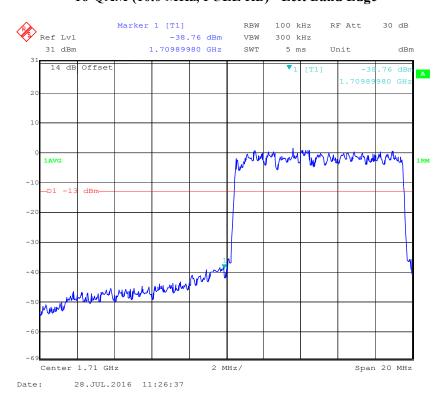


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

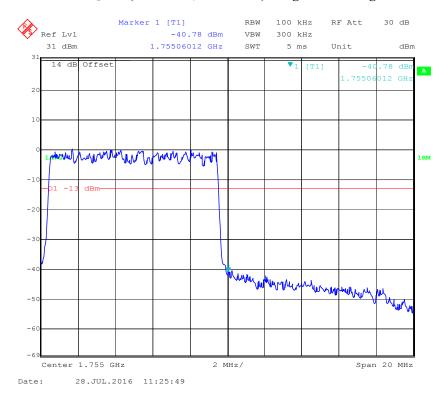


QPSK (15.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

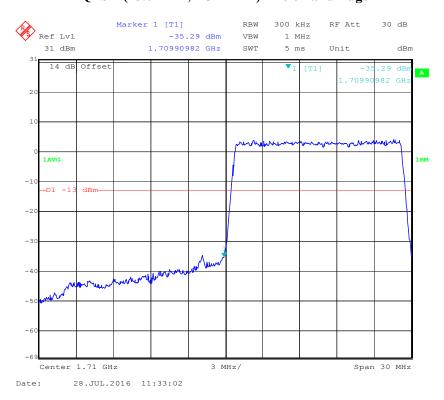


QPSK (15.0 MHz, FULL RB) - Right Band Edge

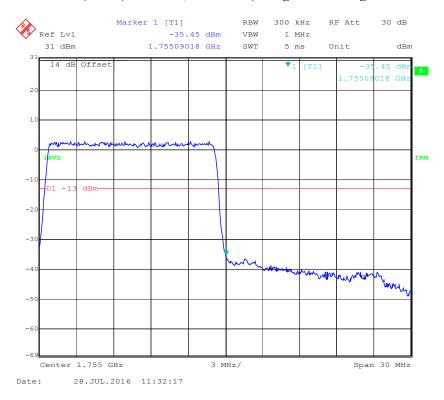


16-QAM (15.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

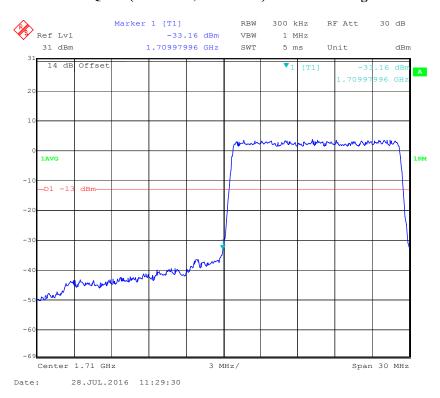


16-QAM (15.0 MHz, FULL RB) - Right Band Edge

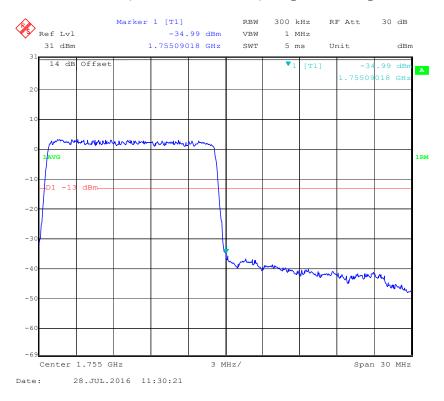


QPSK (20.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

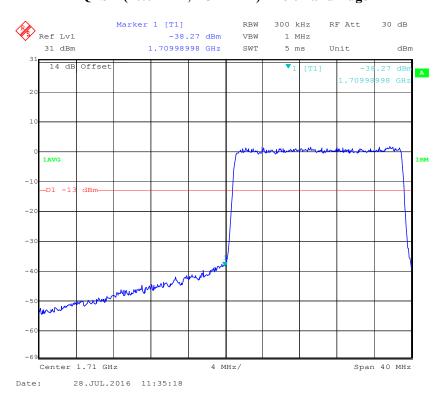


QPSK (20.0 MHz, FULL RB) - Right Band Edge

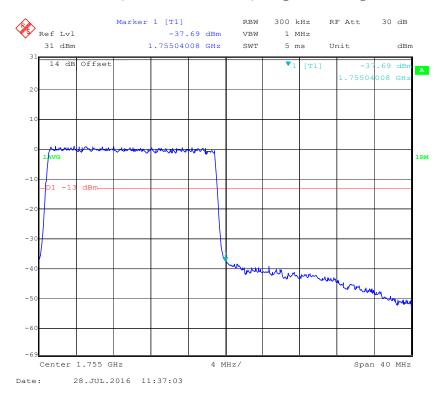


16-QAM (20.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

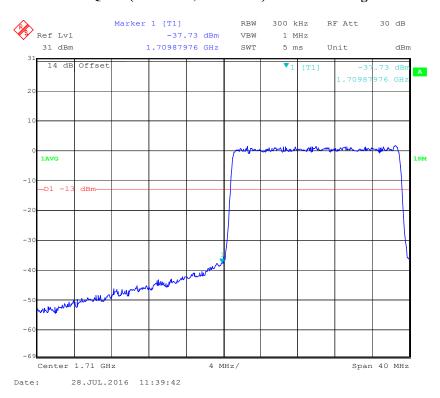


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

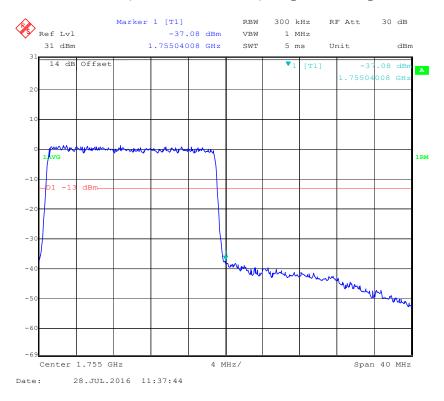


Band 7:

QPSK (5.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

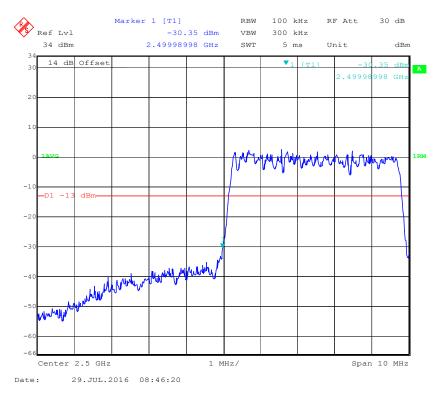


QPSK (5.0 MHz, FULL RB) - Right Band Edge

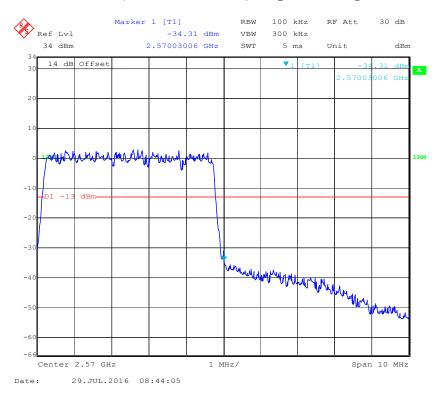


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

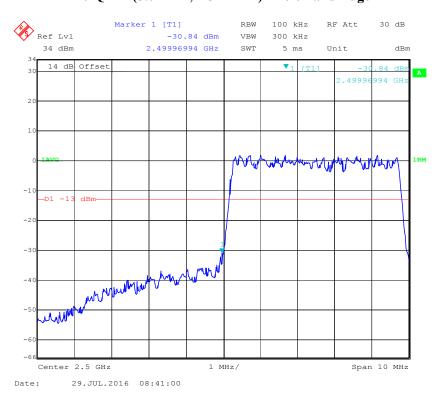


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

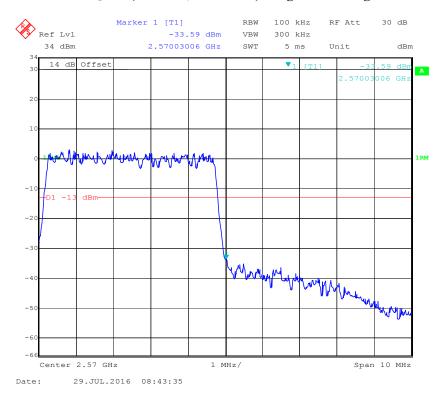


QPSK (10.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

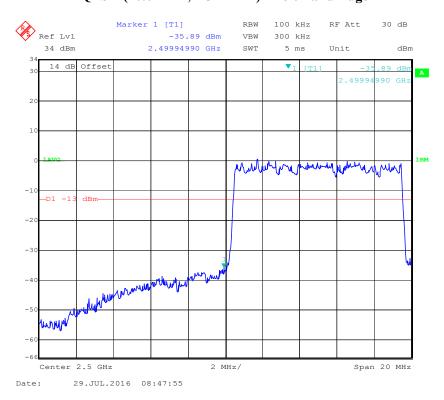


QPSK (10.0 MHz, FULL RB) - Right Band Edge

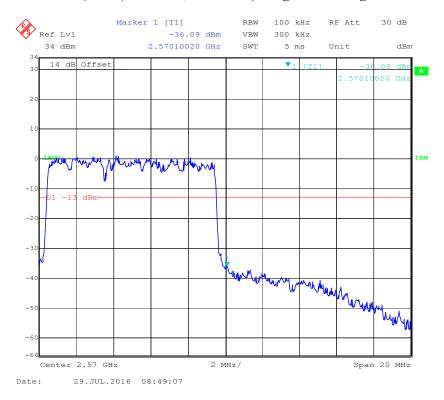


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

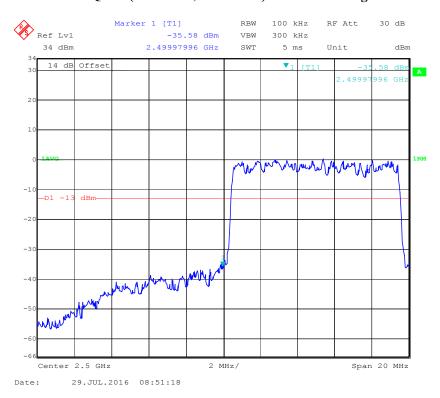


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

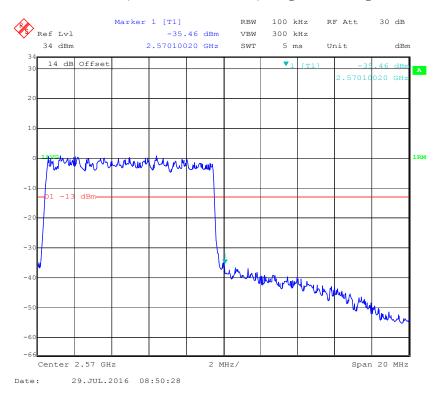


QPSK (15 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

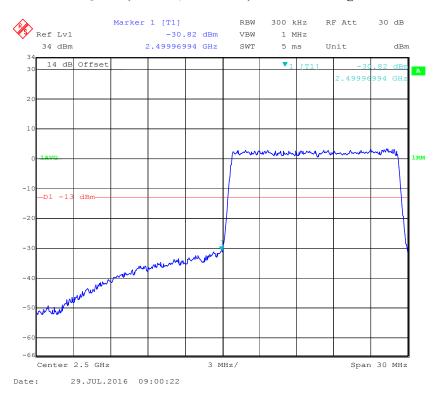


QPSK (15 MHz, FULL RB) - Right Band Edge

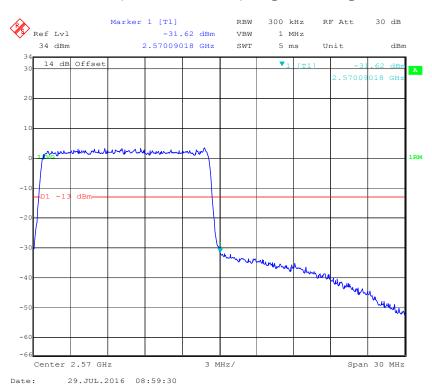


16-QAM (15 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

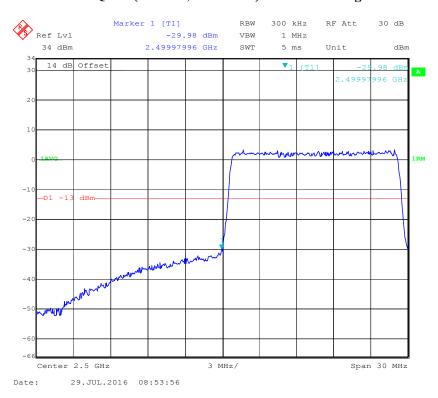


16-QAM (15 MHz, FULL RB) - Right Band Edge

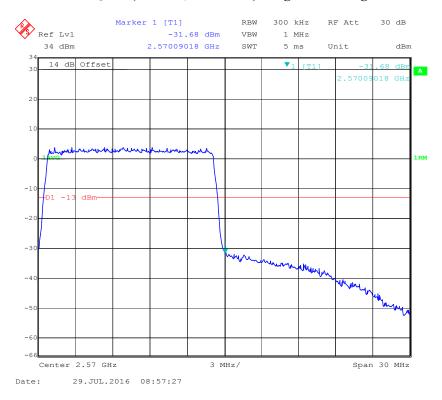


QPSK (20 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

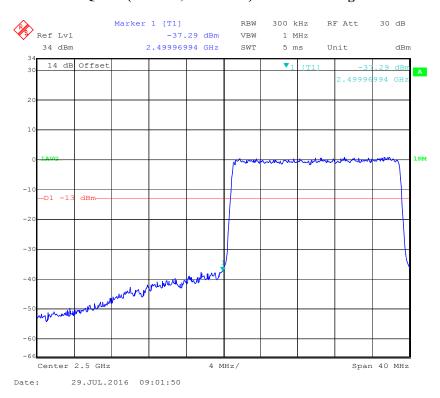


QPSK (20 MHz, FULL RB) - Right Band Edge

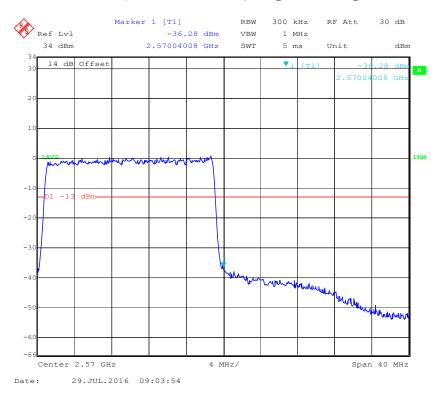


16-QAM (20 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

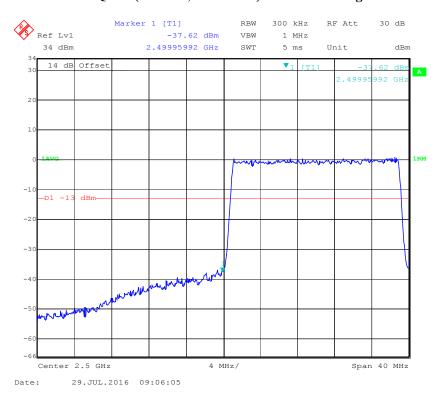


16-QAM (20 MHz, FULL RB) - Right Band Edge

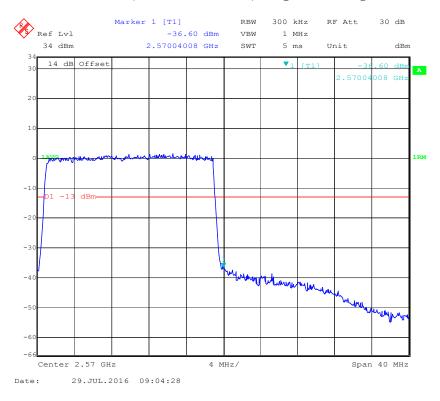

Band 12:

QPSK (1.4 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

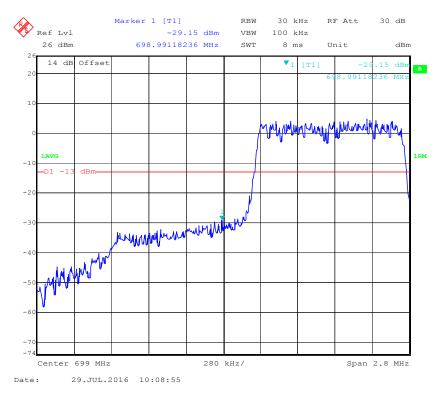


QPSK (1.4 MHz, FULL RB) - Right Band Edge



16-QAM (1.4 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

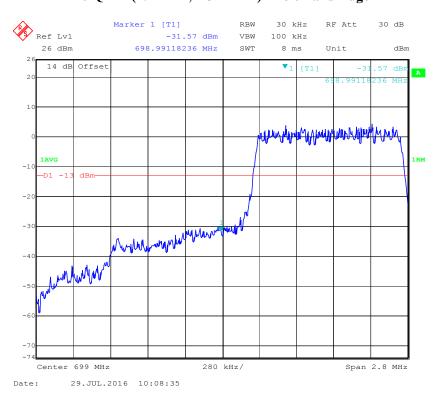


16-QAM (1.4 MHz, FULL RB) - Right Band Edge




QPSK (3.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

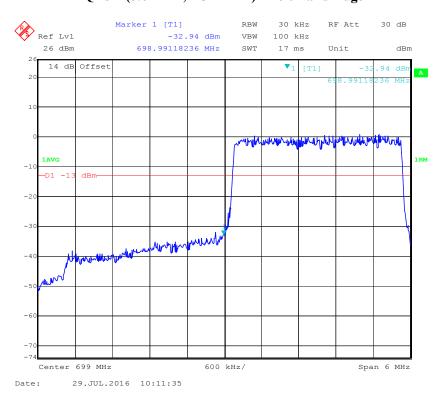


QPSK (3.0 MHz, FULL RB) - Right Band Edge

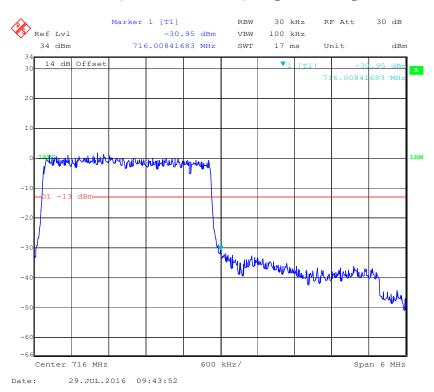


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

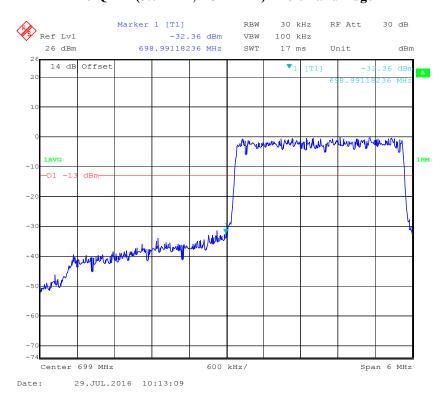


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

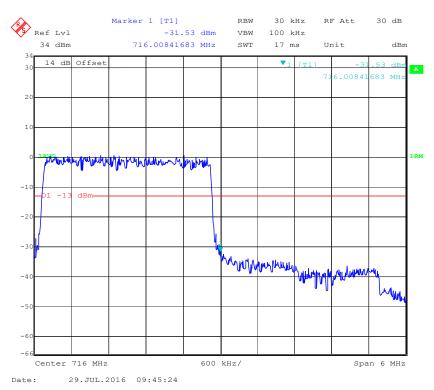


QPSK (5.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

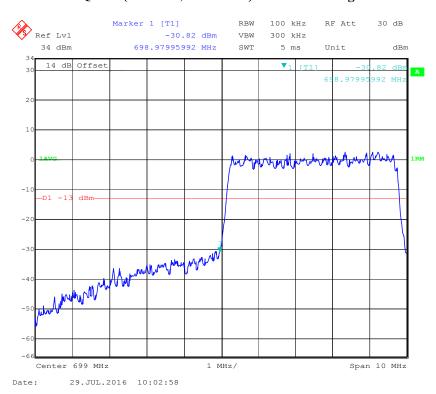


QPSK (5.0 MHz, FULL RB) - Right Band Edge

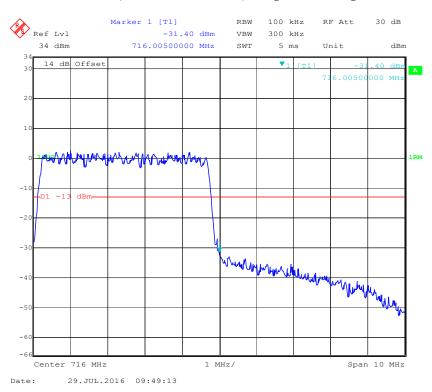


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

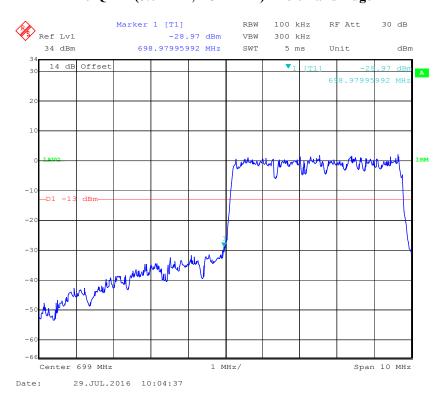


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

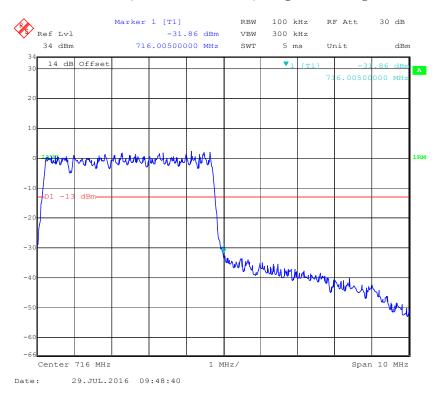


QPSK (10.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

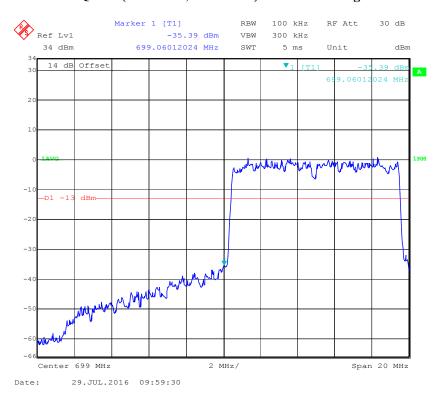


QPSK (10.0 MHz, FULL RB) - Right Band Edge

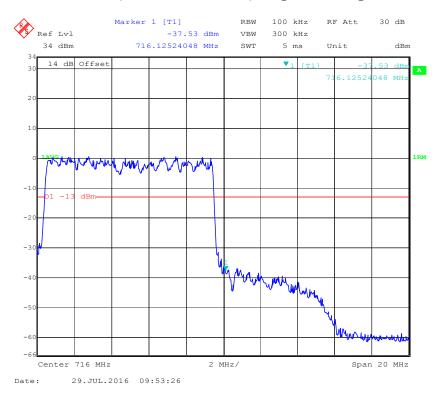


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

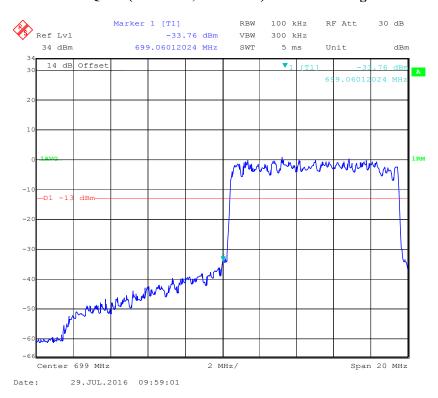


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

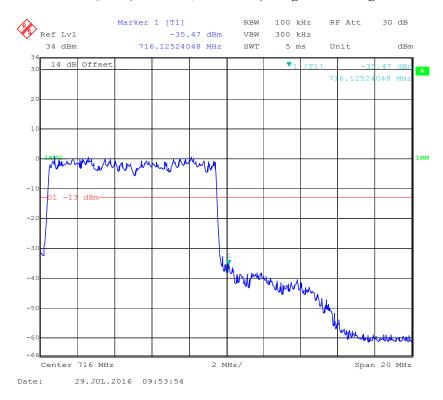


Band 17:

QPSK (5.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

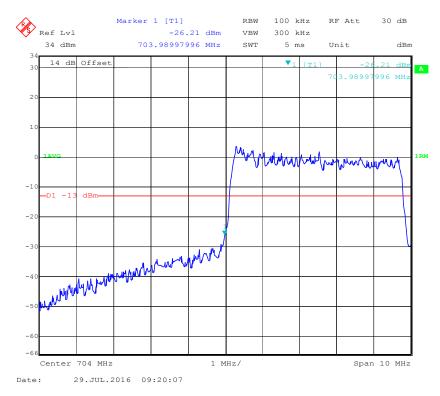


QPSK (5.0 MHz, FULL RB) - Right Band Edge

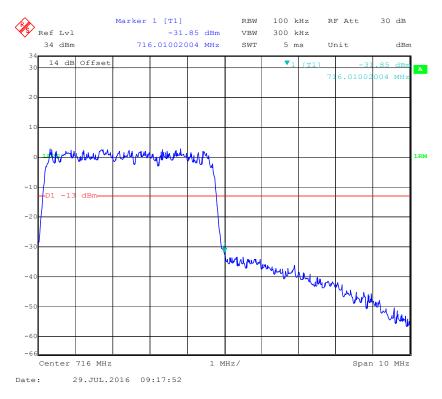


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

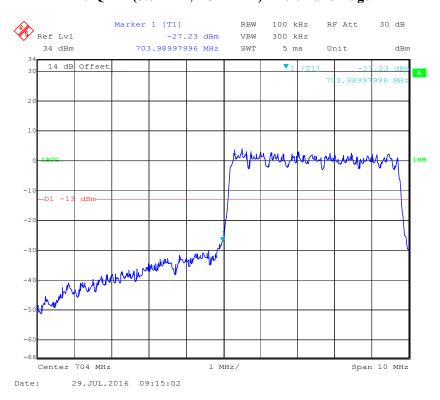


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

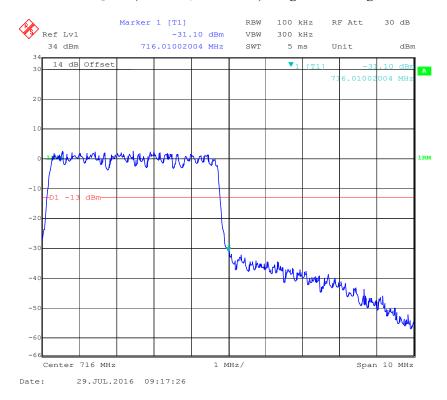


QPSK (10.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

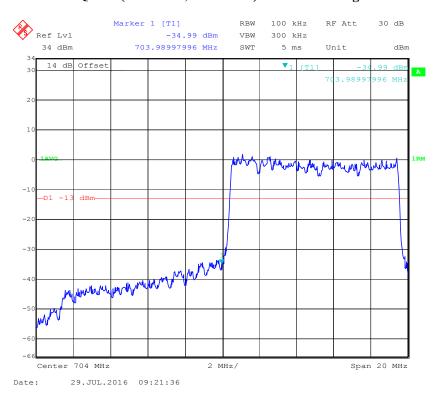


QPSK (10.0 MHz, FULL RB) - Right Band Edge

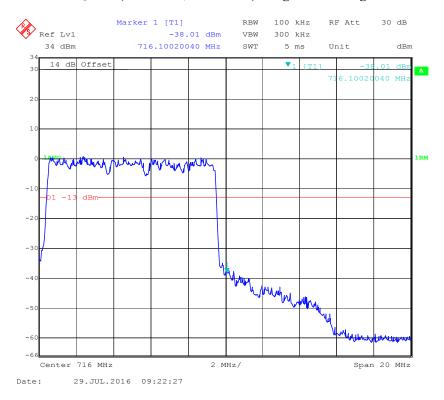


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

Report No.: RSZ160721004-00D

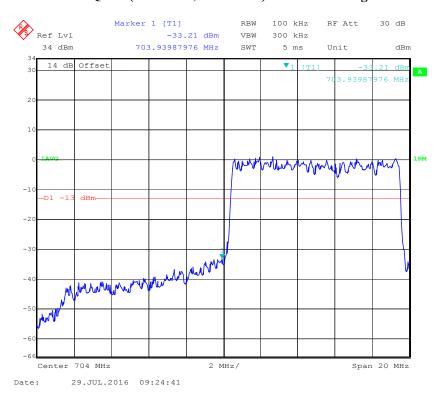

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

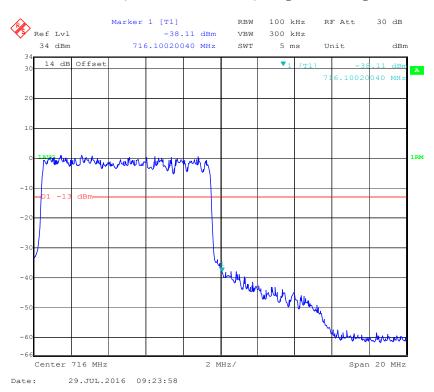

FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY

Applicable Standards

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

J	Frequency To	olerance	for T	Γransn	nitters in	the	Publi	c Mobile S	ervic	es
,		-		,	25.11			25 20		

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2015-11-01	2016-11-01
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23
R&S	Wideband Radio Communication tester	CMW500	1201.002K50- 146520-wh	2015-11-23	2016-11-23
Ducommun technologies	RF Cable	RG-214	4	2016-06-15	2017-06-15
WEINSCHEL	3dB Attenuator	5321	AU0709	2016-06-18	2017-06-18
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0kPa

The testing was performed by Haiguo Li on 2016-07-30.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Report No.: RSZ160721004-00D

Cellular Band (Part 22H)

GSM Mode

	Middle Channel, f _o =836.6 MHz						
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)			
-30		25	0.02988	2.5			
-20		25	0.02988	2.5			
-10		15	0.01793	2.5			
0		15	0.01793	2.5			
10	3.8	15	0.01793	2.5			
20		15	0.01793	2.5			
30		20	0.02391	2.5			
40		20	0.02391	2.5			
50		20	0.02391	2.5			
25	V min.= 3.5	25	0.02988	2.5			
25	V max.= 4.35	25	0.02988	2.5			

EDGE Mode

	Middle C	Channel, f _o =836.6 M	IHz	
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30		22	0.02630	2.5
-20		22	0.02630	2.5
-10		15	0.01793	2.5
0		15	0.01793	2.5
10	3.8	15	0.01793	2.5
20		15	0.01793	2.5
30		20	0.02391	2.5
40		20	0.02391	2.5
50		20	0.02391	2.5
25	V min.= 3.5	22	0.02630	2.5
25	V max.= 4.35	22	0.02630	2.5

Report No.: RSZ160721004-00D

	Middle Channel, f _o =836.6 MHz					
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)		
-30		25	0.02988	2.5		
-20		25	0.02988	2.5		
-10		22	0.02630	2.5		
0		22	0.02630	2.5		
10	3.8	22	0.02630	2.5		
20		20	0.02391	2.5		
30		20	0.02391	2.5		
40		20	0.02391	2.5		
50		20	0.02391	2.5		
25	V min.= 3.5	25	0.02988	2.5		
25	V max.= 4.35	25	0.02988	2.5		

PCS Band (Part 24E)

GSM Mode

	Middle Channel, f _o =1880.0 MHz						
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result			
-30		32	0.01702	pass			
-20		32	0.01702	pass			
-10		22	0.01170	pass			
0		22	0.01170	pass			
10	3.8	22	0.01170	pass			
20		22	0.01170	pass			
30		22	0.01170	pass			
40		30	0.01596	pass			
50		30	0.01596	pass			
25	V min.= 3.5	32	0.01702	pass			
25	V max.= 4.35	32	0.01702	pass			

EDGE Mode

Middle Channel, f _o =1880.0 MHz					
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		32	0.01702	pass	
-20		32	0.01702	pass	
-10		30	0.01596	pass	
0		30	0.01596	pass	
10	3.8	25	0.01330	pass	
20		25	0.01330	pass	
30		25	0.01330	pass	
40		30	0.01596	pass	
50		30	0.01596	pass	
25	V min.= 3.5	32	0.01702	pass	
25	V max.= 4.35	32	0.01702	pass	

WCDMA Mode

	Middle Channel, f _o =1880.0 MHz					
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		25	0.01330	pass		
-20		25	0.01330	pass		
-10		20	0.01064	pass		
0		20	0.01064	pass		
10	3.8	18	0.00957	pass		
20		18	0.00957	pass		
30		18	0.00957	pass		
40		20	0.01064	pass		
50		20	0.01064	pass		
25	V min.= 3.5	25	0.01330	pass		
25	V max.= 4.35	25	0.01330	pass		

AWS Band (Part 27)

WCDMA Mode

	Middle Channel, f _o =1732.6 MHz					
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		32	0.01847	pass		
-20		32	0.01847	pass		
-10		28	0.01616	pass		
0		28	0.01616	pass		
10	3.8	20	0.01154	pass		
20		20	0.01154	pass		
30		20	0.01154	pass		
40		28	0.01616	pass		
50		28	0.01616	pass		
25	V min.= 3.5	32	0.01847	pass		
25	V max.= 4.35	32	0.01847	pass		

Band 2:

20.0 MHz Middle Channel, f _o =1880MHz						
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		32	0.01702	pass		
-20		28	0.01489	pass		
-10		28	0.01489	pass		
0		25	0.01330	pass		
10	3.8	25	0.01330	pass		
20		25	0.01330	pass		
30		28	0.01489	pass		
40		28	0.01489	pass		
50		28	0.01489	pass		
25	V min.= 3.5	32	0.01702	pass		
25	V max.= 4.35	32	0.01702	pass		

Band 4:

20.0 MHz Middle Channel, f _o =1732.5 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30		32	0.01847	pass
-20		32	0.01847	pass
-10		20	0.01154	pass
0		20	0.01154	pass
10	3.8	20	0.01154	pass
20		20	0.01154	pass
30		20	0.01154	pass
40		30	0.01732	pass
50		30	0.01732	pass
25	V min.= 3.5	30	0.01732	pass
25	V max.= 4.35	32	0.01847	pass

Band 7:

20.0 MHz Middle Channel, f _o =2535 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30		35	0.01381	pass
-20		35	0.01381	pass
-10		25	0.00986	pass
0		25	0.00986	pass
10	3.8	25	0.00986	pass
20		25	0.00986	pass
30		25	0.00986	pass
40		30	0.01183	pass
50		30	0.01183	pass
25	V min.= 3.5	30	0.01183	pass
25	V max.= 4.35	35	0.01381	pass

Band 12:

10.0 MHz Middle Channel, f _o =707.5 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30		25	0.03536	pass
-20		25	0.03536	pass
-10		25	0.03536	pass
0		20	0.02829	pass
10	3.8	20	0.02829	pass
20		20	0.02829	pass
30		20	0.02829	pass
40		20	0.02829	pass
50		25	0.03536	pass
25	V min.= 3.5	25	0.03536	pass
25	V max.= 4.35	25	0.03536	pass

Band 17:

10.0 MHz Middle Channel, f _o =710 MHz				
Temperature (℃)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30		28	0.03944	pass
-20		28	0.03944	pass
-10	3.8	20	0.02817	pass
0		20	0.02817	pass
10		20	0.02817	pass
20		20	0.02817	pass
30		20	0.02817	pass
40		20	0.02817	pass
50		20	0.02817	pass
25	V min.= 3.5	28	0.03944	pass
25	V max.= 4.35	28	0.03944	pass

***** END OF REPORT *****