


# FCC Test Report


APPLICANT : CT Asia  
EQUIPMENT : Mobile Phone  
BRAND NAME : BLU  
MODEL NAME : Life One  
MARKETING NAME : Life One  
FCC ID : YHLBLULIFEONE  
STANDARD : FCC 47 CFR FCC Part 15 Subpart B  
CLASSIFICATION : Certification

The product was received on Aug. 01, 2013 and completely tested on Aug. 14, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Louis Wu / Manager



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (SHENZHEN) INC.**

**No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District,  
Shenzhen, Guangdong, P.R.C.**

## TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT .....	4
1. GENERAL DESCRIPTION .....	5
1.1. Applicant.....	5
1.2. Manufacturer .....	5
1.3. Feature of Equipment Under Test.....	5
1.4. Product Specification of Equipment Under Test .....	6
1.5. Modification of EUT .....	6
1.6. Test Site .....	7
1.7. Applied Standards .....	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....	8
2.1. Test Mode .....	8
2.2. Connection Diagram of Test System .....	10
2.3. Support Unit used in test configuration and system.....	12
2.4. EUT Operation Test Setup.....	13
3. TEST RESULT.....	14
3.1. Test of AC Conducted Emission Measurement .....	14
3.2. Test of Radiated Emission Measurement .....	20
4. LIST OF MEASURING EQUIPMENT .....	27
5. UNCERTAINTY OF EVALUATION .....	28
APPENDIX A. SETUP PHOTOGRAPHS	

## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC380112	Rev. 01	Initial issue of report	Aug. 20, 2013

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 6.93 dB at 0.490 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.29 dB at 114.39 MHz for Quasi-Peak

## 1. General Description

### 1.1. Applicant

**CT Asia**

Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon, Hongkong

### 1.2. Manufacturer

**Tinno mobile**

Floor2-2, H-3 Building east industrial zoom, OCT east, Nanshan, Shenzhen

### 1.3. Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	BLU
Model Name	Life One
Marketing Name	Life One
FCC ID	YHLBLULIFEONE
EUT supports Radios application	GSM/GPRS/EDGE/WCDMA/HSPA/HSPA+/DC-HSDPA/ WLAN 2.4GHz 802.11bgn / Bluetooth v3.0 + EDR
HW Version	V1.0
SW Version	V06
EUT Stage	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4. Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz
<b>Antenna Type</b>	WWAN : IFA Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA: QPSK (Uplink) HSDPA/DC-HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM(Uplink) DC-HSDPA: 64QAM (Downlink Only) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth v3.0 + EDR : GFSK, $\pi/4$ -DQPSK, 8-DPSK GPS : BPSK

## 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6. Test Site

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.		
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755- 3320-2398		
Test Site No.	Sporton Site No.		FCC Registration No.
	CO01-SZ	03CH01-SZ	831040

## 1.7. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2003

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	☒	☒	☒
2.	Data application transferred mode (EUT with notebook)	☒	☒	☒

#### Abbreviations:


- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz

**Remark:** For signal above 1GHz, the worst case is test item 1.




Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1/2	<p>Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Camera + SIM 1&lt;Fig.1&gt;</p> <p>Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4 + SIM 1&lt;Fig.1&gt;</p> <p>Mode 3: WCDMA band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + FM Rx + SIM 1&lt;Fig.2&gt;</p> <p>Mode 4: WCDMA band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx + SIM 1&lt;Fig.3&gt;</p>
Radiated Emissions < 1GHz	1/2	<p>Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Camera + SIM 1&lt;Fig.1&gt;</p> <p>Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4 + SIM 1&lt;Fig.1&gt;</p> <p>Mode 3: WCDMA band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + FM Rx + SIM 1&lt;Fig.2&gt;</p> <p>Mode 4: WCDMA band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx + SIM 1&lt;Fig.3&gt;</p>
Radiated Emissions ≥ 1GHz	1/2	<p>Mode 1: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4 + SIM 1&lt;Fig.1&gt;</p> <p>Mode 2: WCDMA band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx + SIM 1&lt;Fig.3&gt;</p>
<b>Remark:</b> <ol style="list-style-type: none"> <li>1. The worst case of AC is mode 2; the test data of this mode is reported.</li> <li>2. The USB Link mode of AC is mode 4; the test data of this mode is also reported.</li> <li>3. The worst case of RE &lt; 1G is mode 2; the test data of this mode is reported.</li> <li>4. The USB Link mode of RE &lt; 1G is mode 4; the test data of this mode is also reported.</li> <li>5. Link with Notebook means data application transferred mode between EUT and Notebook.</li> </ol>		


## 2.2. Connection Diagram of Test System

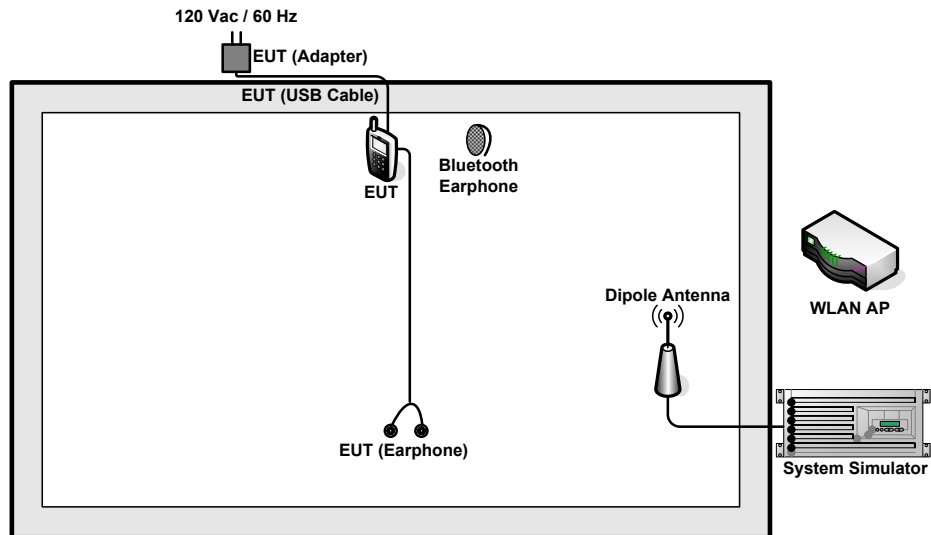

<Fig.1>

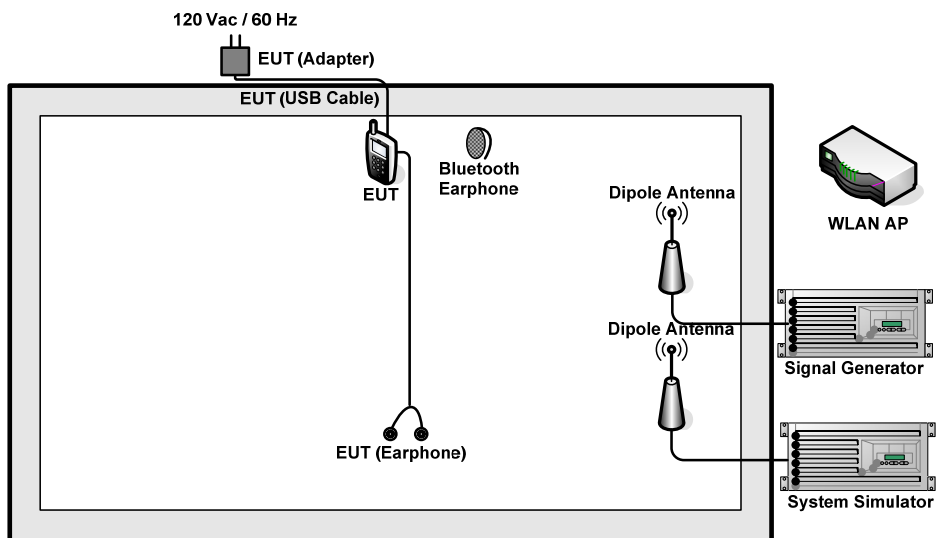

<Fig.2>

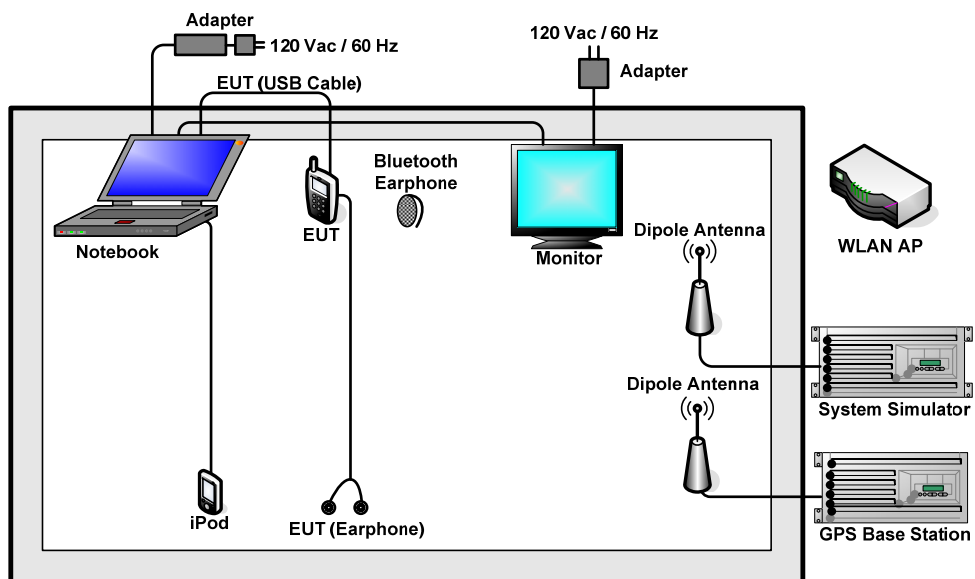

<Fig.3>

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	signal generator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	System Simulator	Agilent	E5515C	N/A	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-link	DIR-612	N/A	N/A	Unshielded, 1.8 m
5.	WLAN AP	D-link	DIR-615	N/A	N/A	Unshielded, 1.8 m
6.	Bluetooth Earphone	Nokia	BH-108	N/A	N/A	N/A
7.	Notebook	DELL	P08S	Fcc DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
8.	Monitor	Dell	1707FPt	FCC DoC	shielded, 1.2 m	Unshielded, 1.8 m
9.	Monitor	Dell	IN1940MWB	FCC DoC	shielded, 1.2 m	Unshielded, 1.8 m
10.	iPod	Apple	MC525 ZP/A	FCC DoC	Shielded, 1.0 m	N/A

## **2.4. EUT Operation Test Setup**

The EUT was in GSM or WCDMA idle mode during the testing. The EUT was synchronized to the BCCH, and was in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Notebook and EUT via USB cable.
2. Turn on GPS function to make the EUT receive continuous signals from GPS station.
3. Execute "Video Player" to play MPEG4 files.
4. Turn on camera to capture images.
5. Execute "H Pattern" to show H Pattern via VGA Cable on the Monitor.

### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.


##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.1.4 Test Setup

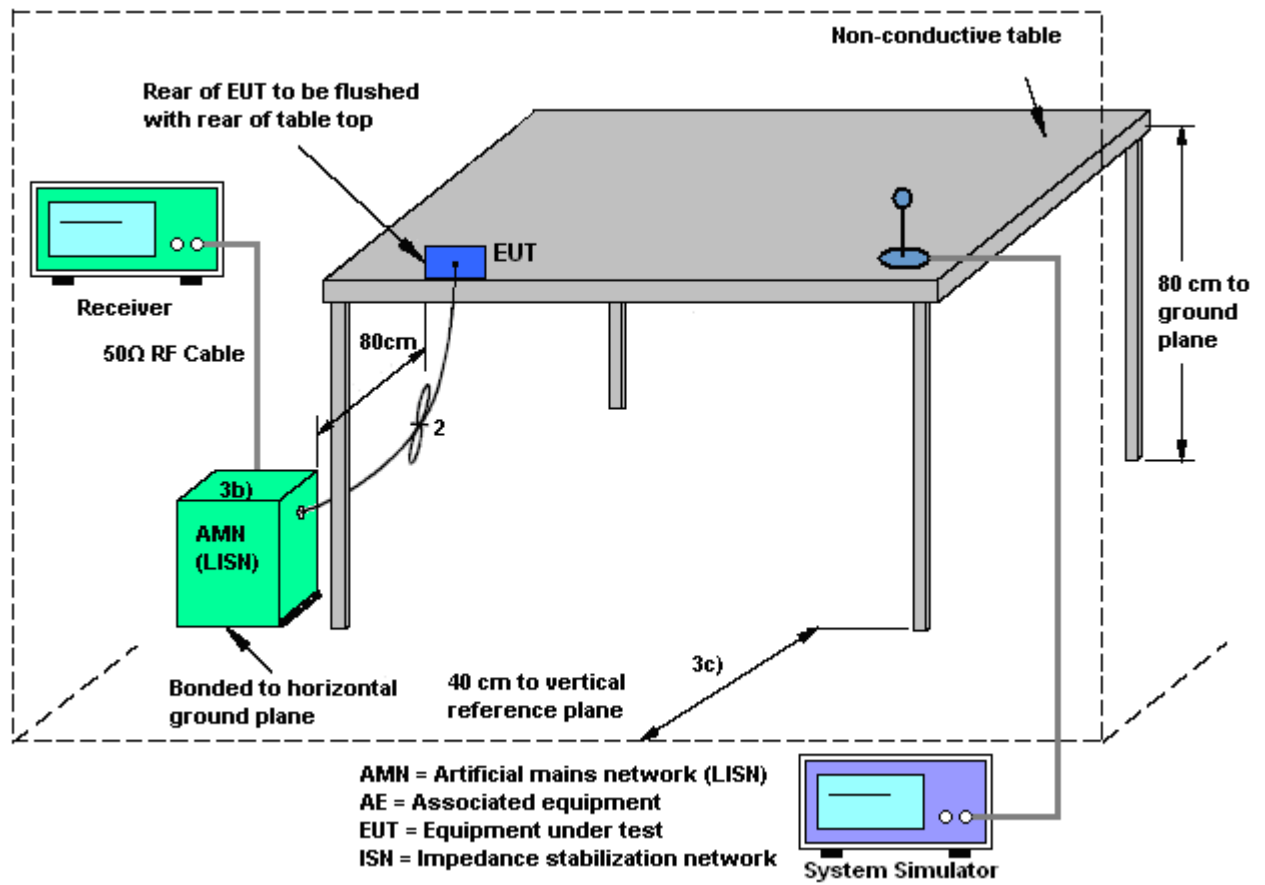


### 3.1.5 Test Result of AC Conducted Emission

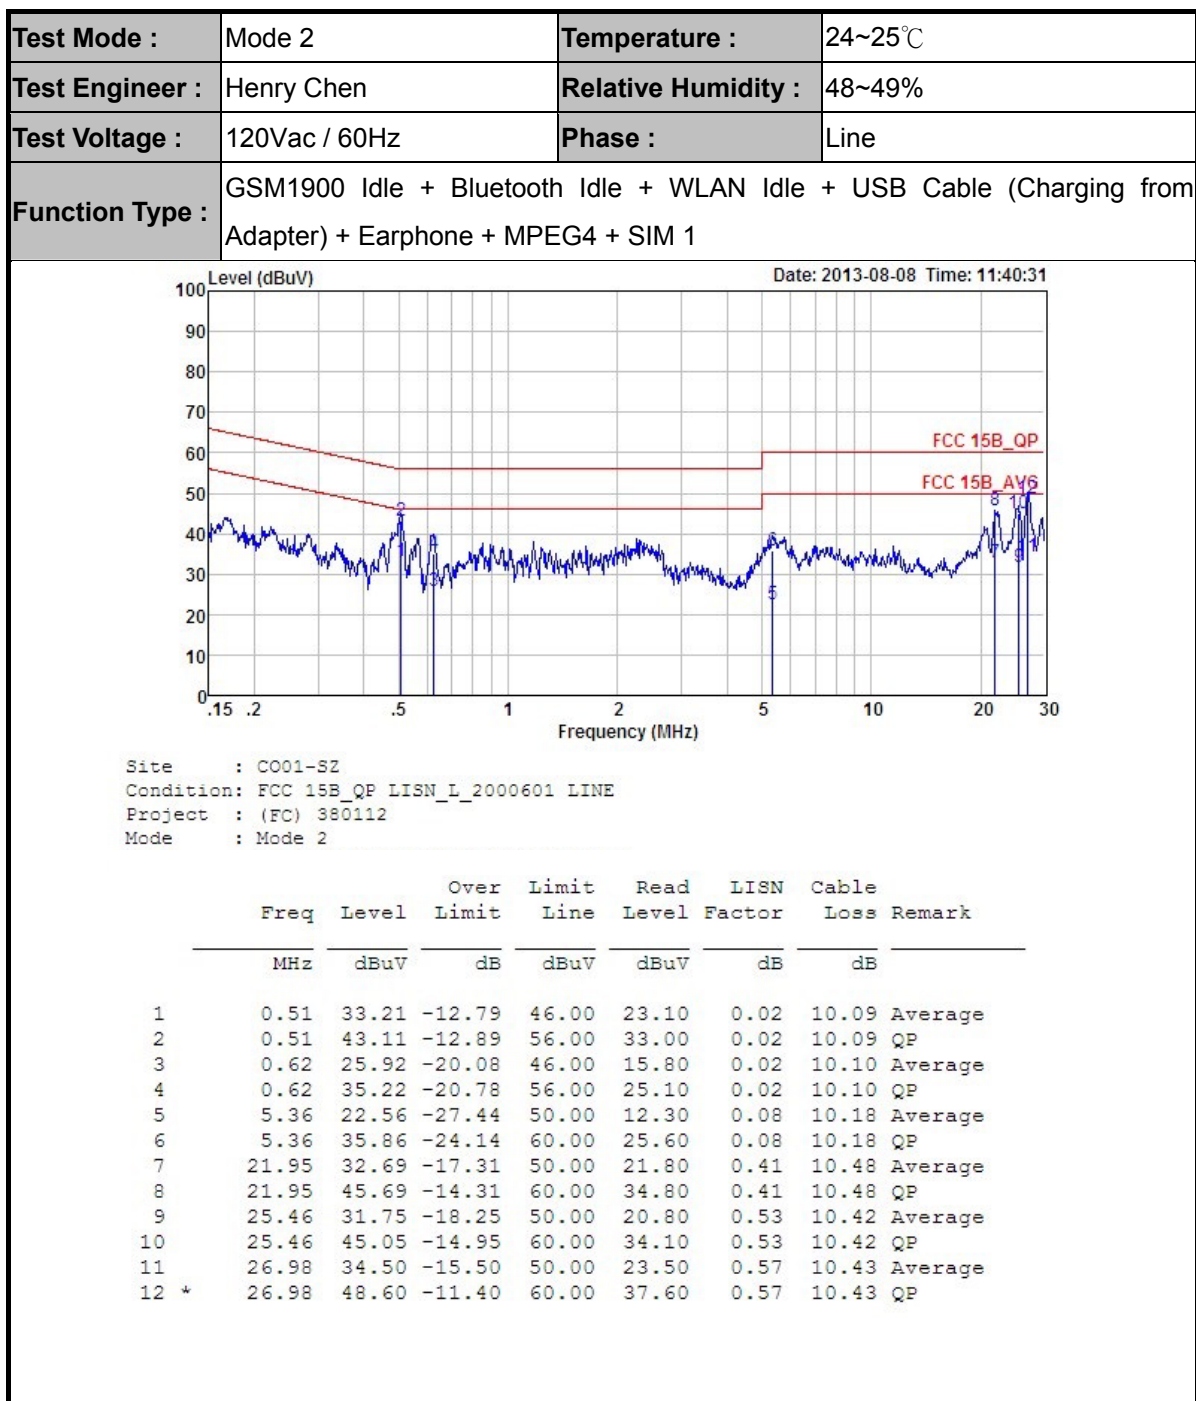




<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	24~25°C
<b>Test Engineer :</b>	Henry Chen	<b>Relative Humidity :</b>	48~49%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4 + SIM 1		

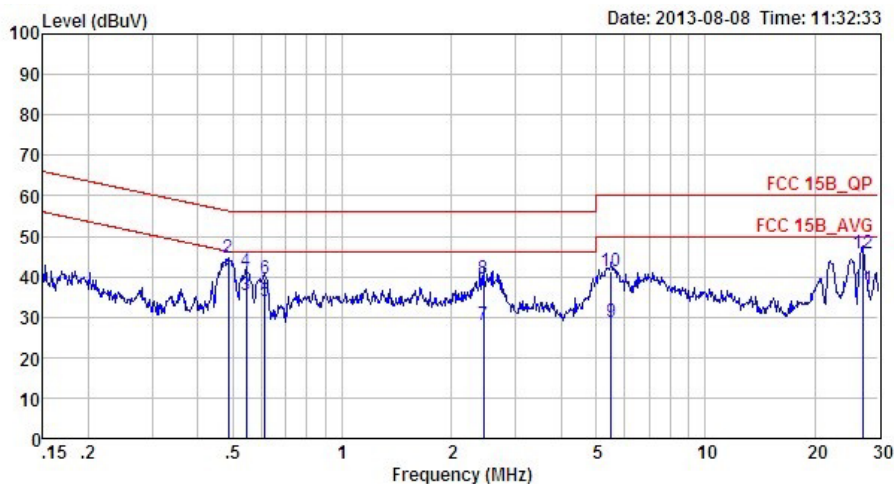

Site : CO01-SZ  
Condition: FCC 15B\_QP LISN\_N\_2000601 NEUTRAL  
Project : (FC) 380112  
Mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.49	39.30	-6.93	46.23	29.20	0.02	10.08	Average
2	0.49	44.50	-11.73	56.23	34.40	0.02	10.08	QP
3	0.54	35.30	-10.70	46.00	25.19	0.02	10.09	Average
4	0.54	41.40	-14.60	56.00	31.29	0.02	10.09	QP
5	0.61	33.81	-12.19	46.00	23.69	0.02	10.10	Average
6	0.61	39.61	-16.39	56.00	29.49	0.02	10.10	QP
7	2.45	28.21	-17.79	46.00	18.00	0.04	10.17	Average
8	2.45	39.41	-16.59	56.00	29.20	0.04	10.17	QP
9	5.51	28.88	-21.12	50.00	18.60	0.09	10.19	Average
10	5.51	41.48	-18.52	60.00	31.20	0.09	10.19	QP
11	27.13	36.83	-13.17	50.00	25.50	0.90	10.43	Average
12	27.13	45.93	-14.07	60.00	34.60	0.90	10.43	QP


<b>Test Mode :</b>	Mode 4	<b>Temperature :</b>	24~25°C
<b>Test Engineer :</b>	Henry Chen	<b>Relative Humidity :</b>	48~49%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Line
<b>Function Type :</b>	WCDMA band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx + SIM 1		

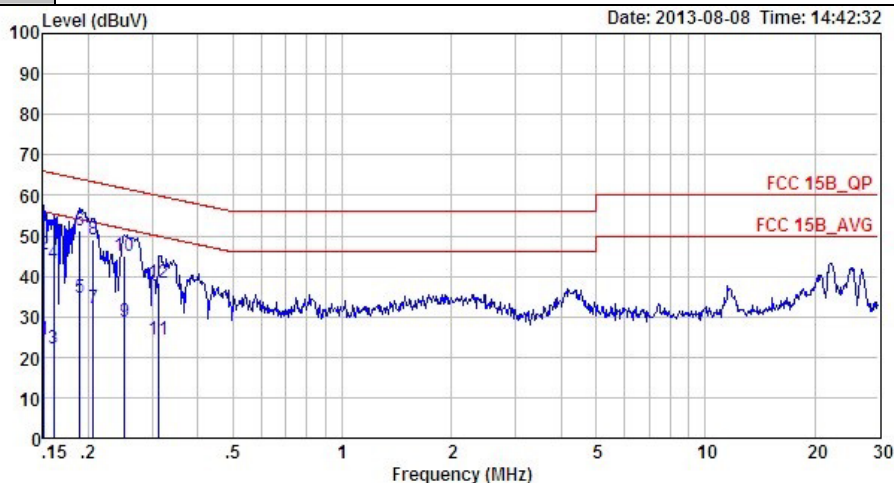

Site : CO01-SZ  
 Condition: FCC 15B\_QP LISN\_L\_2000601 LINE  
 Project : (FC) 380112  
 Mode : Mode 4

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	24.48	-31.48	55.96	14.40	0.03	10.05	Average
2	0.15	45.28	-20.68	65.96	35.20	0.03	10.05	QP
3	0.16	22.08	-33.35	55.43	12.00	0.03	10.05	Average
4	0.16	43.18	-22.25	65.43	33.10	0.03	10.05	QP
5	0.19	34.58	-19.48	54.06	24.50	0.03	10.05	Average
6 *	0.19	51.28	-12.78	64.06	41.20	0.03	10.05	QP
7	0.21	32.18	-21.18	53.36	22.10	0.02	10.06	Average
8	0.21	49.18	-14.18	63.36	39.10	0.02	10.06	QP
9	0.25	28.68	-23.01	51.69	18.60	0.02	10.06	Average
10	0.25	45.08	-16.61	61.69	35.00	0.02	10.06	QP
11	0.31	24.39	-25.49	49.88	14.31	0.02	10.06	Average
12	0.31	38.49	-21.39	59.88	28.41	0.02	10.06	QP

<b>Test Mode :</b>	Mode 4	<b>Temperature :</b>	24~25°C
<b>Test Engineer :</b>	Henry Chen	<b>Relative Humidity :</b>	48~49%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	WCDMA band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx + SIM 1		

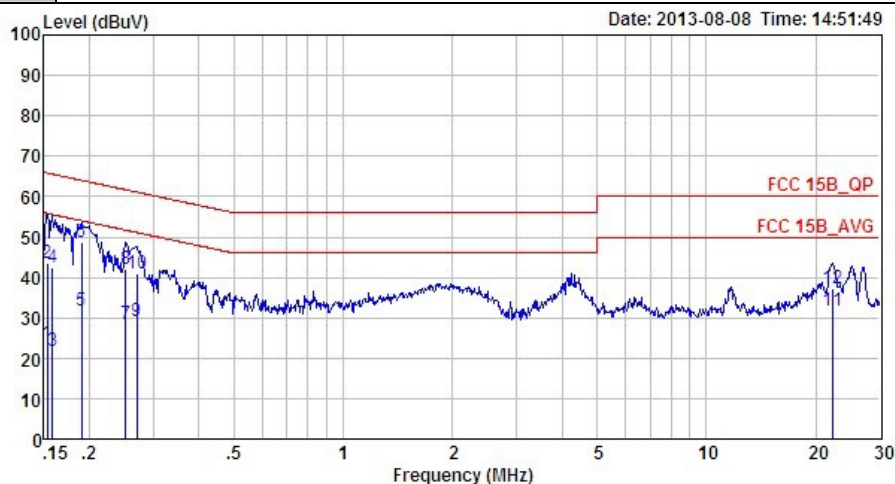

Site : CO01-SZ  
 Condition: FCC 15B\_QP LISN\_N\_2000601 NEUTRAL  
 Project : (FC) 380112  
 Mode : Mode 4

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	23.47	-32.35	55.82	13.40	0.02	10.05	Average
2	0.15	43.67	-22.15	65.82	33.60	0.02	10.05	QP
3	0.16	21.77	-33.79	55.56	11.70	0.02	10.05	Average
4	0.16	42.27	-23.29	65.56	32.20	0.02	10.05	QP
5	0.19	31.77	-22.25	54.02	21.70	0.02	10.05	Average
6 *	0.19	48.57	-15.45	64.02	38.50	0.02	10.05	QP
7	0.25	28.38	-23.31	51.69	18.30	0.02	10.06	Average
8	0.25	42.08	-19.61	61.69	32.00	0.02	10.06	QP
9	0.27	29.18	-21.94	51.12	19.10	0.02	10.06	Average
10	0.27	40.88	-20.24	61.12	30.80	0.02	10.06	QP
11	22.30	31.60	-18.40	50.00	20.51	0.63	10.46	Average
12	22.30	37.30	-22.70	60.00	26.21	0.63	10.46	QP

## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### **3.2.2. Measuring Instruments**


See list of measuring instruments of this test report.

### **3.2.3. Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

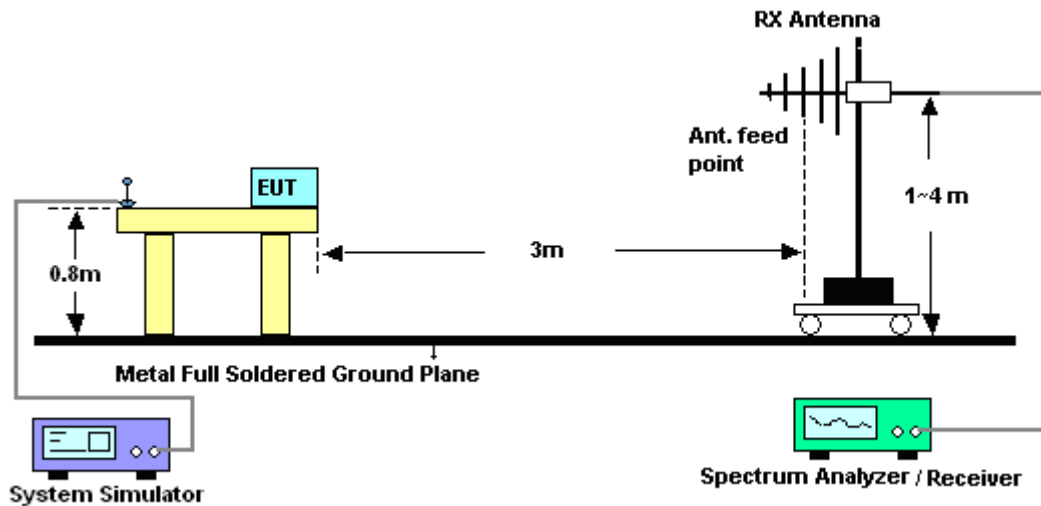


For radiated emissions above 1GHz

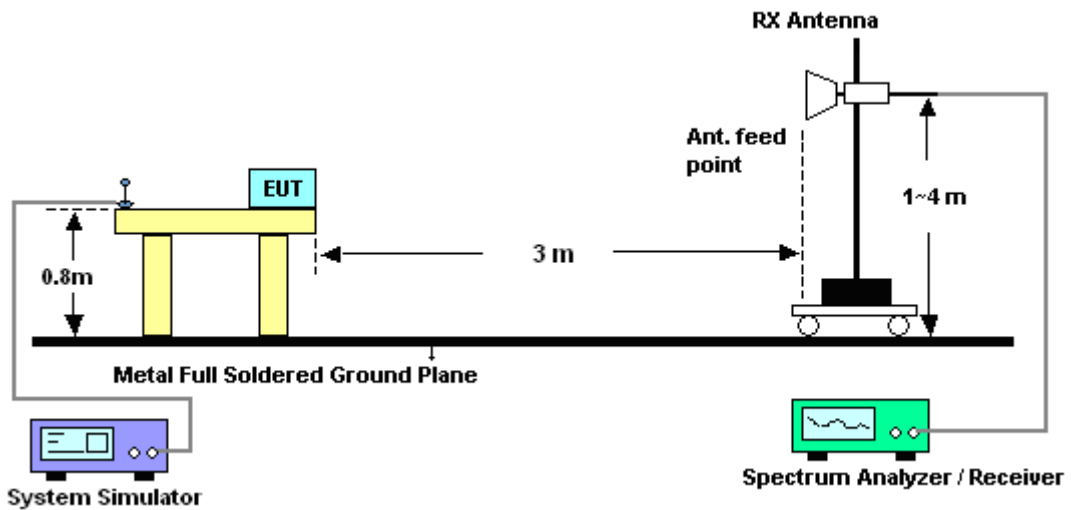

**3.2.5. Test Result of Radiated Emission**

<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Gavin Chen	<b>Relative Humidity :</b>	49~53%
<b>Test Distance :</b>	3m	<b>Polarization :</b>	Horizontal
<b>Function Type :</b>	GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4 + SIM 1		

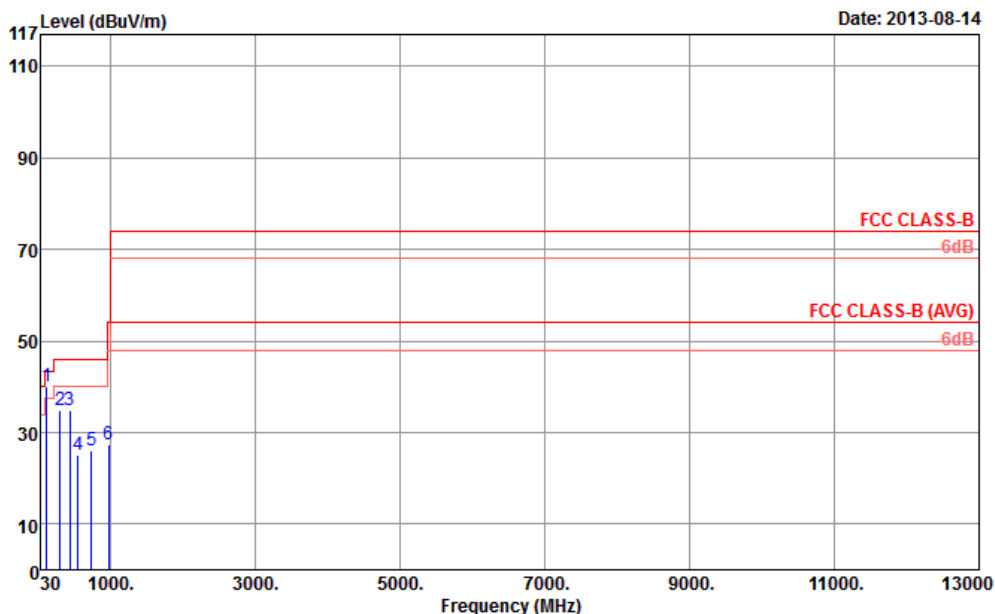


Site : 03CH01-SZ  
 Condition : FCC CLASS-B 3m LF\_ANT\_121103 HORIZONTAL  
 Project : (FC) 380112  
 Mode : Mode 2

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 Q	114.39	40.21	-3.29	43.50	57.40	12.10	1.33	30.62	120	140	QP
2	306.45	34.76	-11.24	46.00	49.64	13.06	2.04	29.98	---	---	Peak
3 P	438.37	34.99	-11.01	46.00	45.29	16.86	2.38	29.54	---	---	Peak
4	555.74	24.96	-21.04	46.00	32.78	18.77	2.67	29.26	---	---	Peak
5	740.04	26.06	-19.94	46.00	31.52	20.50	3.05	29.01	---	---	Peak
6	968.96	27.28	-26.72	54.00	30.73	21.80	3.46	28.71	---	---	Peak



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Gavin Chen	<b>Relative Humidity :</b>	49~53%
<b>Test Distance :</b>	3m	<b>Polarization :</b>	Vertical
<b>Function Type :</b>	GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4 + SIM 1		

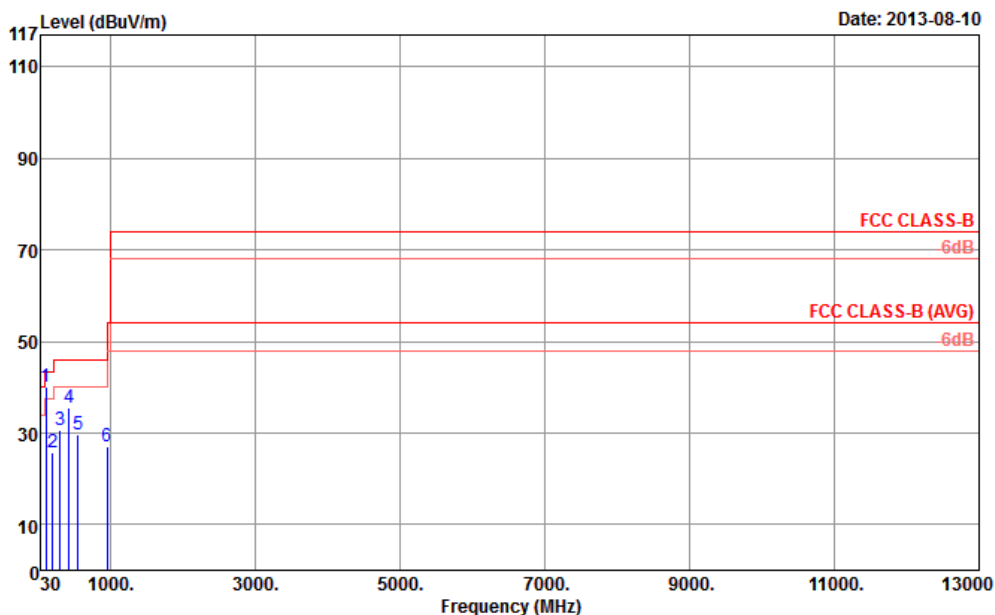


Site : 03CH01-SZ  
 Condition : FCC CLASS-B 3m LF\_ANT\_121103 VERTICAL  
 Project : (FC) 380112  
 Mode : Mode 2

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm deg
1 P	105.66	39.93	-3.57	43.50	57.48	11.80	1.30	30.65	154 214 Peak
2	195.87	25.65	-17.85	43.50	45.12	9.20	1.68	30.35	--- --- Peak
3	306.45	30.57	-15.43	46.00	45.45	13.06	2.04	29.98	--- --- Peak
4	427.70	35.53	-10.47	46.00	46.04	16.70	2.36	29.57	--- --- Peak
5	549.92	29.60	-16.40	46.00	37.35	18.87	2.65	29.27	--- --- Peak
6	949.56	27.12	-18.88	46.00	30.33	22.10	3.42	28.73	--- --- Peak




<b>Test Mode :</b>	Mode 4	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Gavin Chen	<b>Relative Humidity :</b>	49~53%
<b>Test Distance :</b>	3m	<b>Polarization :</b>	Horizontal
<b>Function Type :</b>	WCDMA band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx + SIM 1		

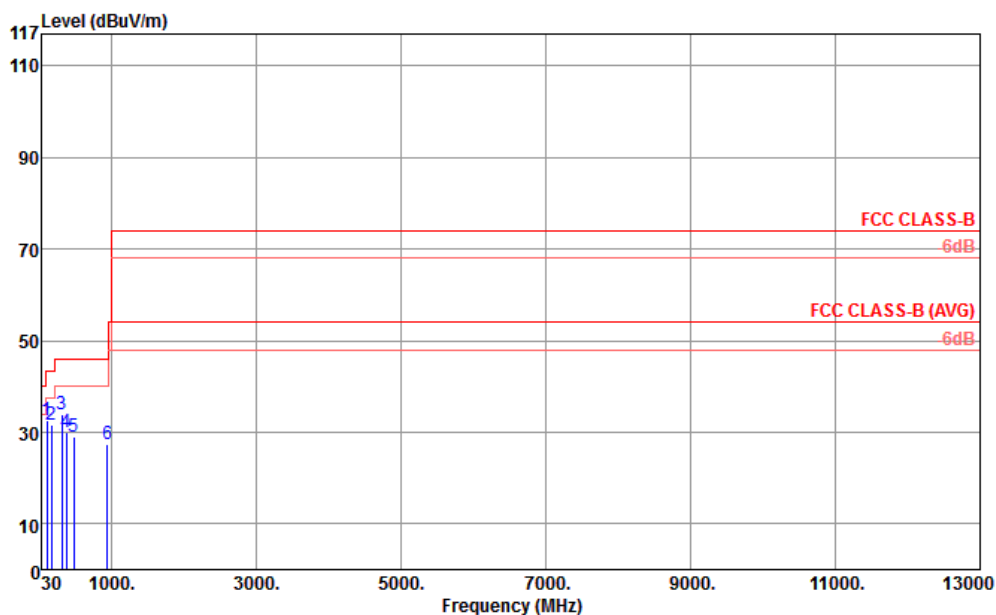

Site : 03CH01-SZ  
 Condition : FCC CLASS-B 3m LF\_ANT\_121103 HORIZONTAL  
 Project : (FC) 380112  
 Mode : Mode 4

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 P	108.57	32.63	-10.87	43.50	49.89	12.07	1.31	30.64	125	254 Peak
2	170.65	31.62	-11.88	43.50	50.68	9.80	1.57	30.43	---	---
3	312.27	34.02	-11.98	46.00	48.61	13.32	2.05	29.96	---	---
4	380.17	30.05	-15.95	46.00	41.54	16.00	2.24	29.73	---	---
5	480.08	29.13	-16.87	46.00	38.85	17.20	2.48	29.40	---	---
6	940.83	27.30	-18.70	46.00	30.50	22.10	3.45	28.75	---	---

<b>Test Mode :</b>	Mode 4	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Gavin Chen	<b>Relative Humidity :</b>	49~53%
<b>Test Distance :</b>	3m	<b>Polarization :</b>	Vertical
<b>Function Type :</b>	WCDMA band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx + SIM 1		

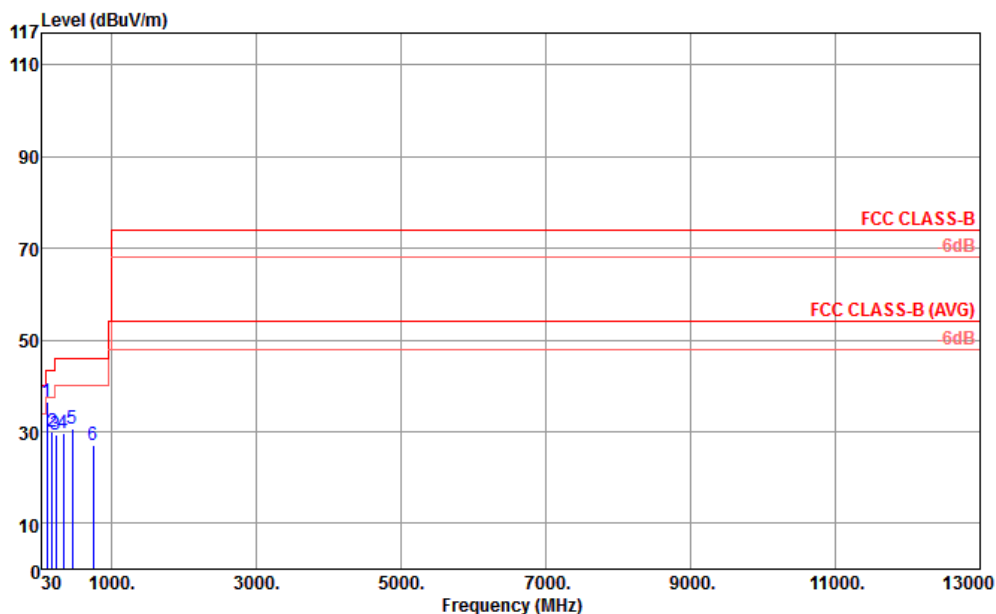

Site : 03CH01-SZ  
 Condition : FCC CLASS-B 3m LF\_ANT\_121103 VERTICAL  
 Project : (FC) 380112  
 Mode : Mode 4

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 P	106.63	36.34	-7.16	43.50	53.75	11.93	1.30	30.64	120	145 Peak	
2	181.32	29.88	-13.62	43.50	49.79	8.87	1.62	30.40	---	---	Peak
3	227.88	29.39	-16.61	46.00	47.64	10.20	1.79	30.24	---	---	Peak
4	332.64	29.62	-16.38	46.00	42.74	14.66	2.11	29.89	---	---	Peak
5	455.83	30.59	-15.41	46.00	40.81	16.84	2.42	29.48	---	---	Peak
6	745.86	26.96	-19.04	46.00	32.22	20.68	3.06	29.00	---	---	Peak

## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC LISN	ETS-LINDGREN	3816/2SH	00103912	0.1MHz~108MHz	Feb. 28, 2011	Aug. 08, 2013	Feb. 27, 2014	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	ETS-LINDGREN	3816/2SH	00103892	0.1MHz~108MHz	Feb. 28, 2011	Aug. 08, 2013	Feb. 27, 2014	Conduction (CO01-SZ)
ESCIO TEST Receiver	R&S	1142.8007.03	100724	9K-3GHz	Mar. 08, 2011	Aug. 08, 2013	Mar. 07, 2014	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891N/A	N/A	Oct. 12, 2011	Aug. 08, 2013	Oct. 11, 2013	Conduction (CO01-SZ)
AC LISN	SCHWARZBECK	NNLK 8121	8121370	10KHz-30MHz	Jun. 13, 2013	Aug. 08, 2013	Jun. 12, 2014	Conduction (CO01-SZ)
ESCI TEST Receiver	R&S	ESCI	100724	9K-3GHz	Mar. 28, 2013	Aug. 10, 2013~ Aug. 14, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSP30	101362	9kHz~30GHz	Oct. 11, 2012	Aug. 10, 2013~ Aug. 14, 2013	Oct. 10, 2013	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 12, 2012	Aug. 10, 2013~ Aug. 14, 2013	Oct. 11, 2013	Radiation (03CH01-SZ)
Bilog Antenna	SCHAFFNER	CBL6112B	2614	30Mhz~2Ghz	Nov. 03, 2012	Aug. 10, 2013~ Aug. 14, 2013	Nov. 02, 2013	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9K-3000MHz GAIN 30db	Mar. 28, 2013	Aug. 10, 2013~ Aug. 14, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	Mar. 28, 2013	Aug. 10, 2013~ Aug. 14, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
Turn Table	EM Electronic	EM 1000	N/A	0 ~ 360 degree	N/A	Aug. 10, 2013~ Aug. 14, 2013	N/A	Radiation (03CH01-SZ)
Antenna Mast	EM electronic	EM 1000	N/A	1 m - 4 m	N/A	Aug. 10, 2013~ Aug. 14, 2013	N/A	Radiation (03CH01-SZ)

## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	2.26
--	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	2.54
--	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	4.72
--	------