RF TEST REPORT

SIEMIC
A Bureau Veritas Group Company

Report No.: 17071343-FCC-R3

Supersede Report No.: N/A

Applicant	BLU Products, Inc.
Product Name	Mobile Phone
Model No.	STUDIO VIEW MEGA
Serial No.	N/A
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013
Test Date	December 20, 2017 to January 07, 2018
Issue Date	March 07, 2018
Test Result	☑ Pass ☐ Fail
Equipment complied with the specification	☑
Equipment did not comply with the specification	☐

Aaron Liang	David Huang	
Test Engineer	Checked By	

This test report may be reproduced in full only

Test result presented in this test report is applicable to the tested sample only

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.

In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

This page has been left blank intentionally.

This page has been left blank intentionally.

CONTENTS

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17071343-FCC-R3	NONE	Original	March 07, 2018

2. Customer information

Applicant Name	BLU Products, Inc.
Applicant Add	10814 NW 33rd St # 100 Doral, FL 33172
Manufacturer	BLU Products, Inc.
Manufacturer Add	10814 NW 33rd St # 100 Doral, FL 33172

3. Test site information

Test Lab A:

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Test Lab B:

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	694825
IC Test Site No.	4842B-1
Test Software	EZ_EMC(ver.Icp-03A1)

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

4. Equipment under Test (EUT) Information

Description of EUT: Mobile Phone

Main Model: STUDIO VIEW MEGA

Serial Model: N/A

Date EUT received: December 20, 2017

Test Date(s):   December 20, 2017 to January 07, 2018

Equipment Category :   DSS

Antenna Gain:
GSM850: -3.8dBi
PCS1900: -2.4dBi
UMTS-FDD Band V: -3.8dBi
UMTS-FDD Band IV: -2.3dBi
UMTS-FDD Band II: -2.7dBi
WIFI: -3.6dBi
Bluetooth/BLE: -3.3dBi
GPS: -3.3dBi

Antenna Type: PIFA antenna

Type of Modulation:
GSM / GPRS: GMSK
EGPRS: GMSK
UMTS-FDD: QPSK
802.11b/g/n: DSSS, OFDM
Bluetooth: GFSK, π /4DQPSK, 8DPSK
BLE: GFSK
GPS:BPSK

RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz UMTS-FDD Band IV TX:1712.4 ~ 1752.6 MHz; RX : 2112.4 ~ 2152.6 MHz WIFI: 802.11b/g/n(20M): 2412-2462 MHz WIFI: 802.11n(40M): 2422-2452 MHz Bluetooth& BLE: 2402-2480 MHz GPS: 1575.42 MHz
Max. Output Power:	4.08dBm
Number of Channels:	GSM 850: 124CH PCS1900: 299CH UMTS-FDD Band V: 102CH UMTS-FDD Band IV: 202CH UMTS-FDD Band II: 277CH WIFI :802.11b/g/n(20M): 11CH WIFI :802.11n(40M): 7CH Bluetooth: 79CH BLE: 40CH GPS:1CH
Port:	USB Port, Earphone Port
Input Power:	Adapter: Model: TPA-46050200UU Input: AC100-240V~50/60Hz,0.3A Output: DC 5V, 2A Battery Model: C876440350P Voltage: 3.8V, 13.3Wh Battery Capacity: 3500mAh
Trade Name :	BLU
FCC ID:	YHLBLUSTVIEWMG

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge& Restricted Band and Radiated Emissions& Restricted Band	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

a. Antenna must be permanently attached to the unit.

b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIF/GPS, the gain is -3.3dBi for Bluetooth/BLE, the gain is -3.6dBi for WIFI, the gain is -3.3dBi for GPS.

A permanently attached PIFA antenna for GSM/PCS/UMTS, the gain is -3.8dBi for GSM850, -2.4dBi for PCS1900, -3.8dBi for UMTS-FDD Band V, -2.7dBi for UMTS-FDD Band II, -2.3dBi for UMTS-FDD Band IV.
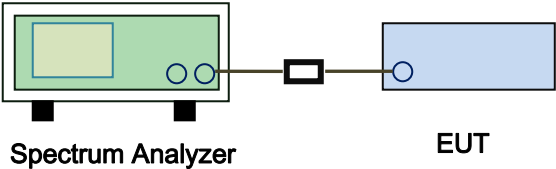
The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	24℃
Relative Humidity	54%
Atmospheric Pressure	1020mbar
Test date :	December 29, 2017
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	☑
Test Setup		 Spectrum Analyzer　　　　　EUT	
Test Procedure		The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span - Video (or Average) Bandwidth (VBW) ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.	

| Remark	
Result	☑Pass　　☐Fail

Test Data　☑Yes　　☐N/A

Test Plot　☑Yes (See below)　　☐N/A

Channel Separation measurement result

| Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.002	0.965	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.958	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.681	Pass
	Adjacency Channel	2479			
CH Separation π /4 DQPSK	Low Channel	2402	1.005	0.878	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.875	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.860	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.005	0.856	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.856	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.863	Pass
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result
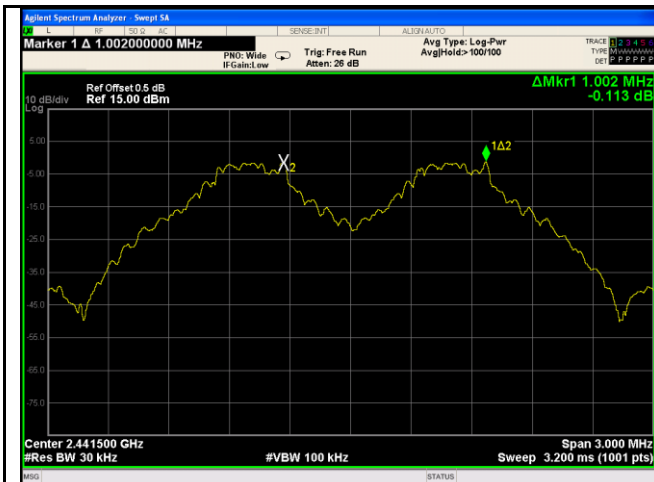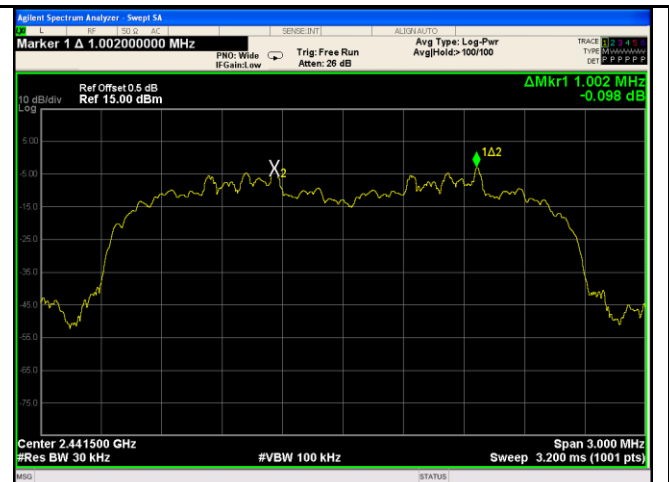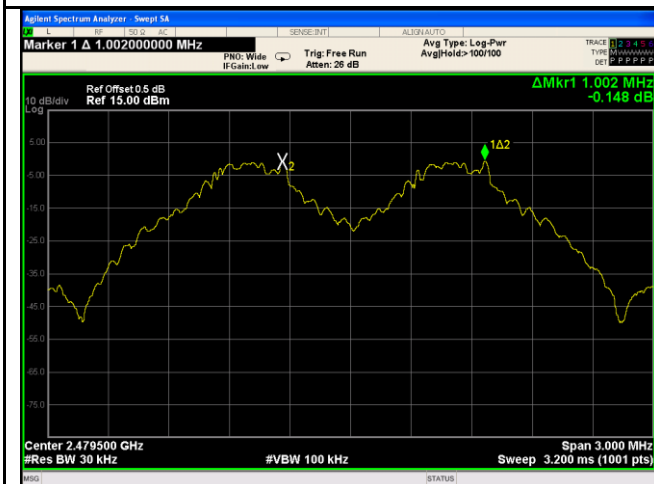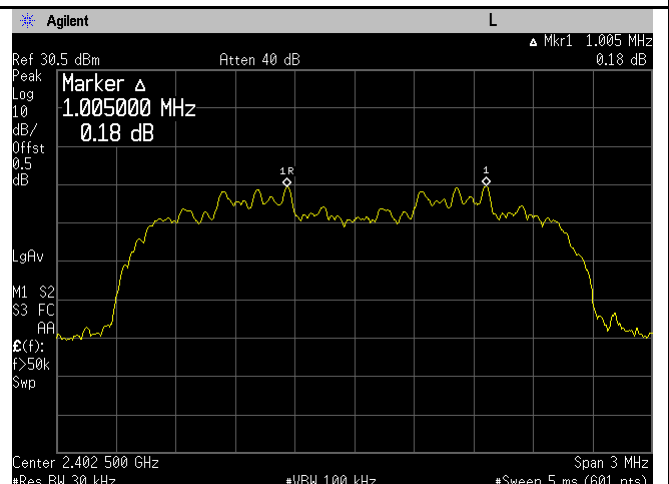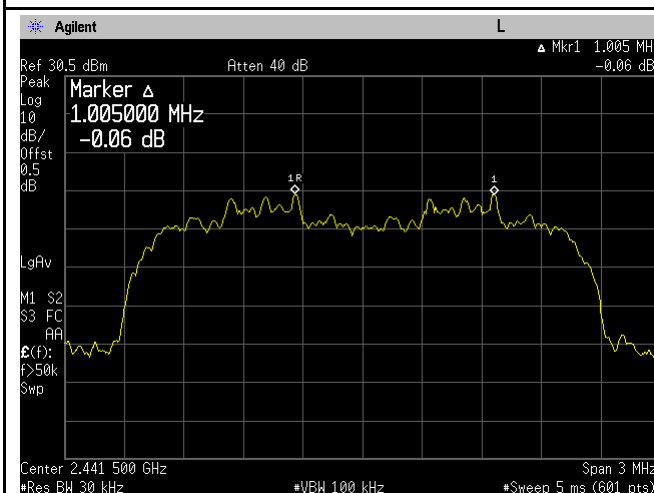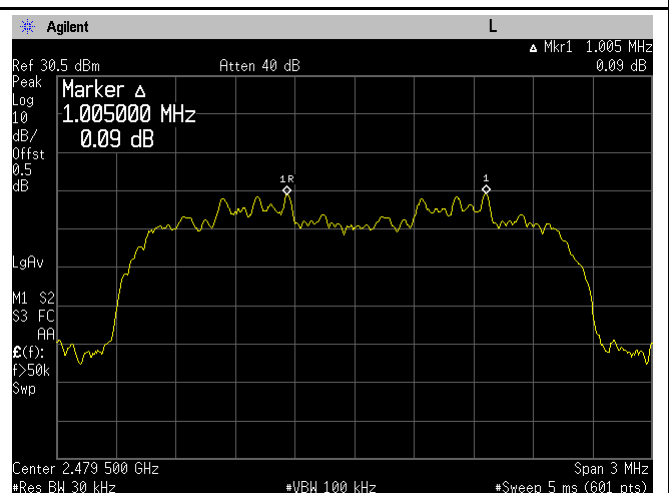

GFSK - Low Channel

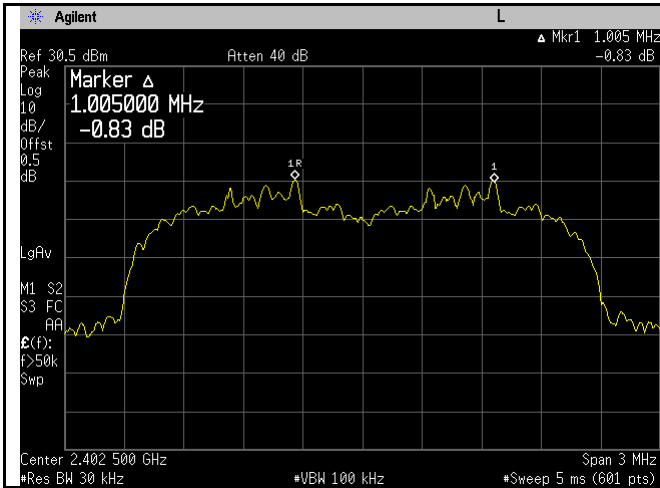GFSK - Middle Channel
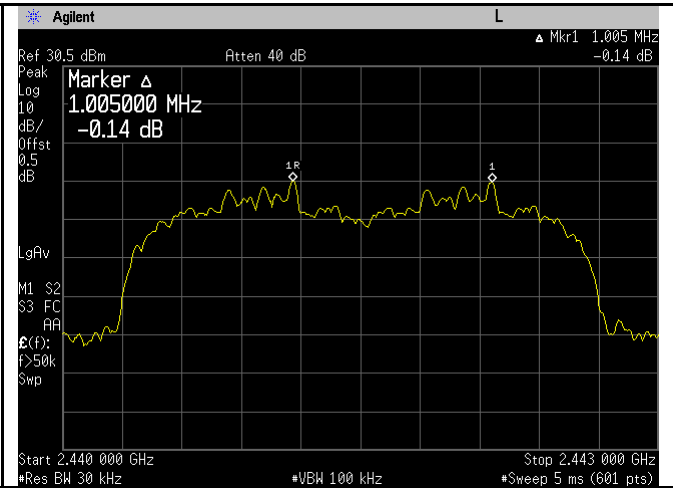

GFSK - High Channel
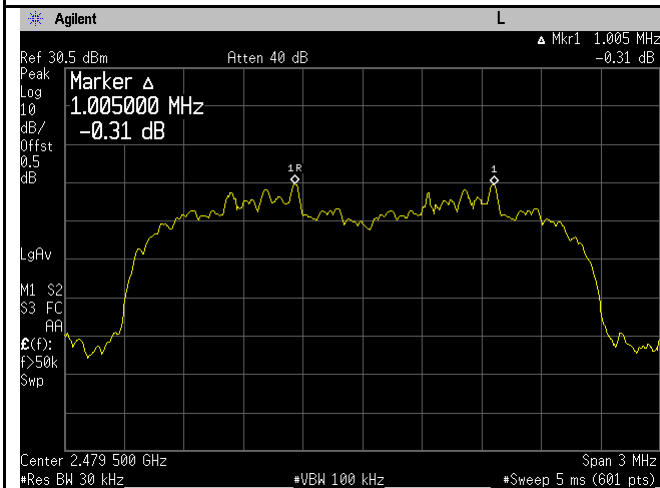

π /4 DPSK - Low Channel

π /4 DQPSK - Middle Channel

π /4 DQPSK - High Channel

8DPSK - Low Channel

8DPSK - Middle Channel

8DPSK - High Channel
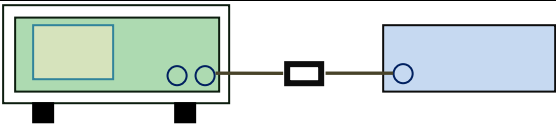
6.3 20dB Bandwidth

Temperature	24℃
Relative Humidity	54%
Atmospheric Pressure	1020mbar
Test date :	December 29, 2017
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	☑
Test Setup		Spectrum Analyzer EUT	
Test Procedure		The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW ≥ 1% of the 20 dB bandwidth - VBW ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference	

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	☑ Pass ☐ Fail

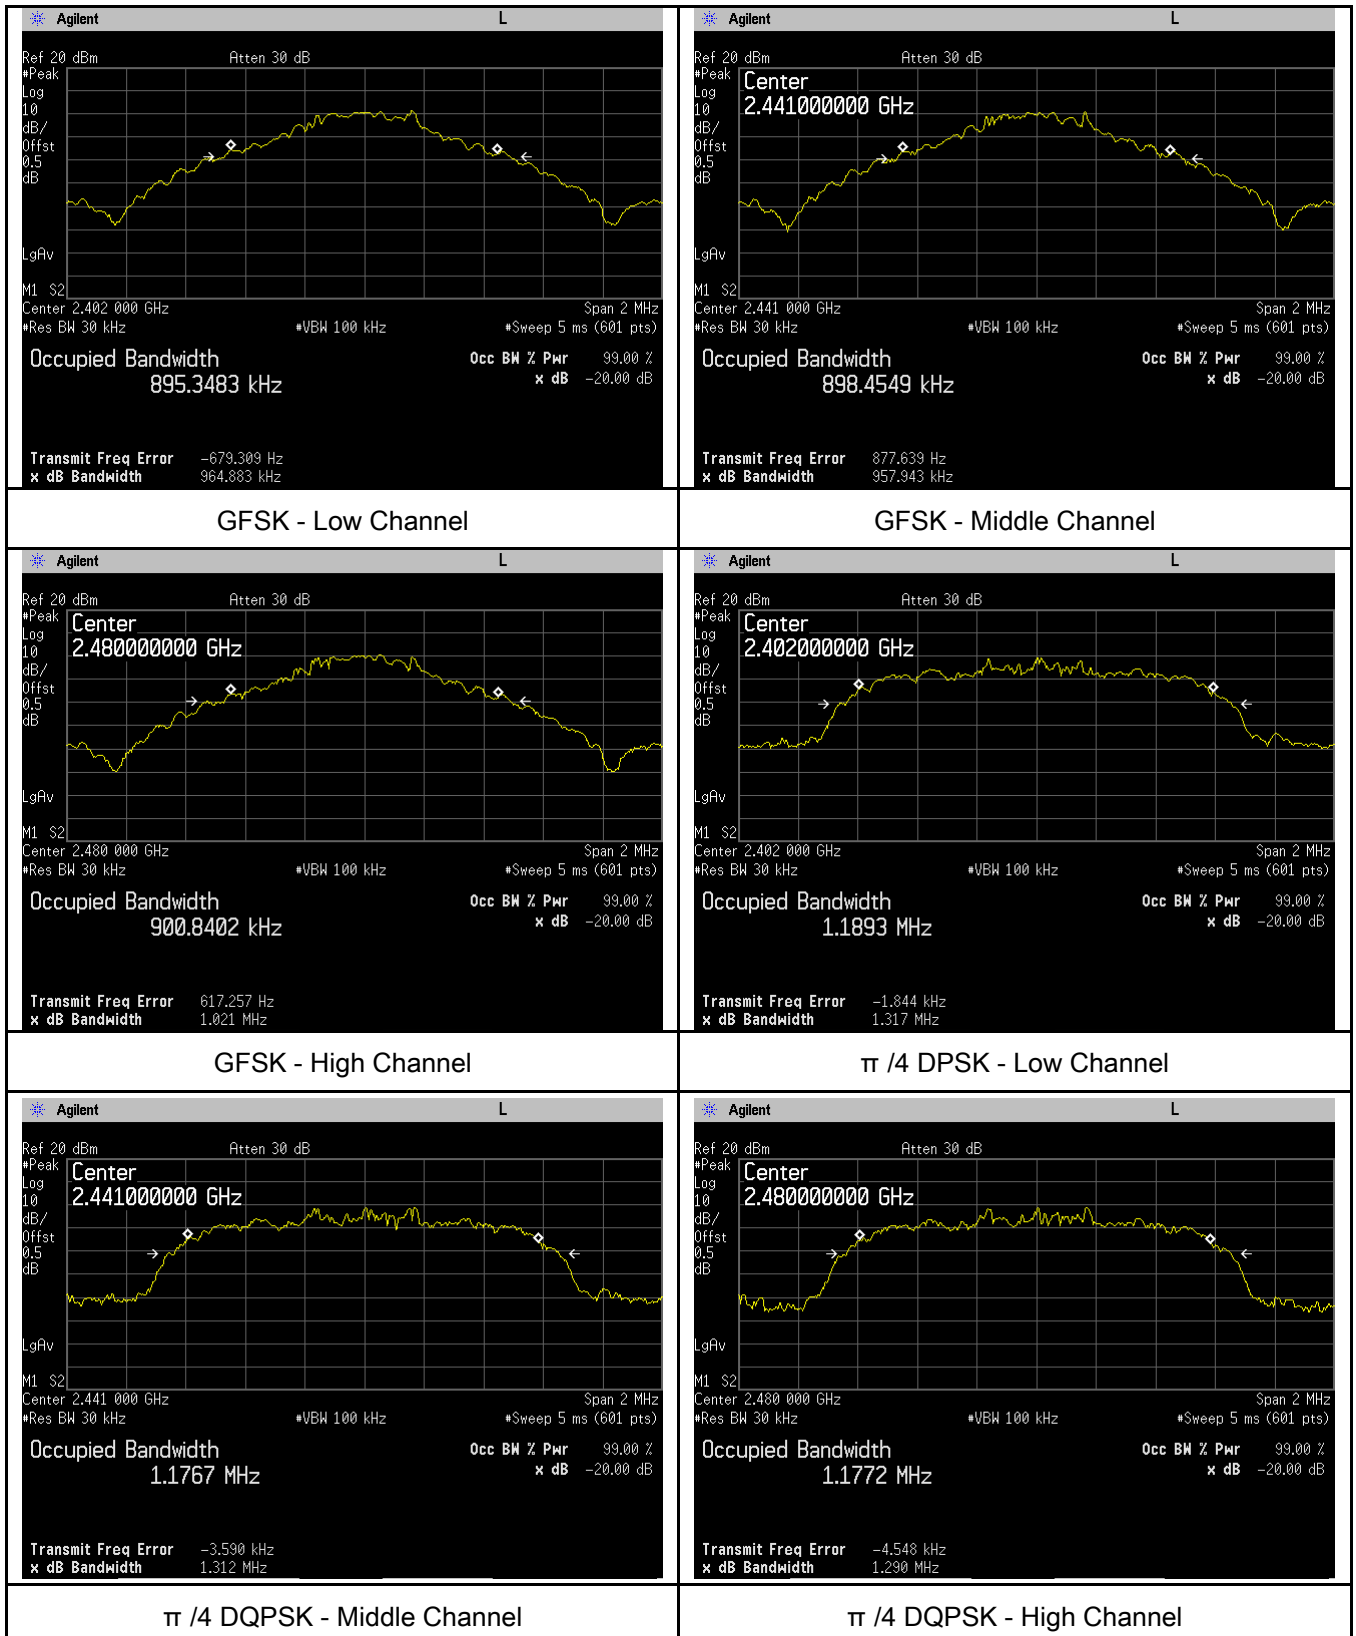Test Data   ☑ Yes   ☐ N/A

Test Plot   ☑ Yes (See below)   ☐ N/A

Measurement result

Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	0.965	0.895
GFSK	Mid	2441	0.958	0.898
GFSK	High	2480	1.021	0.901
π /4 DQPSK	Low	2402	1.317	1.1893
π /4 DQPSK	Mid	2441	1.312	1.1767
π /4 DQPSK	High	2480	1.290	1.1772
8-DPSK	Low	2402	1.284	1.1897
8-DPSK	Mid	2441	1.284	1.1870
8-DPSK	High	2480	1.294	1.1745

Test Plots

20dB Bandwidth measurement result

GFSK - Low Channel

GFSK - Middle Channel

GFSK - High Channel

π /4 DPSK - Low Channel

π /4 DQPSK - Middle Channel

π /4 DQPSK - High Channel
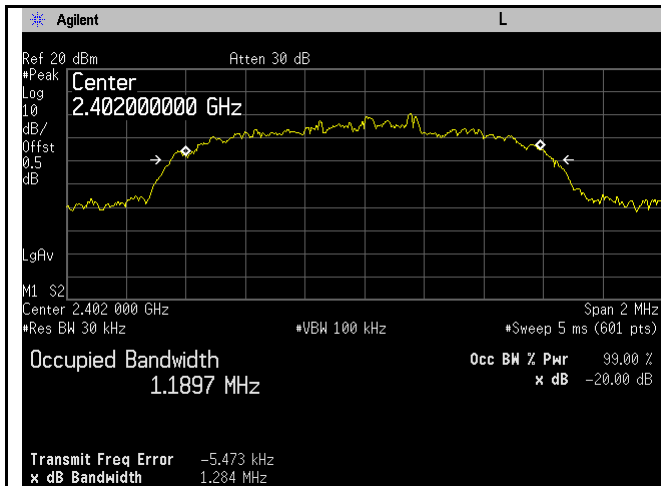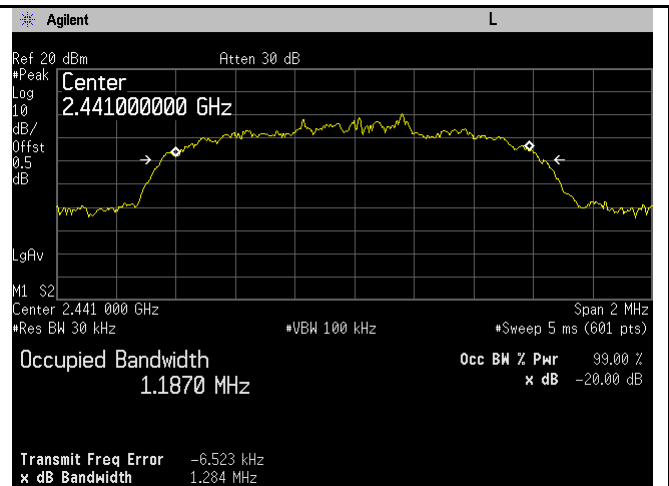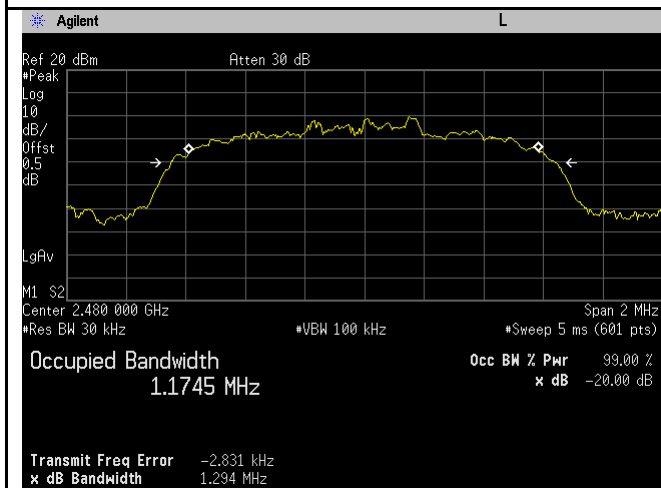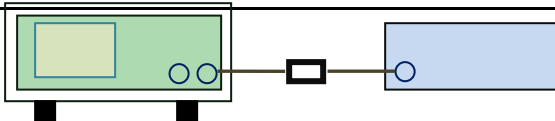
8DPSK - Low Channel	8DPSK - Middle Channel
8DPSK - High Channel	

6.4 Peak Output Power

Temperature	24℃
Relative Humidity	54%
Atmospheric Pressure	1020mbar
Test date :	December 29, 2017
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	☑
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	☐
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	☑
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	☐
	e)	FHSS in 902-928MHz with ≥ 25 & <50 channels: ≤ 0.25 Watt	☐
	f)	DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt	☐
Test Setup		Spectrum Analyzer EUT	
Test Procedure		The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize.	

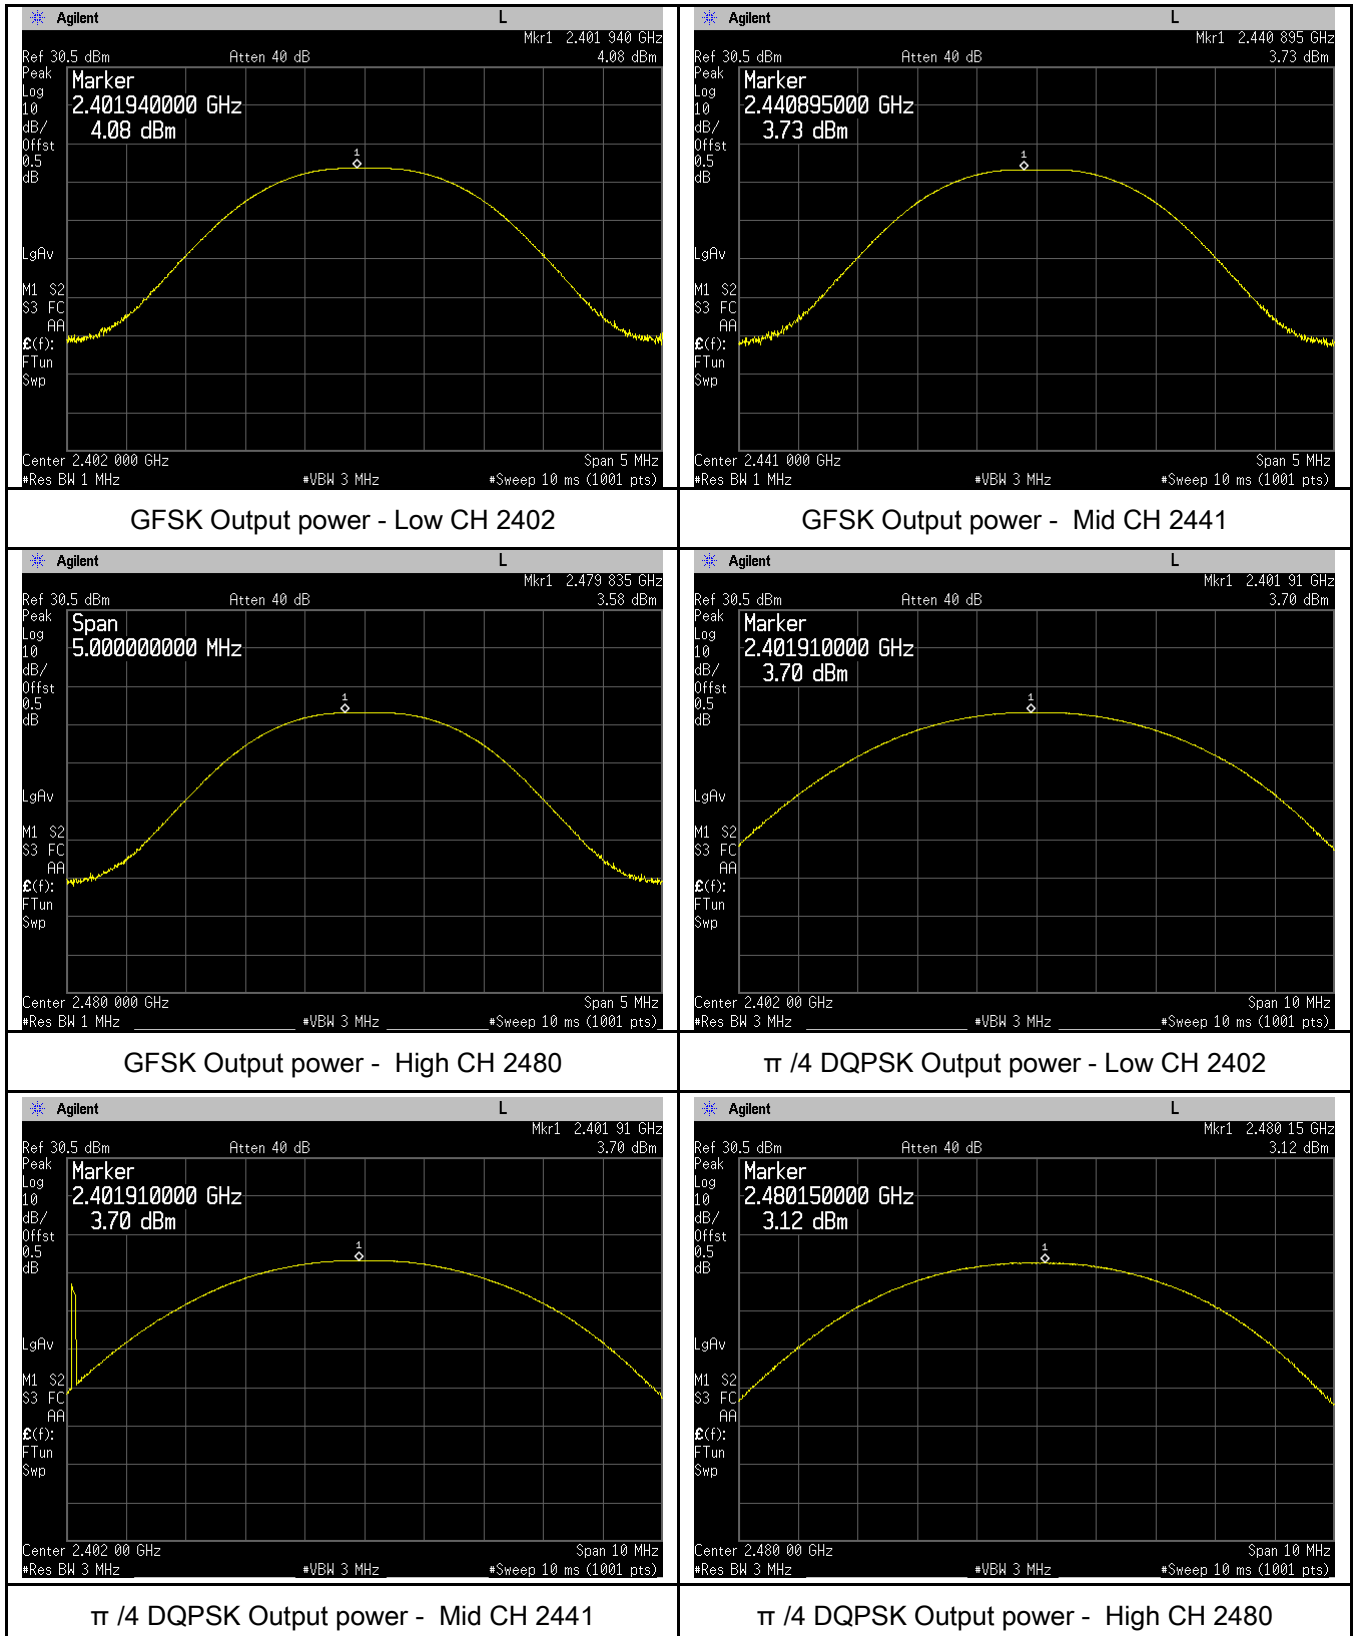|	- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	☑ Pass ☐ Fail

Test Data   ☑ Yes   ☐ N/A

Test Plot   ☑ Yes (See below)   ☐ N/A

Peak Output Power measurement result

Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	4.08	1000	Pass
		Mid	2441	3.73	1000	Pass
		High	2480	3.58	125	Pass
	π /4 DQPSK	Low	2402	3.70	125	Pass
		Mid	2441	3.70	125	Pass
		High	2480	3.12	125	Pass
	8-DPSK	Low	2402	3.73	125	Pass
		Mid	2441	3.38	125	Pass
		High	2480	3.22	125	Pass

Test Plots

Output Power measurement result

GFSK Output power - Low CH 2402

GFSK Output power - Mid CH 2441

GFSK Output power - High CH 2480

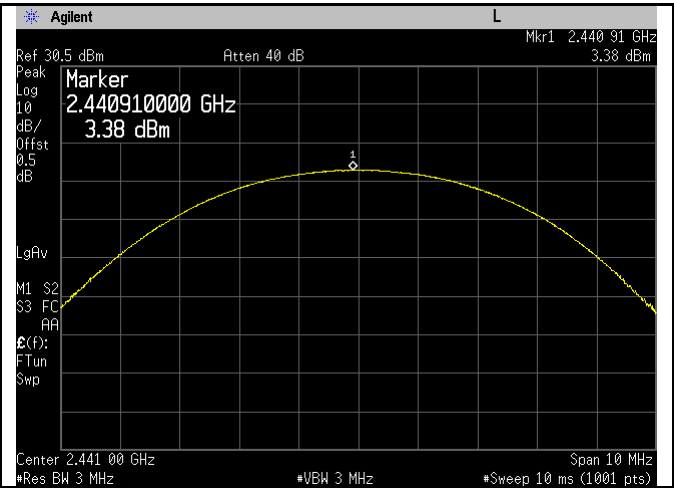π /4 DQPSK Output power - Low CH 2402

π /4 DQPSK Output power - Mid CH 2441

π /4 DQPSK Output power - High CH 2480
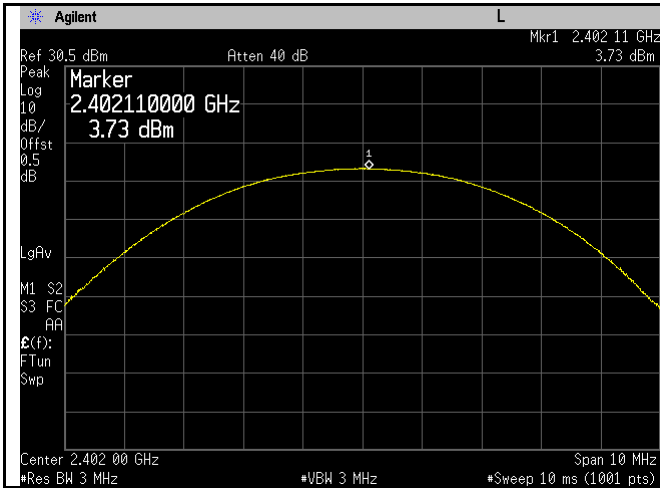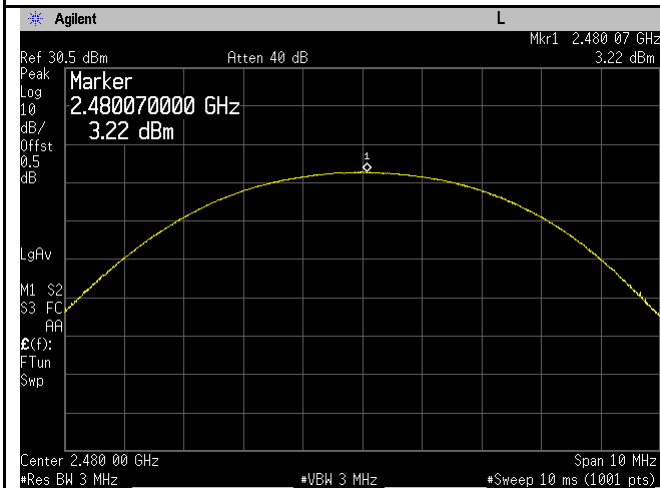
8DPSK Output power - Low CH 2402

8DPSK Output power - Mid CH 2441
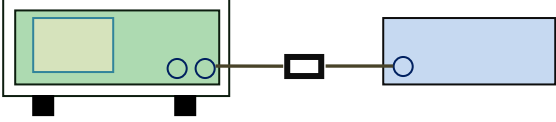
8DPSK Output power - High CH 2480

6.5 Number of Hopping Channel

Temperature	24℃
Relative Humidity	54%
Atmospheric Pressure	1020mbar
Test date :	December 29, 2017
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a)(1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	☑
Test Setup		Spectrum Analyzer EUT	
Test Procedure		The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: The EUT must have its hopping function enabled. - Span = the frequency band of operation - RBW ≥ 1% of the span - VBW ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).	
Remark			
Result	☑ Pass ☐ Fail		

Test Data ☑ Yes   ☐ N/A

Test Plot ☑ Yes (See below)   ☐ N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	π /4 DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots
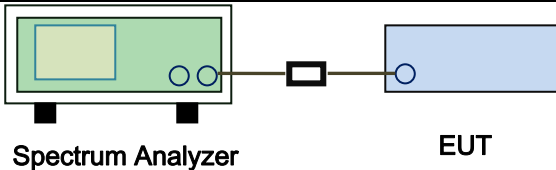
Number of Hopping Channels measurement result

GFSK

π /4DQPSK

8DPSK
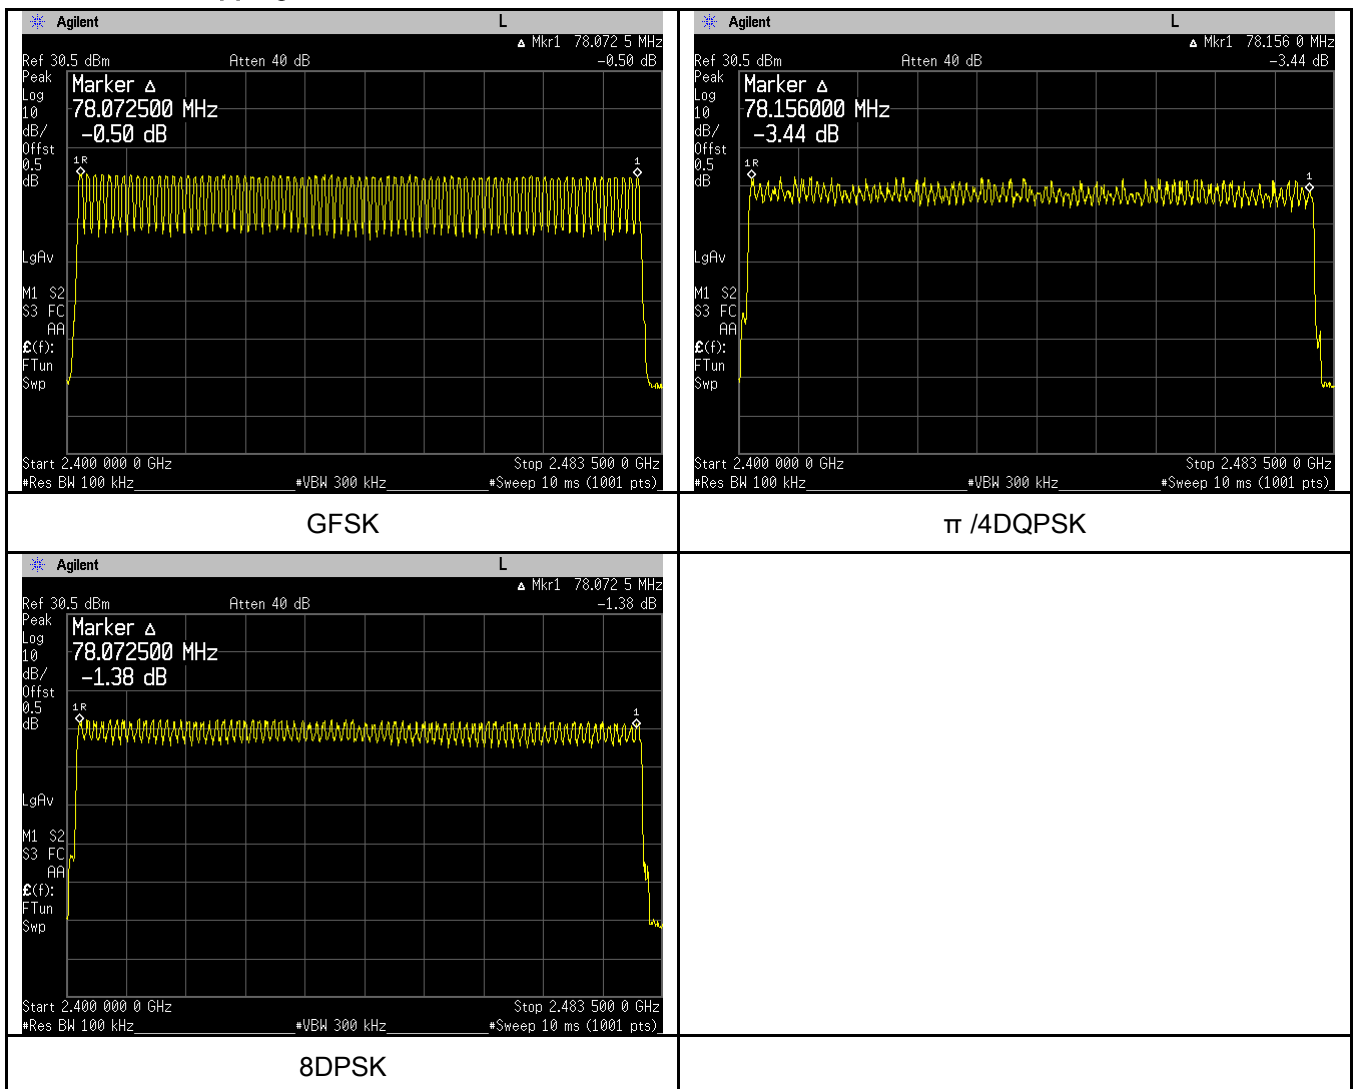
6.6 Time of Occupancy (Dwell Time)

Temperature	24℃
Relative Humidity	54%
Atmospheric Pressure	1020mbar
Test date :	December 29, 2017
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a)(1)(iii)	a)	Dwell Time < 0.4s	☑
Test Setup		Spectrum Analyzer EUT	
Test Procedure		The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time	
Remark			
Result	☑ Pass ☐ Fail		

Test Data   ☑ Yes   ☐ N/A

Test Plot   ☑ Yes (See below)   ☐ N/A

Dwell Time measurement result

Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.91	310.400	400	Pass
		Mid	2.91	310.400	400	Pass
		High	2.92	311.467	400	Pass
	π /4 DQPSK	Low	2.92	311.467	400	Pass
		Mid	2.91	310.400	400	Pass
		High	2.92	311.467	400	Pass
	8-DPSK	Low	2.92	311.467	400	Pass
		Mid	2.91	310.400	400	Pass
		High	2.91	310.400	400	Pass
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6						

Test Plots

Dwell Time measurement result

GFSK - Low CH 2402

GFSK - Mid CH 2441

GFDK - High CH 2480

π /4 DQPSK - Low CH 2402

π /4 DQPSK - Mid CH 2441

π /4 DQPSK - High CH 2480
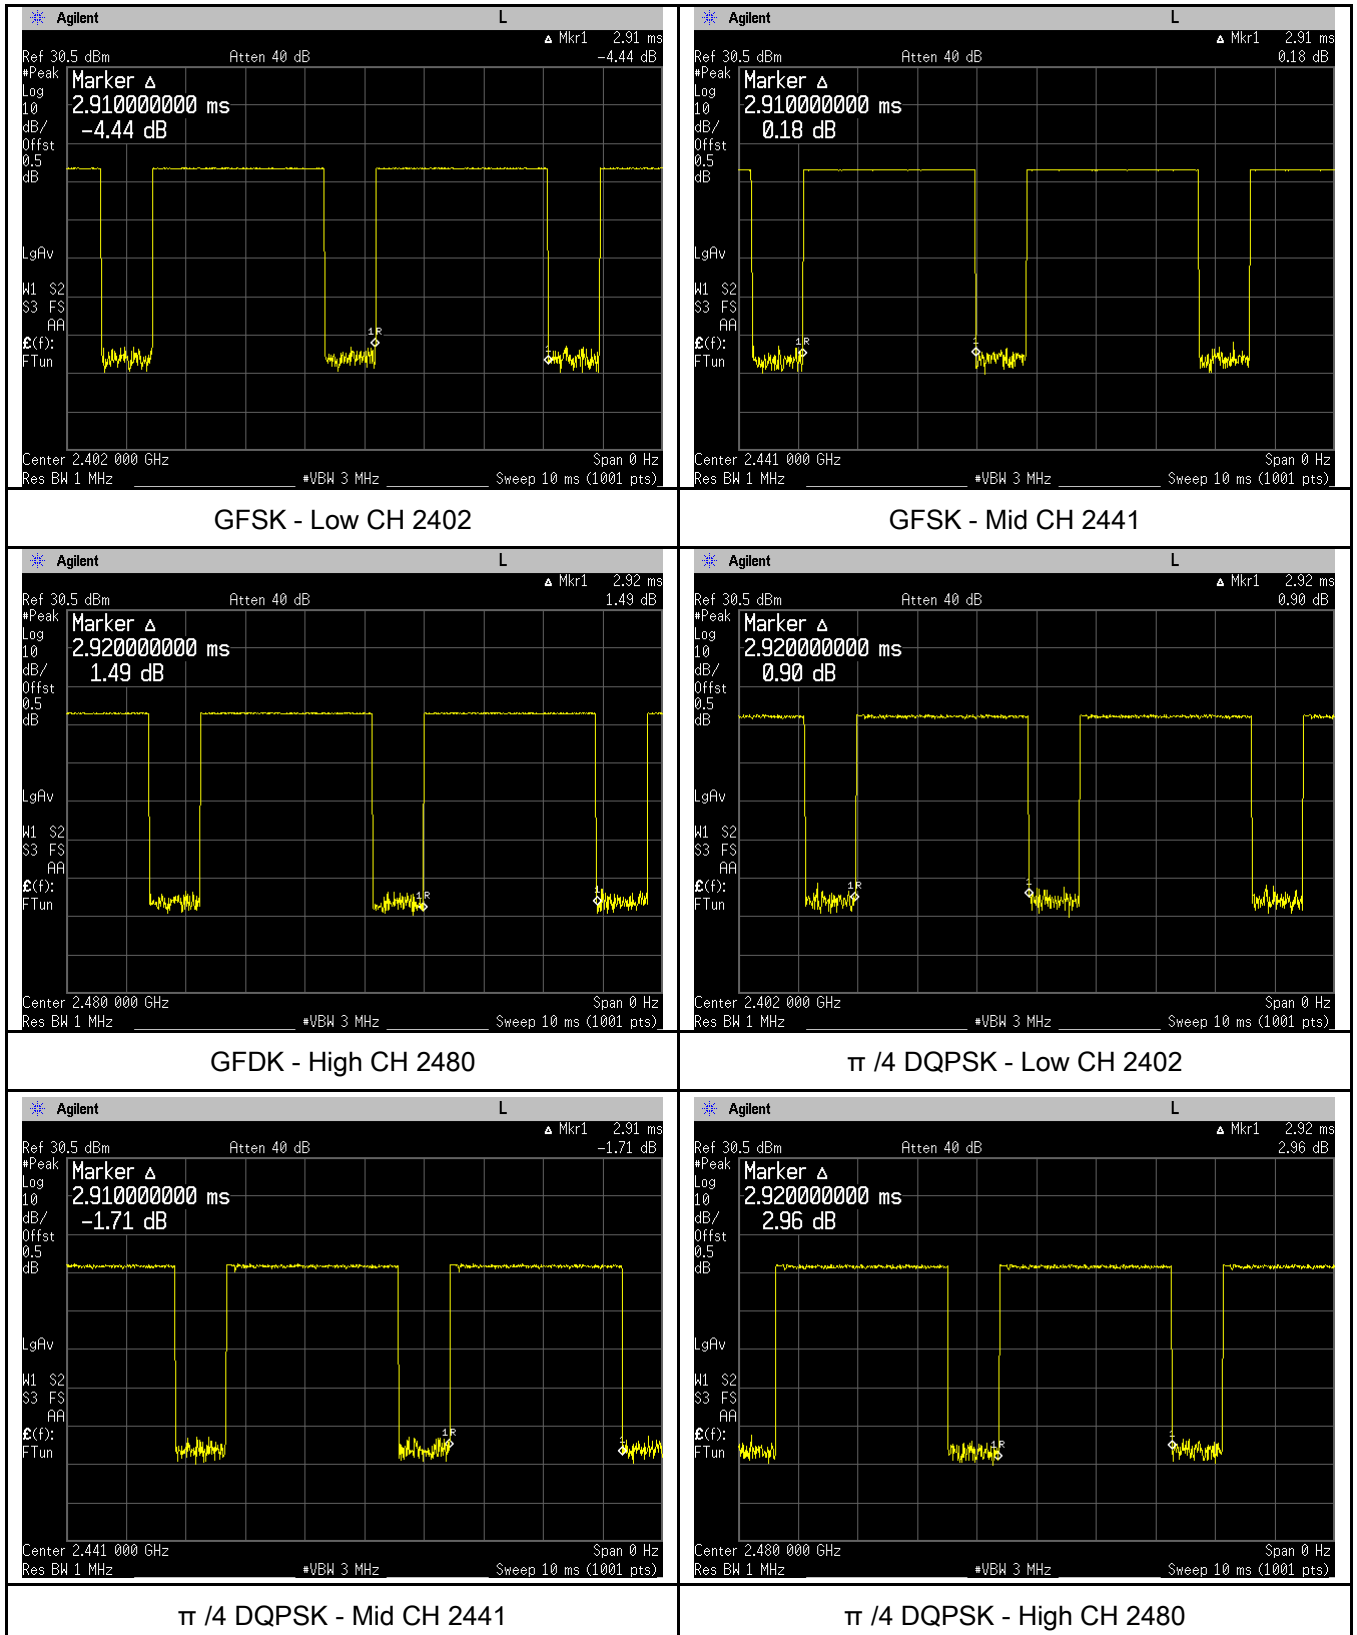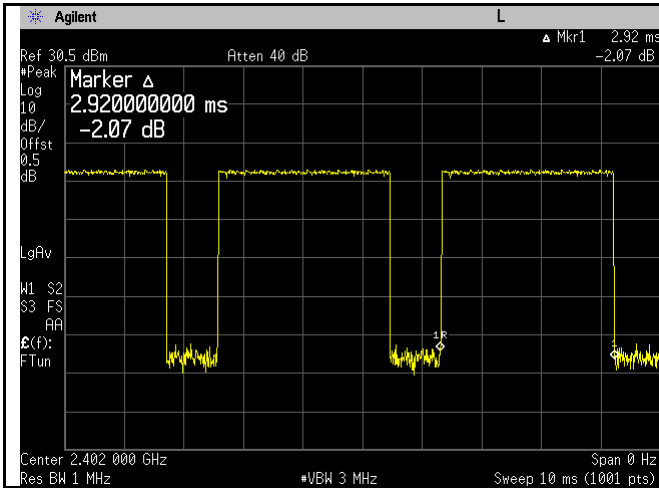
8DPSK - Low CH 2402
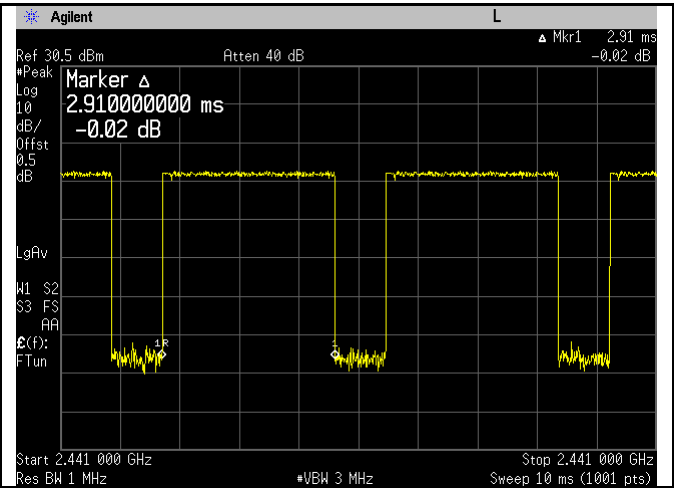
8DPSK - Mid CH 2441
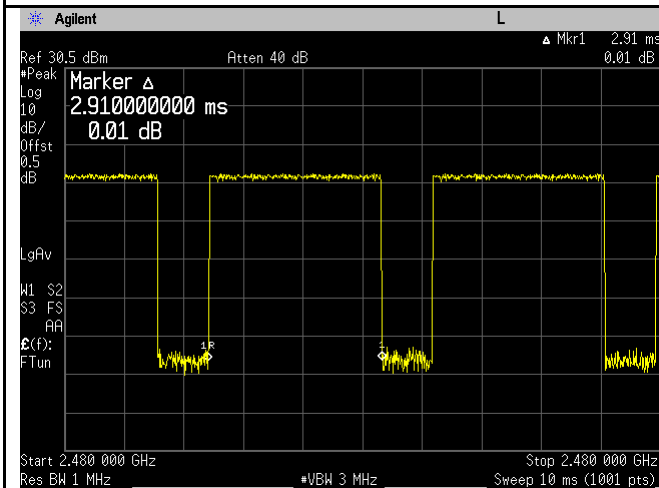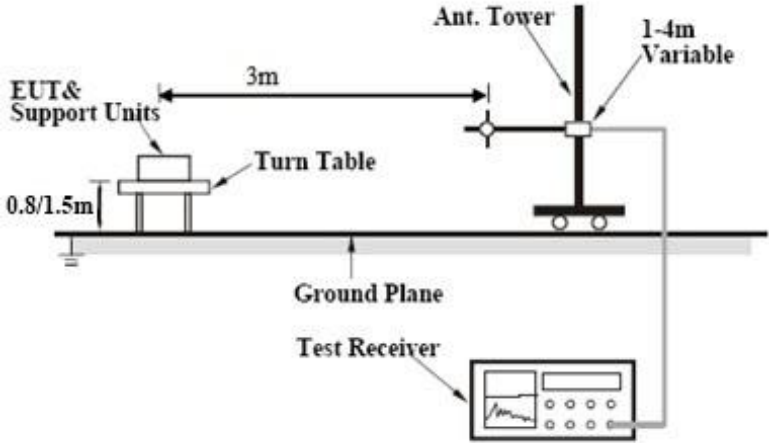
8DPSK - High CH 2480

6.7 Band Edge & Restricted Band

Temperature	26℃
Relative Humidity	56%
Atmospheric Pressure	1022mbar
Test date :	December 26, 2017
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a)(1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	☑
Test Setup			
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,		

- and make sure the instrument is operated in its linear range.
- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:

  a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.

  b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.

  c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

Remark	
Result	☑ Pass ☐ Fail

Test Data ☐ Yes ☑ N/A

Test Plot ☑ Yes (See below) ☐ N/A

Test Plots

GFSK Mode:
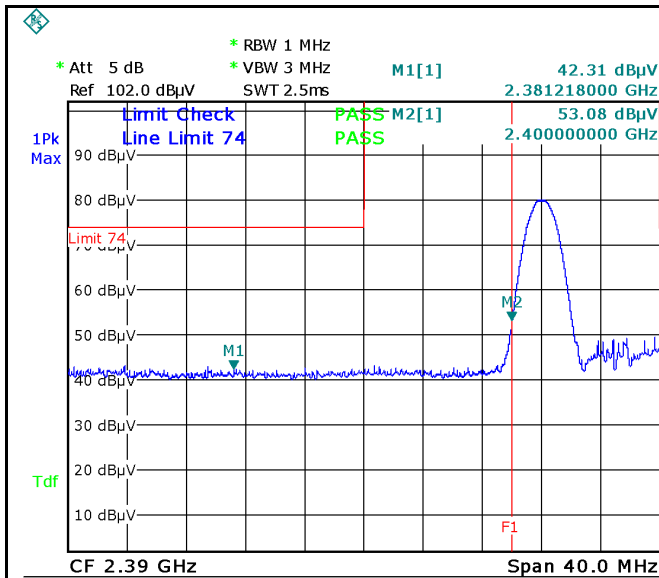
GFSK-Hopping Left Side-PK	GFSK-Hopping Right Side-PK
Note: F1 is frequency 2400MHz	Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)	Note: (no need if PK value less than the AV limit)
GFSK-Hopping Left Side-AV	GFSK-Hopping Right Side-AV

Note: Both Horizontal and vertical polarities were investigated.

GFSK-Left Side-PK	GFSK-Right Side-PK
Note: F1 is frequency 2400MHz	Note: F1 is frequency 2483.5MHz
Note: (no need if PK value less than the AV limit)	Note: (no need if PK value less than the AV limit)
GFSK-Left Side-AV	GFSK-Right Side-AV

Note: Both Horizontal and vertical polarities were investigated.

π /4 DQPSK Mode:

π /4 DQPSK-Hopping Left Side-PK	π /4 DQPSK-Hopping Right Side-PK
Note: F1 is frequency 2400MHz	Note: F1 is frequency 2483.5MHz
Note: (no need if PK value less than the AV limit)	Note: (no need if PK value less than the AV limit)
π /4 DQPSK-Hopping Left-AV	π /4 DQPSK-Hopping Right-AV

Note: Both Horizontal and vertical polarities were investigated.
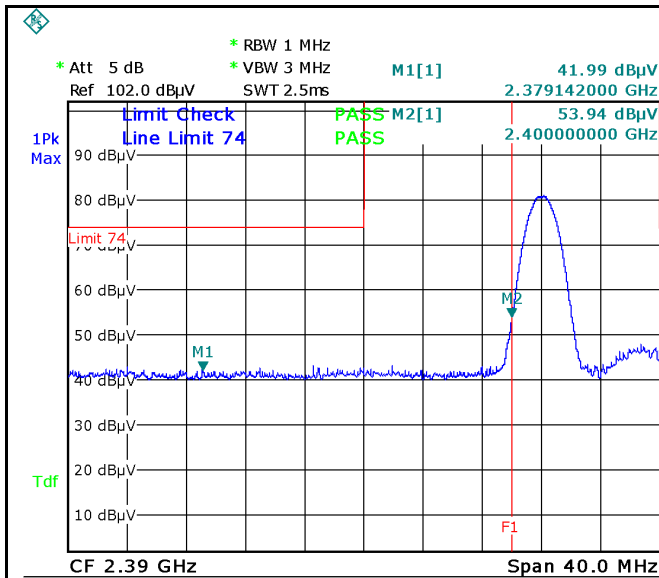
π /4 DQPSK-Left Side-PK

Note: F1 is frequency 2400MHz

π /4 DQPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

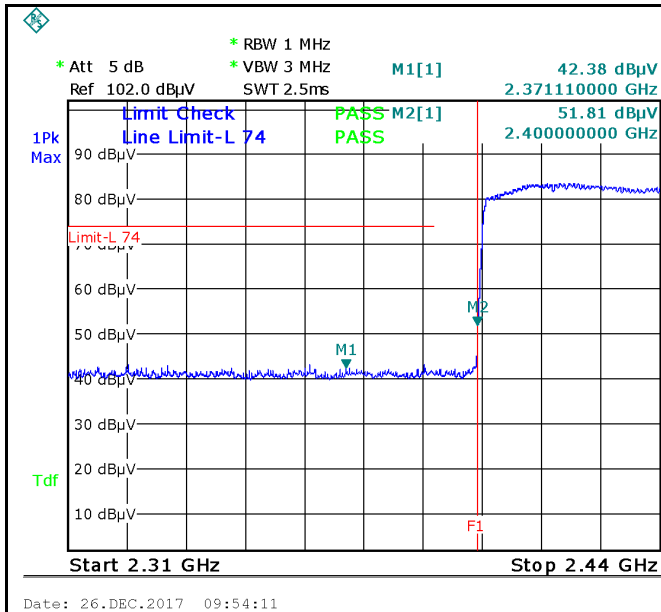Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)

π /4 DQPSK-Left Side-AV
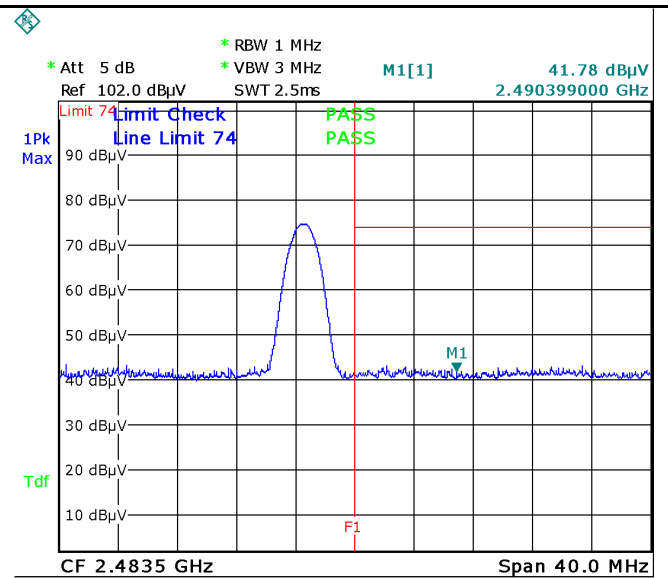
π /4 DQPSK-Right Side-AV

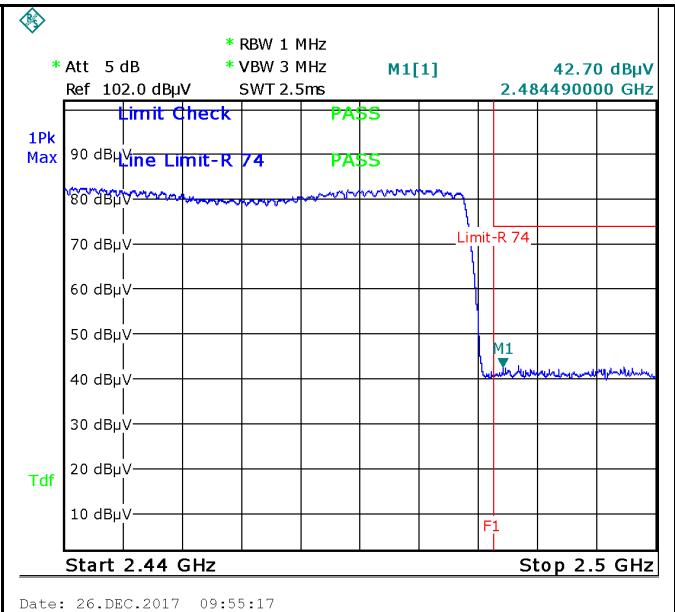Note: Both Horizontal and vertical polarities were investigated.

8-DPSK Mode:

8DPSK-Hopping Left Side-PK	8DPSK-Hopping Right Side-PK
Note: F1 is frequency 2400MHz	Note: F1 is frequency 2483.5MHz
Note: (no need if PK value less than the AV limit)	Note: (no need if PK value less than the AV limit)
8DPSK-Hopping Left-AV	8DPSK-Hopping Right-AV
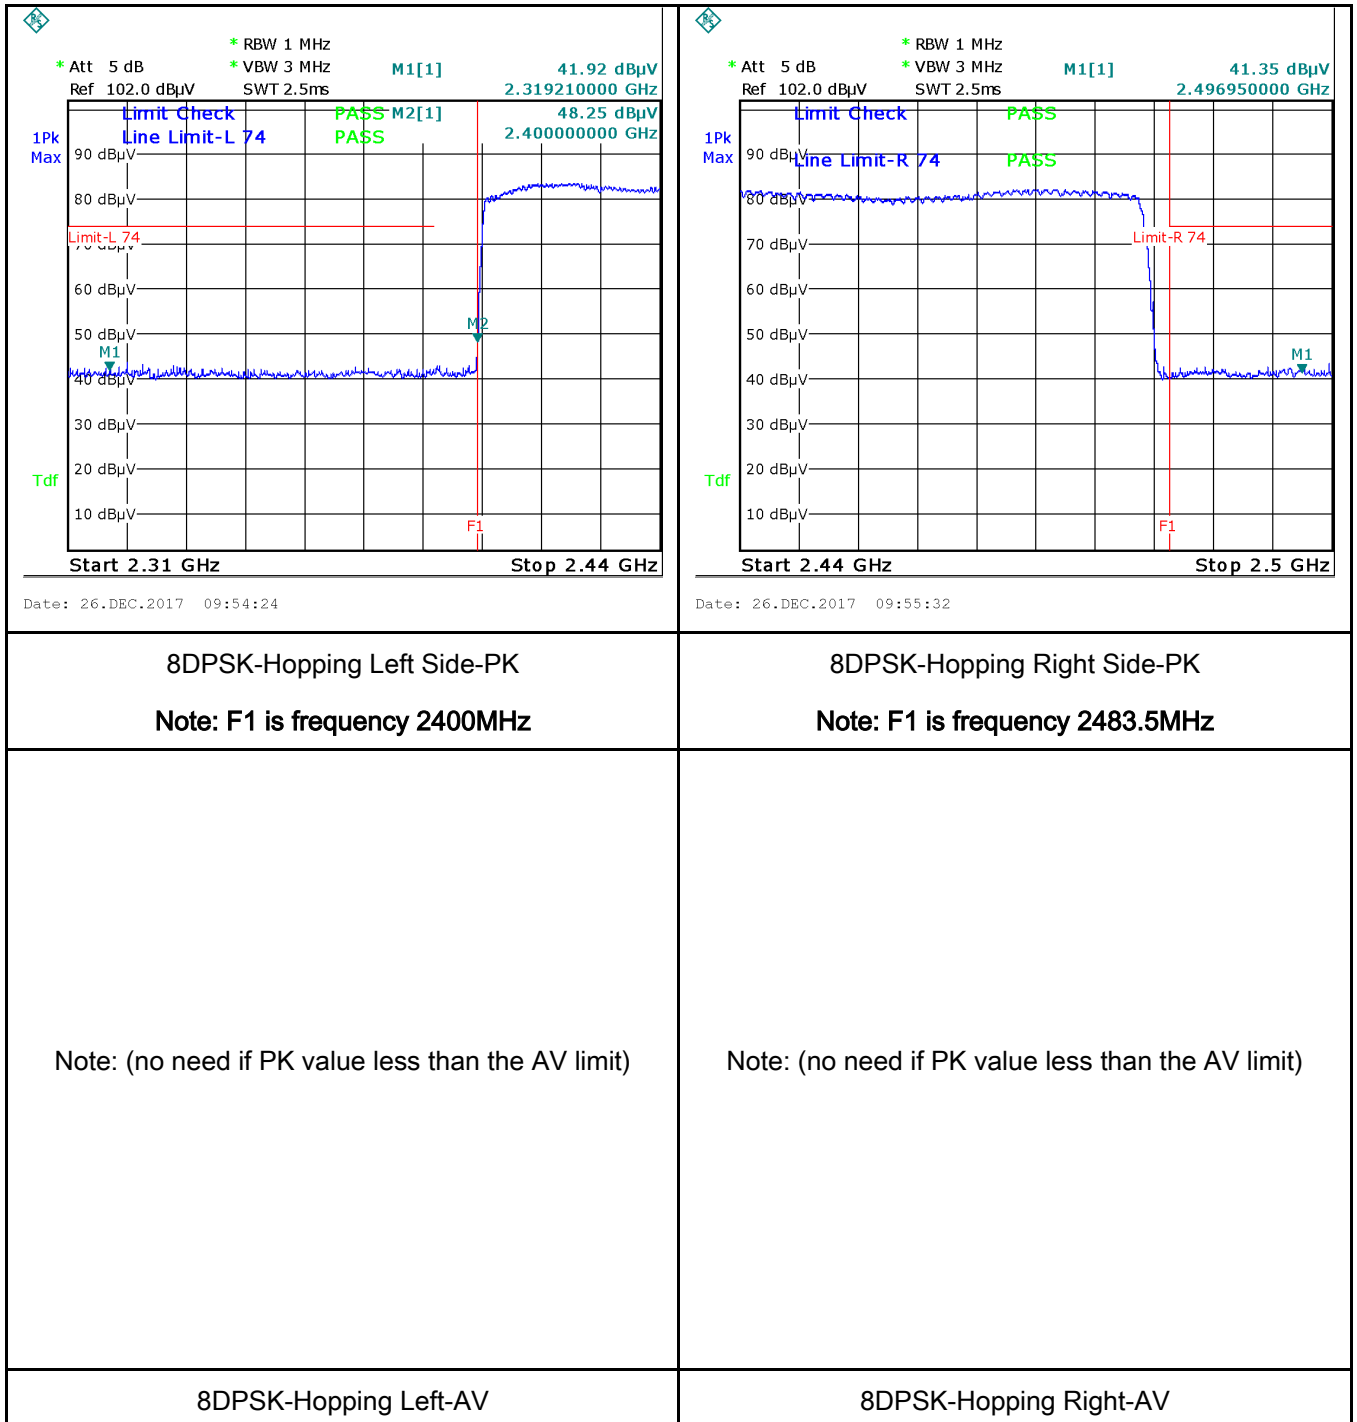
Note: Both Horizontal and vertical polarities were investigated.
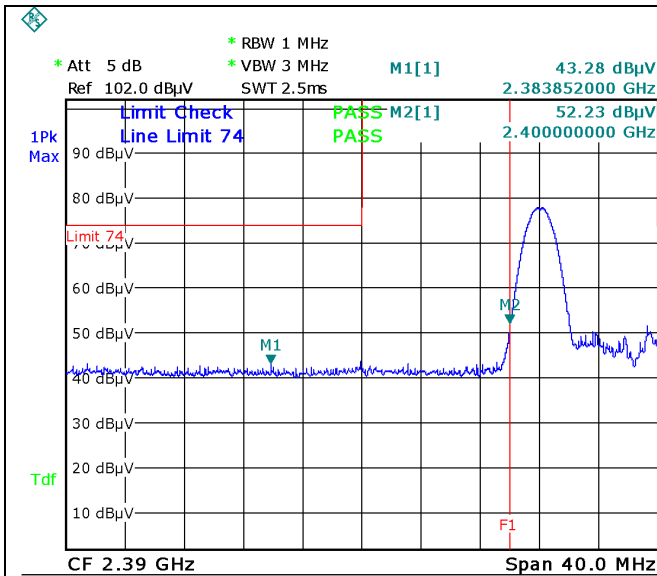
Date: 26.DEC.2017 10:01:27
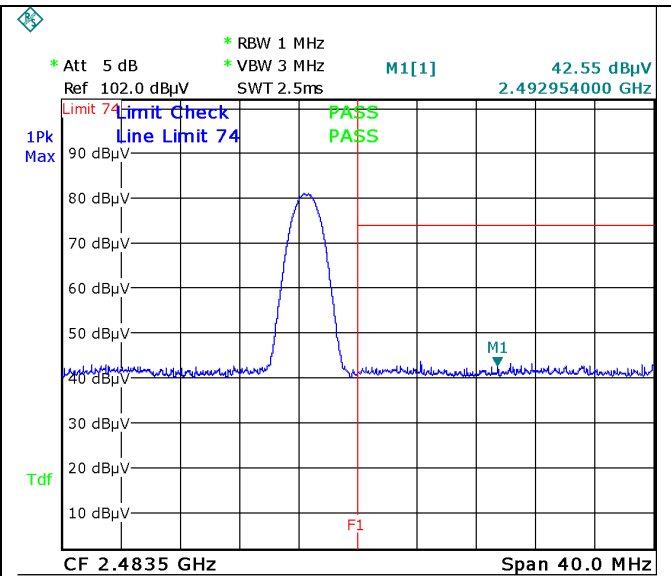
Date: 26.DEC.2017 09:57:53

8DPSK-Left Side-PK	8DPSK-Right Side-PK
Note: F1 is frequency 2400MHz	Note: F1 is frequency 2483.5MHz
Note: (no need if PK value less than the AV limit)	Note: (no need if PK value less than the AV limit)
8DPSK-Left Side-AV	8DPSK-Right Side-AV
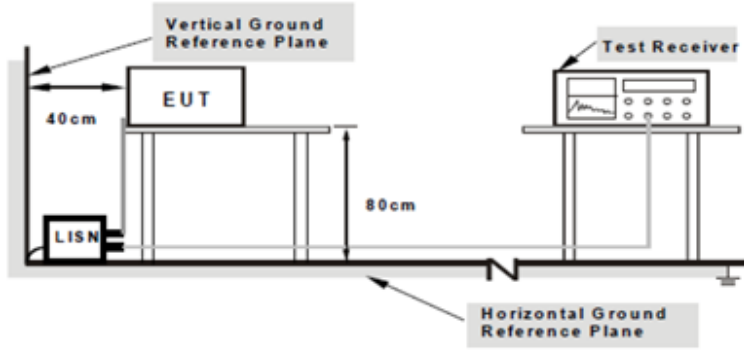
Note: Both Horizontal and vertical polarities were investigated.

6.8 AC Power Line Conducted Emissions

Temperature	26℃
Relative Humidity	56%
Atmospheric Pressure	1022mbar
Test date :	December 26, 2017
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	☑

Frequency ranges (MHz)	Limit (dBμV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

Test Setup	Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.
Procedure	1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. 2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss

	coaxial cable.
	4. All other supporting equipment were powered separately from another main supply.
	5. The EUT was switched on and allowed to warm up to its normal operating condition.
	6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
	7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.
	8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	☑ Pass ☐ Fail

Test Data ☑ Yes ☐ N/A

Test Plot ☑ Yes (See below) ☐ N/A

Test Mode:	Bluetooth Mode
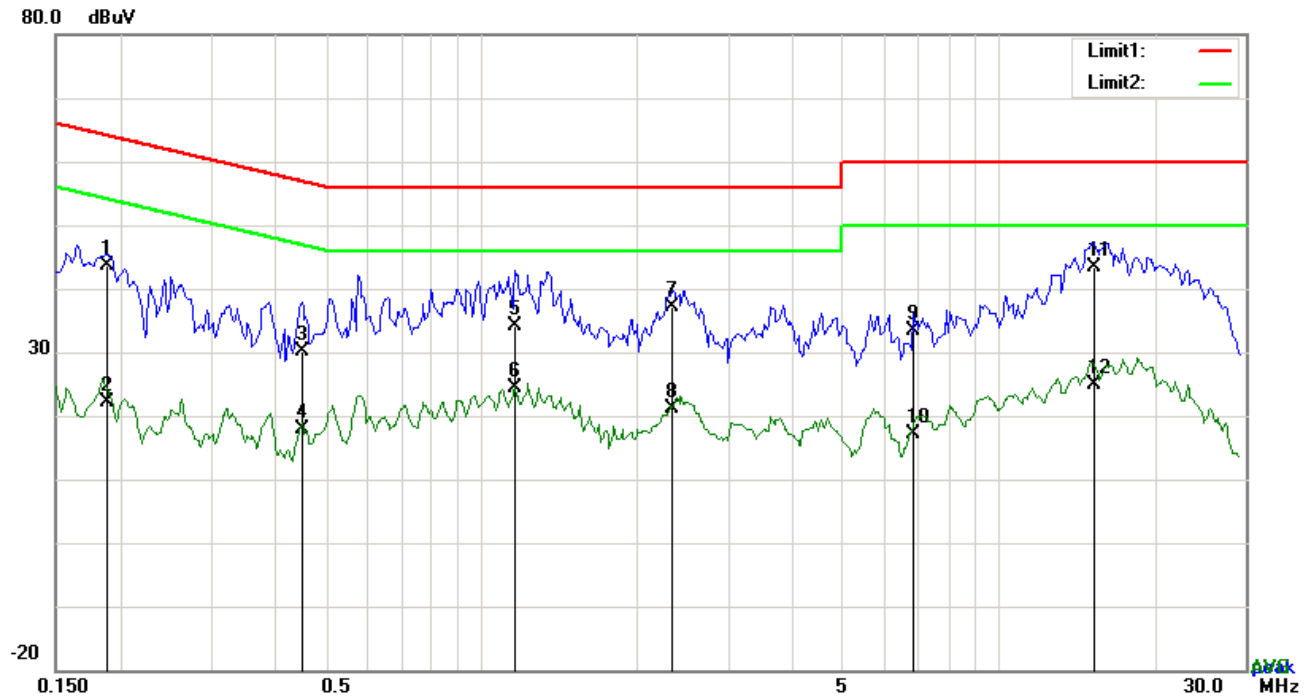
Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.1890	33.60	QP	10.03	43.63	64.08	-20.45
2	L1	0.1890	12.22	AVG	10.03	22.25	54.08	-31.83
3	L1	0.4503	20.04	QP	10.03	30.07	56.87	-26.80
4	L1	0.4503	7.81	AVG	10.03	17.84	46.87	-29.03
5	L1	1.1640	24.12	QP	10.03	34.15	56.00	-21.85
6	L1	1.1640	14.32	AVG	10.03	24.35	46.00	-21.65
7	L1	2.3340	27.18	QP	10.05	37.23	56.00	-18.77
8	L1	2.3340	11.01	AVG	10.05	21.06	46.00	-24.94
9	L1	6.8181	23.31	QP	10.11	33.42	60.00	-26.58
10	L1	6.8181	6.99	AVG	10.11	17.10	50.00	-32.90
11	L1	15.3162	33.04	QP	10.23	43.27	60.00	-16.73
12	L1	15.3162	14.62	AVG	10.23	24.85	50.00	-25.15

Test Mode:	Bluetooth Mode
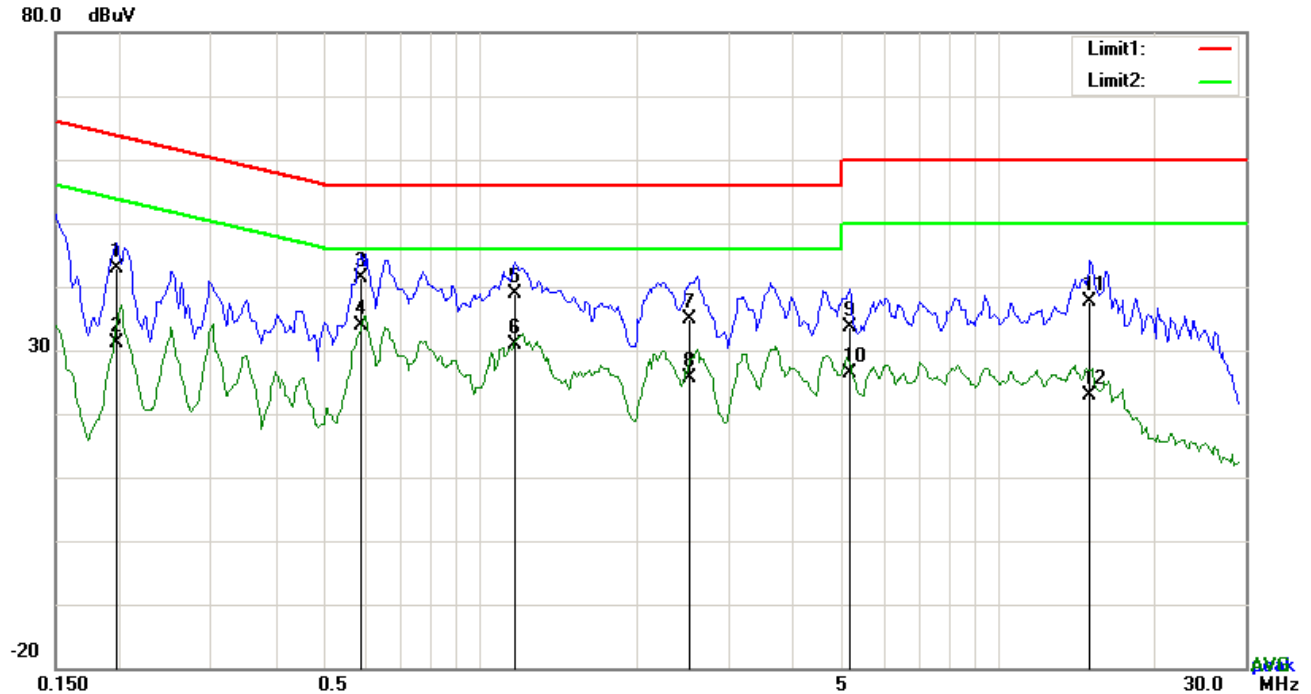
Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.1968	32.87	QP	10.02	42.89	63.74	-20.85
2	N	0.1968	21.14	AVG	10.02	31.16	53.74	-22.58
3	N	0.5868	31.37	QP	10.02	41.39	56.00	-14.61
4	N	0.5868	23.86	AVG	10.02	33.88	46.00	-12.12
5	N	1.1601	28.85	QP	10.03	38.88	56.00	-17.12
6	N	1.1601	20.74	AVG	10.03	30.77	46.00	-15.23
7	N	2.5251	24.76	QP	10.05	34.81	56.00	-21.19
8	N	2.5251	15.53	AVG	10.05	25.58	46.00	-20.42
9	N	5.1528	23.63	QP	10.07	33.70	60.00	-26.30
10	N	5.1528	16.41	AVG	10.07	26.48	50.00	-23.52
11	N	15.0432	27.38	QP	10.20	37.58	60.00	-22.42
12	N	15.0432	12.78	AVG	10.20	22.98	50.00	-27.02

Test Mode:	Bluetooth Mode
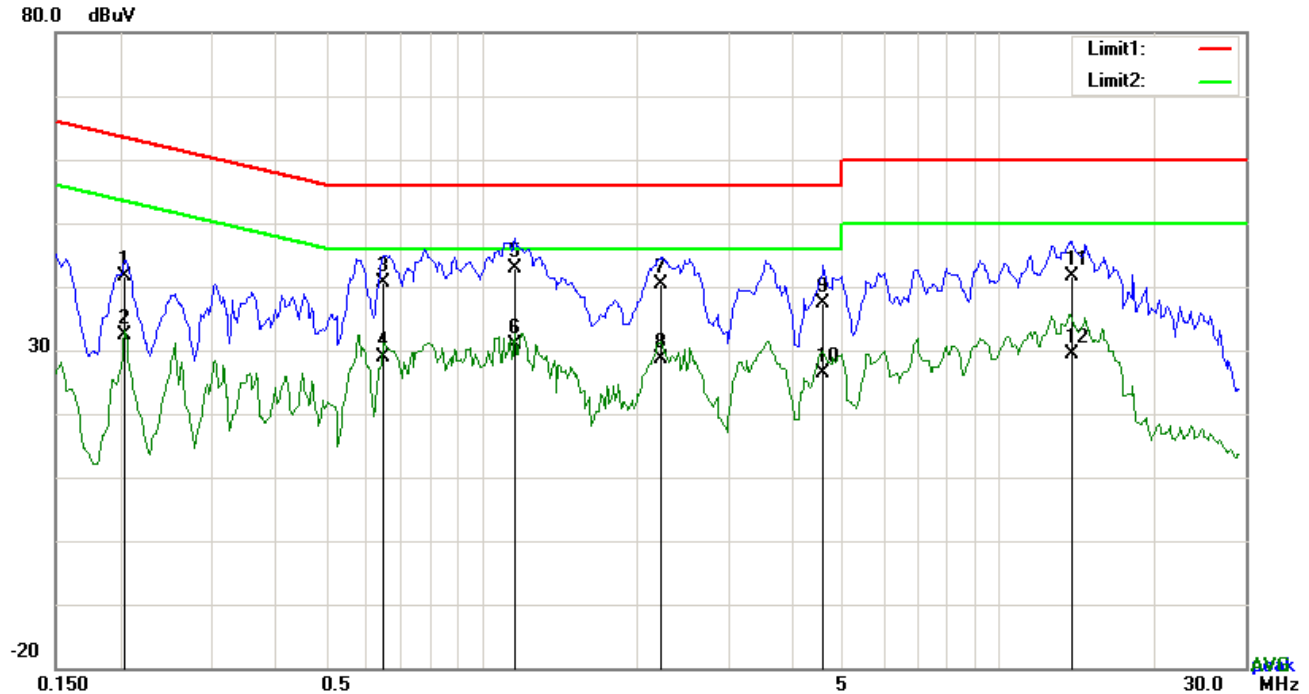
Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.2046	31.62	QP	10.03	41.65	63.42	-21.77
2	L1	0.2046	22.27	AVG	10.03	32.30	53.42	-21.12
3	L1	0.6453	30.67	QP	10.03	40.70	56.00	-15.30
4	L1	0.6453	18.91	AVG	10.03	28.94	46.00	-17.06
5	L1	1.1601	32.78	QP	10.03	42.81	56.00	-13.19
6	L1	1.1601	20.90	AVG	10.03	30.93	46.00	-15.07
7	L1	2.2287	30.35	QP	10.05	40.40	56.00	-15.60
8	L1	2.2287	18.68	AVG	10.05	28.73	46.00	-17.27
9	L1	4.5795	27.43	QP	10.07	37.50	56.00	-18.50
10	L1	4.5795	16.19	AVG	10.07	26.26	46.00	-19.74
11	L1	13.8459	31.47	QP	10.21	41.68	60.00	-18.32
12	L1	13.8459	19.25	AVG	10.21	29.46	50.00	-20.54

Test Mode:	Bluetooth Mode
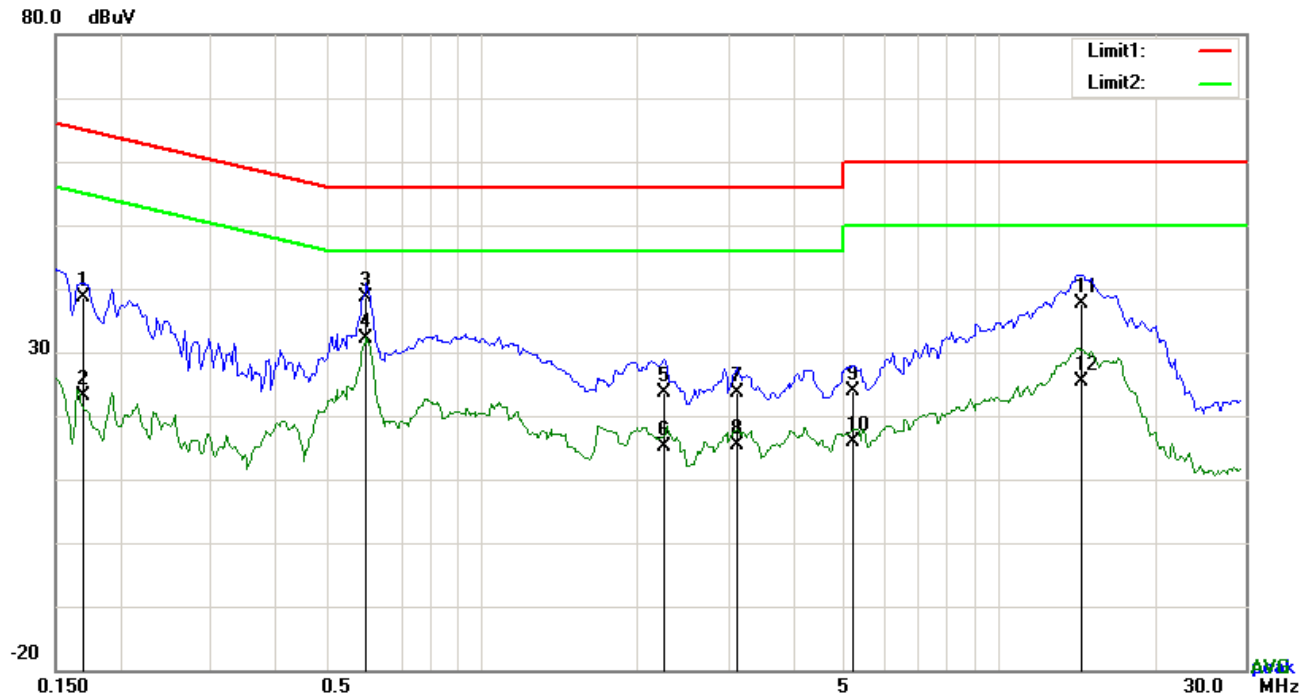
Test Data

Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.1695	28.56	QP	10.02	38.58	64.98	-26.40
2	N	0.1695	13.02	AVG	10.02	23.04	54.98	-31.94
3	N	0.5985	28.71	QP	10.02	38.73	56.00	-17.27
4	N	0.5985	22.04	AVG	10.02	32.06	46.00	-13.94
5	N	2.2560	13.48	QP	10.04	23.52	56.00	-32.48
6	N	2.2560	5.19	AVG	10.04	15.23	46.00	-30.77
7	N	3.1170	13.58	QP	10.05	23.63	56.00	-32.37
8	N	3.1170	5.31	AVG	10.05	15.36	46.00	-30.64
9	N	5.2425	13.83	QP	10.07	23.90	60.00	-36.10
10	N	5.2425	5.79	AVG	10.07	15.86	50.00	-34.14
11	N	14.4933	27.38	QP	10.19	37.57	60.00	-22.43
12	N	14.4933	15.21	AVG	10.19	25.40	50.00	-24.60
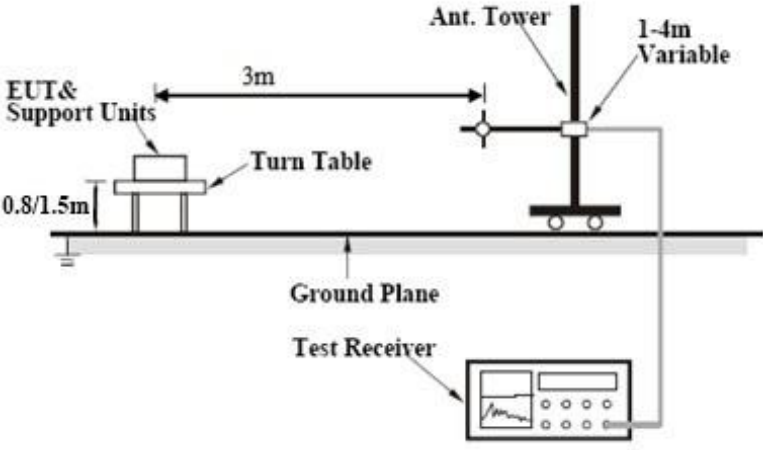
6.9 Radiated Emissions & Restricted Band

Temperature	26℃
Relative Humidity	56%
Atmospheric Pressure	1022mbar
Test date :	December 26, 2017
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR§15.205, §15.209, §15.247(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges | Frequency range (MHz)	Field Strength (µV/m) | |---|---| | 0.009~0.490 | 2400/F(KHz) | | 0.490~1.705 | 24000/F(KHz) | | 1.705~30.0 | 30 | | 30 – 88 | 100 | | 88 – 216 | 150 | | 216 960 | 200 | | Above 960 | 500 |	☑
Test Setup			

Procedure	1. The EUT was switched on and allowed to warm up to its normal operating condition.
	2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
	a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
	b. The EUT was then rotated to the direction that gave the maximum emission.
	c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
	3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.
	4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.
	The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.
	5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	
Result	☑ Pass ☐ Fail

Test Data ☑ Yes   ☐ N/A

Test Plot ☑ Yes (See below)   ☐ N/A

Test Result:

Test Mode:	Transmitting Mode

Frequency range: 9KHz - 30MHz

| Freq. (MHz)	Detection value	Factor (dB/m)	Reading (dBuV/m)	Result (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)
--	--	--	--	--	--	>20
--	--	--	--	--	--	>20

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

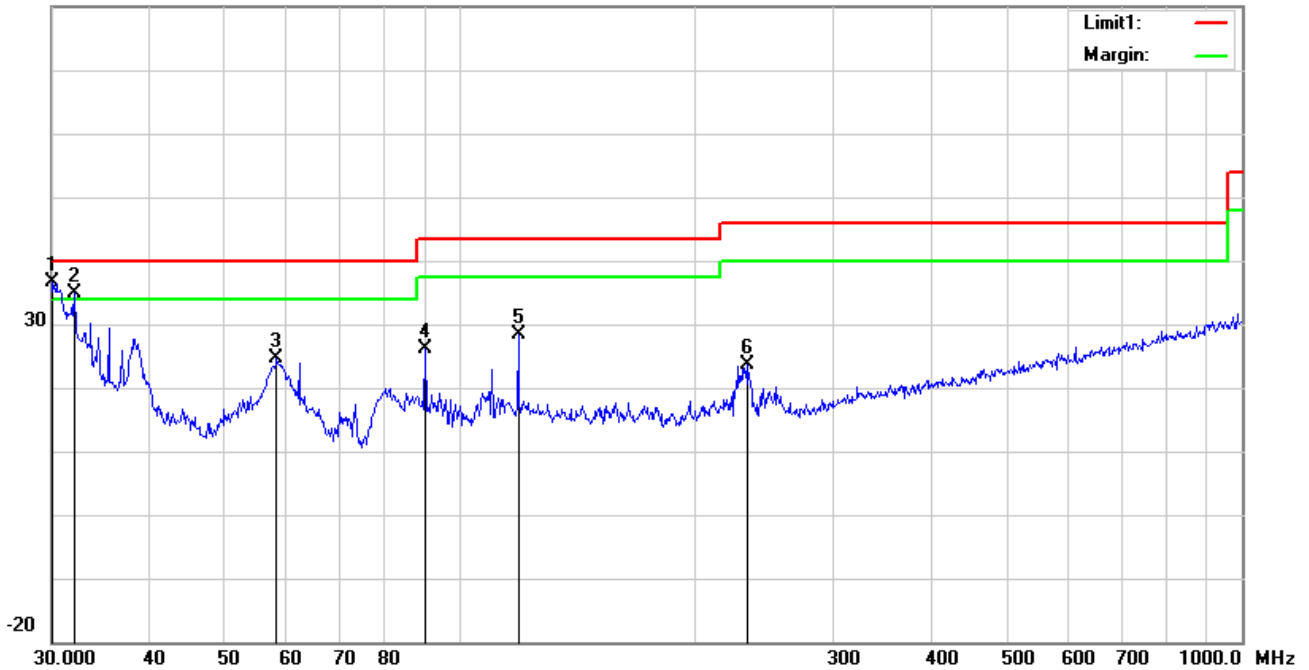| Test Mode:	Bluetooth Mode

30MHz -1GHz
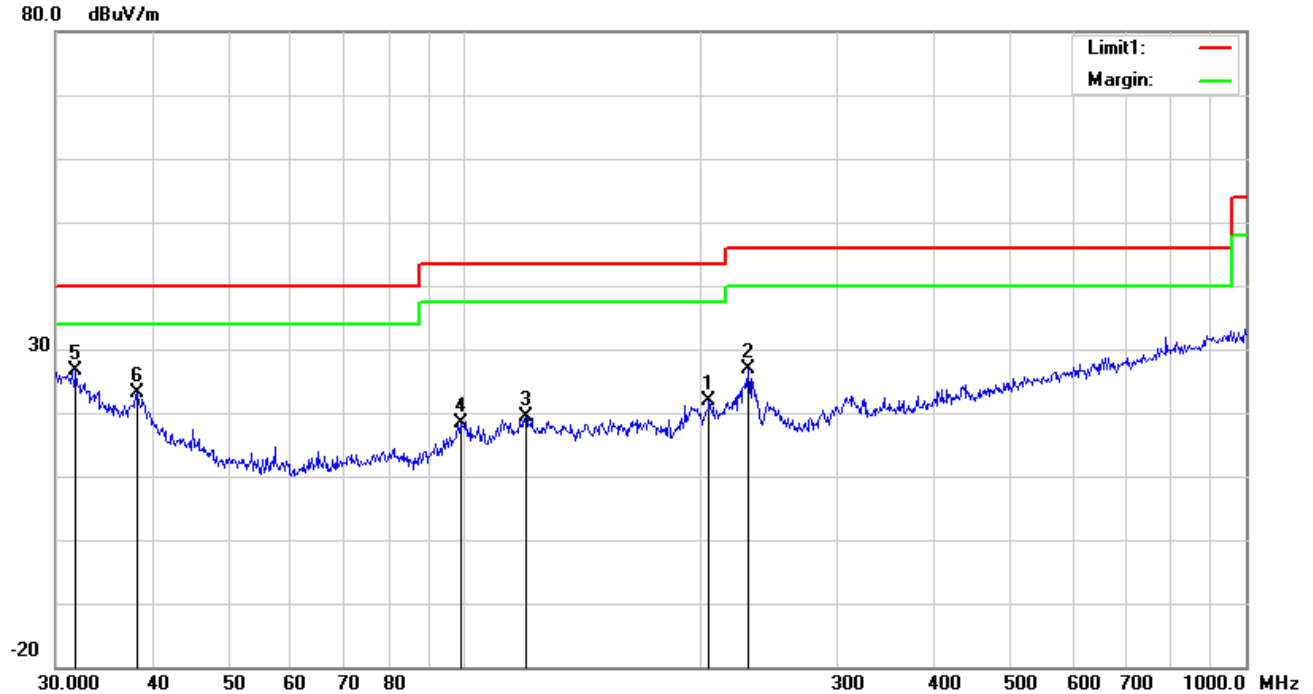
Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(')
1	H	205.6751	30.65	peak	12.02	22.37	1.56	21.86	43.50	-21.64	100	204
2	H	230.9068	35.83	peak	11.67	22.32	1.64	26.82	46.00	-19.18	200	20
3	H	119.8556	26.83	peak	13.87	22.36	1.16	19.50	43.50	-24.00	100	125
4	H	98.8326	29.45	peak	10.12	22.32	1.09	18.34	43.50	-25.16	100	129
5	H	31.8427	28.16	peak	19.98	22.27	0.67	26.54	40.00	-13.46	100	154
6	H	38.2120	29.48	peak	15.21	22.27	0.78	23.20	40.00	-16.80	100	71

30MHz -1GHz

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(')
1	V	30.0000	36.89	QP	21.40	22.28	0.62	36.63	40.00	-3.37	100	139
2	V	32.0668	36.77	peak	19.81	22.27	0.68	34.99	40.00	-5.01	100	291
3	V	58.2030	38.82	peak	7.50	22.40	0.76	24.68	40.00	-15.32	100	29
4	V	90.2205	39.41	peak	8.05	22.32	0.95	26.09	43.50	-17.41	100	311
5	V	118.6014	35.85	peak	13.66	22.36	1.16	28.31	43.50	-15.19	100	269
6	V	232.5318	32.69	peak	11.64	22.32	1.64	23.65	46.00	-22.35	100	332

Above 1GHz

Test Mode:	Transmitting Mode

Low Channel: GFSK Mode (Worst Case) (2402 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4804	47.1	AV	V	33.39	7.22	48.46	39.25	54	-14.75
4804	44.73	AV	H	33.39	7.22	48.46	36.88	54	-17.12
4804	69.71	PK	V	33.39	7.22	48.46	61.86	74	-12.14
4804	66.09	PK	H	33.39	7.22	48.46	58.24	74	-15.76
7671	32.58	AV	V	37.72	7.64	48.04	29.9	54	-24.1
7671	30.25	AV	H	37.72	7.64	48.04	27.57	54	-26.43
7671	56.98	PK	V	37.72	7.64	48.04	54.3	74	-19.7
7671	55.66	PK	H	37.72	7.64	48.04	52.98	74	-21.02

Middle Channel: GFSK Mode (Worst Case) (2441 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4882	45.32	AV	V	33.62	7.53	48.36	38.11	54	-15.89
4882	44.15	AV	H	33.62	7.53	48.36	36.94	54	-17.06
4882	66.54	PK	V	33.62	7.53	48.36	59.33	74	-14.67
4882	64.02	PK	H	33.62	7.53	48.36	56.81	74	-17.19
11693	32.56	AV	V	39.71	12.49	47.11	37.65	54	-16.35
11693	30.18	AV	H	39.71	12.49	47.11	35.27	54	-18.73
11693	48.75	PK	V	39.71	12.49	47.11	53.84	74	-20.16
11693	46.94	PK	H	39.71	12.49	47.11	52.03	74	-21.97

High Channel: GFSK Mode (Worst Case) (2480 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960	43.45	AV	V	33.89	7.86	48.31	36.89	54	-17.11
4960	45.52	AV	H	33.89	7.86	48.31	38.96	54	-15.04
4960	67.39	PK	V	33.89	7.86	48.31	60.83	74	-13.17
4960	66.11	PK	H	33.89	7.86	48.31	59.55	74	-14.45
17849	18.06	AV	V	42.8	19.37	43.61	36.62	54	-17.38
17849	20.62	AV	H	42.8	19.37	43.61	39.18	54	-14.82
17849	39.51	PK	V	42.8	19.37	43.61	58.07	74	-15.93
17849	41.07	PK	H	42.8	19.37	43.61	59.63	74	-14.37

Note:

1, The testing has been conformed to 10*2480MHz=24,800MHz

2, All other emissions more than 30 dB below the limit

3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/15/2017	09/14/2018	☑
Line Impedance	LI-125A	191106	09/23/2017	09/22/2018	☑
Line Impedance	LI-125A	191107	09/23/2017	09/22/2018	☑
ISN	ISN T800	34373	09/23/2017	09/22/2018	☐
Transient Limiter	LIT-153	531118	08/30/2017	08/29/2018	☐
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/15/2017	09/14/2018	☑
Power Splitter	1#	1#	08/30/2017	08/29/2018	☑
DC Power Supply	E3640A	MY40004013	09/15/2017	09/14/2018	☑
Radiated Emissions					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	☑
Positioning Controller	UC3000	MF780208282	11/17/2017	11/16/2018	☑
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	☑
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	☑
Horn Antenna	BBHA9170	3145226D1	09/27/2017	09/26/2018	☑
Active Antenna (9kHz-30MHz)	AL-130	121031	10/12/2017	10/11/2018	☑
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	☑
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/22/2017	09/21/2018	☑
Universal Radio Communication Tester	CMU200	121393	09/23/2017	09/22/2018	☑

Annex B. EUT And Test Setup Photographs

Annex B.i.   Photograph: EUT External Photo

Whole Package View

Adapter - Lable View
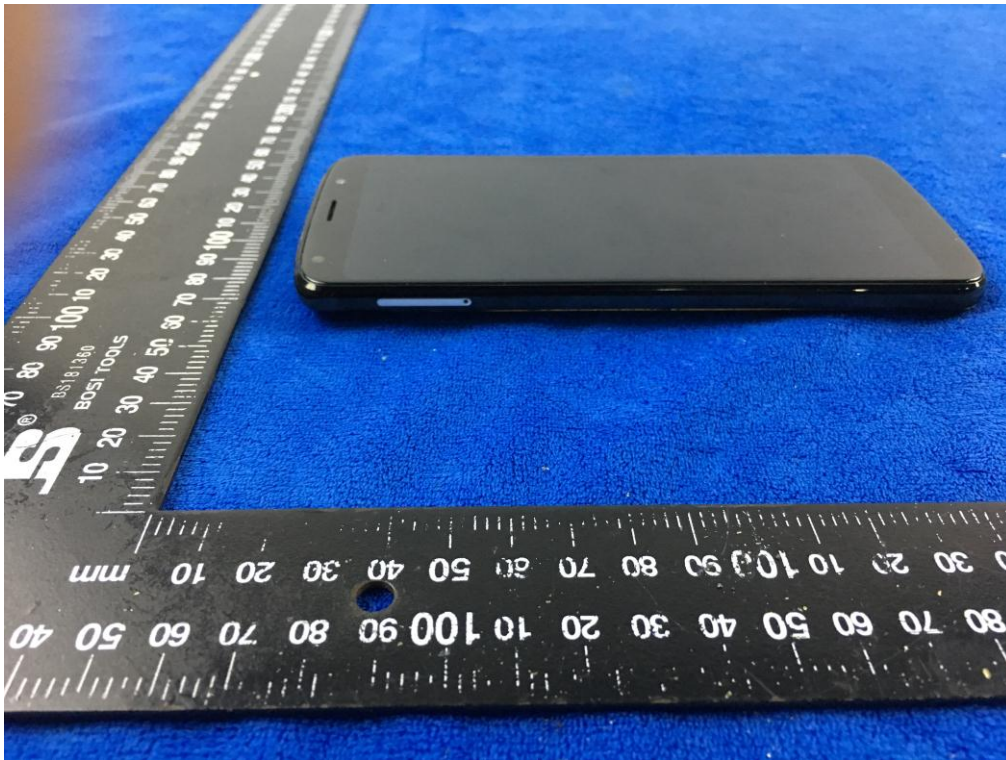
EUT - Front View

EUT - Rear View

EUT - Top View

EUT - Bottom View

EUT - Left View

EUT - Right View

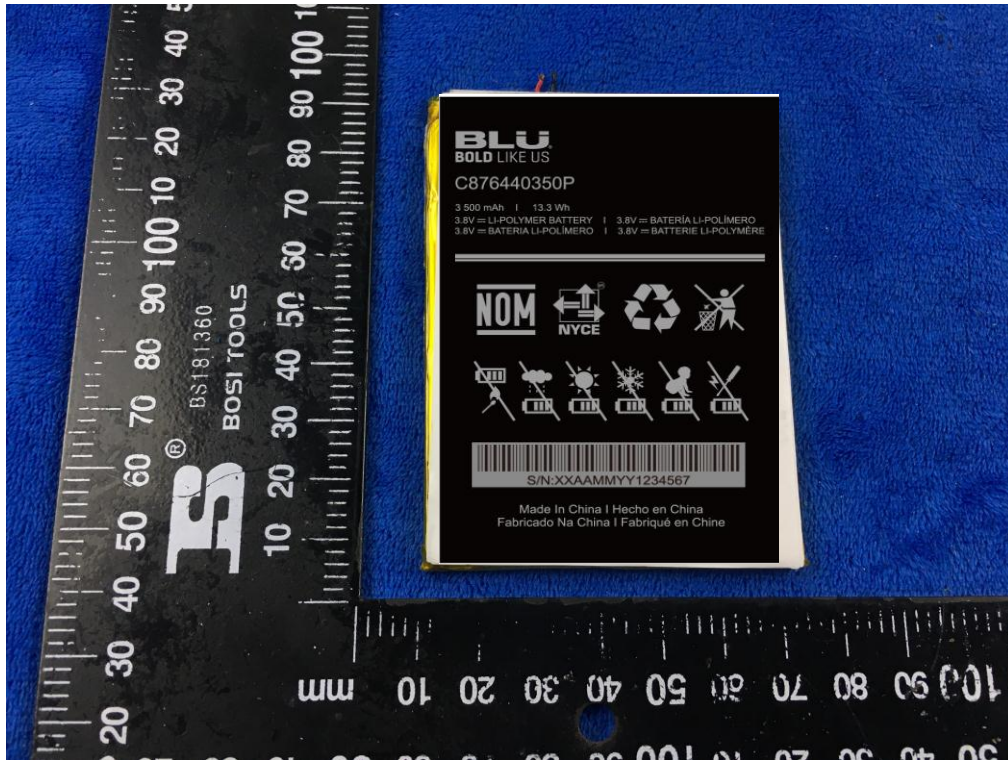## Annex B.ii.   Photograph: EUT Internal Photo
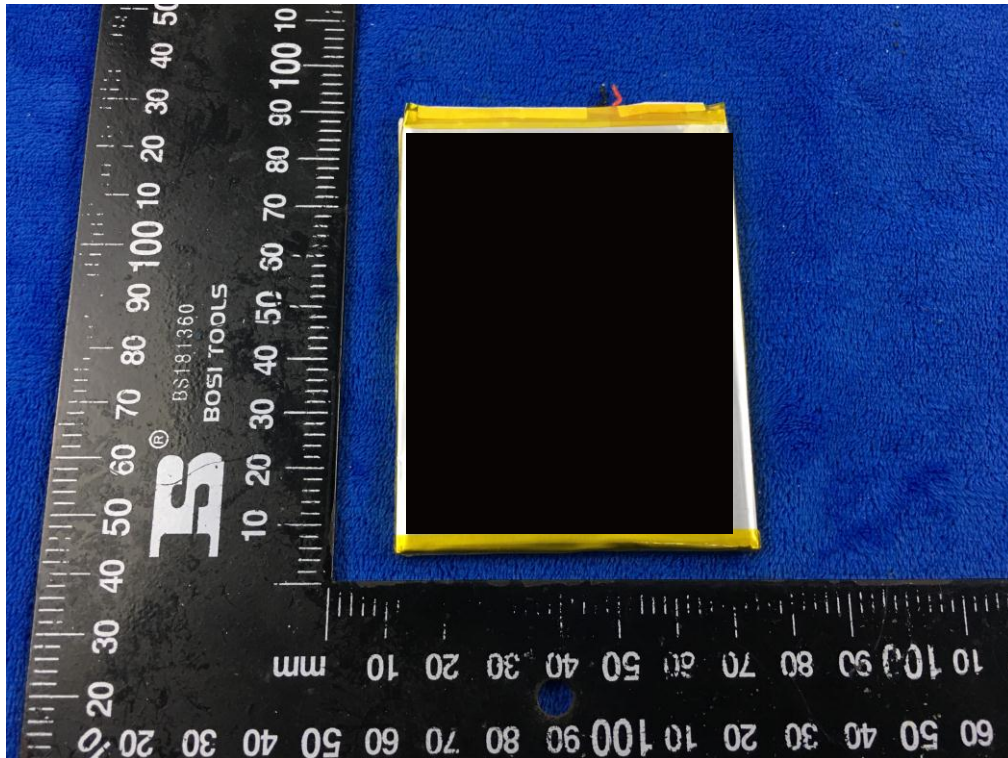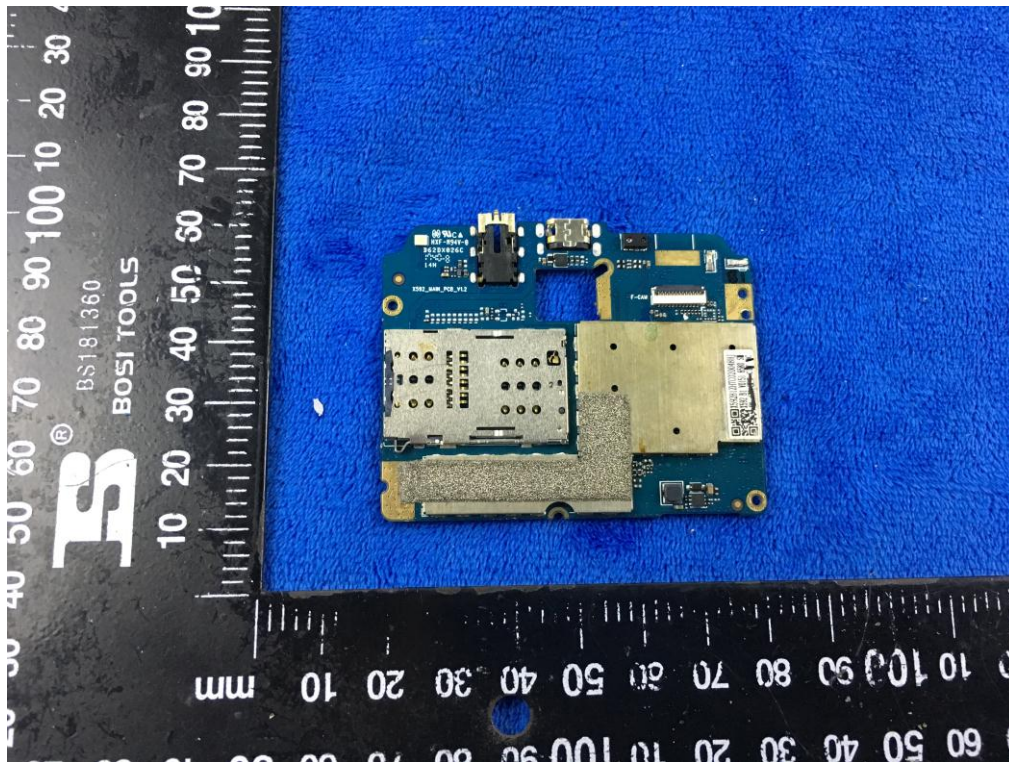
Cover Off - Top View 1
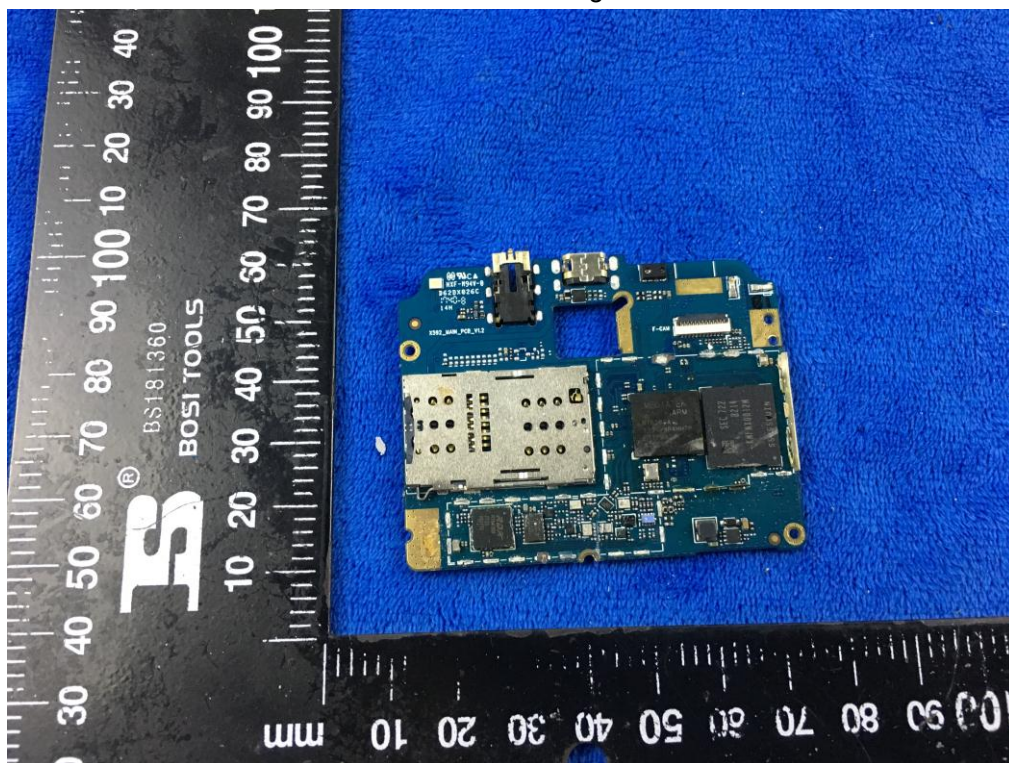

Cover Off - Top View 2

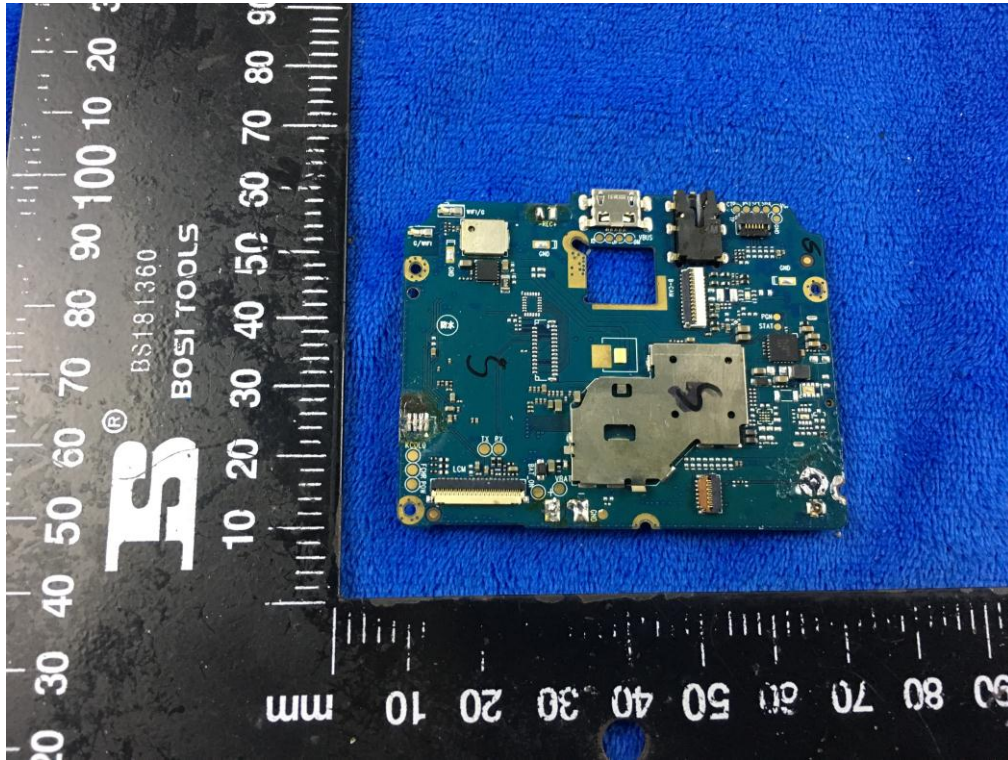Battery - Front View

Battery - Rear View

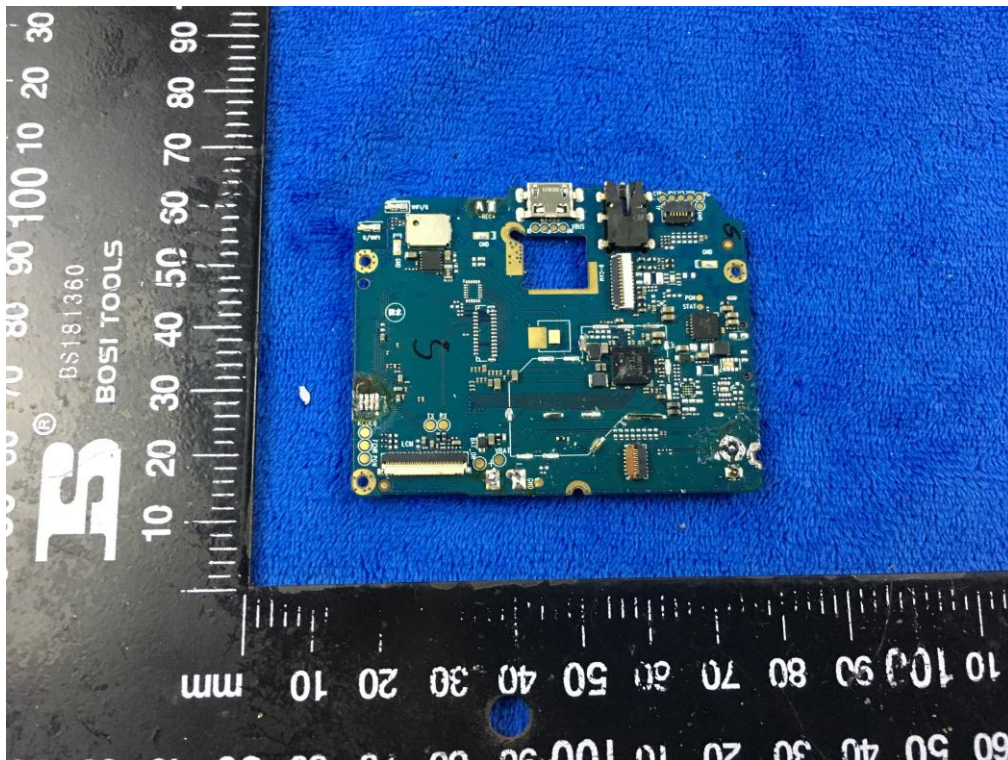Mainboard with Shielding - Front View

Mainboard without Shielding - Front View

Mainboard with Shielding – Rear View

Mainboard without Shielding – Rear View

LCD – Front View

LCD – Rear View
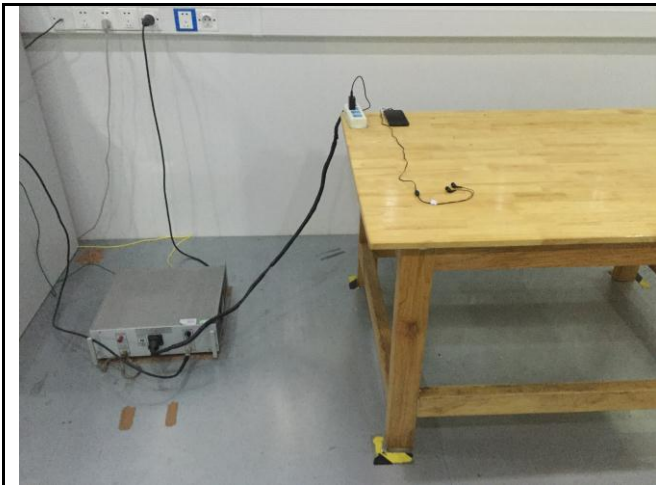
GSM/PCS/UMTS-FDD Antenna View

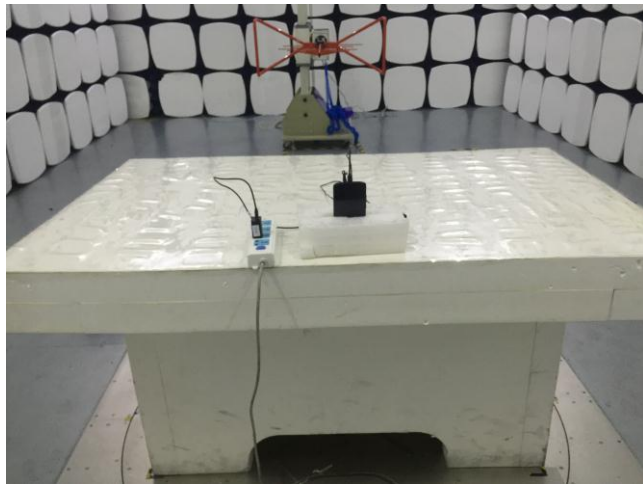WIFI/BT/BLE/GPS - Antenna View

RXD - Antenna View

Annex B.iii.   Photograph: Test Setup Photo

Conducted Emissions Test Setup Front View

Conducted Emissions Test Setup Side View

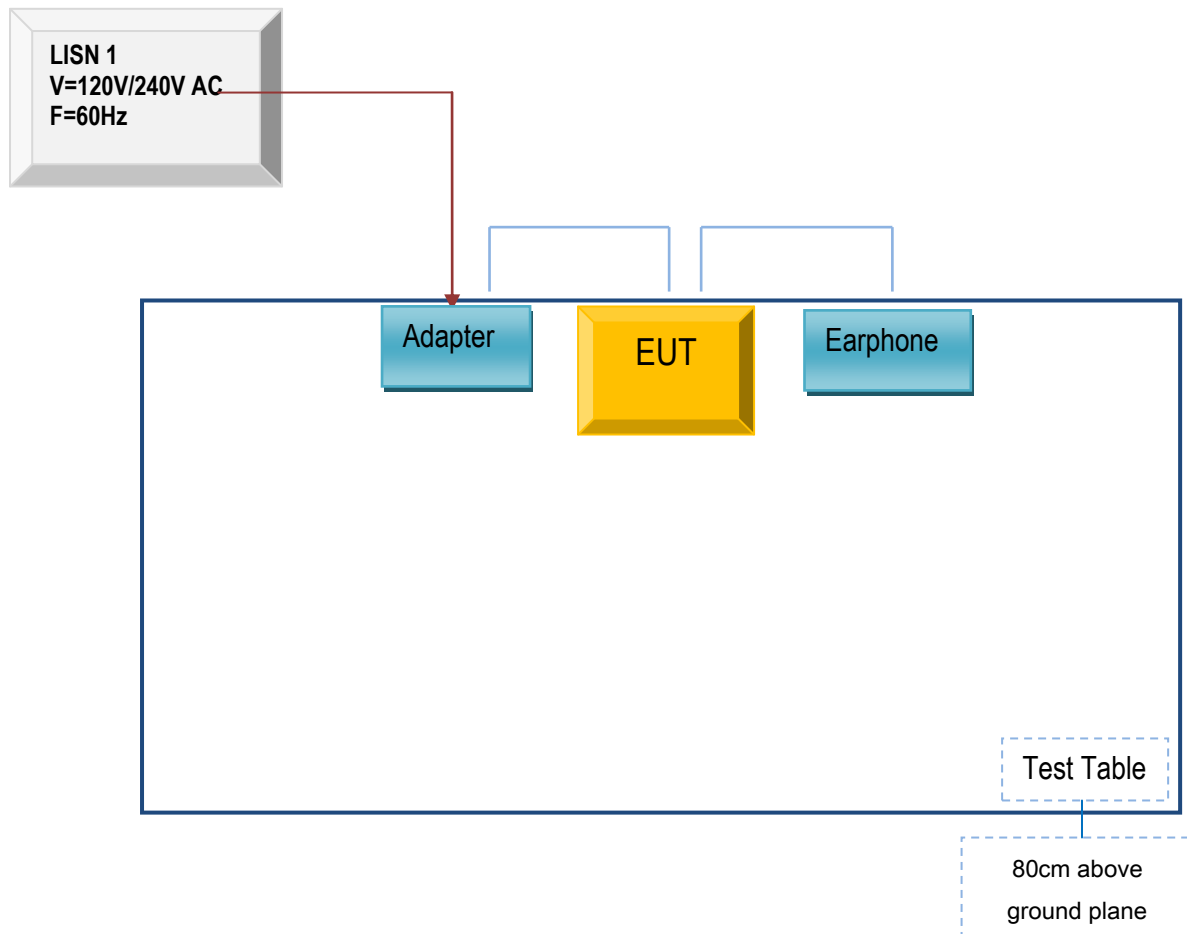Radiated Spurious Emissions Test Setup Below 1GHz

Radiated Spurious Emissions Test Setup Above 1GHz
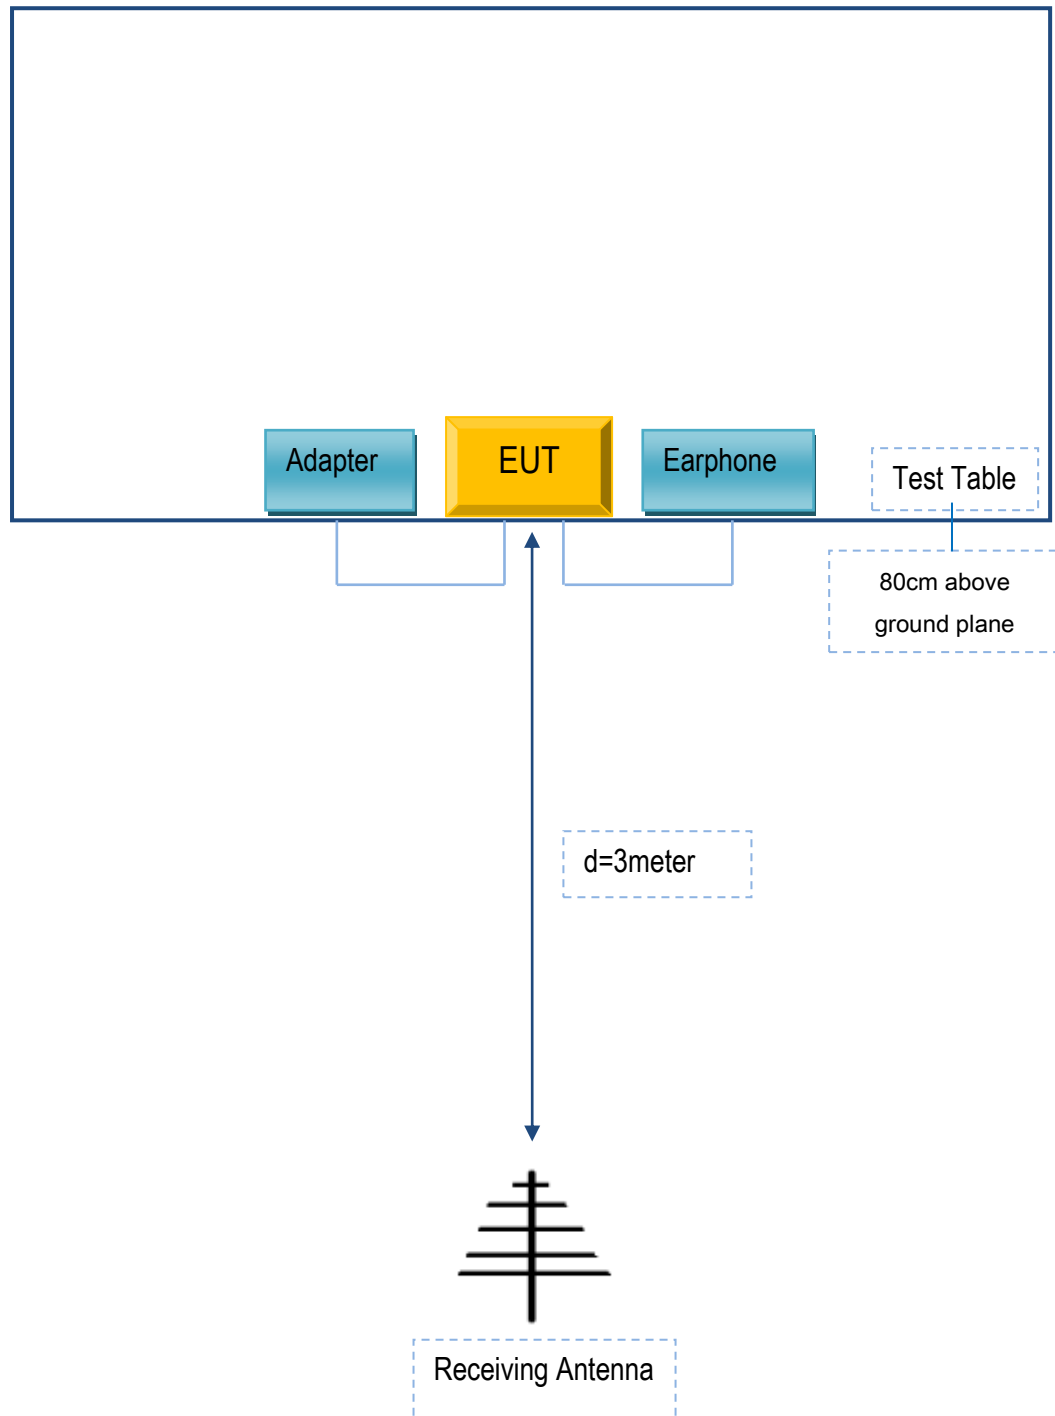
Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for AC Line Conducted Emissions

LISN 1
V=120V/240V AC
F=60Hz

Adapter

EUT

Earphone

Test Table

80cm above ground plane

Block Configuration Diagram for Radiated Emissions （Below 1GHz）.

Block Configuration Diagram for Radiated Emissions （Above 1GHz）.

Earphone	EUT	Adapter

Test Table

150cm above
ground plane

d=3meter

Receiving Antenna
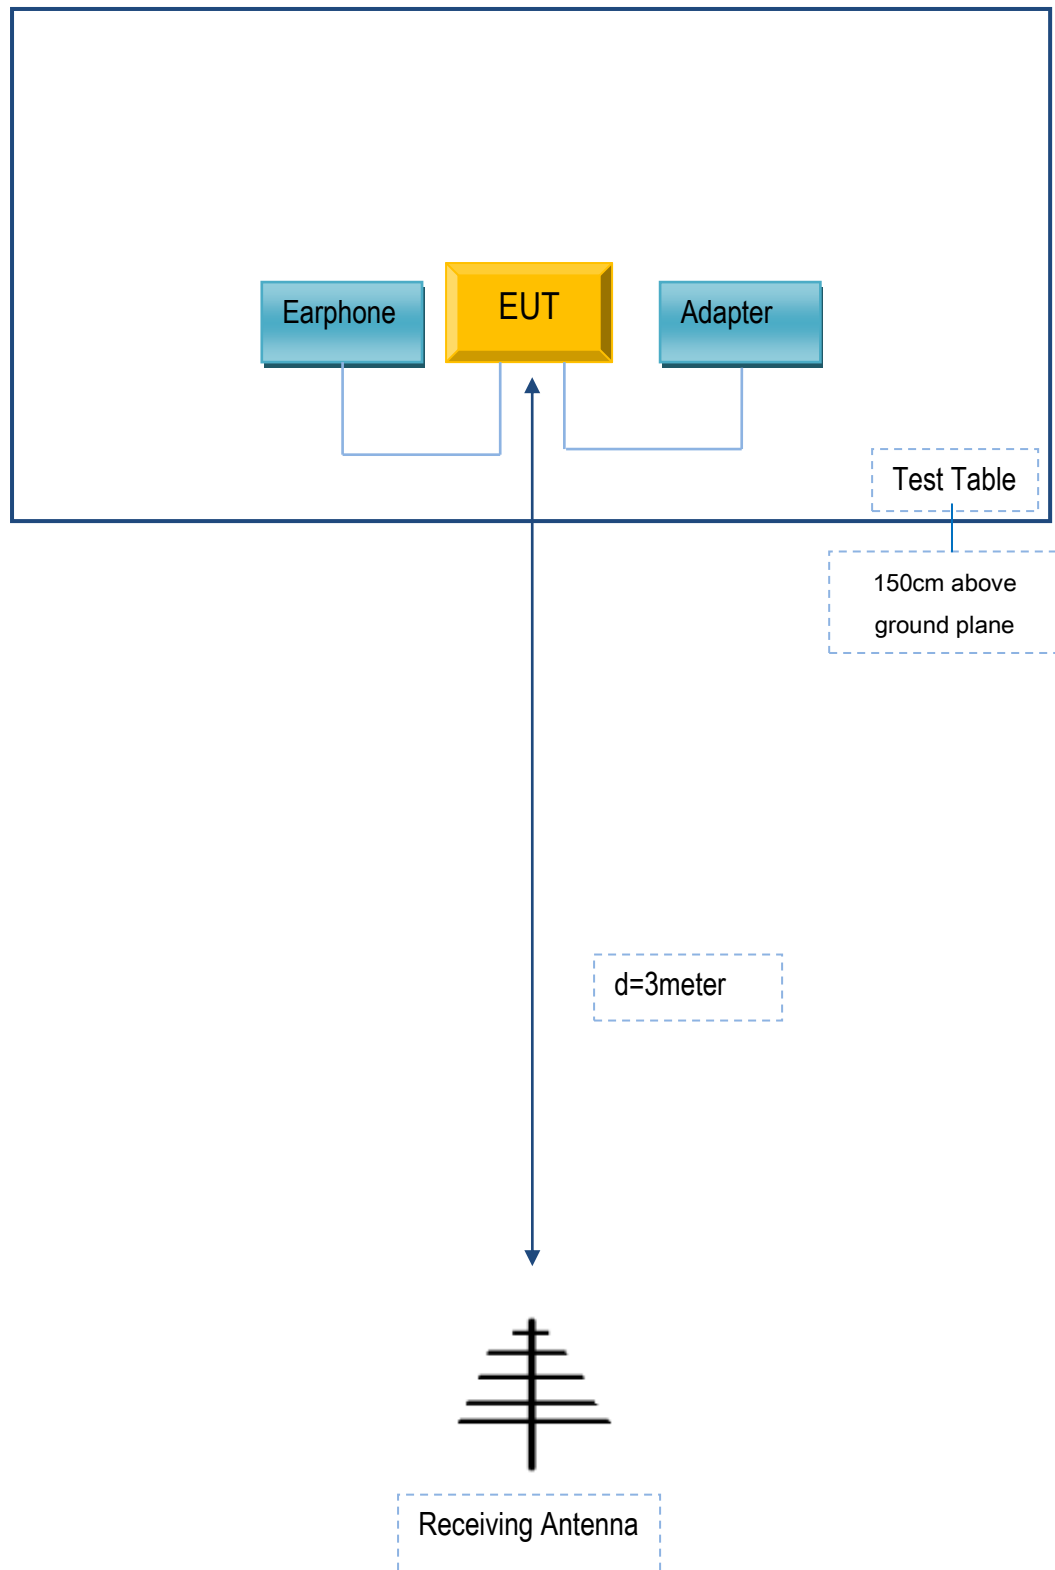
Annex C. iI. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
BLU Products, Inc.	Adapter	STUDIO VIEW MEGA	N/A
N/A	Earphone	N/A	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

N/A