

Report No.: FR421305A

FCC RF Test Report

APPLICANT : CT Asia

EQUIPMENT: Mobile phone

BRAND NAME : BLU

MODEL NAME : Neo 4.5

FCC ID : YHLBLUNEO45

STANDARD : FCC Part 15 Subpart C §15.247

CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Feb. 13, 2014 and testing was completed on Feb. 20, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

Innoe/sai

UNSHAN) INC.

SPORTON INTERNATIONAL (KUNSHAN) INC. No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 1 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



TABLE OF CONTENTS

REV	/ISIOI	N HISTORY	3
SUN	ИМАР	Y OF TEST RESULT	4
1	GENI	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	5
	1.3	Feature of Equipment Under Test	5
	1.4	Product Specification of Equipment Under Test	5
	1.5	Modification of EUT	6
	1.6	Testing Site	6
	1.7	Applied Standards	6
2	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	7
	2.1	Descriptions of Test Mode	7
	2.2	Test Mode	8
	2.3	Connection Diagram of Test System	9
	2.4	Support Unit used in test configuration and system	10
	2.5	EUT Operation Test Setup	10
	2.6	Measurement Results Explanation Example	10
3	TEST	RESULT	11
	3.1	Number of Channel Measurement	11
	3.2	Hopping Channel Separation Measurement	
	3.3	Dwell Time Measurement	20
	3.4	20dB Bandwidth Measurement	22
	3.5	Peak Output Power Measurement	29
	3.6	Conducted Band Edges Measurement	31
	3.7	Conducted Spurious Emission Measurement	38
	3.8	Radiated Band Edges and Spurious Emission Measurement	48
	3.9	AC Conducted Emission Measurement	59
	3.10	Antenna Requirements	63
4	LIST	OF MEASURING EQUIPMENT	64
5	UNCI	ERTAINTY OF EVALUATION	65
APP	PEND	IX A. SETUP PHOTOGRAPHS	

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 2 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR421305A	Rev. 01	Initial issue of report	Mar. 13, 2014

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 3 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.5	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 11.80 dB at 2483.500 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.00 dB at 0.360 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 4 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



1 General Description

1.1 Applicant

CT Asia

Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon, Hongkong

1.2 Manufacturer

Ragentek Technology Group

Building D10-D11, No. 58-60, Lane 3188, Xiupu Road, PuDong District, Shanghai, PRC

1.3 Feature of Equipment Under Test

Product Feature				
Equipment	Mobile phone			
Brand Name	BLU			
Model Name	Neo 4.5			
FCC ID	YHLBLUNEO45			
EUT supports Radios application	GSM/GPRS/WCDMA/HSPA/HSPA+(Downlink Only) WLAN 2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE			
HW Version	Q106_MAIN_PCB_V1.1			
SW Version	BLU-D410a-V10-GENERIC			
EUT Stage	Identical Prototype			

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard				
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz			
Number of Channels	79			
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78			
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 6.33 dBm (0.00430 W) Bluetooth EDR (2Mbps) : 6.08 dBm (0.00406 W) Bluetooth EDR (3Mbps) : 6.22 dBm (0.00419 W)			
Antenna Type	PIFA Antenna with gain -4.00 dBi			
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : π /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK			

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 5 of 65
Report Issued Date : Mar. 13, 2014

Report No.: FR421305A

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.				
	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.				
Test Site Location	TEL: +86-0512-5790-0158				
	FAX: +86-0512-5790-0958				
Took Site No		Sporton Site No.		FCC Registration No.	
Test Site No.	TH01-KS	03CH01-KS	CO01-KS	149928	

Note: The test site complies with ANSI C63.4 2003 requirement.

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.4-2003

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 6 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

		В	luetooth RF Output Powe	er	
Channal	Erogueneu	Data Rate / Modulation			
Channel	Frequency	GFSK	π/4-DQPSK	8-DPSK	
		1Mbps	2Mbps	3Mbps	
Ch00	2402MHz	5.39 dBm	4.98 dBm	5.29 dBm	
Ch39	2441MHz	6.08 dBm	5.67 dBm	5.98 dBm	
Ch78	2480MHz	<mark>6.33</mark> dBm	6.08 dBm	6.22 dBm	

Remark:

- 1. All the test data for each data rate were verified, but only the worst case was reported.
- 2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Y plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 7 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

	Summary table of Test Cases					
	Data Rate / Modulation					
Test Item	Bluetooth BR 1Mbps	Bluetooth EDR 2Mbps	Bluetooth EDR 3Mbps			
	GFSK	π/4-DQPSK	8-DPSK			
Conducted	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz			
Conducted	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz			
Test Cases	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz			
		Bluetooth BR 1Mbps GFS	SK .			
Radiated		Mode 1: CH00_2402 MHz				
Test Cases		Mode 2: CH39_2441 MHz				
	Mode 3: CH78_2480 MHz					
AC						
Conducted Mode 1 :GSM850 Idle + Bluetooth Link + WLAN Link + Earphone +						
Emission	(Charging from Adapter)					

Remark:

- For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate
 has the highest RF output power at preliminary tests, and no other significantly frequencies found in
 conducted spurious emission.
- 2. For radiated test cases, the tests were performed with adapter, earphone and USB cable.


TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 8 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




Report No.: FR421305A

Connection Diagram of Test System 2.3

<Bluetooth Tx Mode>

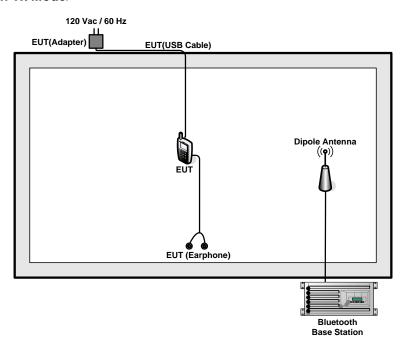

<AC Conducted Emission Mode>

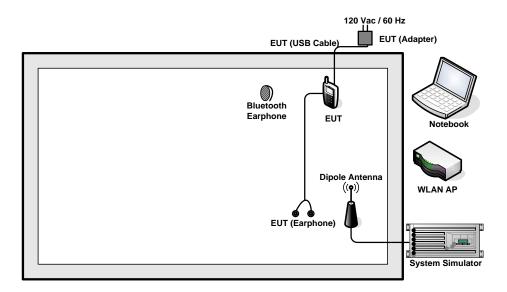

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45

Page Number : 9 of 65 Report Issued Date: Mar. 13, 2014 Report Version : Rev. 01



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
5.	Notebook	DELL	PP42L	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.0 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB). = 6.0 + 10 = 16.0 (dB)

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 10 of 65 Report Issued Date : Mar. 13, 2014

Report No.: FR421305A



3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

- 1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Enable the EUT hopping function.
- 5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW ≥ 1% of the span; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
- 6. The number of hopping frequency used is defined as the number of total channel.
- 7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup



3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	1Mbps	Temperature :	24~25℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass


SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 11 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




Report No.: FR421305A

Number of Hopping Channel Plot on Channel 00 - 78

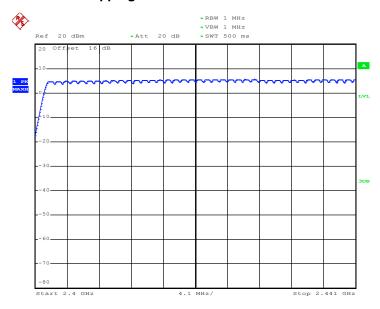

Date: 18.FEB.2014 19:58:19

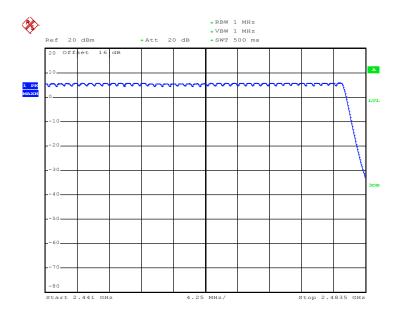

Date: 18.FEB.2014 20:04:31

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 12 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Enable the EUT hopping function.
- 5. Use the following spectrum analyzer settings:
 Span = wide enough to capture the peaks of two adjacent channels; RBW ≥ 1% of the span;
 VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
- 6. Measure and record the results in the test report.

3.2.4 Test Setup



SPORTON INTERNATIONAL (KUNSHAN) INC. TEL: 86-0512-5790-0158

FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 13 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~25 ℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6080	Pass
39	2441	1.002	0.6053	Pass
78	2480	1.002	0.5947	Pass

Channel Separation Plot on Channel 00 - 01

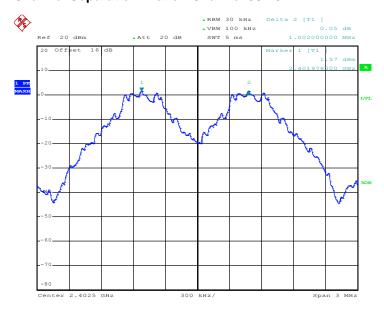

Date: 18.FEB.2014 19:24:15

SPORTON INTERNATIONAL (KUNSHAN) INC.


TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 14 of 65
Report Issued Date : Mar. 13, 2014

Report No.: FR421305A




Report No. : FR421305A



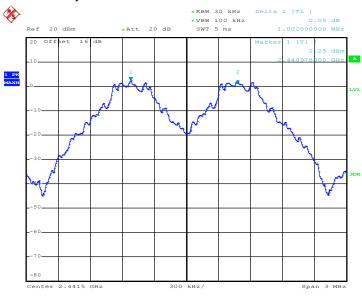

Date: 18.FEB.2014 19:24:55

Channel Separation Plot on Channel 77 - 78

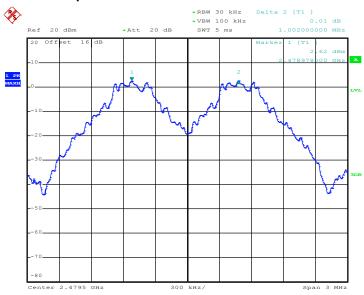

Date: 18.FEB.2014 19:25:34


TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 15 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01

FCC RF Test Report

Test Mode :	2Mbps	Temperature :	24~25℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8400	Pass
39	2441	1.002	0.8400	Pass
78	2480	1.002	0.8200	Pass


Channel Separation Plot on Channel 00 - 01

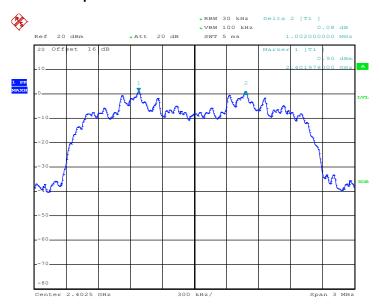

Date: 18.FEB.2014 19:27:04


TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 16 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



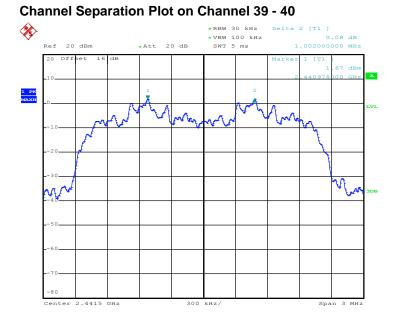

Date: 18.FEB.2014 19:27:51

Channel Separation Plot on Channel 77 - 78

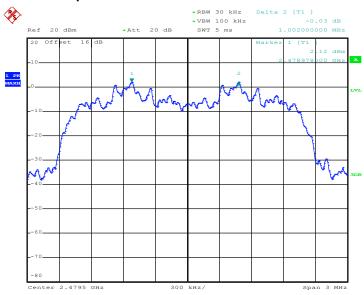

Date: 18.FEB.2014 19:28:34


TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 17 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01

FCC RF Test Report

Test Mode :	3Mbps	Temperature :	24~25℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8240	Pass
39	2441	1.002	0.8320	Pass
78	2480	1.002	0.8360	Pass

Channel Separation Plot on Channel 00 - 01

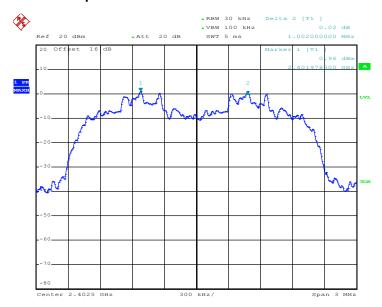


Date: 18.FEB.2014 19:29:17

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 18 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




Report No.: FR421305A



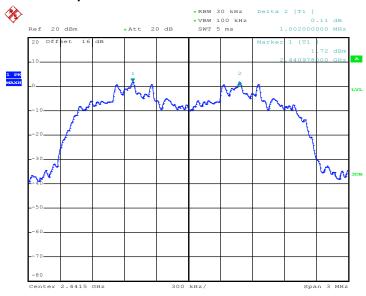

Date: 18.FEB.2014 19:30:31

Channel Separation Plot on Channel 77 - 78

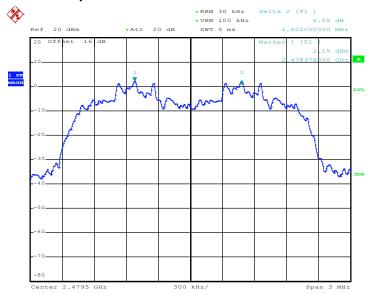

Date: 18.FEB.2014 19:31:22

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 19 of 65 Report Issued Date: Mar. 13, 2014 Report Version : Rev. 01



3.3 **Dwell Time Measurement**

3.3.1 **Limit of Dwell Time**

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 **Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

3.3.3 **Test Procedures**

- The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Enable the EUT hopping function.
- 5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
- 6. Measure and record the results in the test report.

3.3.4 Test Setup



TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45

Page Number : 20 of 65 Report Issued Date: Mar. 13, 2014

Report No.: FR421305A

: Rev. 01 Report Version



3.3.5 Test Result of Dwell Time


Test Mode :	DH5	Temperature :	24~25 ℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

Mode	Channel	Hops Over Occupancy Time(hops)		Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.892	0.31	0.4	Pass
AFH	20	53.33	2.892	0.15	0.4	Pass

Remark:

- In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.
 With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
 Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
 With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
 Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- 3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

Package Transfer Time Plot

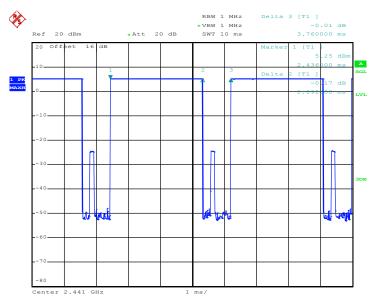

Date: 18.FEB.2014 18:22:44

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 21 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



3.4 20dB Bandwidth Measurement

3.4.1 Limit of 20dB Bandwidth

Reporting only

3.4.2 Measuring Instruments


Trace = max hold.

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
 RBW ≥ 1% of the 20 dB bandwidth; VBW ≥ RBW; Sweep = auto; Detector function = peak;
- 5. Measure and record the results in the test report.

3.4.4 Test Setup



SPORTON INTERNATIONAL (KUNSHAN) INC.


TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 22 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01

3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~25 ℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.912
39	2441	0.908
78	2480	0.892

20 dB Bandwidth Plot on Channel 00

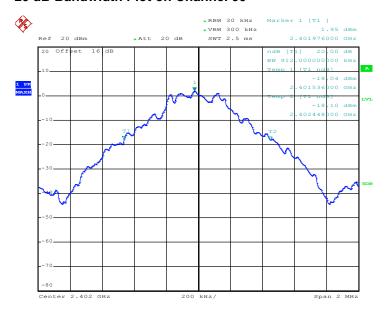

Date: 18.FEB.2014 19:31:42


TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 23 of 65
Report Issued Date : Mar. 13, 2014

Report No.: FR421305A




Report No.: FR421305A



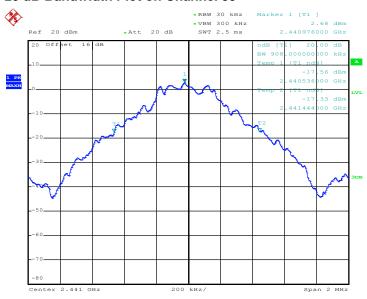

Date: 18.FEB.2014 19:31:56

20 dB Bandwidth Plot on Channel 78

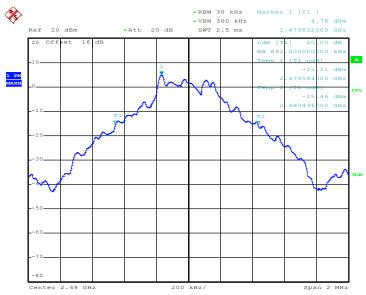

Date: 18.FEB.2014 19:32:28

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 24 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




FCC RF Test Report

Test Mode :	2Mbps	Temperature :	24~25℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.260
39	2441	1.260
78	2480	1.230

20 dB Bandwidth Plot on Channel 00

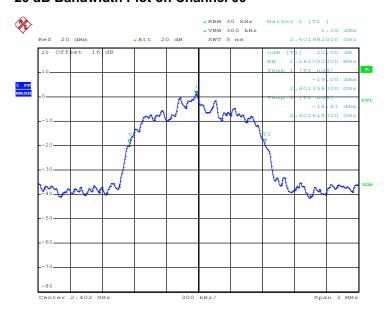

Date: 18.FEB.2014 19:33:06


TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 25 of 65
Report Issued Date : Mar. 13, 2014

Report No.: FR421305A




Report No.: FR421305A



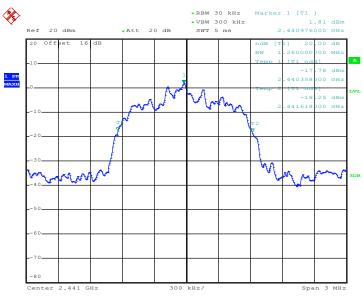

Date: 18.FEB.2014 19:33:27

20 dB Bandwidth Plot on Channel 78

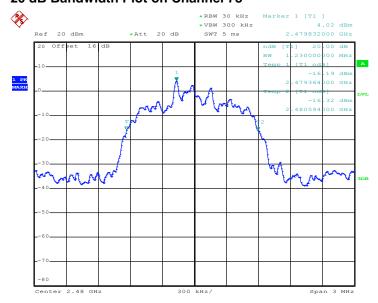

Date: 18.FEB.2014 19:33:43

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 26 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




FCC RF Test Report

Test Mode :	3Mbps	Temperature :	24~25℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.236
39	2441	1.248
78	2480	1.254

20 dB Bandwidth Plot on Channel 00

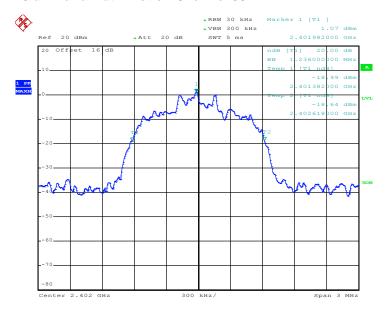


Date: 18.FEB.2014 19:34:02

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 27 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




Report No.: FR421305A

20 dB Bandwidth Plot on Channel 39

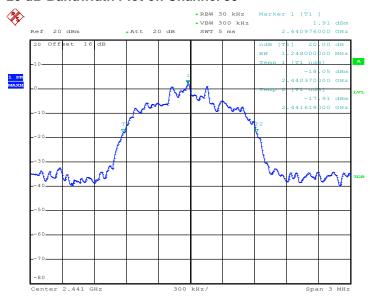

Date: 18.FEB.2014 19:34:28

20 dB Bandwidth Plot on Channel 78

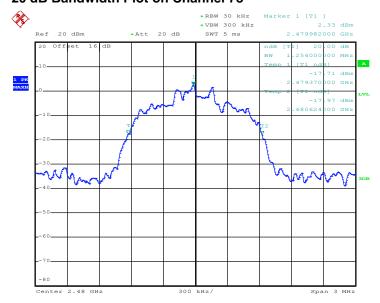

Date: 18.FEB.2014 19:34:54

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 28 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



3.5 **Peak Output Power Measurement**

3.5.1 **Limit of Peak Output Power**

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 **Test Procedures**

- 1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power with cable loss and record the results in the test report.
- 5. Measure and record the results in the test report.

3.5.4 Test Setup



TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45

Page Number : 29 of 65 Report Issued Date: Mar. 13, 2014

Report No.: FR421305A

FCC RF Test Report

3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~25 ℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

	Eroguenev	RF Power (dBm)			
Channel	Frequency (MHz)	GFSK	Max. Limits	Pass/Fail	
	(IVITIZ)	1 Mbps	(dBm)	Pass/Fall	
00	2402	5.39	20.97	Pass	
39	2441	6.08	20.97	Pass	
78	2480	6.33	20.97	Pass	

Test Mode :	2Mbps	Temperature :	24~25 ℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

	Fragueney	RF Power (dBm)		
Channel	Frequency	π/4-DQPSK	Max. Limits	Pass/Fail
	(MHz)	2 Mbps	(dBm)	Pass/Faii
00	2402	4.98	20.97	Pass
39	2441	5.67	20.97	Pass
78	2480	6.08	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~25 ℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

Fraguenay		RF Power (dBm)			
Channel	Frequency	8-DPSK	Max. Limits	Pass/Fail	
	(MHz)	3 Mbps	(dBm)	Pass/Fall	
00	2402	5.29	20.97	Pass	
39	2441	5.98	20.97	Pass	
78	2480	6.22	20.97	Pass	

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 30 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

- The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Set RBW = 100kHz (≥ 1% span=10MHz), VBW = 300kHz (≥ RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
- 4. Enable hopping function of the EUT and then repeat step 2. and 3.
- 5. Measure and record the results in the test report.

3.6.4 Test Setup




TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 31 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



3.6.6 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~25℃
Test Channel :	00 and 78	Relative Humidity :	47~49%
		Test Engineer :	Issac Song

Low Band Edge Plot on Channel 00

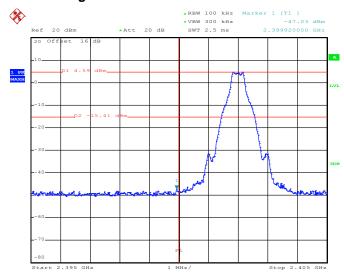

Date: 18.FEB.2014 20:24:54

High Band Edge Plot on Channel 78

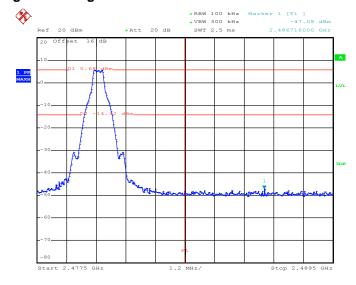

Date: 18.FEB.2014 20:23:27


TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 32 of 65
Report Issued Date : Mar. 13, 2014

Report No.: FR421305A




Test Mode :	2Mbps	Temperature :	24~25℃
Test Channel :	00 and 78	Relative Humidity :	47~49%
		Test Engineer :	Issac Song

Low Band Edge Plot on Channel 00

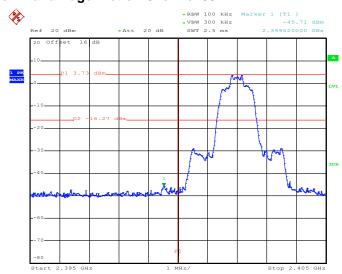

Date: 18.FEB.2014 19:37:31

High Band Edge Plot on Channel 78

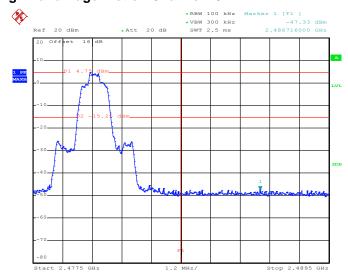

Date: 18.FEB.2014 19:38:23


SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 33 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




Test Mode :	3Mbps	Temperature :	24~25 ℃
Test Channel :	00 and 78	Relative Humidity :	47~49%
		Test Engineer :	Issac Song

Low Band Edge Plot on Channel 00

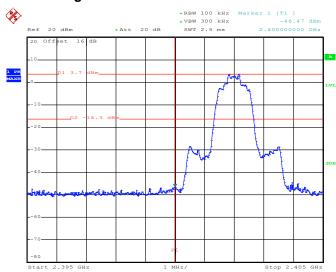

Date: 18.FEB.2014 19:39:15

High Band Edge Plot on Channel 78

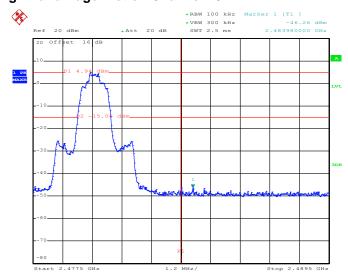

Date: 18.FEB.2014 19:40:06

SPORTON INTERNATIONAL (KUNSHAN) INC.


TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 34 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



3.6.7 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	24~25 ℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

1Mbps Hopping Mode Low Band Edge Plot

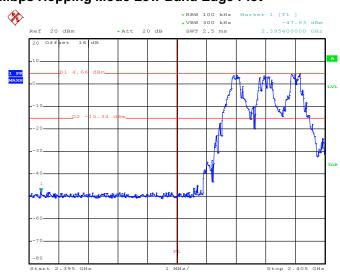

Date: 18.FEB.2014 20:17:42

1Mbps Hopping Mode High Band Edge Plot

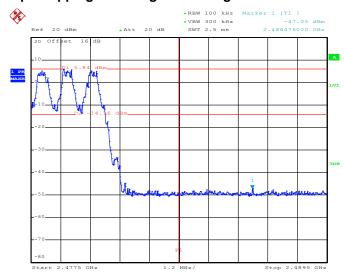

Date: 18.FEB.2014 20:18:27

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 35 of 65
Report Issued Date : Mar. 13, 2014

Report No.: FR421305A




Test Mode :	2Mbps	Temperature :	24~25 ℃
Test Engineer :	Issac Song	Relative Humidity :	47~49%

2Mbps Hopping Mode Low Band Edge Plot



Date: 18.FEB.2014 20:19:52

2Mbps Hopping Mode High Band Edge Plot

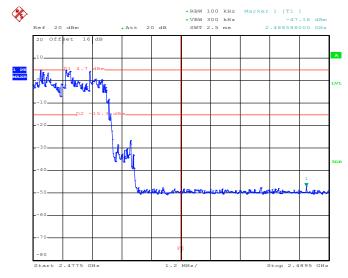

Date: 18.FEB.2014 20:19:03

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 36 of 65
Report Issued Date : Mar. 13, 2014


Report No.: FR421305A



 Test Mode :
 3Mbps
 Temperature :
 24~25°C


 Test Engineer :
 Issac Song
 Relative Humidity :
 47~49%

3Mbps Hopping Mode Low Band Edge Plot

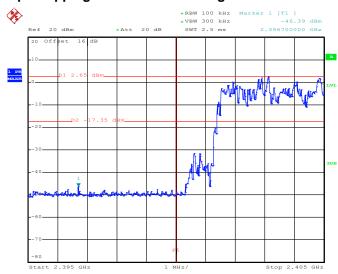

Date: 18.FEB.2014 20:20:26

3Mbps Hopping Mode High Band Edge Plot

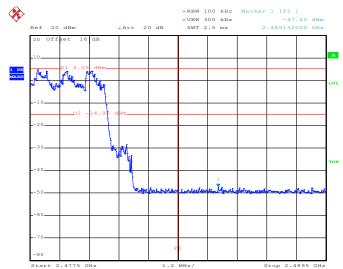

Date: 18.FEB.2014 20:21:25

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 37 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



3.7 **Conducted Spurious Emission Measurement**

3.7.1 **Limit of Spurious Emission Measurement**

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 **Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

- 1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
- 5. Measure and record the results in the test report.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup



SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45

Page Number : 38 of 65 Report Issued Date: Mar. 13, 2014

Report No.: FR421305A


Report Version : Rev. 01



3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	1Mbps	Temperature :	24~25 ℃
Test Channel :	00	Relative Humidity :	47~49%
		Test Engineer :	Issac Song

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

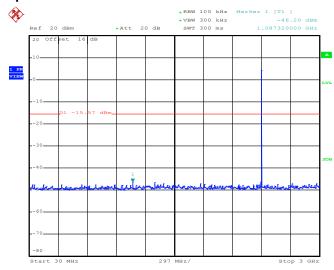

Date: 18.FEB.2014 19:46:27

1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

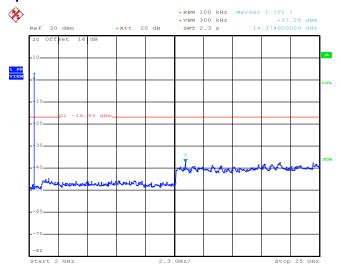

Date: 18.FEB.2014 19:47:19

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 39 of 65
Report Issued Date : Mar. 13, 2014


Report No.: FR421305A

Report Version : Rev. 01




Test Mode :	1Mbps	Temperature :	24~25 ℃	
Test Channel :	39	Relative Humidity :	47~49%	
		Test Engineer :	Issac Song	

1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

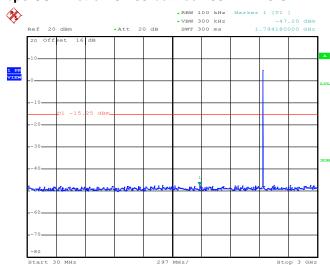

Date: 18.FEB.2014 19:48:11

1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

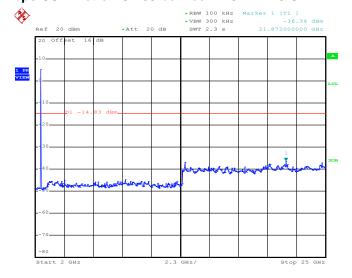

Date: 18.FEB.2014 19:49:03


SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 40 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




Test Mode :	1Mbps	Temperature :	24~25 ℃
Test Channel :	78	Relative Humidity :	47~49%
		Test Engineer :	Issac Song

1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

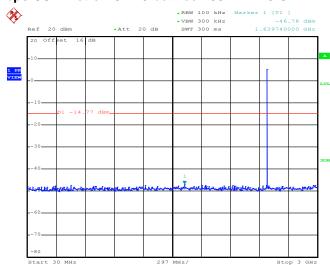

Date: 18.FEB.2014 19:49:55

1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

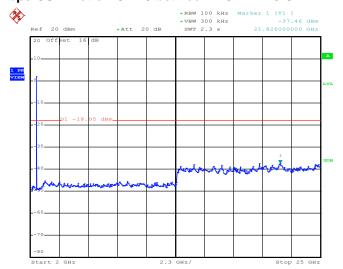

Date: 18.FEB.2014 19:50:47

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 41 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




Test Mode : 2Mbps Temperature : 24~25°C

Test Channel : 00 Relative Humidity : 47~49%


Test Engineer : Issac Song

2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

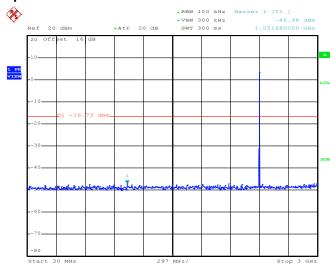

Date: 18.FEB.2014 20:05:48

2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

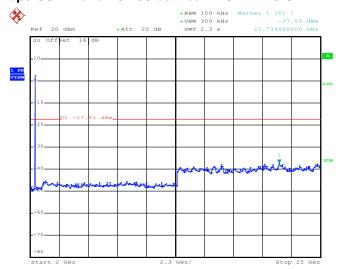

Date: 18.FEB.2014 20:06:40


SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 42 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




Test Mode :	2Mbps	Temperature :	24~25 ℃
Test Channel :	39	Relative Humidity :	47~49%
		Test Engineer :	Issac Song

2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

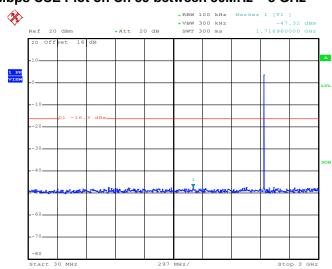

Date: 18.FEB.2014 20:07:32

2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

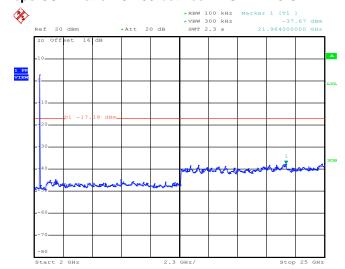

Date: 18.FEB.2014 20:08:24


SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 43 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




Test Mode :	2Mbps	Temperature :	24~25 ℃
Test Channel :	78	Relative Humidity :	47~49%
		Test Engineer :	Issac Song

2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

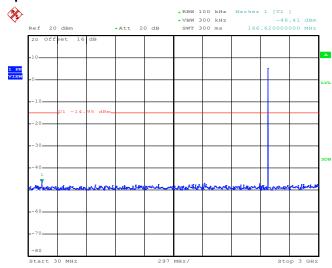

Date: 18.FEB.2014 20:09:16

2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

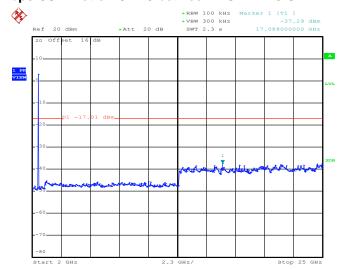

Date: 18.FEB.2014 20:10:08


SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 44 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




Test Mode :	3Mbps	Temperature :	24~25 ℃
Test Channel :	00	Relative Humidity :	47~49%
		Test Engineer :	Issac Song

3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

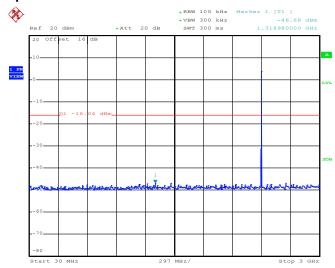

Date: 18.FEB.2014 20:11:56

3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

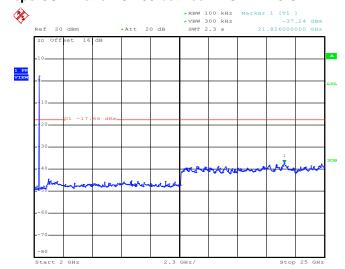

Date: 18.FEB.2014 20:12:48


SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 45 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




Test Mode :	3Mbps	Temperature :	24~25 ℃
Test Channel :	39	Relative Humidity :	47~49%
		Test Engineer :	Issac Song

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

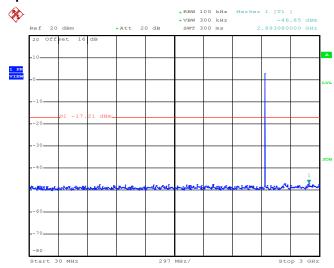

Date: 18.FEB.2014 20:13:40

3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

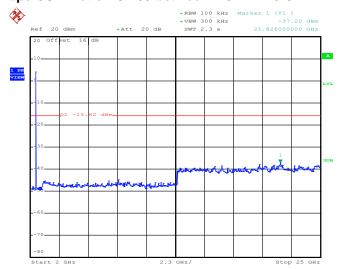

Date: 18.FEB.2014 20:14:32


SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 46 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01




Test Mode :	3Mbps	Temperature :	24~25 ℃	
Test Channel :	78	Relative Humidity :	47~49%	
		Test Engineer :	Issac Song	

3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

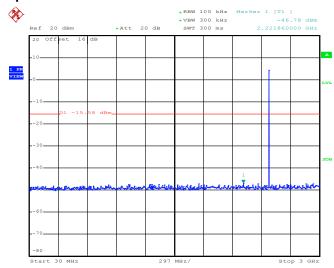

Date: 18.FEB.2014 20:15:24

3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

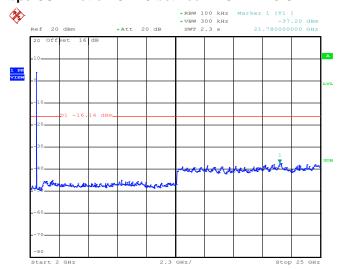

Date: 18.FEB.2014 20:16:16

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 47 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 48 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01

3.8.3 Test Procedures

 The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.

Report No.: FR421305A

- 2. The EUT was placed on a turntable with 0.8 meter above ground.
- 3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 5. Set to the maximum power setting and enable the EUT transmit continuously.
- 6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for f < 1 GHz, RBW=1MHz for f>1GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds

On time = $N_1*L_1+N_2*L_2+...+N_{n-1}*LN_{n-1}+N_n*L_n$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + 20*log(Duty cycle)

7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from 20log (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

Page Number

Report Version

: 49 of 65


: Rev. 01

Report Issued Date: Mar. 13, 2014




3.8.4 Test Setup

For radiated emissions below 30MHz

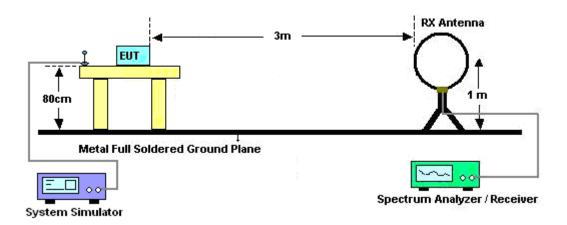

For radiated emissions from 30MHz to 1GHz

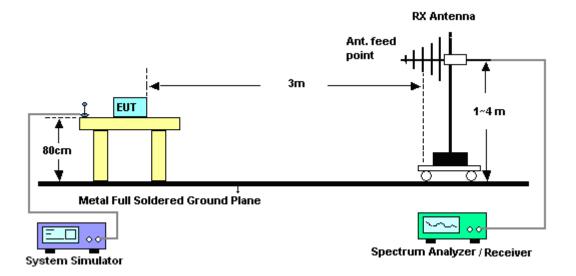

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 50 of 65 Report Issued Date : Mar. 13, 2014

Report No.: FR421305A

Report Version : Rev. 01



Ant. feed point 3m EUT Netal Full Soldered Ground Plane

For radiated emissions above 1GHz

00

System Simulator

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 51 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01

Report No.: FR421305A


Spectrum Analyzer / Receiver



Report No.: FR421305A


Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

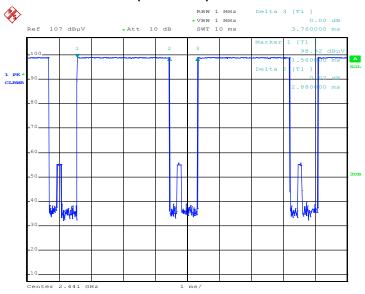

Date: 20.FEB.2014 09:00:22

DH5 on time (Count Pulses) Plot on Channel 39

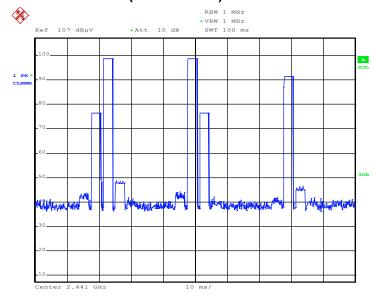

Date: 20.FEB.2014 08:59:04

Note:

- 1. Worst case Duty cycle = on time/100 milliseconds = $2 \times 2.88 / 100 = 5.76 \%$
- 2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
- DH5 has the highest duty cycle worst case and is reported.

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45

Page Number : 52 of 65 Report Issued Date: Mar. 13, 2014 Report Version : Rev. 01

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

 $2.88 \text{ ms } \times 20 \text{ channels} = 57.6 \text{ ms}$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. [100ms / 57.6ms] = 2 hops

Thus, the maximum possible ON time:

2.88 ms x 2 = 5.76 ms

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

 $20 \times log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$

Page Number : 53 of 65 Report Issued Date: Mar. 13, 2014

Report No.: FR421305A

: Rev. 01 Report Version

3.8.7 Test Result of Radiated Spurious at Band Edges

Test Mode :	1Mbps	Temperature :	22~23°C
Test Channel :	00	Relative Humidity :	42~43%
		Test Engineer :	Star Wei

	ANTENNA POLARITY : HORIZONTAL									
Frequency	Frequency Level Over Limit Read Antenna Cable Preamp Ant Table Remark								Remark	
		Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB)	(dB)	(dB)	(cm)	(deg)	
2389.83	46.11	-27.89	74	42.92	32.86	3.59	33.26	100	183	Peak
2389.83	21.32	-32.68	54	-	-	-	-	-	-	Average

	ANTENNA POLARITY : VERTICAL									
Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
		Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB)	(dB)	(dB)	(cm)	(deg)	
2375.61	45.43	-28.57	74	42.28	32.83	3.58	33.26	200	96	Peak
2375.61	20.64	-33.36	54	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	22~23°C
Test Channel :	78	Relative Humidity :	42~43%
		Test Engineer :	Star Wei

	ANTENNA POLARITY : HORIZONTAL													
Frequency Level Over Limit Read Antenna Cable Preamp Ant Table Rema														
		Limit	Line	Level	Factor	Loss	Factor	Pos	Pos					
(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB)	(dB)	(dB)	(cm)	(deg)					
2483.5	61.62	-12.38	74	58.25	33.01	3.65	33.29	102	172	Peak				
2483.5	36.83	-17.17	54	-	-	-	-	-	-	Average				

	ANTENNA POLARITY : VERTICAL													
Frequency	requency Level Over Limit Read Antenna Cable Preamp Ant Table Remark													
		Limit	Line	Level	Factor	Loss	Factor	Pos	Pos					
(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB)	(dB)	(dB)	(cm)	(deg)					
2483.5	62.2	-11.8	74	58.83	33.01	3.65	33.29	100	36	Peak				
2483.5	37.41	-16.59	54	-	-	-	-	-	-	Average				

Note: Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79dB)

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 54 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic) 3.8.8

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

Test Mode :	1Mbps		Temperature :	22~23°C
Test Channel :	00		Relative Humidity :	42~43%
Test Engineer : Star Wei		Wei	Polarization :	Horizontal
	1.	2402 MHz is fundamer	ntal signal which can be	e ignored.
Remark :	2.	Average measurement	t was not performed if	peak level went lower than the
		average limit.		

Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
		Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB)	(dB)	(dB)	(cm)	(deg)	
2402	100.71	-	-	97.52	32.86	3.59	33.26	100	183	Peak
2402	75.92	-	-	-	-	-	-	100	183	Average
4804	46.24	-27.76	74	39.63	35.17	5.24	33.8	100	147	Peak

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	1Mbps	Temperature :	22~23°C			
Test Channel :	00	Relative Humidity :	42~43%			
Test Engineer :	Star Wei	Polarization :	Vertical			
	1. 2402 MHz is fundamental signal which can be ignored.					
Remark :	2. Average measurement was not performed if peak level went lower than					
	average limit.					

Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
		Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB)	(dB)	(dB)	(cm)	(deg)	
2402	98.2	-	-	95.01	32.86	3.59	33.26	200	96	Peak
2402	73.41	-	-	-	-	-	-	200	96	Average
4804	47.01	-26.99	74	40.4	35.17	5.24	33.8	112	332	Peak

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45

Page Number : 55 of 65 Report Issued Date: Mar. 13, 2014 Report Version

: Rev. 01

Test Mode :	1Mbps	Temperature :	22~23°C
Test Channel :	39	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
	1. 2441 MHz is fundament	al signal which can be	ignored.
Remark :	2. Average measurement	was not performed if	peak level went lower than the
	average limit.		

Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB)	(dB)	(dB)	(cm)	(deg)	
2441	102.71	-	-	99.41	32.95	3.63	33.28	100	172	Peak
2441	77.92	-	-	-	-	-	-	100	172	Average
4882	46.13	-27.87	74	39.47	35.18	5.28	33.8	132	154	Peak
7324	48.3	-25.7	74	39.59	36.21	6.63	34.13	145	78	Peak

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	1Mbps	Temperature :	22~23°C
Test Channel :	39	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
	1. 2441 MHz is fundament	al signal which can be	ignored.
Remark :	2. Average measurement	was not performed if	peak level went lower than the
	average limit.		

Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable	Preamp Factor	Ant Pos	Table Pos	Remark
(MHz)	(dBµV/m)	(dB)	(dBµV/m)		(dB)	Loss (dB)	(dB)	(cm)		
2441	101.91	-	-	98.61	32.95	3.63	33.28	109	27	Peak
2441	77.12	-	-	-	-	-	-	109	27	Average
4882	46.19	-27.81	74	39.53	35.18	5.28	33.8	100	145	Peak
7324	49.37	-24.63	74	40.66	36.21	6.63	34.13	100	102	Peak

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 56 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



Test Mode: 1Mbps 22~23°C Temperature : Test Channel: 78 Relative Humidity: 42~43% Star Wei Test Engineer: Polarization: Horizontal 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the Remark: average limit.

Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
		Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
(MHz)	(dBµV/m)	(dB)	$(dB\mu V/m)$	(dBµV)	(dB)	(dB)	(dB)	(cm)	(deg)	
110.51	27.8	-15.7	43.5	48.63	11.8	0.98	33.61	100	154	Peak
194.9	25.89	-17.61	43.5	49.42	8.75	1.28	33.56	-	-	Peak
281.23	21.46	-24.54	46	40.63	12.68	1.55	33.4	-	-	Peak
405.39	20.95	-25.05	46	36.37	16.03	1.85	33.3	-	-	Peak
631.4	20.58	-25.42	46	32.43	18.8	2.3	32.95	-	-	Peak
740.04	20.46	-25.54	46	30.99	19.81	2.45	32.79	-	-	Peak
2480	102.52	-	-	99.15	33.01	3.65	33.29	102	172	Peak
2480	77.73	-	-	-	-	-	-	102	172	Average
4960	46.32	-27.68	74	39.59	35.2	5.33	33.8	100	100	Peak
7440	49.66	-24.34	74	40.82	36.27	6.75	34.18	100	148	Peak

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 57 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



FCC RF Test Report Report No.: FR421305A

Test Mode :	1Mbps	Temperature :	22~23°C				
Test Channel :	78	Relative Humidity :	42~43%				
Test Engineer :	Star Wei	Polarization :	Vertical				
	 2480 MHz is fundamental signal which can be ignored. Average measurement was not performed if peak level went lower than the 						
Remark :							
	average limit.						

Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
		Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB)	(dB)	(dB)	(cm)	(deg)	
52.31	27.54	-12.46	40	53.44	7.01	0.67	33.58	113	265	Peak
111.48	27.36	-16.14	43.5	48.19	11.8	0.98	33.61	-	-	Peak
225.94	24.15	-21.85	46	45.68	10.59	1.38	33.5	-	-	Peak
405.39	20.29	-25.71	46	35.71	16.03	1.85	33.3	-	-	Peak
574.17	21.87	-24.13	46	34.11	18.55	2.19	32.98	-	-	Peak
850.62	22.18	-23.82	46	31.77	20.51	2.63	32.73	-	-	Peak
2480	103.97	-	-	100.6	33.01	3.65	33.29	100	36	Peak
2480	79.18	-	-	-	-	-	-	100	36	Average
4960	45.78	-28.22	74	39.05	35.2	5.33	33.8	147	115	Peak
7440	49.96	-24.04	74	41.12	36.27	6.75	34.18	100	200	Peak

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 58 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Fraguency of emission (MUz)	Conducted limit (dBµV)				
Frequency of emission (MHz)	Quasi-peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			

^{*}Decreases with the logarithm of the frequency.

3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 59 of 65
Report Issued Date : Mar. 13, 2014


Report No.: FR421305A

Report Version : Rev. 01



Report No.: FR421305A

Test Setup 3.9.4

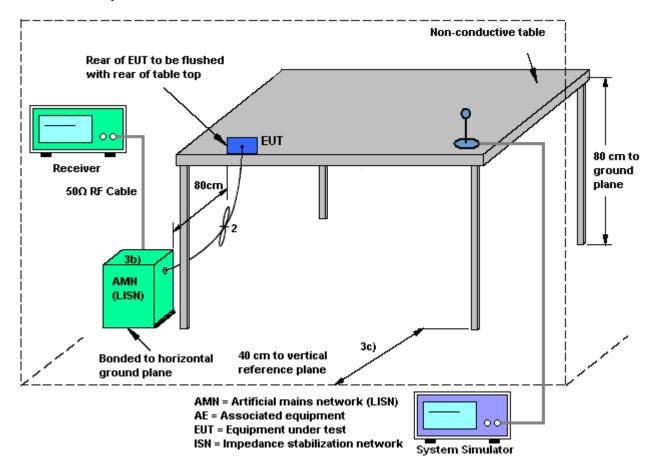


TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45

Page Number : 60 of 65 Report Issued Date: Mar. 13, 2014 Report Version : Rev. 01



3.9.5 Test Result of AC Conducted Emission

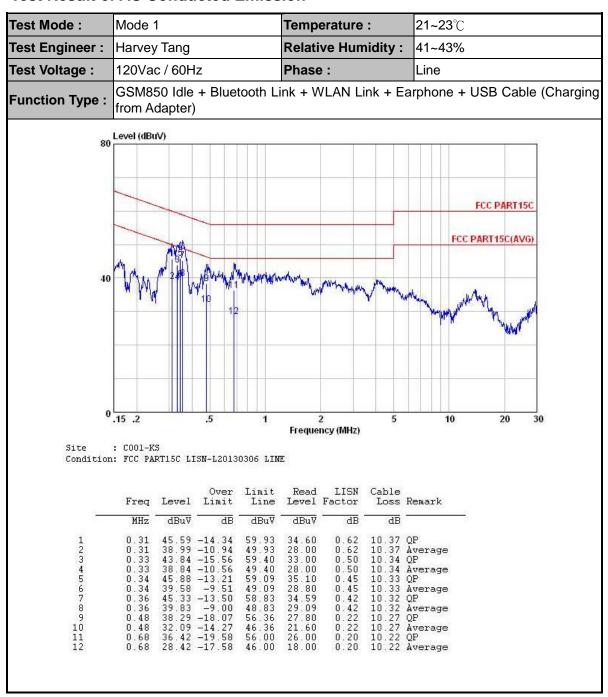

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 61 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



Test Mode: Mode 1 21~23°C Temperature: Test Engineer: Harvey Tang **Relative Humidity:** 41~43% Test Voltage: 120Vac / 60Hz Neutral Phase: GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging Function Type: from Adapter) 80 Level (dBuV) FCC PART 15C FCC PART15C(AVG) .15 .2 30 Frequency (MHz) Site : C001-KS Condition: FCC PART15C LISN-N20130306 NEUTRAL LISN Cable actor Loss Remark Over Limit Freq Level Limit Line Read Level Factor dBuV MHz dB dBuV dBuV dB dB 38.44 -27.34 31.44 -24.34 42.01 -17.83 37.01 -12.83 37.91 -10.96 43.01 -15.86 34.89 -21.11 29.49 -16.51 34.48 -21.52 29.38 -16.62 35.08 -20.92 10.70 QP 10.70 Average 10.36 QP 10.36 Average 10.32 Average 10.32 QP 10.24 QP 10.24 Average 10.18 QP 65.78 55.78 59.84 49.84 48.87 58.87 56.00 46.00 56.00 46.00 1.84 1.84 0.65 0.65 0.50 0.50 0.25 0.25 123456789 0.15 0.31 0.35 0.35 0.59 0.59 0.99 0.99 18.90 31.00 26.00 27.09 32.19 24.40 19.00 24.20 19.10 24.80 19.61 10 0.10 10.18 Average 10.18 OP 11 12

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 62 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01

3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45

Page Number : 63 of 65 Report Issued Date: Mar. 13, 2014

Report No.: FR421305A

Report Version : Rev. 01



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics Calibratic		Test Date	Test Date Due Date	
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Feb. 18, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Feb. 28, 2013	Feb. 18, 2014	Feb. 27, 2014	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 28, 2013	Feb. 18, 2014	Feb. 27, 2014	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Feb. 20, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 23, 2013	Feb. 20, 2014	May 22, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Feb. 20, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 08, 2014	Feb. 20, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz~40GHz	Nov. 22, 2013	Feb. 20, 2014	Nov. 21, 2014	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Feb. 20, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	May 23, 2013	Feb. 20, 2014	May 22, 2014	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A023 71	1GHz~26.5GHz	Dec. 10, 2013	Feb. 20, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Feb. 20, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Feb. 20, 2014	NCR	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	May 23, 2013	Feb. 19, 2014	May 22, 2014	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 10, 2013	Feb. 19, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Dec. 10, 2013	Feb. 19, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	May 25, 2013	Feb. 19, 2014	May 24, 2014	Conduction (CO01-KS)

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 64 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01



FCC RF Test Report

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of	2.26
Confidence of 95% (U = 2Uc(y))	2.26

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	2.54
Confidence of 95% (U = 2Uc(y))	2.54

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL: 86-0512-5790-0158 FAX: 86-0512-5790-0958 FCC ID: YHLBLUNEO45 Page Number : 65 of 65
Report Issued Date : Mar. 13, 2014
Report Version : Rev. 01