Page 1 of 268

Report No.: 190326007RFM-1

FCC TEST REPORT

Product Name: Mobile Phone

Trade Mark: BLU

Model No.: U851

Report Number: 190326007RFM-1

Test Standards: FCC 47 CFR Part 22 Subpart H

FCC 47 CFR Part 24 Subpart E

FCC 47 CFR Part 27 FCC 47 CFR Part 2

FCC ID: YHLBLUU851

Test Result: PASS

Date of Issue: April 26, 2019

Prepared for:

BLU Products, Inc. 10814 NW 33rd St # 100 Doral, FL 33172 ,USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd. 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

TEL: +86-755-2823 0888 FAX: +86-755-2823 0886

Tested by:

Reviewed by:

Kevin Liang Assistant Manager

Approved by:

Date: _

April 26, 2019

Technical Director



Version

Version No.	Date	Description
V1.0	April 26, 2019	Original





CONTENTS

1.	GEN	ERAL INFORMATION	4
	1.1	CLIENT INFORMATION	4
	1.2	EUT INFORMATION	4
		1.2.1 GENERAL DESCRIPTION OF EUT	4
		1.2.2 DESCRIPTION OF ACCESSORIES	4
	1.3	PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
	1.4	DESCRIPTION OF SUPPORT UNITS	7
	1.5	TEST LOCATION	
	1.6	TEST FACILITY	
	1.7	DEVIATION FROM STANDARDS	
	1.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	1.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	1.10	MEASUREMENT UNCERTAINTY	8
2.	TEST	SUMMARY	a
3.		PMENT LIST	
4.		CONFIGURATION	
•			
	4.1	ENVIRONMENTAL CONDITIONS FOR TESTING	
		4.1.1 NORMAL OR EXTREME TEST CONDITIONS	
		4.1.2 RECORD OF NORMAL ENVIRONMENT	
	4.2	TEST SETUP	
		4.2.1 FOR RADIATED EMISSIONS TEST SETUP	
		4.2.2 FOR CONDUCTED RF TEST SETUP	
	4.3	TEST CHANNELS	
	4.4	SYSTEM TEST CONFIGURATION	
	4.5	PRE-SCAN	
5.	RADI	O TECHNICAL REQUIREMENTS SPECIFICATION	27
	- 4	REFERENCE DOCUMENTS FOR TESTING	07
	5.1 5.2	ERP OR EIRP	
	5.2 5.3	CONDUCTED OUTPUT POWER	
	5.4	PEAK-TO-AVERAGE RATIO	
	5.4 5.5	99%&26dB Bandwidth	
	5.6	BAND EDGE AT ANTENNA TERMINALS	
	5.0 5.7	SPURIOUS EMISSIONS AT ANTENNA TERMINALS	
	5. <i>1</i> 5.8	FIELD STRENGTH OF SPURIOUS RADIATION	
	5.0	5.8.1 RADIATED EMISSION TEST DATA (30 MHz to 1 GHz)	
		5.8.2 RADIATED EMISSION TEST DATA (ABOVE 1GHz)	
	5.9	FREQUENCY STABILITY	
	0.0		
ΑP	PEND	X 1 PHOTOS OF TEST SETUP	
A D	DENIDI	IV 2 DUOTOS OF FUT CONSTRUCTIONAL DETAILS	260

Page 4 of 268 Report No.: 190326007RFM-1

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	BLU Products, Inc.
Address of Applicant:	10814 NW 33rd St # 100 Doral, FL 33172 ,USA
Manufacturer:	BLU Products, Inc.
Address of Manufacturer:	10814 NW 33rd St # 100 Doral, FL 33172 ,USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Mobile Phone					
Model No.:	U851					
Trade Mark:	BLU					
DUT Stage:	Identical Prototype					
	GSM Bands:	GSM850/1900				
	UTRA Bands: Band II/ Band IV/ Band V					
EUT Supports Function:	E-UTRA Bands:	FDD Band 2/ Band 4/ Band 5/ Band 7/Band 12/ Band 17				
	0.4.011 1014 Dec. 1	IEEE 802.11b/g/n				
	2.4 GHz ISM Band:	Bluetooth V4.0				
Sample Received Date:	March 26, 2019					
Sample Tested Date:	March 26, 2019 to April 19, 2019					

1.2.2 Description of Accessories

Adapter					
Model No.:	US-BB-2000				
Input: 100-240 V~50/60 Hz 0.3 A					
Output:	5.0 V == 2000 mA				
DC Cable:	1.05 Meter, Unshielded without ferrite				

Battery						
Model No.:	C825444300L					
Battery Type:	Lithium-ion Rechargeable Battery					
Rated Voltage:	3.8 Vdc					
Limited Charge Voltage:	4.35 Vdc					
Rated Capacity:	3000 mAh					

Cable				
Description: USB Type-C Plug Cable				
Cable Type:	Unshielded without ferrite			
Length:	1.0 Meter			



1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Support Networks:	GSM, GPRS, EDGE, WCDMA, HSDPA, HSUF	PA, LTE
	GSM/GPRS:	GMSK
	EDGE:	GMSK, 8PSK
Type of Modulation:	WCDMA	BPSK
Type of Modulation.	HSDPA:	QPSK
	HSUPA:	QPSK
	LTE	QPSK, 16QAM
	GSM/GPRS/EDGE 850:	824.2-848.8 MHz
	GSM/GPRS/EDGE 1900:	1850.2-1909.8 MHz
	WCDMA Band II:	1852.4-1907.6 MHz
	WCDMA Band IV:	1712.4-1752.6 MHz
	WCDMA Band V:	826.4-846.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz):	1850.7-1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz):	1851.5-1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz):	1852.5-1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz):	1855.0-1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz):	1857.5-1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz):	1860.0-1900.0 MHz
	LTE Band 4 (Channel Bandwidth: 1.4 MHz):	1710.7-1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz):	1711.5-1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz):	1712.5-1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz):	1715-1750 MHz
Frequency Range:	LTE Band 4 (Channel Bandwidth: 15 MHz):	1717.5-1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz):	1720-1745 MHz
	LTE Band 5 (Channel Bandwidth: 1.4 MHz):	824.7-848.3 MHz
	LTE Band 5 (Channel Bandwidth: 3 MHz):	825.5-847.5MHz
	LTE Band 5 (Channel Bandwidth: 5 MHz):	826.5-846.5 MHz
	LTE Band 5 (Channel Bandwidth: 10 MHz):	829-844 MHz MHz
	LTE Band 7 (Channel Bandwidth: 5 MHz):	2502.5-2567.5 MHz
	LTE Band 7 (Channel Bandwidth: 10 MHz):	2505-2565 MHz
	LTE Band 7 (Channel Bandwidth: 15 MHz):	2507.5-2562.5 MHz
	LTE Band 7 (Channel Bandwidth: 20 MHz):	2510-2560 MHz
	LTE Band 12 (Channel Bandwidth: 1.4 MHz):	699.7-715.3 MHz
	LTE Band 12 (Channel Bandwidth: 3 MHz):	700.5-714.5 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz):	701.5-713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz):	704-711 MHz
	LTE Band 17 (Channel Bandwidth: 5 MHz):	706.5-713.5 MHz
	LTE Band 17 (Channel Bandwidth: 10 MHz):	709-711 MHz
	GSM/GPRS 850:	33.07dBm
	EDGE 850:	27.06dBm
	GSM/GPRS 1900:	29.97dBm
Max RF Output Power:	EDGE 1900:	27.12dBm
	WCDMA Band II:	23.08dBm
	WCDMA Band IV:	23.27dBm
	WCDMA Band V:	24.13dBm

Page 6 of 268 Report No.: 190326007RFM-1

	LTE:		See Note 1
	GSM/GPRS 850:		247KGXW
	EDGE 850:		245KG7W
	GSM/GPRS 1900:		245KGXW
Time of Emission.	EDGE 1900:		245KG7W
Type of Emission:	WCDMA Band II:	,	4M17F9W
	WCDMA Band IV:		4M18F9W
	WCDMA Band V:		4M18F9W
	LTE:		See Note 1
IEMI:	Radiation: 357518074475880, 3575180	7447589	98
ILIVII.	Conducted: 357518074475906, 357518074475914		
Antenna Type:	PIFA Antenna		
	GSM 850:	-0.47 dBi	
	GSM 1900:	1900: 0.39 dBi	
	WCDMA Band II: 0.39 dBi		si
	WCDMA Band IV: 0.37 d		si 💮 💮
	WCDMA Band V: -0.47 dBi		3i
Antenna Gain:	LTE Band 2:	0.39 dBi	
	LTE Band 4:	0.37 dBi	
	LTE Band 5:	-0.47 dE	3i
	LTE Band 7:	0.56 dB	si .
	LTE Band 12:	-0.5 dBi	
	LTE Band 17:	-0.5 dBi	
Normal Test Voltage:	3.8 Vdc		
Extreme Test Voltage:	3.4 to 4.35Vdc		
Extreme Test Temperature:	-30 °C to +50 °C		

Note 1:

LTE Summ	LTE Summary of Results:								
Dand	BW		Max RF Output Power (dBm)		Type of Emission				
Band	(MHz)	Range (MHz)	Conducted	ERP/EIRP	QPSK	16QAM	64QAM		
		(IVITIZ)	(Average)	(Average)	QF3K		04QAIVI		
	1.4	1850.7-1909.3	22.77	23.16	1M11G7D	1M11W7D	N/A		
	3	1851.5-1908.5	22.31	22.70	2M70G7D	2M71W7D	N/A		
LTE	5	1852.5-1907.5	22.34	22.73	4M47G7D	4M47W7D	N/A		
Band 2	10	1855.0-1905.0	22.23	22.62	8M93G7D	8M93W7D	N/A		
	15	1857.5-1902.5	22.25	22.64	13M4G7D	13M4W7D	N/A		
	20	1860.0-1900.0	22.34	22.73	17M9G7D	17M9W7D	N/A		
	1.4	1710.7-1754.3	22.33	22.98	1M10G7D	1M10W7D	N/A		
LTE	3	1711.5-1753.5	22.36	22.36	2M69G7D	2M69W7D	N/A		
Band 4	5	1712.5-1752.5	22.25	22.35	4M46G7D	4M46W7D	N/A		
Dailu 4	10	1715-1750	22.27	22.33	8M92G7D	8M92W7D	N/A		
	15	1717.5-1747.5	22.36	22.40	13M4G7D	13M4W7D	N/A		



Page 7 of 268 Report No.: 190326007RFM-1

	20	1720-1745	22.33	22.45	17M8G7D	17M8W7D	N/A
	1.4	824.7-848.3	22.90	20.28	1M10G7D	1M10W7D	N/A
LTE	3	825.5-847.5	21.86	19.60	2M69G7D	2M71W7D	N/A
Band 5	5	826.5-846.5	21.88	19.62	4M46G7D	4M46W7D	N/A
	10	829-844	21.92	19.66	8M92G7D	8M92W7D	N/A
	5	2502.5-2567.5	22.05	21.49	4M46G7D	4M47W7D	N/A
LTE	10	2505-2565	22.20	21.64	8M92G7D	8M92W7D	N/A
Band 7	15	2507.5-2562.5	22.09	21.53	13M4G7D	13M4W7D	N/A
	20	2510-2560	22.22	21.66	17M8G7D	17M8W7D	N/A
	1.4	699.7-715.3	23.07	20.42	1M09G7D	1M19W7D	N/A
LTE	3	700.5-714.5	22.38	19.73	2M71G7D	2M70W7D	N/A
Band 12	5	701.5-713.5	22.39	19.74	4M51G7D	4M52W7D	N/A
	10	704-711	22.43	19.78	8M99G7D	8M99W7D	N/A
LTE	5	706.5-713.5	22.34	19.69	4M52G7D	4M52W7D	N/A
Band 17	10	709-711	22.36	19.71	8M96G7D	8M95W7D	N/A

1.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by	
-	-	-	-	-	

2) Support Cable

Cable No.	Description	Connector	Connector Length	
1	Antenna Cable	SMA	0.30 Meter	UnionTrust

1.5 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New

District, Shenzhen, China 518109 Telephone: +86 (0) 755 2823 0888 Fax: +86 (0) 755 2823 0886

1.6 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

IC-Registration No.: 21600-1

Page 8 of 268 Report No.: 190326007RFM-1

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.7 DEVIATION FROM STANDARDS

None.

1.8 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.10MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB



2. TEST SUMMARY

FCC 47 CFR P	art 22 Subpart H Test Cases (GSM 850	0/WCDMA Band V/LTE Band	5)
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	Peak-to-average ratio FCC 47 CFR Part 22.913(a)		PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals			PASS
Spurious emissions at antenna terminals	·		PASS
Field strength of spurious radiation			PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 22.355	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Pa	art 24 Subpart E Test Cases (GSM 190	0/WCDMA Band II/LTE Band	2)
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)		ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 24.232(d)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 24.238(b)	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)(b)	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 24.238(a)(b)	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 24.235	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS



FCC	47 CFR Part 27 Test Cases (WCDMA	Band IV/LTE Band 4)		
Test Item	Test Requirement	Test Method	Result	
Equivalent Isotropic			PASS	
Radiated Power (EIRP)	FCC 47 CFR Part 27.50(d)(4)	KDB 971168 D01v03r01	17.00	
Conducted Output	FCC 47 CFR Part 2.1046(a) &	ANSI/TIA-603-E-2016 &	PASS	
Power	FCC 47 CFR Part 27.50(d)(4)	KDB 971168 D01v03r01	1 700	
Peak-to-average ratioFCC 47 CFR Part 27.50(d)(5)		KDB 971168 D01v03r01	PASS	
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI/TIA-603-E-2016 &	PASS	
99 /6&200B Balldwidtii	FCC 47 CFR Part 27.53(h)	KDB 971168 D01v03r01	PASS	
Band Edge at antenna	FCC 47 CFR Part 27.53(h)(1)	ANSI/TIA-603-E-2016 &	PASS	
terminals	1 66 47 61 KT alt 27:55(H)(T)	KDB 971168 D01v03r01		
Spurious emissions at	FCC 47 CFR Part 2.1051 &	ANSI/TIA-603-E-2016 &	PASS	
antenna terminals	antenna terminals FCC 47 CFR Part 27.53(h)		FK33	
Field strength of	FCC 47 CFR Part 2.1053 &	ANSI/TIA-603-E-2016 &	PASS	
spurious radiation	FCC 47 CFR Part 27.53(h)	KDB 971168 D01v03r01	FAOO	
Frequency stability	FCC 47 CFR Part 2.1055 &	ANSI/TIA-603-E-2016 &	PASS	
Frequency stability	FCC 47 CFR Part 27.54	KDB 971168 D01v03r01	FA33	

FCC	47 CFR Part 27 Test Cases (LTE Band	d 7/Band 12/Band 17)	
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)			PASS
Conducted Output FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(c)(10)		ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio FCC 47 CFR Part 27.50(d)(5)		KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) FCC 47 CFR Part 27.53(g)	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(g)	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(g)	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(g)	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01	PASS



3. EQUIPMENT LIST

	Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)	
\boxtimes	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 03, 2018	Dec. 03, 2021	
\boxtimes	Receiver	R&S	ESIB26	100114	Nov. 24, 2018	Nov. 24, 2019	
	Loop Antenna	ETS-LINDGREN	6502	00202525	Dec. 03, 2018	Dec. 03, 2019	
\boxtimes	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Dec. 08, 2018	Dec. 08, 2019	
\boxtimes	6dB Attenuator	Talent	RA6A5-N- 18	18103001	Dec. 08, 2018	Dec. 08, 2019	
\boxtimes	Preamplifier	HP	8447F	2805A02960	Nov. 24, 2018	Nov. 24, 2019	
\boxtimes	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	May 19, 2018	May 19, 2019	
\boxtimes	6dB Attenuator	Talent	RA6A5-N- 18	18103002	Nov. 24, 2018	Nov. 24, 2019	
\boxtimes	Horn Antenna	ETS-LINDGREN	3117	00164202	Dec. 08, 2018	Dec. 08, 2019	
\boxtimes	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	May 22, 2018	May 22, 2019	
\boxtimes	Horn Antenna	ETS-LINDGREN	3116C	00200180	May 20, 2018	May 20, 2019	
\boxtimes	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Jan. 05, 2019	Jan. 05, 2020	
	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A	
	Highpass Filter (1.2GHz~18GHz)	Micro-Tronics	HPM50108	G552	Nov. 29, 2018	Nov. 29, 2019	
	Highpass Filter (3GHz~18GHz)	Micro-Tronics	HPM50117	G005	Nov. 29, 2018	Nov. 29, 2019	
	Wideband Radio Communication Tester	R&S	CMW500	116254	Jun. 07, 2018	Jun. 07, 2019	
\boxtimes	Test Software	Audix	e3	Sof	tware Version: 9.16	0333	

	RF Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)	
\boxtimes	Receiver	R&S	ESR7	1316.3003K07 -101181-K3	Nov. 24, 2018	Nov. 24, 2019	
	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Nov. 24, 2018	Nov. 24, 2019	
	Wideband Radio Communication Tester	R&S	CMW500	116254	Jun. 07, 2018	Jun. 07, 2019	
\boxtimes	DC Source	KIKUSUI	PWR400L	LK003024	Sep. 18, 2018	Sep. 18, 2019	
\boxtimes	Temp & Humidity chamber	Votisch	VT4002	58566133290 020	Jun. 05, 2018	Jun. 05, 2020	



4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Test Environment	Selected Values During Tests				
Test Condition	Ambient				
rest Condition	Temperature (°C)	Relative Humidity (%)			
TN/VN	+15 to +35	3.8	20 to 75		
TL/VL	-30	3.4	20 to 75		
TH/VL	+50	3.4	20 to 75		
TL/VH	-30	4.35	20 to 75		
TH/VH	+50	4.35	20 to 75		

Remark:

- 1) The EUT just work in such extreme temperature of -30 °C to +50 °C and the extreme voltage of 3.4 V to 4.35 V, so here the EUT is tested in the temperature of -30 °C to +50 °C and the voltage of 3.4 V to 4.35 V.
- 2) VN: Normal Voltage; TN: Normal Temperature;
 - TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;
 - VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.


4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
Equivalent Isotropic Radiated Power (EIRP)	25	53	99.80	Hank Wu
Conducted Output Power	25	53	99.80	Hank Wu
Peak-to-average ratio	25	53	99.80	Hank Wu
99%&26dB Bandwidth	25	53	99.80	Hank Wu
Band Edge at antenna terminals	25	53	99.80	Hank Wu
Spurious emissions at antenna terminals	25	53	99.80	Hank Wu
Field strength of spurious radiation	25.2	52	99.36	Fire Huo
Frequency stability	25	53	99.80	Hank Wu




4.2TEST SETUP

4.2.1 For Radiated Emissions test setup

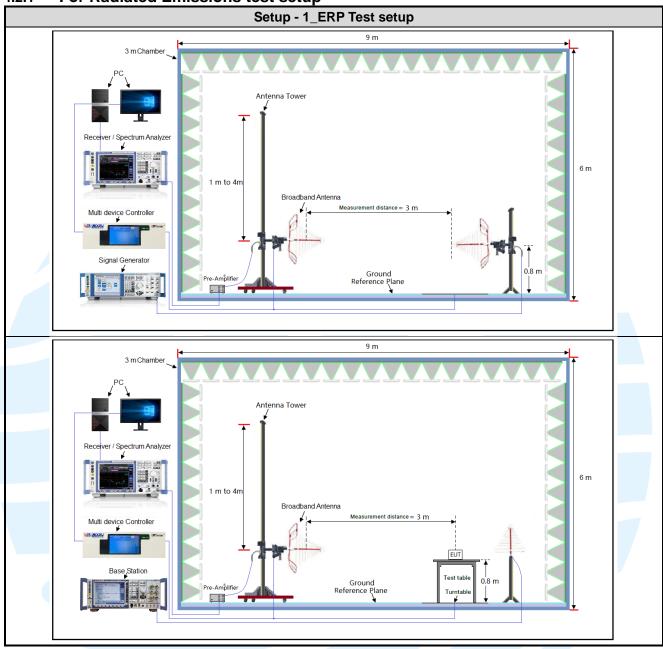




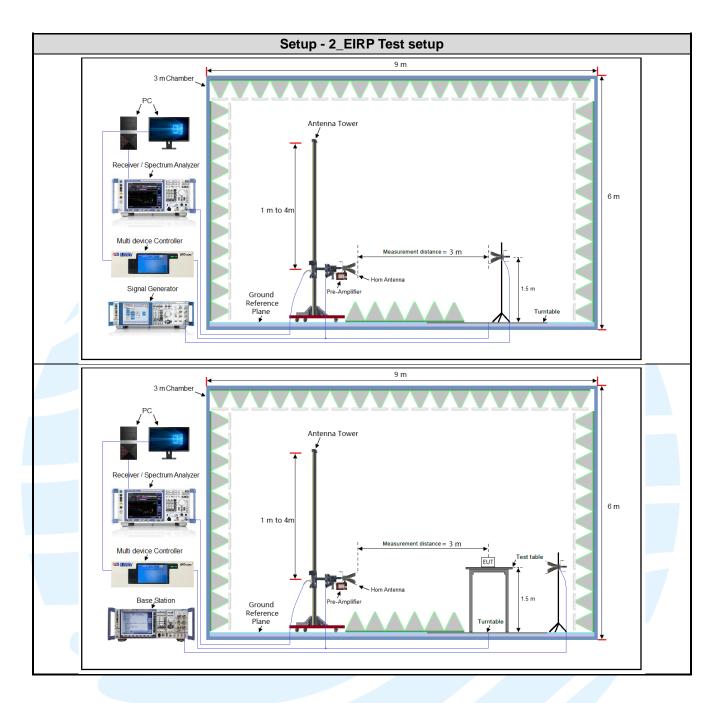



4.2.2 For Conducted RF test setup

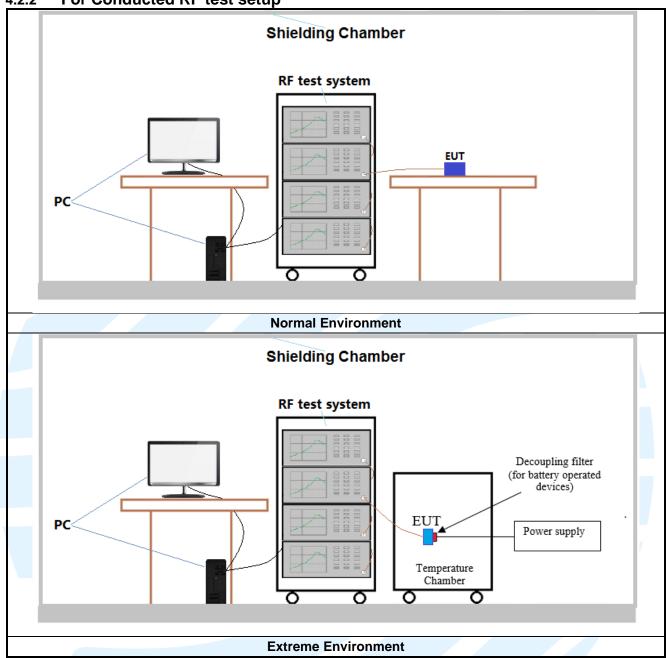



4.3TEST CHANNELS

Band	Tx/Rx Frequency	RF Channel			
Dallu	1 X/KX Frequency	Low(L)	Middle(M)	High(H)	
GSM/GPRS/	Tx	Channel 128	Channel 190	Channel 251	
EDGE850	(824 MHz ~ 849 MHz)	824.2 MHz	836.6 MHz	848.8 MHz	
WCDMA band V	Tx	Channel 4132	Channel 4182	Channel 4233	
WCDIVIA Dariu V	(824 MHz ~ 849 MHz)	826.4 MHz	836.4 MHz	846.6 MHz	

Band	Tx/Rx Frequency	RF Channel		
Dallu	1x/Kx Frequency	Low(L)	Middle(M)	High(H)
GSM/GPRS/	Tx	Channel 512	Channel 661	Channel 810
EDGE1900	(1850 MHz-1910 MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz
WCDMA Band II	Тх	Channel 9262	Channel 9400	Channel 9538
WCDIVIA Band II	(1850 MHz-1910 MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz

Band	Ty/Dy Eroquopoy		RF Channel	
Dallu	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)
WCDMA Band IV	Tx	Channel 1312	Channel 1412	Channel 1513
WCDMA Band IV	(1710 MHz-1755 MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz

Band	Test Frequency ID	Bandwidth (MHz)	Number [UL]	Frequency of Uplink (MHz)
		1.4	18607	1850.7
		3	18615	1851.5
	Low Dongs	5	18625	1852.5
	Low Range	10	18650	1855
		15	18675	1857.5
175 0 10		20	18700	1860
LTE Band 2 TX: 1850-1910MHz LTE Band 4 TX:1710-1755MHz	Middle Range	1.4/3/5/10/15/20	18900	1880
		1.4	19193	1909.3
		3	19185	1908.5
	High Range	5	19175	1907.5
	High Kange	10	19150	1905
		15	19125	1902.5
		20	19100	1900
		1.4	19957	1710.7
		3	19965	1711.5
	Low Pongo	5	19975	1712.5
	Low Range	10	20000	1715
		15	20025	1717.5
LTE Band 4		20	20050	1720
TX:1710-1755MHz	Middle Range	1.4/3/5/10/ 15/20	20175	1732.5
		1.4	20393	1754.3
		3	20385	1753.5
	High Range	5	20375	1752.5
		10	20350	1750
		15	20325	1747.5



Page 17 of 268

		20	20300	1745
		1.4	20407	824.7
		3	20415	825.5
	Low Range	5	20425	826.5
		10	20450	829
LTE band 5 TX:824–849 MHz	Middle Range	1.4/3/5/10	20525	836.5
17.024-043 WILIZ		1.4	20643	848.3
	High Bongs	3	20635	847.5
	High Range	5	20625	846.5
		10	20600	844
		5	20775	2502.5
	Low Range	10	20800	2505
	Low Range	15	20825	2507.5
LTE D		20	20850	2510
LTE Band 7 TX:2500-2570MHz	Middle Range	5/10/15/20	21100	2535
17.2000 207 01VII 12	High Range	5	21425	2567.5
		10	21400	2565
		15	21375	2562.5
		20	21350	2560
		1.4	23017	699.7
	Low Panga	3	23025	700.5
	Low Range	5	23035	701.5
LTE Day 140		10	23060	704
LTE Band 12 TX:699-716MHz	Middle Range	1.4/3/5/10	23095	707.5
174.000 7 TOWN 12		1.4	23173	715.3
	High Range	3	23165	714.5
	r light Natige	5	23155	713.5
		10	23130	711
	Low Range	5	23755	706.5
LTC Decid 47	Low Nange	10	23780	709
LTE Band 17 TX:704-716MHz	Middle Range	5/10	23790	710
77.70171011112	High Range	5	23825	713.5
	riigiriXarige	10	23800	711

Page 18 of 268 Report No.: 190326007RFM-1

4.4 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8Vdc rechargeable Li-on battery. Only the worst case data were recorded in this test report.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X/Y/Z axis, and antenna ports.

The worst case was found when positioned as the table below.

Band	Mode	Antenna Port	Worst-case axis positioning
GSM 850	1TX	Chain 0	Y axis
GSM 1900	1TX	Chain 0	Y axis
WCDMA Band II	1TX	Chain 0	Y axis
WCDMA Band IV	1TX	Chain 0	Y axis
WCDMA Band V	1TX	Chain 0	Y axis
LTE Band 2	1TX	Chain 0	Y axis
LTE Band 4	1TX	Chain 0	Y axis
LTE Band 5	1TX	Chain 0	Y axis
LTE Band 12	1TX	Chain 0	Y axis
LTE Band 17	1TX	Chain 0	Y axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.5 PRE-SCAN

Pre-scan under all rate at lowest middle and highest channel, find the transmitter power as below:

	GSM 850 Maximum Average Power (dBm)									
Channel	128	190	251							
Frequency(MHz)	824.2 MHz	836.6 MHz	848.8 MHz							
GSM (GMSK, 1Tx-slot)	32.69	32.81	32.85							
GPRS (GMSK, 1Tx-slot)	32.71	32.77	32.78							
GPRS (GMSK, 2Tx-slot)	30.88	30.99	31.15							
GPRS (GMSK, 3Tx-slot)	29.03	29.18	29.31							
GPRS (GMSK, 4Tx-slot)	27.03	27.21	27.36							
EDGE (8PSK, 1Tx-slot)	26.09	26.19	25.95							
EDGE (8PSK, 2Tx-slot)	24.96	25.03	24.91							
EDGE (8PSK, 3Tx-slot)	22.91	22.87	22.76							
EDGE (8PSK, 4Tx-slot)	20.16	20.17	20.01							



GSM 1900 Maximum Average Power (dBm)										
Channel	512	661	810							
Frequency(MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz							
GSM (GMSK, 1Tx-slot)	29.65	29.79	29.94							
GPRS (GMSK, 1Tx-slot)	29.68	29.78	29.93							
GPRS (GMSK, 2Tx-slot)	27.84	27.85	27.89							
GPRS (GMSK, 3Tx-slot)	26.30	26.32	26.36							
GPRS (GMSK, 4Tx-slot)	24.31	24.33	24.38							
EDGE (8PSK, 1Tx-slot)	25.95	26.05	25.45							
EDGE (8PSK, 2Tx-slot)	24.43	24.56	24.04							
EDGE (8PSK, 3Tx-slot)	22.46	22.54	22.11							
EDGE (8PSK, 4Tx-slot)	20.58	20.70	20.05							

	WCDMA Band II Maximum Average Power (dBm)										
Channel	9262	9400	9538								
Frequency(MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz								
RMC 12.2K	22.93	22.96	23.04								
HSDPA Subtest-1	22.43	22.08	22.22								
HSDPA Subtest-2	22.06	21.79	21.88								
HSDPA Subtest-3	21.86	21.62	21.71								
HSDPA Subtest-4	21.89	21.64	21.74								
HSUPA Subtest-1	19.70	19.55	19.59								
HSUPA Subtest-2	19.98	19.85	19.91								
HSUPA Subtest-3	20.51	20.12	20.17								
HSUPA Subtest-4	20.51	20.39	20.42								
HSUPA Subtest-5	22.38	22.13	22.20								

	WCDMA Band IV Max	imum Average Power (dBm)	
Channel	1312	1412	1513
Frequency(MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz
RMC 12.2K	23.07	23.08	23.09
HSDPA Subtest-1	23.03	22.68	22.82
HSDPA Subtest-2	22.66	22.39	22.48
HSDPA Subtest-3	22.46	22.22	22.31
HSDPA Subtest-4	22.49	22.24	22.34
HSUPA Subtest-1	20.30	20.15	20.19
HSUPA Subtest-2	20.58	20.45	20.51
HSUPA Subtest-3	21.11	20.72	20.77
HSUPA Subtest-4	21.11	20.99	21.02
HSUPA Subtest-5	22.98	22.73	22.80



	WCDMA Band V Maximum Average Power (dBm)										
Channel	4132	4182	4233								
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz								
RMC 12.2K	23.34	23.44	23.43								
HSDPA Subtest-1	21.90	21.89	22.05								
HSDPA Subtest-2	21.61	21.62	21.72								
HSDPA Subtest-3	21.21	21.19	21.34								
HSDPA Subtest-4	21.25	21.21	21.36								
HSUPA Subtest-1	19.92	20.01	20.00								
HSUPA Subtest-2	20.06	20.15	20.10								
HSUPA Subtest-3	20.20	20.28	20.16								
HSUPA Subtest-4	20.11	20.20	20.16								
HSUPA Subtest-5	22.58	22.55	22.53								

					ım Averag		·				
Modulation		В		est Chann			B		est Chann		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High	
		l Bandwi							th: 3 MHz		
	1	0	22.13	22.33	22.03	1	0	22.11	22.31	22.10	
	1	2	22.13	22.12	22.21	1	7	22.21	22.05	22.13	
0.0014	1	5	21.94	22.21	22.04	1	14	21.97	22.10	22.11	
QPSK	3	0	22.63	22.63	22.75	8	0	21.62	21.63	21.71	
	3	1	22.60	22.52	22.61	8	3	21.65	21.55	21.62	
	3	3	22.57	22.77	22.71	8	7	21.56	21.77	21.80	
	6	0	21.66	21.71	21.66	15	0	21.73	21.79	21.67	
	1	0	21.83	21.80	22.06	1	0	21.88	21.80	22.18	
	1	2	21.83	21.67	22.13	1	7	21.72	21.57	22.04	
	1	5	21.91	21.57	22.22	1	14	21.77	21.74	22.21	
16QAM	3	0	21.85	22.01	21.84	8	0	20.72	20.86	20.95	
	3	1	21.83	21.86	21.87	8	3	20.86	20.79	21.01	
	3	3	21.73	21.87	21.83	8	7	20.82	20.87	20.81	
	6	0	20.95	20.65	20.98	15	0	20.88	20.70	20.92	
	Chann	el Bandw	idth: 5 MI	Hz			Channel E	hannel Bandwidth: 10 MHz			
	1	0	22.17	22.34	22.12	1	0	22.23	22.22	22.10	
	1	12	22.06	22.11	22.14	1	24	22.17	22.22	22.22	
	1	24	22.04	22.18	22.16	1	49	21.96	22.22	22.11	
QPSK	12	0	21.57	21.72	21.67	25	0	21.61	21.73	21.83	
	12	6	21.52	21.53	21.76	25	12	21.65	21.52	21.68	
	12	13	21.68	21.79	21.79	25	25	21.54	21.63	21.66	
	25	0	21.74	21.74	21.80	50	0	21.73	21.72	21.79	
	1	0	21.97	21.73	22.01	1	0	21.98	21.77	22.18	
	1	12	21.88	21.74	22.06	1	24	21.79	21.55	22.01	
	1	24	21.81	21.68	22.13	1	49	21.91	21.68	22.11	
16QAM	12	0	20.73	20.98	20.91	25	0	20.73	20.85	20.94	
	12	6	20.73	20.94	21.03	25	12	20.72	20.78	20.98	
	12	13	20.69	20.95	20.94	25	25	20.74	20.89	20.78	
	25	0	20.86	20.82	21.01	50	0	20.92	20.68	20.89	



		L	TE Band	2 Maximu	ım Averag	e Power	(dBm)			
Modulation	R	В	Te	est Chann	el	R	В	Te	est Chann	el
Wodulation	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
	Channe	el Bandwi	dth: 15 M	Hz			Channel E	Bandwidt	h: 20 MHz	2
	1	0	22.25	22.20	22.12	1	0	22.28	22.34	22.17
	1	37	22.03	22.18	22.05	1	50	22.23	22.23	22.24
	1	74	22.03	22.13	22.13	1	99	22.10	22.28	22.20
QPSK	37	0	21.63	21.70	21.72	50	0	21.67	21.78	21.85
	37	19	21.64	21.53	21.74	50	25	21.70	21.69	21.80
	37	39	21.64	21.75	21.76	50	50	21.71	21.80	21.81
	75	0	21.70	21.70	21.68	100	0	21.80	21.81	21.84
	1	0	21.93	21.75	22.10	1	0	22.00	21.84	22.20
	1	37	21.87	21.74	22.07	1	50	21.88	21.75	22.19
	1	74	21.88	21.63	22.24	1	99	21.96	21.77	22.30
16QAM	37	0	20.68	20.98	20.92	50	0	20.86	21.03	21.00
	37	19	20.85	20.89	20.97	50	25	20.87	20.98	21.04
	37	39	20.80	20.91	20.93	50	50	20.84	20.98	20.95
	75	0	20.81	20.75	20.88	100	0	20.97	20.83	21.02

		L	TE Band	4 Maximu	ım Averag	ge Power	(dBm)			
Madulation	R						В	Te	est Chann	el
wodulation	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
	Channe	l Bandwi	dth: 1.4 N	lHz			Channel	Bandwid	th: 3 MHz	
	1	0	21.89	21.90	21.83	1	0	21.83	21.99	21.96
	1	2	21.80	21.98	21.84	1	7	21.92	21.92	21.85
	Channel Bandwidth: 1.4 MHz	1	14	21.84	21.82	21.74				
QPSK	3	0	22.31	22.40	22.54	8	0	21.39	21.42	21.48
		-	22.58	22.61	22.42	8	3	21.51	21.63	21.56
						8	7	21.50	21.33	21.45
	6	0	21.42	21.48	21.45	15	0	21.51	21.42	21.43
	1		21.60	21.65	21.72	1	0	21.67	21.74	21.74
	1	2	21.57	21.74	21.68	1	7	21.69	21.61	21.75
		5	21.60	21.63	21.66	1	14	21.56	21.64	21.65
16QAM	3	0	21.54	21.54	21.57	8	0	20.48	20.54	20.57
			21.52	21.56	21.55	8	3	20.53	20.53	20.66
			21.62			8	7	20.60	20.53	20.63
	6	0	20.52	20.62	20.63	15	0	20.68	20.65	20.66
						ge Power	(dBm)			
Modulation							В			
Woddiation					High	Size	Offset	Low		High
	Chann		idth: 5 MI				Channel E		h: 10 MHz	
	-					1	0	21.87	21.87	21.85
						1	24	21.81		21.84
						1	49	21.89		21.76
QPSK						25	0	21.37		21.61
						25	12	21.46		21.54
			21.51			25	25	21.61		21.39
	25		21.47		21.50	50	0	21.42		21.46
	1					1	0	21.69		21.78
	1					1	24	21.56		21.81
						1	49	21.50	th: 3 MHz 21.99 21.92 21.82 21.42 21.63 21.33 21.42 21.61 21.64 20.54 20.53 20.53 20.65 est Channe Mid h: 10 MHz	21.60
16QAM						25	0	20.54		20.71
						25	12	20.37		20.66
	12	13	20.60	20.58	20.66	25	25	20.60	20.58	20.61
						50	0	20.65		



	Channe	el Bandwi	dth: 15 M	(Channel E	Bandwidt	h: 20 MHz	4		
	1	0	21.91	21.98	21.82	1	0	21.95	22.03	21.99
	1	37	21.75	22.03	21.91	1	50	21.92	22.08	21.95
	1	74	21.71	21.93	21.89	1	99	21.91	22.00	21.91
QPSK	37	0	21.32	21.33	21.58	50	0	21.50	21.51	21.61
	37	19	21.57	21.63	21.55	50	25	21.64	21.64	21.56
	37	39	21.48	21.40	21.48	50	50	21.62	21.50	21.51
	75	0	21.44	21.40	21.47	100	0	21.53	21.53	21.52
	1	0	21.59	21.71	21.74	1	0	21.76	21.75	21.84
	1	37	21.71	21.64	21.74	1	50	21.71	21.79	21.86
	1	74	21.59	21.55	21.75	1	99	21.67	21.69	21.78
16QAM	37	0	20.62	20.54	20.59	50	0	20.63	20.67	20.75
	37	19	20.42	20.52	20.66	50	25	20.57	20.70	20.71
	37	39	20.49	20.60	20.53	50	50	20.68	20.66	20.67
	75	0	20.50	20.70	20.53	100	0	20.69	20.71	20.69

			TE Band							
Modulation		В		est Chann			В		est Chann	
Modulation	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
	Channe	l Bandwi							th: 3 MHz	
	1	0	22.11	22.14	22.10	1	0	22.12	22.17	22.15
	1	2	22.09	22.03	22.11	1	7	22.08	22.17	22.16
	1	5	22.05	22.11	22.26	1	14	22.22	22.20	22.12
QPSK	3	0	22.75	22.70	22.87	8	0	21.77	21.86	21.86
	3	1	22.90	22.77	22.71	8	3	21.84	21.78	21.74
	3	3	22.72	22.84	22.86	8	7	21.79	21.88	21.94
	6	0	21.72	21.73	21.84	15	0	21.76	21.80	21.84
	1	0	21.86	21.77	21.88	1	0	21.77	21.69	21.85
	1	2	21.71	21.95	21.93	1	7	21.82	21.87	21.85
	1	5	21.82	21.82	21.71	1	14	21.79	21.80	21.88
16QAM	3	0	21.81	21.86	21.84	8	0	20.78	20.87	20.89
	3	1	21.82	21.86	21.85	8	3	20.83	20.82	20.88
	3	3	21.87	21.85	21.75	8	7	20.87	20.84	20.84
	6	0	20.81	20.80	20.96	15	0	20.77	20.75	20.95
	Chann	el Bandw	idth: 5 MI	Hz			Channel I	Bandwidt	h: 10 MHz	2
	1	0	22.18	22.13	22.18	1	0	22.22	22.27	22.26
	1	12	22.07	22.21	22.24	1	24	22.26	22.22	22.27
	1	24	22.04	22.24	22.21	1	49	22.24	22.26	22.28
QPSK	12	0	21.65	21.75	21.86	25	0	21.79	21.86	21.87
	12	6	21.80	21.72	21.69	25	12	21.93	21.92	21.86
	12	13	21.78	21.84	21.90	25	25	21.89	21.93	21.94
	25	0	21.83	21.84	21.80	50	0	21.86	21.92	21.90
	1	0	21.77	21.83	21.80	1	0	21.89	21.86	21.98
	1	12	21.64	21.81	21.92	1	24	21.82	21.96	21.97
	1	24	21.89	21.79	21.84	1	49	21.95	21.85	21.91
16QAM	12	0	20.77	20.88	20.83	25	0	20.85	20.95	20.98
	12	6	20.74	20.75	20.80	25	12	20.87	20.89	20.93
	12	13	20.87	20.86	20.86	25	25	20.89	20.92	20.94
	25	0	20.73	20.81	20.83	50	0	20.88	20.88	20.98



		L	TE Band	je Power	(dBm)						
Modulation	R	В	Te	est Chann	el	R	В	Te	est Chann	el	
Wiodulation	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High	
	Chann	el Bandw	idth: 5 MI	Hz			Channel E	3andwidt	h: 10 MHz	4	
	1	0	23.00	23.07	22.77	1	0	23.10	23.23	22.84	
	1	12	23.08	22.97	22.44	1	24	23.07	22.85	22.51	
	1	24	23.02	22.94	22.91	1	49	22.91	23.04	22.83	
QPSK	12	0	22.51	22.50	22.43	25	0	22.46	22.57	22.51	
	12	6	22.57	22.35	22.38	25	12	22.60	22.35	22.47	
	12	13	22.59	22.48	22.27	25	25	22.56	22.59	22.32	
	25	0	22.67	22.40	22.34	50	0	22.74	22.37	22.43	
	1	0	22.66	22.59	22.36	1	0	22.50	22.57	22.44	
	1	12	22.68	22.78	22.43	1	24	22.65	22.75	22.39	
	1	24	22.77	22.79	22.61	1	49	22.82	22.61	22.61	
16QAM	12	0	21.67	21.64	21.49	25	0	21.75	21.55	21.46	
	12	6	21.65	21.75	21.55	25	12	21.61	21.69	21.60	
	12	13	21.73	21.59	21.66	25	25	21.77	21.73	21.58	
	25	0	21.79	21.51	21.59	50	0	21.73	21.53	21.62	
	Channe	el Bandwi	dth: 15 M	Hz	•	Channel Bandwidth: 20 MHz					
	1	0	23.09	23.12	22.72	1	0	23.13	23.25	22.92	
	1	37	22.94	23.02	22.49	1	50	23.12	23.03	22.60	
	1	74	23.03	23.07	22.94	1	99	23.09	23.12	22.95	
QPSK	37	0	22.57	22.57	22.36	50	0	22.64	22.70	22.55	
	37	19	22.62	22.43	22.44	50	25	22.64	22.53	22.53	
	37	39	22.54	22.54	22.39	50	50	22.66	22.62	22.44	
	75	0	22.73	22.33	22.44	100	0	22.77	22.50	22.45	
	1	0	22.57	22.72	22.36	1	0	22.69	22.72	22.52	
	1	37	22.67	22.64	22.53	1	50	22.78	22.82	22.56	
	1	74	22.74	22.68	22.56	1	99	22.86	22.80	22.62	
16QAM	37	0	21.73	21.66	21.54	50	0	21.83	21.72	21.64	
	37	19	21.66	21.67	21.54	50	25	21.80	21.77	21.70	
	37	39	21.86	21.60	21.61	50	50	21.92	21.75	21.69	
	75	0	21.84	21.58	21.67	100	0	21.84	21.71	21.72	

LTE Band 12 Maximum Average Power (dBm)												
	R	В		est Chann			В	Te	est Chann	el		
Modulation	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High		
		l Bandwi	dth: 1.4 N			Bandwidt	h: 3 MHz					
	1	0	22.18	22.15	22.18	1	0	22.16	22.09	22.07		
	1	2	22.31	22.22	22.16	1	7	22.22	22.26	22.05		
	1	5	22.35	22.23	22.27	1	14	22.38	22.29	22.37		
QPSK	3	0	22.82	22.76	22.70	8	0	21.83	21.86	21.87		
	3	1	23.03	23.07	22.73	8	3	21.99	22.08	21.87		
	3	3	22.89	22.85	22.87	8	7	21.79	21.75	21.85		
	6	0	21.87	21.89	21.88	15	0	21.92	21.94	21.91		
	1	0	21.76	21.84	21.90	1	0	21.79	21.88	21.90		
	1	2	22.00	21.90	22.08	1	7	22.03	21.99	22.10		
	1	5	22.06	21.84	21.91	1	14	21.98	21.95	22.09		
16QAM	3	0	21.81	21.79	21.96	8	0	20.87	20.70	20.86		
	3	1	22.08	21.81	21.94	8	3	21.15	20.81	20.95		
	3	3	21.78	22.03	22.29	8	7	20.80	20.95	21.36		
	6	0	21.20	20.84	20.97	15	0	21.21	20.83	20.83		
	Chann	el Bandw	idth: 5 MI	Hz			Channel E	Bandwidt	h: 10 MHz			
	1	0	22.16	22.09	22.23	1	0	22.22	22.25	22.27		
QPSK	1	12	22.25	22.27	22.14	1	24	22.37	22.32	22.22		
	1	24	22.26	22.18	22.39	1	49	22.43	22.38	22.42		

Page 24 of 268 Report No.: 190326007RFM-1

	12	0	21.93	21.82	21.72	25	0	21.95	21.88	21.88
	12	6	21.94	22.01	21.71	25	12	22.08	22.12	21.89
	12	13	21.73	21.90	21.73	25	25	21.93	21.94	21.87
	25	0	22.00	21.97	21.78	50	0	22.01	22.01	21.91
	1	0	21.86	21.79	21.90	1	0	21.93	21.91	21.99
	1	12	22.03	21.91	22.10	1	24	22.09	22.01	22.14
	1	24	21.92	21.82	21.94	1	49	22.06	21.98	22.10
16QAM	12	0	20.86	20.77	20.84	25	0	21.01	20.85	20.98
	12	6	21.12	20.88	21.02	25	12	21.21	20.95	21.03
	12	13	20.79	20.85	21.33	25	25	20.96	21.05	21.36
	25	0	21.11	20.81	20.90	50	0	21.23	20.99	20.99

LTE Band 17 Maximum Average Power (dBm)											
Modulation	R	В		est Chann		Ť	B	Te	est Chann	el	
Wodulation	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High	
	Chann	el Bandw	idth: 5 MI		Channel E	Bandwidt	h: 10 MHz				
	1	0	22.05	22.14	22.21	1	0	22.19	22.17	22.21	
	1	12	22.13	22.06	22.08	1	24	22.27	22.21	22.15	
	1	24	22.08	22.19	22.34	1	49	22.28	22.20	22.36	
QPSK	12	0	21.67	21.95	21.63	25	0	21.76	21.95	21.81	
	12	6	21.81	21.76	21.72	25	12	21.96	21.81	21.82	
	12	13	21.98	21.75	21.77	25	25	22.07	21.83	21.80	
	25	0	21.75	21.79	21.79	50	0	21.84	21.87	21.85	
	1	0	21.75	21.89	21.75	1	0	21.84	21.90	21.89	
	1	12	21.77	21.71	21.97	1	24	21.82	21.87	22.02	
	1	24	21.92	21.77	22.06	1	49	22.01	21.95	22.06	
16QAM	12	0	20.71	20.80	20.83	25	0	20.84	20.80	20.89	
	12	6	20.90	20.94	20.81	25	12	20.94	20.96	20.98	
	12	13	21.10	21.11	21.30	25	25	21.16	21.12	21.32	
	25	0	20.81	20.83	20.86	50	0	20.91	20.90	20.90	

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
GSM/GPRS/ EDGE 850/1900	1) GSM (GMSK, 1Tx-slot) Link 2) GPRS (GMSK, 1Tx-slot) Link 3) EDGE (8PSK, 1Tx-slot) Link	1) GSM (GMSK,1Tx-slot) Link 2) GPRS (GMSK, 1Tx-slot) Link 3) EDGE (8PSK, 1Tx-slot) Link
WCDMA Band II/IV/V	RMC 12.2Kbps Link	RMC 12.2Kbps Link

			Ra	ndwic	lth/MI	-lz)			Modulatio	n		RB		Test Channel			
Item	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	Н	
	2	\boxtimes	\boxtimes	\boxtimes	\boxtimes			\boxtimes			\boxtimes			\boxtimes	\boxtimes	\boxtimes	
	4							\boxtimes			\boxtimes				\boxtimes	\boxtimes	
EDD/EIDD	5	\boxtimes			\boxtimes	-	-	\boxtimes			\boxtimes			\boxtimes	\boxtimes	\boxtimes	
ERP/EIRP	7	-	-		\boxtimes			\boxtimes	\boxtimes	\boxtimes	\boxtimes			\boxtimes	\boxtimes	\boxtimes	
	12				\boxtimes	-	-	\boxtimes	\boxtimes		\boxtimes			\boxtimes	\boxtimes	\boxtimes	
	17	-	-		\boxtimes	-	-	\boxtimes	\boxtimes		\boxtimes			\boxtimes	\boxtimes	\boxtimes	
Conducted	2				\boxtimes			\boxtimes	\boxtimes		\boxtimes				\boxtimes	\boxtimes	
output power	4	\boxtimes			\boxtimes			\boxtimes	\boxtimes		\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes	

Page 25 of 268 Report No.: 190326007RFM-1

	5	\boxtimes	\boxtimes	\boxtimes	\boxtimes	_	_	\boxtimes				\boxtimes				\boxtimes
_	7	_	_			\boxtimes										
	12						_									
-																
	17	-	•			•	•									
-	2															
_	4															
99%&26dB Bandwidth	5					-	-									
Bandwidth	7	-	-					\boxtimes								
	12					-	-		\square							
	17	-	-	\boxtimes		•	-							\boxtimes	\boxtimes	
	2	\boxtimes					\boxtimes		\boxtimes							\boxtimes
	4	\boxtimes	\boxtimes	\boxtimes			\boxtimes				\boxtimes			\boxtimes	\boxtimes	\boxtimes
peak-to-av erage	5	\boxtimes				-	-				\boxtimes		\boxtimes			\boxtimes
ratio	7	-	•	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes					\boxtimes	\boxtimes	\boxtimes
	12	\boxtimes	\boxtimes	\boxtimes	\boxtimes		-	\boxtimes	\boxtimes		\boxtimes		\boxtimes	\boxtimes	\boxtimes	\boxtimes
	17	1			\boxtimes		-	\boxtimes	\boxtimes		\boxtimes		\boxtimes	\boxtimes		\boxtimes
	2	\boxtimes		\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes			\boxtimes			\boxtimes		\boxtimes
	4	\boxtimes		\boxtimes			\boxtimes									
Band Edge	5	\boxtimes	\boxtimes	\boxtimes	\boxtimes	•	-	\boxtimes	\boxtimes		\boxtimes			\boxtimes		\boxtimes
at antenna terminals	7	-	•	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes		\boxtimes			\boxtimes			\boxtimes
	12	\boxtimes	\boxtimes	\boxtimes		-	-	\boxtimes			\boxtimes			\boxtimes		\boxtimes
	17	-	•			•	-	\boxtimes	\boxtimes		\boxtimes			\boxtimes		\boxtimes
	2	\boxtimes					\boxtimes	\boxtimes	\boxtimes		\boxtimes			\boxtimes		\boxtimes
	4					\boxtimes		\boxtimes	\boxtimes							
Spurious emissions	5					-	-									
at antenna terminals	7	-	-							\boxtimes						
terrilliais	12					-	-									
-	17	-	-			-	-									
Field	2															



Page 26 of 268 Report No.: 190326007RFM-1

strength of spurious	4	\boxtimes			\boxtimes				\boxtimes							
radiation	5	\boxtimes				•	•	\boxtimes			\boxtimes				\boxtimes	
	7	-	-	\boxtimes	\boxtimes	\boxtimes		\boxtimes			\boxtimes				\boxtimes	
	12	\boxtimes						\boxtimes			\boxtimes				\boxtimes	
	17	-	-			•	•	\boxtimes			\boxtimes				\boxtimes	
	2	\boxtimes			\boxtimes	\boxtimes		\boxtimes					\boxtimes		\boxtimes	
	4			\boxtimes	\boxtimes	\boxtimes	\boxtimes								\boxtimes	
Frequency	Frequency 5 🛛 🖂 🖂 🖂 🖂 🖂 🖂 🖂 🖂 🖂															
stability	7	-	-		\boxtimes	\boxtimes	\boxtimes	\boxtimes					\boxtimes		\boxtimes	
	12					-		\boxtimes					\boxtimes			
	17 🗵 🗵 🗵 🗆 🗆 🗆 🖂 🖂															
	Remark: The mark "⊠" means is chosen for testing; The mark "⊡" means is not chosen for testing; The mark "-" means is not supported bandwidth															

Page 27 of 268 Report No.: 190326007RFM-1

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2 Subpart J	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 22 Subpart H	Cellular Radiotelephone Service
3	FCC 47 CFR Part 27	Miscellaneous Wireless Communications Services
4	FCC 47 CFR Part 24 Subpart E	PART 24 – PERSONAL COMMUNICATIONS SERVICES Subpart E – Broadband PCS
5	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
6	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01

5.2 ERP OR EIRP

Test Requirement: FCC 47 CFR Part 2.1046(a),

GSM 850 & WCDMA Band V & LTE Band 5: FCC 47 CFR Part 22.913(a), **GSM 1900 & WCDMA Band II & LTE Band 2:** FCC 47 CFR Part 24.232(c),

WCDMA Band IV & LTE Band 4: FCC 47 CFR Part 27.50(d)(4), **LTE Band 12 & Band 17:** FCC 47 CFR Part 27.50(c)(10)

LTE Band 7: FCC 47 CFR Part 27.50(h)(2)

Test Method: KDB 971168 D01v03r01& ANSI/TIA-603-E-2016

Limit:

FCC 47 CFR Part 22.913(a)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c)

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

FCC 47 CFR Part 27.50(c)(10):

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

FCC 47 CFR Part 27.50(h)(2): Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure:

Test procedure as below:

- 1) The EUT was powered ON and placed on a 0.8/1.5m high table at a 3 meter semi/fully Anechoic Chamber. The antenna of the transmitter was extended to its maximum length. Modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 4) Steps 1) to 3) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 5) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 6) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 3) is obtained for this set of conditions.
- 7) The output power into the substitution antenna was then measured.
- 8) Steps 6) and 7) were repeated with both antennas polarized.
- 9) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd) EIRP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBi)



Page 28 of 268

EIRP=ERP+2.15dB

Report No.: 190326007RFM-1

where:

Pg is the generator output power into the substitution antenna.

- 10) Test the EUT in the lowest channel, the middle channel the Highest channel
- 11) The radiation measurements are performed in X, Y, Z axis positioning for EUT operation mode, and found the Y axis positioning which it is worse case.

12) Repeat above procedures until all frequencies measured was complete.

Frequency Detector **RBW VBW** Remark **Receiver Setup:** 30MHz-1GHz Peak 100kHz 300kHz Peak Above 1GHz Peak 1MHz 3MHz Peak

Test Setup: Refer to section 4.2.1 for details. **Instruments Used:** Refer to section 3 for details

Test Mode: Link mode
Test Results: Pass

Test Data: See table below

	Maximum ERP (dBm)													
Channel	GSM 850 1Tx-slot													
Lowest	30.07	23.47	21.47	38.45	Pass									
Middle	30.19	23.57	21.57	38.45	Pass									
Highest	30.23	23.33	21.56	38.45	Pass									

Maximum EIRP (dBm)						
Channel	GSM 1900 1Tx-slot	EDGE 1900 1Tx-slot	WCDMA Band II RMC 12.2Kbps	Limit (dBm)	Result	
Lowest	30.04	26.34	23.32	33.01	Pass	
Middle	30.18	26.44	23.35	33.01	Pass	
Highest	30.33	25.84	23.43	33.01	Pass	

Maximum EIRP (dBm)						
Channel	WCDMA Band IV RMC 12.2Kbps	Limit (dBm)	Result			
Lowest	23.44	30.00	Pass			
Middle	23.45	30.00	Pass			
Highest	23.46	30.00	Pass			

LTE Band 2 Maximum EIRP (dBm)						
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result	
		Channel Band	width: 1.4MHz			
Lowest	22.96	22.30	N/A	33.01	Pass	
Middle	23.16	21.96	N/A	33.01	Pass	
Highest	23.10	22.61	N/A	33.01	Pass	
		Channel Ban	dwidth: 3MHz			
Lowest	22.50	22.16	N/A	33.01	Pass	
Middle	22.70	22.13	N/A	33.01	Pass	
Highest	22.49	22.60	N/A	33.01	Pass	
Channel Bandwidth: 5MHz						
Lowest	22.56	22.20	N/A	33.01	Pass	
Middle	22.73	22.07	N/A	33.01	Pass	



Page 29 of 268 Report No.: 190326007RFM-1

Highest	22.51	22.52	N/A	33.01	Pass		
Channel Bandwidth: 10MHz							
Lowest	22.62	22.37	N/A	33.01	Pass		
Middle	22.61	22.16	N/A	33.01	Pass		
Highest	22.49	22.57	N/A	33.01	Pass		
	Channel Bandwidth: 15MHz						
Lowest	22.64	22.27	N/A	33.01	Pass		
Middle	22.59	22.02	N/A	33.01	Pass		
Highest	22.51	22.63	N/A	33.01	Pass		
	Channel Bandwidth: 20MHz						
Lowest	22.67	22.35	N/A	33.01	Pass		
Middle	22.73	22.16	N/A	33.01	Pass		
Highest	22.56	22.69	N/A	33.01	Pass		

		LTE Band 4 Maxi	mum EIRP (dBm)				
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result		
Channel Bandwidth: 1.4MHz							
Lowest	22.95	21.94	N/A	30.00	Pass		
Middle	22.98	22.11	N/A	30.00	Pass		
Highest	22.79	22.05	N/A	30.00	Pass		
		Channel Ban	dwidth: 3MHz				
Lowest	22.20	22.06	N/A	30.00	Pass		
Middle	22.36	21.98	N/A	30.00	Pass		
Highest	22.33	22.12	N/A	30.00	Pass		
		Channel Ban	dwidth: 5MHz				
Lowest	22.26	21.90	N/A	30.00	Pass		
Middle	22.35	22.16	N/A	30.00	Pass		
Highest	22.21	22.06	N/A	30.00	Pass		
	-	Channel Band	width: 10MHz				
Lowest	22.18	21.93	N/A	30.00	Pass		
Middle	22.33	22.01	N/A	30.00	Pass		
Highest	22.21	22.18	N/A	30.00	Pass		
	-	Channel Band	lwidth: 15MHz				
Lowest	22.12	21.96	N/A	30.00	Pass		
Middle	22.40	21.92	N/A	30.00	Pass		
Highest	22.28	22.12	N/A	30.00	Pass		
		Channel Band	dwidth: 20MHz				
Lowest	22.29	22.08	N/A	30.00	Pass		
Middle	22.45	22.16	N/A	30.00	Pass		
Highest	22.32	22.23	N/A	30.00	Pass		



	LTE Band 5 Maximum ERP (dBm)						
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result		
Channel Bandwidth: 1.4MHz							
Lowest	20.28	19.09	N/A	38.45	Pass		
Middle	20.15	19.33	N/A	38.45	Pass		
Highest	20.09	19.31	N/A	38.45	Pass		
	·	Channel Ban	dwidth: 3MHz				
Lowest	19.60	19.17	N/A	38.45	Pass		
Middle	19.58	19.18	N/A	38.45	Pass		
Highest	19.50	19.26	N/A	38.45	Pass		
	·	Channel Ban	dwidth: 5MHz				
Lowest	19.45	19.02	N/A	38.45	Pass		
Middle	19.59	19.19	N/A	38.45	Pass		
Highest	19.62	19.30	N/A	38.45	Pass		
	Channel Bandwidth: 10MHz						
Lowest	19.62	19.27	N/A	38.45	Pass		
Middle	19.64	19.24	N/A	38.45	Pass		
Highest	19.66	19.36	N/A	38.45	Pass		

LEED LEW L. EDD/ID							
LTE Band 7 Maximum ERP (dBm)							
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result		
	Channel Bandwidth: 5MHz						
Lowest	21.49	21.18	N/A	33.01	Pass		
Middle	21.38	21.20	N/A	33.01	Pass		
Highest	20.85	21.02	N/A	33.01	Pass		
		Channel Band	lwidth: 10MHz				
Lowest	21.51	21.23	N/A	33.01	Pass		
Middle	21.64	21.02	N/A	33.01	Pass		
Highest	21.25	21.02	N/A	33.01	Pass		
		Channel Band	lwidth: 15MHz				
Lowest	21.50	21.15	N/A	33.01	Pass		
Middle	21.53	21.09	N/A	33.01	Pass		
Highest	21.13	20.97	N/A	33.01	Pass		
Channel Bandwidth: 20MHz							
Lowest	21.54	21.27	N/A	33.01	Pass		
Middle	21.66	21.21	N/A	33.01	Pass		
Highest	21.33	21.03	N/A	33.01	Pass		



	LTE Band 12 Maximum ERP (dBm)						
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result		
Channel Bandwidth: 1.4MHz							
Lowest	20.38	19.13	N/A	34.77	Pass		
Middle	20.42	19.38	N/A	34.77	Pass		
Highest	20.08	19.64	N/A	34.77	Pass		
		Channel Ban	dwidth: 3MHz				
Lowest	19.73	19.38	N/A	34.77	Pass		
Middle	19.64	19.34	N/A	34.77	Pass		
Highest	19.72	19.45	N/A	34.77	Pass		
		Channel Ban	dwidth: 5MHz				
Lowest	19.61	19.38	N/A	34.77	Pass		
Middle	19.53	19.26	N/A	34.77	Pass		
Highest	19.74	19.45	N/A	34.77	Pass		
Channel Bandwidth: 10MHz							
Lowest	19.78	19.44	N/A	34.77	Pass		
Middle	19.73	19.36	N/A	34.77	Pass		
Highest	19.77	19.49	N/A	34.77	Pass		

LTE Band 17 Maximum ERP (dBm)						
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result	
		Channel Ban	dwidth: 5MHz			
Lowest	19.43	19.27	N/A	34.77	Pass	
Middle	19.54	19.12	N/A	34.77	Pass	
Highest	19.69	19.41	N/A	34.77	Pass	
		Channel Band	lwidth: 10MHz			
Lowest	19.63	19.36	N/A	34.77	Pass	
Middle	19.55	19.30	N/A	34.77	Pass	
Highest	19.71	19.41	N/A	34.77	Pass	



Page 32 of 268 Report No.: 190326007RFM-1

5.3 CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 2.1046(a),

GSM 850 & WCDMA Band V & LTE Band 5: FCC 47 CFR Part 22.913(a), **GSM 1900 & WCDMA Band II & LTE Band 2:** FCC 47 CFR Part 24.232(c),

WCDMA Band IV & LTE Band 4: FCC 47 CFR Part 27.50(d)(4),

LTE Band 12 & Band 17: FCC 47 CFR Part 27.50(c)(10)

LTE Band 7: FCC 47 CFR Part 27.50(h)(2)

Test Method: ANSI/TIA-603-E-2016 & KDB 971168 D01v03r01

Limit:

FCC 47 CFR Part 22.913(a)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c)

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

FCC 47 CFR Part 27.50(c)(10):

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

FCC 47 CFR Part 27.50(h)(2): Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA2000, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details. **Instruments Used:** Refer to section 3 for details

Test Mode: Link mode
Test Results: Pass

Test Data: The full result refer to section 4.5 for details.



Page 33 of 268 Report No.: 190326007RFM-1

5.4 PEAK-TO-AVERAGE RATIO

Test Requirement: GSM 850 & WCDMA Band V & LTE Band 5: FCC 47 CFR Part 22.913(a),

GSM 1900 & WCDMA Band II & LTE Band 2: FCC 47 CFR Part 24.232(c),

WCDMA Band IV & LTE Band 4: FCC 47 CFR Part 27.50(d)(5),

LTE Band 12 & Band 17: FCC 47 CFR Part 27.50(d)(5)

LTE Band 7: FCC 47 CFR Part 27.50(d)(5)

Test Method: KDB 971168 D01v03r01

Limit: In measuring transmissions in this band using an average power technique, the

peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

a) Set resolution/measurement bandwidth ≥ signal's occupied bandwidth

b) Set the number of counts to a value that stabilizes the measured CCDF curve

c) Record the maximum PAPR level associated with a probability of 0.1 %

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details. **Instruments Used:** Refer to section 3 for details

Test Mode: Link mode
Test Results: Pass

Test Data: See table below

Peak-to-average ratio (dB)						
Channel GSM 1900 EDGE 1900 WCDMA Band II Limit Result (dBm)						
Lowest	-0.50	-3.01	2.81	13	Pass	
Middle	-0.33	-2.96	2.90	13	Pass	
Highest	0.32	-3.10	2.72	13	Pass	