# **FCC RF Test Report**

APPLICANT : BLU Products, Inc.

**EQUIPMENT**: Smartphone

BRAND NAME : BLU

MODEL NAME : GRAND 5.5 HD MARKETING NAME : GRAND 5.5 HD

FCC ID : YHLBLUGRAND55HD

STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

**CLASSIFICATION**: PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Apr. 07, 2016 and testing was completed on Apr. 25, 2016. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Prepared by: Ken Chen / Manager

lon Chen

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL (SHENZHEN) INC.

1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 1 of 24
Report Issued Date : May 20, 2016

Testing Laboratory 2353

Report No.: FG640702

Report Version : Rev. 01

# **TABLE OF CONTENTS**

| RE | VISIO                 | N HISTORY   | 3  |  |  |
|----|-----------------------|---|----|--|--|
| SL | IMMAI                 | RY OF TEST RESULT   | 4  |  |  |
| 1  | GEN                   | ERAL DESCRIPTION  | 6  |  |  |
| •  |                       | Applicant   |    |  |  |
|    | 1.1<br>1.2            | Manufacturer  |    |  |  |
|    | 1.2                   | Product Feature of Equipment Under Test                                     |    |  |  |
|    | 1.4                   | Product Specification of Equipment Under Test                               |    |  |  |
|    | 1.5                   | Modification of EUT   |    |  |  |
|    | 1.6                   | Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator        |    |  |  |
|    | 1.7                   | Testing Location  |    |  |  |
|    | 1.8                   | Applicable Standards  |    |  |  |
| 2  |                       | Γ CONFIGURATION OF EQUIPMENT UNDER TEST                                     |    |  |  |
| _  | 2.1                   | Test Mode   |    |  |  |
|    | 2.1                   | Connection Diagram of Test System   |    |  |  |
|    | 2.3                   | Support Unit used in test configuration                                     |    |  |  |
|    | 2.4                   | Measurement Results Explanation Example                                     |    |  |  |
|    |                       | ·   |    |  |  |
| 3  | CONDUCTED TEST RESULT |   |    |  |  |
|    | 3.1                   | Measuring Instruments   | 13 |  |  |
|    | 3.2                   | Test Setup  |    |  |  |
|    | 3.3                   | Test Result of Conducted Test   |    |  |  |
|    | 3.4                   | Conducted Output Power  |    |  |  |
|    | 3.5                   | Peak-to-Average Ratio   |    |  |  |
|    | 3.6                   | 99% Occupied Bandwidth and 26dB Bandwidth Measurement                       |    |  |  |
|    | 3.7                   | Conducted Band Edge   |    |  |  |
|    | 3.8                   | Conducted Spurious Emission   |    |  |  |
|    | 3.9                   | Frequency Stability   | 18 |  |  |
| 4  | RAD                   | IATED TEST ITEMS  | 19 |  |  |
|    | 4.1                   | Measuring Instruments   |    |  |  |
|    | 4.2                   | Test Setup  |    |  |  |
|    | 4.3                   | Test Result of Radiated Test  |    |  |  |
|    | 4.4                   | Effective Radiated Power and Effective Isotropic Radiated Power Measurement |    |  |  |
|    | 4.5                   | Field Strength of Spurious Radiation Measurement                            | 22 |  |  |
| 5  | LIST                  | OF MEASURING EQUIPMENT  | 23 |  |  |
| 6  | UNC                   | ERTAINTY OF EVALUATION  | 24 |  |  |
| AF | PEND                  | OIX A. TEST RESULTS OF CONDUCTED TEST                                       |    |  |  |
|    |                       | DIX B. TEST RESULTS OF RADIATED TEST  |    |  |  |
| Αľ | FENL                  | IA C. LEGI SETUF FRUTUGRAFRS  |    |  |  |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 2 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

# **REVISION HISTORY**

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE  |
|------------|---------|-------------------------|--------------|
| FG640702   | Rev. 01 | Initial issue of report | May 20, 2016 |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |

 ${\it SPORTON\ INTERNATIONAL\ (SHENZHEN)\ INC.}$ 

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 3 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

# **SUMMARY OF TEST RESULT**

| Report<br>Section | FCC Rule  | IC Rule   | Description               | Limit                  | Result | Remark |
|-------------------|---|---|---------------------------|------------------------|--------|--------|
| 3.4               | §2.1046   | RSS-132 (5.4)<br>RSS-133 (6.4)<br>RSS-139 (6.5)               | Conducted Output<br>Power | Reporting Only         | PASS   | -      |
| 3.5               | §24.232(d)  | RSS-132 (5.4)<br>RSS-133 (6.4)<br>RSS-139 (6.5)               | Peak-to-Average<br>Ratio  | < 13 dB                | PASS   | -      |
| 3.6               | §2.1049<br>§22.917(b)<br>§24.238(b)<br>§27.53(g)                          | RSS-GEN(6.6)<br>RSS-132(3.1)<br>RSS-133(3.1)<br>RSS-139 (3.1) | Occupied Bandwidth        | Reporting Only         | PASS   | -      |
| 3.7               | §2.1051<br>§22.917(a)<br>§24.238(a)<br>§27.53(h)                          | RSS-132 (5.5)<br>RSS-133 (6.5)<br>RSS-139 (6.6)               | Band Edge<br>Measurement  | < 43+10log10(P[Watts]) | PASS   | -      |
| 3.8               | §2.1051<br>§22.917(a)<br>§24.238(a)<br>§27.53(h)                          | RSS-132 (5.5)<br>RSS-133 (6.5)<br>RSS-139 (6.6)               | Conducted Emission        | < 43+10log10(P[Watts]) | PASS   | -      |
|                   | §2.1055<br>§22.355  | RSS-GEN(6.11)<br>RSS-132 (5.3)                                | 5 0,139,5                 | < 2.5 ppm for Part 22H |        |        |
| 3.9               | \$2.1055 RSS-GEN(6.11)<br>\$24.235 RSS-133 (6.3)<br>\$27.54 RSS-139 (6.4) | Within Authorized Band  | PASS                      | -                      |        |        |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 4 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

| Report<br>Section | FCC Rule                            | IC Rule                          | Description                             | Limit                  | Result | Remark                                     |
|-------------------|-------------------------------------|----------------------------------|---|------------------------|--------|--|
|                   | §22.913(a)(2)                       | RSS-132(5.4)<br>SRSP-503(5.1.3)  | Effective Radiated Power                | < 7 Watts              | PASS   | -  |
| 4.4               | §24.232(c)                          | RSS-133 (6.4)<br>SRSP-510(5.1.2) | Equivalent Isotropic<br>Radiated Power  | < 2 Watts              | PASS   | -  |
|                   | §27.50(d)(4)                        | RSS-139 (6.5)<br>SRSP-513(5.1.2) | Equivalent Isotropic Radiated Power     | < 1 Watts              | PASS   | -  |
| 4.5               | §2.1053<br>\$22.917(a) RSS-132 (5.5 |                                  | Field Strength of<br>Spurious Radiation | < 43+10log10(P[Watts]) | PASS   | Under limit<br>12.54 dB at<br>2472.600 MHz |

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 5 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

# 1 General Description

# 1.1 Applicant

**BLU Products, Inc.** 

10814 NW 33rd St # 100 Doral, FL 33172

#### 1.2 Manufacturer

**BLU Products, Inc.** 

10814 NW 33rd St # 100 Doral, FL 33172

# 1.3 Product Feature of Equipment Under Test

|                                 | Product Feature   |
|---------------------------------|---|
| Equipment                       | Smartphone  |
| Brand Name                      | BLU   |
| Model Name                      | GRAND 5.5 HD  |
| Marketing Name                  | GRAND 5.5 HD  |
| FCC ID                          | YHLBLUGRAND55HD   |
| EUT supports Radios application | GSM/GPRS/EGPRS/<br>WCDMA/HSPA/HSPA+(16QAM uplink is not supported)<br>WLAN2.4GHz 802.11b/g/n HT20/HT40/<br>Bluetooth v3.0 + EDR/Bluetooth v4.0 LE |
| IMEI Code                       | Conduction: 353919028107179/353919028157174<br>Radiation:353919028107393/3539190228157398   |
| HW Version                      | V1.0  |
| SW Version                      | BLU_3750_V01_GENERIC  |
| EUT Stage                       | Pre-Production  |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 6 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

# 1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification |  |                         |  |  |  |
|---|--|-------------------------|--|--|--|
| Standards                               | ·  |                         |  |  |  |
|   | GSM/GPF  |                         |  |  |  |
|   | 850:   | 824.2 MHz ~ 848.8 MHz   |  |  |  |
|   |  | 1850.2 MHz ~ 1909.8MHz  |  |  |  |
| Tx Frequency                            | WCDMA:   |                         |  |  |  |
|   |  | 826.4 MHz ~ 846.6 MHz   |  |  |  |
|   | Band II:                                       | 1852.4 MHz ~ 1907.6 MHz |  |  |  |
|   | Band IV:                                       | 1712.4 MHz ~ 1752.6 MHz |  |  |  |
|   | GSM/GPF  | RS/EDGE:                |  |  |  |
|   | 850:   | 869.2 MHz ~ 893.8 MHz   |  |  |  |
|   | 1900:  | 1930.2 MHz ~ 1989.8 MHz |  |  |  |
| Rx Frequency                            | WCDMA:   |                         |  |  |  |
|   | Band V:  | 871.4 MHz ~ 891.6 MHz   |  |  |  |
|   | Band II:                                       | 1932.4 MHz ~ 1987.6 MHz |  |  |  |
|   | Band IV:                                       | 2112.4 MHz ~ 2152.6 MHz |  |  |  |
|   | GSM/GPRS/EDGE:                                 |                         |  |  |  |
|   | 850:   | 32.85 dBm               |  |  |  |
|   | 1900:  | 29.72 dBm               |  |  |  |
| Maximum Output Power to Antenna         | WCDMA:   |                         |  |  |  |
|   | Band V:  | 22.61 dBm               |  |  |  |
|   | Band II:                                       | 22.62 dBm               |  |  |  |
|   | Band IV:                                       | 22.71 dBm               |  |  |  |
| Antenna Type                            | PIFA Antenna                                   |                         |  |  |  |
|   | GSM: GMSK                                      |                         |  |  |  |
|   | GPRS: GMSK                                     |                         |  |  |  |
|   | EDGE: GM                                       |                         |  |  |  |
| Type of Modulation                      | WCDMA: QPSK (Uplink)                           |                         |  |  |  |
|   | HSDPA : QPSK (Uplink)<br>HSUPA : QPSK (Uplink) |                         |  |  |  |
|   |  |                         |  |  |  |
|   | HSPA+ : 16QAM uplink is not supported          |                         |  |  |  |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 7 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

# 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

| FCC Rule | System                     | Type of<br>Modulation | Maximum<br>ERP/EIRP<br>(W) | Frequency Tolerance (ppm) | Emission<br>Designator |
|----------|----------------------------|-----------------------|----------------------------|---------------------------|------------------------|
| Part 22H | GSM850 GSM                 | GMSK                  | 0.4682                     | 0.0251 ppm                | 250KGXW                |
| Part 22H | GSM850 EDGE class 8        | 8PSK                  | 0.1939                     | 0.0072 ppm                | 248KG7W                |
| Part 22H | WCDMA Band V RMC 12.2Kbps  | QPSK                  | 0.0511                     | 0.0060 ppm                | 4M16F9W                |
| Part 24E | GSM1900 GSM                | GMSK                  | 0.8100                     | 0.0072 ppm                | 245KGXW                |
| Part 24E | GSM1900 EDGE class 8       | 8PSK                  | 0.3786                     | 0.0072 ppm                | 251KG7W                |
| Part 24E | WCDMA Band II RMC 12.2Kbps | QPSK                  | 0.1520                     | 0.0132 ppm                | 4M17F9W                |
| Part 27L | WCDMA Band IV RMC 12.2Kbps | QPSK                  | 0.1328                     | 0.0072 ppm                | 4M16F9W                |

# 1.7 Testing Location

| Test Site          | SPORTON INTERNATIONAL (SHENZHEN) INC.                                  |
|--------------------|--|
|                    | 1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili |
| Toot Site Leastion | Town, Nanshan District, Shenzhen, Guangdong, P. R. China               |
| Test Site Location | TEL: +86-755-8637-9589   |
|                    | FAX: +86-755-8637-9595   |
| Total Oito No      | Sporton Site No.   |
| Test Site No.      | TH01-SZ  |

| Test Site          | SPORTON INTERNATIONAL (SHENZHEN) INC.                                  |                         |  |  |
|--------------------|--|-------------------------|--|--|
|                    | No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan |                         |  |  |
| Test Site Location | warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China          |                         |  |  |
|                    | TEL: +86-755- 3320-2398  |                         |  |  |
| Took Cita No       | Sporton Site No.   | FCC/IC Registration No. |  |  |
| Test Site No.      | 03CH02-SZ  | 566869/4086F            |  |  |

Note: The test site complies with ANSI C63.4 2014 requirement.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 8 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

#### Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD

TEL: 86-755-8637-9589

Page Number : 9 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

# 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

- 1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
- 2. 30 MHz to 10th harmonic for WCDMA Band IV.
- 3. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:


| Test Modes    |                     |                     |  |  |  |  |
|---------------|---------------------|---------------------|--|--|--|--|
| Band          | Radiated TCs        | Conducted TCs       |  |  |  |  |
| GSM 850       | ■ GSM Link          | ■ GSM Link          |  |  |  |  |
| GSIVI 650     | ■ EDGE class 8 Link | ■ EDGE class 8 Link |  |  |  |  |
| GSM 1900      | ■ GSM Link          | ■ GSM Link          |  |  |  |  |
| GSW 1900      | ■ EDGE class 8 Link | ■ EDGE class 8 Link |  |  |  |  |
| WCDMA Band V  | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |  |  |  |  |
| WCDMA Band II | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |  |  |  |  |
| WCDMA Band IV | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |  |  |  |  |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 10 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

# 2.2 Connection Diagram of Test System

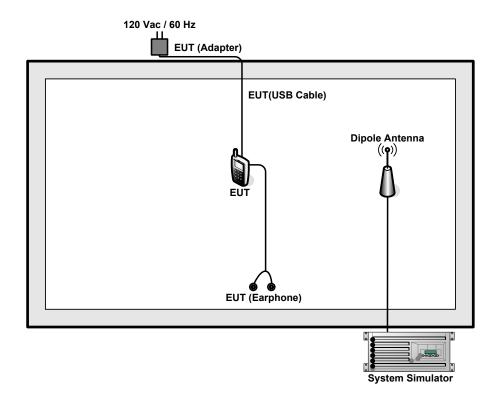

# 2.3 Support Unit used in test configuration

| Item | Equipment        | Trade Name | Model No. | FCC ID | Data Cable | Power Cord        |
|------|------------------|------------|-----------|--------|------------|-------------------|
| 1.   | System Simulator | R&S        | CMU 200   | N/A    | N/A        | Unshielded, 1.8 m |
| 2.   | DC Power Supply  | GW INSTEK  | GPS-3030D | N/A    | N/A        | Unshielded, 1.8 m |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 11 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

## 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.5 dB and a 10dB attenuator.

#### Example:

$$Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$$
  
= 4.5 + 10 = 14.5 (dB)

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD

TEL: 86-755-8637-9589

Page Number : 12 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1


### 3 Conducted Test Result

## 3.1 Measuring Instruments


See list of measuring instruments of this test report.

### 3.2 Test Setup


#### 3.2.1 Conducted Output Power



# 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

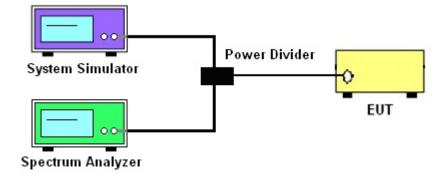

#### 3.2.3 Frequency Stability

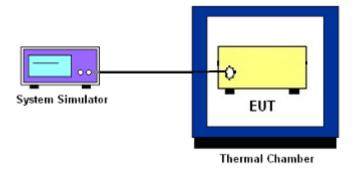

#### 3.3 Test Result of Conducted Test

Please refer to Appendix A.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 13 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

## 3.4 Conducted Output Power

#### 3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

#### 3.4.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

## 3.5 Peak-to-Average Ratio

#### 3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 3.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 3. Set EUT to transmit at maximum output power.
- 4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
- 5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of

the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and

one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB

below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit

bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of

the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.

2. The EUT was connected to spectrum analyzer and system simulator via a power divider.

3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.

The span range for the spectrum analyzer shall be between two and five times the anticipated

OBW.

4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated

OBW, and the VBW shall be at least 3 times the RBW.

5. Set the detection mode to peak, and the trace mode to max hold.

6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to

stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value)

7. Determine the "-26 dB down amplitude" as equal to (Reference Value - X).

8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of

the spectral display such that each marker is at or slightly below the "-X dB down amplitude"

determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed

as close as possible to this value. The OBW is the positive frequency difference between the

two markers.

9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured

bandwidth.

FCC ID: YHLBLUGRAND55HD

Page Number

Report Template No.: BU5-FG22/24/27 Version 1.1

Report Issued Date: May 20, 2016

: 15 of 24

## 3.7 Conducted Band Edge

#### 3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

#### 3.7.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.The path loss was compensated to the results for each measurement.
- 4. The band edges of low and high channels for the highest RF powers were measured.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
  - = P(W) [43 + 10log(P)] (dB)
  - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
  - = -13dBm.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD

TEL: 86-755-8637-9589

Page Number : 16 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

#### 3.8 Conducted Spurious Emission

#### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.8.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4. The middle channel for the highest RF power within the transmitting frequency was measured.
- 5. The conducted spurious emission for the whole frequency range was taken.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
  - = P(W) [43 + 10log(P)] (dB)
- = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
- = -13dBm.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD

TEL: 86-755-8637-9589

Page Number : 17 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

## 3.9 Frequency Stability

#### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

#### 3.9.2 Test Procedures for Temperature Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.9.3 Test Procedures for Voltage Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595

FCC ID : YHLBLUGRAND55HD

Page Number : 18 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702


#### 4 Radiated Test Items

## 4.1 Measuring Instruments


See list of measuring instruments of this test report.

## 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

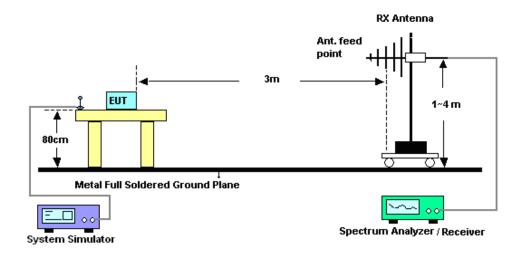

#### 4.2.2 For radiated test above 1GHz

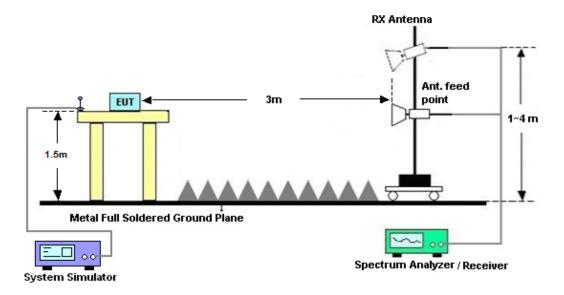

#### 4.3 Test Result of Radiated Test

Please refer to Appendix B.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 19 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

# 4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

#### 4.4.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-D-2010, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).

#### 4.4.2 Test Procedures

- The testing follows FCC KDB 971168 D01 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-D-2010 Section 2.2.17.
- 2. The EUT was placed on a non-conductive rotating platform (0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz) in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
- 3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
- 4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. Tx Cable loss + Substitution antenna gain Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, EIRP = LVL + Correction factor and ERP = EIRP 2.15. Take the record of the output power at substitution antenna.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD

TEL: 86-755-8637-9589

Page Number : 20 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

|              | GSM/GPRS/EDGE | WCDMA/HSPA |
|--------------|---------------|------------|
| SPAN         | 500kHz        | 10MHz      |
| RBW          | 10kHz         | 100kHz     |
| VBW          | 30kHz         | 300kHz     |
| Detector     | RMS           | RMS        |
| Trace        | Average       | Average    |
| Average Type | Power         | Power      |
| Sweep Count  | 100           | 100        |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 21 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

## 4.5 Field Strength of Spurious Radiation Measurement

#### 4.5.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 4.5.2 Test Procedures

- The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
- 2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12. ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
  - = P(W) [43 + 10log(P)] (dB)
  - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
  - = -13dBm.

# **5** List of Measuring Equipment

| Instrument                   | Manufacturer                 | Model<br>No.  | Serial No.   | Characteristics           | Calibration<br>Date | Test Date                       | Due Date      | Remark                   |
|------------------------------|------------------------------|---------------|--------------|---------------------------|---------------------|---------------------------------|---------------|--------------------------|
| Spectrum<br>Analyzer         | R&S                          | FSV40         | 101078       | 9kHz~40GHz                | May 05, 2015        | Apr. 11, 2016~<br>Apr. 12, 2016 | May 04, 2016  | Conducted (TH01-SZ)      |
| Thermal<br>Chamber           | Ten Billion<br>Hongzhangroup | LP-150U       | H2014081803  | -40~+150°C                | Aug. 07, 2015       | Apr. 11, 2016~<br>Apr. 12, 2016 | Aug. 06, 2016 | Conducted (TH01-SZ)      |
| Spectrum<br>Analyzer         | R&S                          | FSV40         | 101041       | 10kHz~40GHz;<br>Max 30dBm | Oct. 20, 2015       | Apr. 24, 2016~<br>Apr. 25, 2016 | Oct. 19, 2016 | Radiation (03CH02-SZ)    |
| Bilog Antenna                | TeseQ                        | CBL6112D      | 23188        | 30MHz~2GHz                | Oct. 17, 2015       | Apr. 24, 2016~<br>Apr. 25, 2016 | Oct. 16, 2016 | Radiation (03CH02-SZ)    |
| Double Ridge<br>Horn Antenna | SCHWARZBEC<br>K              | BBHA<br>9120D | 9120D-1285   | 1GHz~18GHz                | Jan. 11, 2016       | Apr. 24, 2016~<br>Apr. 25, 2016 | Jan. 10, 2017 | Radiation (03CH02-SZ)    |
| SHF-EHF<br>Horn              | com-power                    | AH-840        | 101071       | 18GHz~40GHz               | Aug. 17, 2015       | Apr. 24, 2016~<br>Apr. 25, 2016 | Aug. 16, 2016 | Radiation<br>(03CH02-SZ) |
| Amplifier                    | HP                           | 8447F         | 3113A04622   | 9kHz~1300MHz /<br>30 dB   | Aug. 07, 2015       | Apr. 24, 2016~<br>Apr. 25, 2016 | Aug. 06, 2016 | Radiation (03CH02-SZ)    |
| Amplifier                    | Agilent                      | 8449B         | 3008A01023   | 1GHz~26.5GHz              | Oct. 20, 2015       | Apr. 24, 2016~<br>Apr. 25, 2016 | Oct. 19, 2016 | Radiation (03CH02-SZ)    |
| AC Power<br>Source           | Chroma                       | 61601         | 616010002470 | N/A                       | NCR                 | Apr. 24, 2016~<br>Apr. 25, 2016 | NCR           | Radiation (03CH02-SZ)    |
| Turn Table                   | Chaintek                     | T-200         | N/A          | 0~360 degree              | NCR                 | Apr. 24, 2016~<br>Apr. 25, 2016 | NCR           | Radiation (03CH02-SZ)    |
| Antenna Mast                 | Chaintek                     | MBS-400       | N/A          | 1 m~4 m                   | NCR                 | Apr. 24, 2016~<br>Apr. 25, 2016 | NCR           | Radiation (03CH02-SZ)    |

NCR: No Calibration Required

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 23 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

# 6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| Measuring Uncertainty for a Level of | 5.0dB |
|--------------------------------------|-------|
| Confidence of 95% (U = 2Uc(y))       | 3.0db |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : 24 of 24
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

# **Appendix A. Test Results of Conducted Test**

# Conducted Output Power(Average power)

|                | Conducted Power (*Unit: dBm) |        |       |        |                    |        |
|----------------|------------------------------|--------|-------|--------|--------------------|--------|
| Band           |                              | GSM850 |       |        |                    |        |
| Channel        | 128                          | 189    | 251   | 512    | 661                | 810    |
| Frequency      | 824.2                        | 836.4  | 848.8 | 1850.2 | 1880.0             | 1909.8 |
| GSM            | <mark>32.85</mark>           | 32.81  | 32.76 | 29.69  | <mark>29.72</mark> | 29.70  |
| GPRS class 8   | 32.82                        | 32.79  | 32.71 | 29.67  | 29.69              | 29.68  |
| GPRS class 10  | 32.07                        | 32.05  | 31.98 | 28.94  | 28.95              | 28.88  |
| GPRS class 11  | 30.31                        | 30.28  | 30.23 | 27.18  | 27.22              | 27.21  |
| GPRS class 12  | 29.23                        | 29.19  | 29.15 | 26.05  | 26.13              | 26.12  |
| EGPRS class 8  | 27.52                        | 27.50  | 27.50 | 26.21  | 26.38              | 26.51  |
| EGPRS class 10 | 26.46                        | 26.50  | 26.48 | 25.19  | 25.43              | 25.56  |
| EGPRS class 11 | 24.43                        | 24.51  | 24.47 | 23.02  | 23.25              | 23.41  |
| EGPRS class 12 | 23.26                        | 23.34  | 23.29 | 21.82  | 22.00              | 22.17  |

| Conducted Power (*Unit: dBm) |       |                    |       |               |                    |        |                    |        |        |
|------------------------------|-------|--------------------|-------|---------------|--------------------|--------|--------------------|--------|--------|
| Band                         | WCI   | DMA Bar            | nd V  | WCDMA Band II |                    |        | WCDMA Band IV      |        |        |
| Channel                      | 4132  | 4182               | 4233  | 9262          | 9400               | 9538   | 1312               | 1413   | 1513   |
| Frequency                    | 826.4 | 836.4              | 846.6 | 1852.4        | 1880               | 1907.6 | 1712.4             | 1732.6 | 1752.6 |
| AMR 12.2Kbps                 | 22.49 | 22.59              | 22.55 | 22.59         | 22.61              | 22.41  | 22.69              | 22.67  | 22.65  |
| RMC 12.2Kbps                 | 22.50 | <mark>22.61</mark> | 22.57 | 22.61         | <mark>22.62</mark> | 22.43  | <mark>22.71</mark> | 22.70  | 22.66  |
| HSDPA Subtest-1              | 21.16 | 21.46              | 21.36 | 21.38         | 21.26              | 21.08  | 21.35              | 21.49  | 21.54  |
| HSDPA Subtest-2              | 21.29 | 21.44              | 21.33 | 21.35         | 21.23              | 21.08  | 21.33              | 21.43  | 21.51  |
| HSDPA Subtest-3              | 20.69 | 20.96              | 20.87 | 20.88         | 20.77              | 20.61  | 20.85              | 20.90  | 21.07  |
| HSDPA Subtest-4              | 20.64 | 20.96              | 20.87 | 20.84         | 20.75              | 20.55  | 20.88              | 20.93  | 21.05  |
| HSUPA Subtest-1              | 19.26 | 19.50              | 19.44 | 19.37         | 19.30              | 19.06  | 19.35              | 19.49  | 19.55  |
| HSUPA Subtest-2              | 19.19 | 19.53              | 19.44 | 19.30         | 19.24              | 19.07  | 19.31              | 19.49  | 19.53  |
| HSUPA Subtest-3              | 20.27 | 20.50              | 20.42 | 20.35         | 20.30              | 20.11  | 20.30              | 20.46  | 20.52  |
| HSUPA Subtest-4              | 18.47 | 18.97              | 18.94 | 18.79         | 18.79              | 18.55  | 18.82              | 18.95  | 19.02  |
| HSUPA Subtest-5              | 21.30 | 21.50              | 21.40 | 21.40         | 21.30              | 21.10  | 21.40              | 21.50  | 21.60  |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-1 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

## A1. GSM

# Peak-to-Average Ratio

| Mode       | GSM8 | Limit: 13dB  |        |
|------------|------|--------------|--------|
| Mod.       | GSM  | EDGE class 8 | Result |
| Lowest CH  | 0.20 | 2.84         |        |
| Middle CH  | 0.24 | 2.88         | PASS   |
| Highest CH | 0.24 | 2.92         |        |

| Mode       | GSM19 | Limit: 13dB  |        |
|------------|-------|--------------|--------|
| Mod.       | GSM   | EDGE class 8 | Result |
| Lowest CH  | 0.20  | 2.96         |        |
| Middle CH  | 0.20  | 2.96         | PASS   |
| Highest CH | 0.24  | 2.84         |        |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-2 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

**GSM850 (GSM)** GSM850 (EDGE class 8) **Lowest Channel Lowest Channel %** Trace 1 32.16 dBm 32.36 dBm 0.20 dB Trace 1 26.86 dBm 29.75 dBm 2.88 dB Peak Peak 0.16 dB 0.20 dB 0.20 dB 0.20 dB 10 % 2.36 dB 2.80 dB 2.84 dB 2.92 dB Date: 11.APR.2016 23:23:06 Date: 11.APR.2016 23:48:06 **Middle Channel Middle Channel** \* **%** Trace 1 32.11 dBm 32.36 dBm 0.24 dB Trace 1 26.82 dBm 29.75 dBm 2.93 dB Mean Peak Crest Mean Peak Crest 0.16 dB 0.20 dB 0.24 dB 0.28 dB 2.32 dB 2.80 dB 2.88 dB 2.88 dB 10 % 1 % .1 % .01 % Date: 11.APR.2016 23:23:23 Date: 11.APR.2016 23:48:41 **Highest Channel Highest Channel %** \* Trace 1
32.08 dBm
32.28 dBm
0.21 dB Trace 1 26.72 dBm 29.67 dBm 2.96 dB Crest 2.40 dB 2.84 dB 2.92 dB 2.96 dB 0.16 dB 10 %

Report No.: FG640702

: A-3 of 35


Date: 11.APR.2016 23:23:38

FAX: 86-755-8637-9595 Report Version : Rev. 01

FCC ID: YHLBLUGRAND55HD Report Template No.: BU5-FG22/24/27/90 Version 1.1

Date: 11.APR.2016 23:49:06

FCC RF Test Report

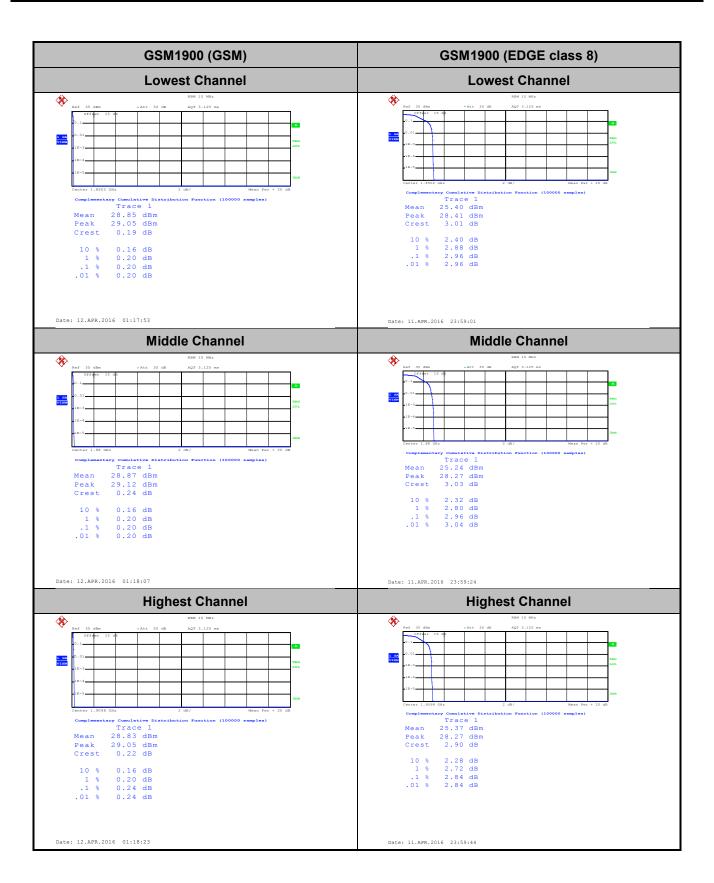

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-4 of 35 Report Issued Date: May 20, 2016 Report Version : Rev. 01

Report No.: FG640702

# 26dB Bandwidth

| Mode       | GSM850(MHz)      |       |  |  |
|------------|------------------|-------|--|--|
| Mod.       | GSM EDGE class 8 |       |  |  |
| Lowest CH  | 0.308            | 0.318 |  |  |
| Middle CH  | 0.313            | 0.294 |  |  |
| Highest CH | 0.295            | 0.314 |  |  |

| Mode       | GSM1900(MHz) |              |  |
|------------|--------------|--------------|--|
| Mod.       | GSM          | EDGE class 8 |  |
| Lowest CH  | 0.311        | 0.299        |  |
| Middle CH  | 0.309        | 0.309        |  |
| Highest CH | 0.316        | 0.310        |  |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-5 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

GSM850 (GSM) GSM850 (EDGE class 8) **Lowest Channel Lowest Channel** Date: 11.APR.2016 23:28:03 **Middle Channel Middle Channel** Date: 12.APR.2016 01:06:17 **Highest Channel Highest Channel** 

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD

Date: 11.APR.2016 23:28:58


Page Number : A-6 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

Report Template No.: BU5-FG22/24/27/90 Version 1.1

Date: 12.APR.2016 01:06:54



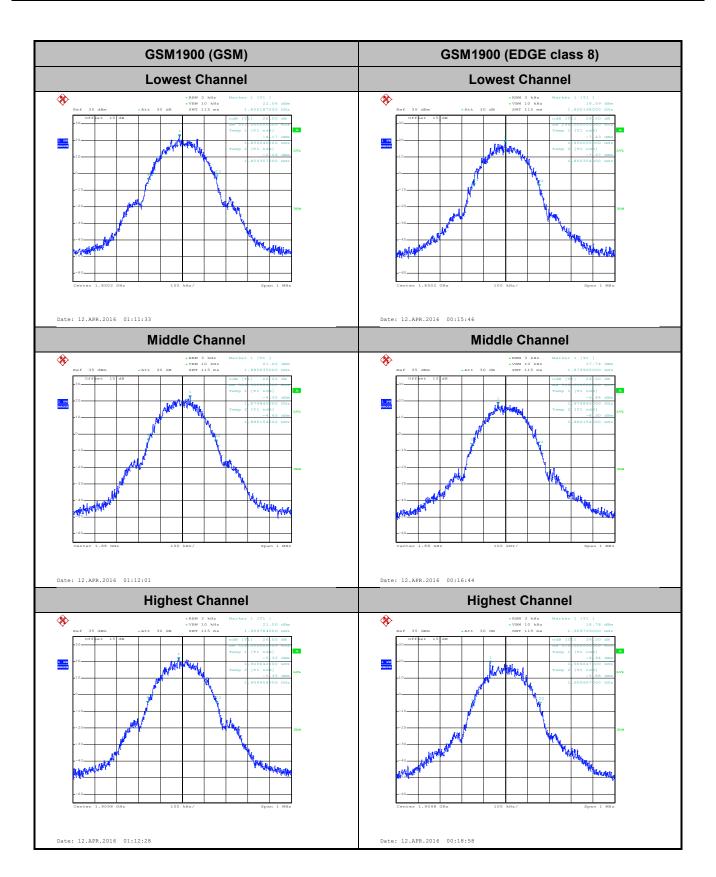

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-7 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

# Occupied Bandwidth


| Mode       | GSM850(MHz)      |       |  |  |
|------------|------------------|-------|--|--|
| Mod.       | GSM EDGE class 8 |       |  |  |
| Lowest CH  | 0.244            | 0.248 |  |  |
| Middle CH  | 0.244            | 0.243 |  |  |
| Highest CH | 0.250            | 0.242 |  |  |


| Mode       | GSM1900(MHz)     |       |  |  |
|------------|------------------|-------|--|--|
| Mod.       | GSM EDGE class 8 |       |  |  |
| Lowest CH  | 0.245            | 0.240 |  |  |
| Middle CH  | 0.244            | 0.249 |  |  |
| Highest CH | 0.245            | 0.251 |  |  |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-8 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01


Report Template No.: BU5-FG22/24/27/90 Version 1.1




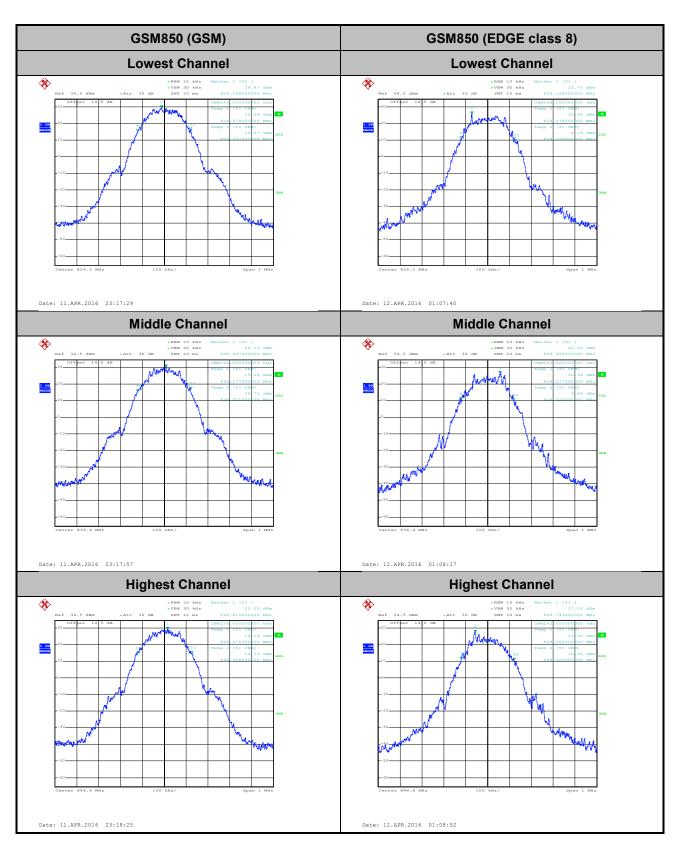

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-9 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

FCC RF Test Report Report No.: FG640702 **GSM1900 (GSM)** GSM1900 (EDGE class 8) **Lowest Channel Lowest Channel** 

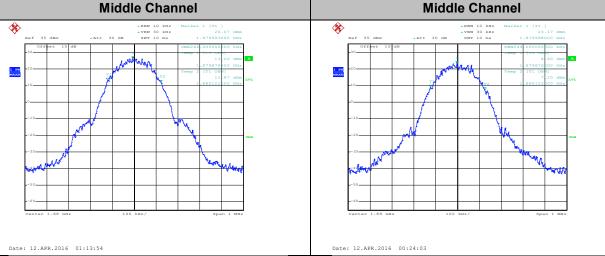

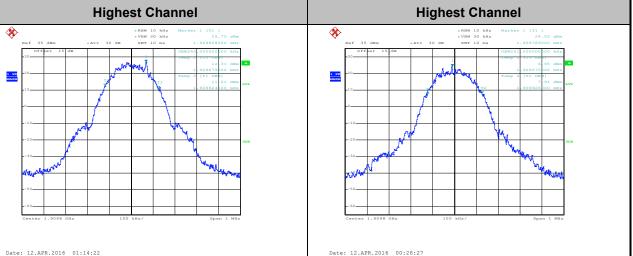


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-10 of 35 Report Issued Date: May 20, 2016 Report Version : Rev. 01

# **Conducted Band Edge**

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-11 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01


Report Template No.: BU5-FG22/24/27/90 Version 1.1

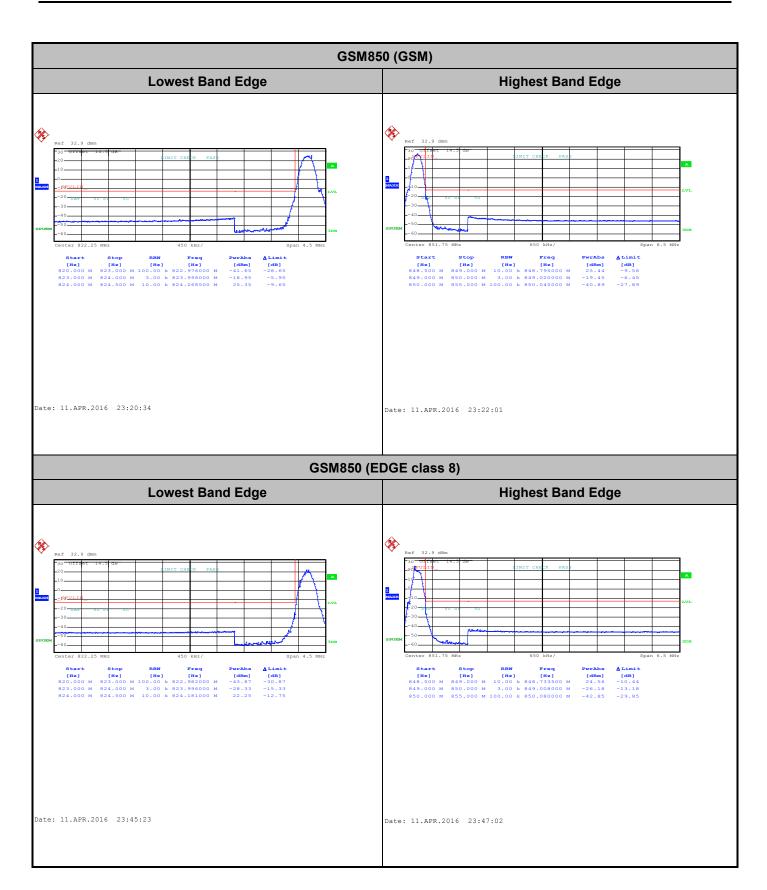

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-12 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

**Report No. : FG640702** 

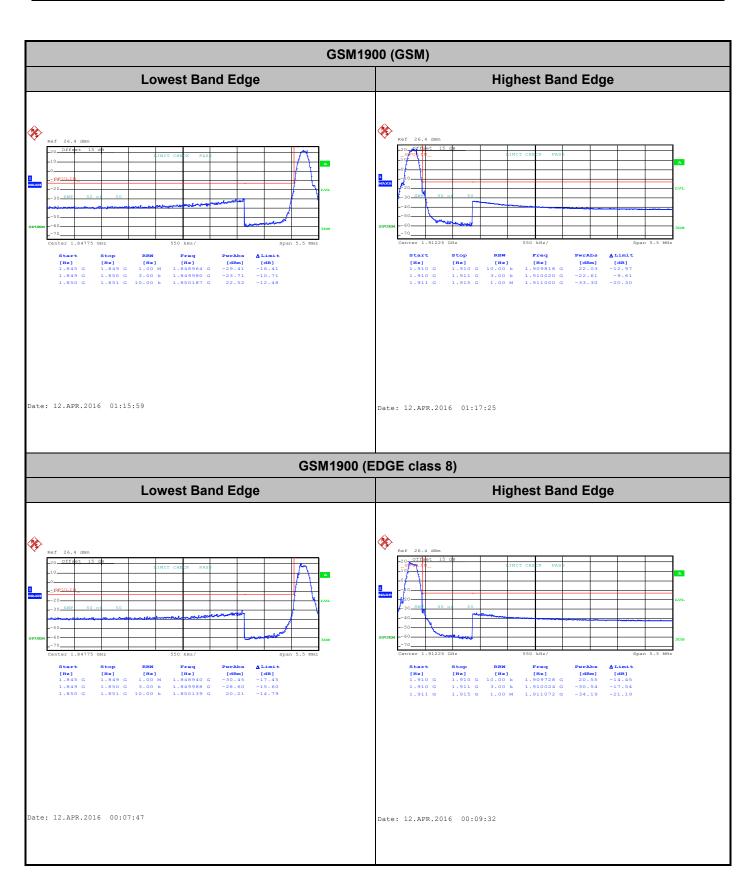

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-13 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702


# **Conducted Spurious Emission**

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-14 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.1




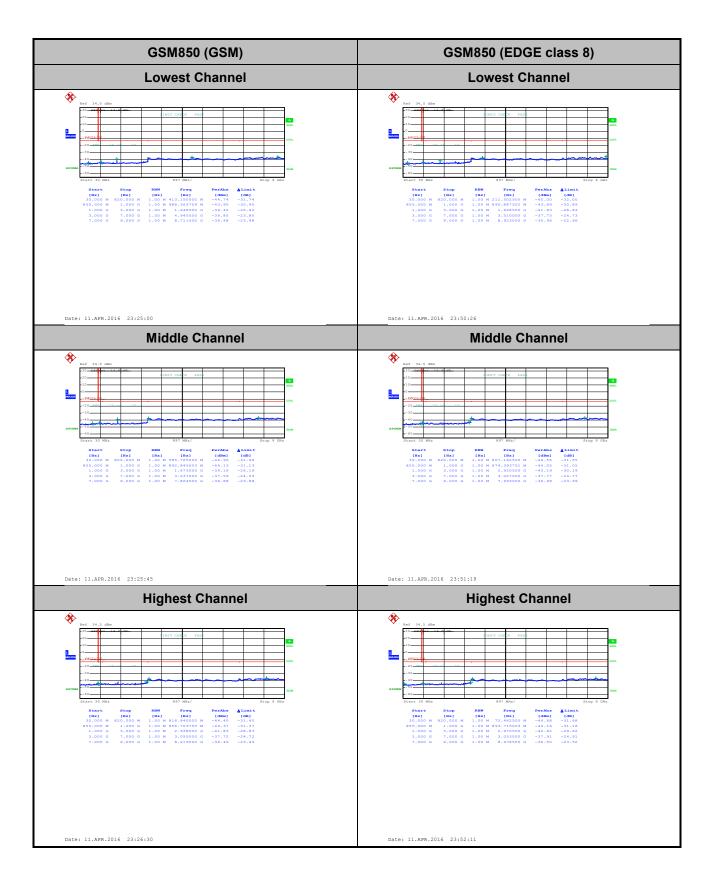

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-15 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01
Report Template No.: BU5-FG22/24/27/90 Version 1.1

FCC RF Test Report

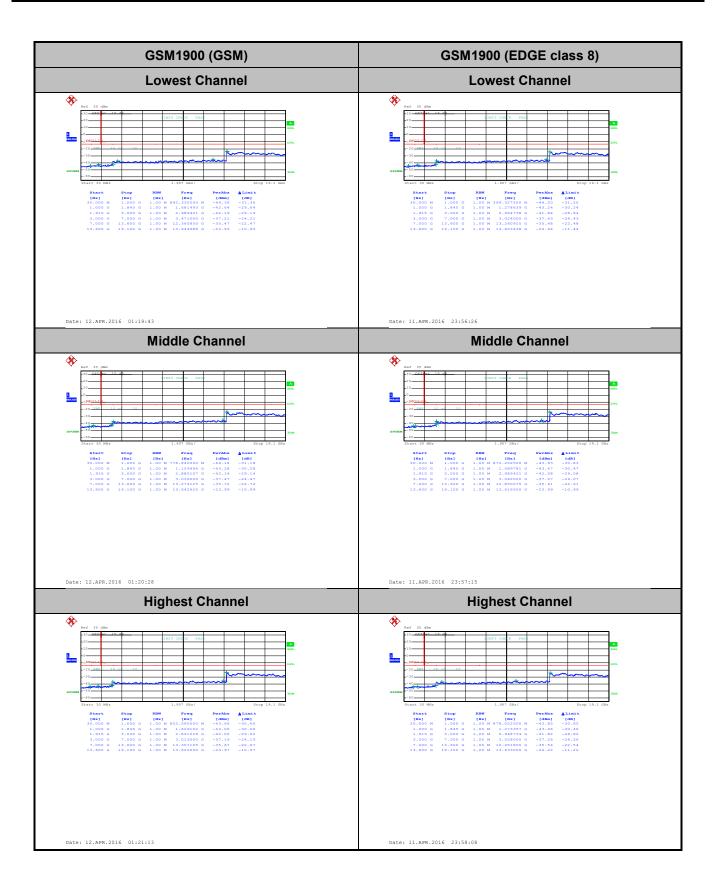

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-16 of 35 Report Issued Date: May 20, 2016 Report Version : Rev. 01

**Report No. : FG640702** 

## Frequency Stability

| Test Conditions  | Middle Channel    | GSM850<br>(GSM) | GSM850<br>(EDGE class 8) | Limit<br>2.5ppm |
|------------------|-------------------|-----------------|--------------------------|-----------------|
| Temperature (°C) | Voltage (Volt)    | Deviatio        | n (ppm)                  | Result          |
| 50               | Normal Voltage    | 0.0048          | 0.0060                   |                 |
| 40               | Normal Voltage    | 0.0024          | 0.0036                   |                 |
| 30               | Normal Voltage    | 0.0012          | 0.0012                   |                 |
| 20(Ref.)         | Normal Voltage    | 0.0000          | 0.0000                   |                 |
| 10               | Normal Voltage    | 0.0179          | 0.0012                   |                 |
| 0                | Normal Voltage    | 0.0191          | 0.0024                   |                 |
| -10              | Normal Voltage    | 0.0215          | 0.0036                   | PASS            |
| -20              | Normal Voltage    | 0.0239          | 0.0060                   |                 |
| -30              | Normal Voltage    | 0.0251          | 0.0072                   |                 |
| 20               | Maximum Voltage   | 0.0012          | 0.0012                   |                 |
| 20               | Normal Voltage    | 0.0000          | 0.0000                   |                 |
| 20               | Battery End Point | 0.0012          | 0.0012                   |                 |

| Test Conditions  | Middle Channel    | GSM1900<br>(GSM) | GSM1900<br>(EDGE class 8) | Limit<br>Note 2. |
|------------------|-------------------|------------------|---------------------------|------------------|
| Temperature (°C) | Voltage (Volt)    | Deviatio         | n (ppm)                   | Result           |
| 50               | Normal Voltage    | 0.0036           | 0.0072                    |                  |
| 40               | Normal Voltage    | 0.0024           | 0.0048                    |                  |
| 30               | Normal Voltage    | 0.0012           | 0.0024                    |                  |
| 20(Ref.)         | Normal Voltage    | 0.0000           | 0.0000                    |                  |
| 10               | Normal Voltage    | 0.0012           | 0.0012                    |                  |
| 0                | Normal Voltage    | 0.0024           | 0.0024                    |                  |
| -10              | Normal Voltage    | 0.0036           | 0.0036                    | PASS             |
| -20              | Normal Voltage    | 0.0048           | 0.0048                    |                  |
| -30              | Normal Voltage    | 0.0072           | 0.0072                    |                  |
| 20               | Maximum Voltage   | 0.0012           | 0.0012                    |                  |
| 20               | Normal Voltage    | 0.0000           | 0.0000                    |                  |
| 20               | Battery End Point | 0.0024           | 0.0024                    |                  |

#### Note:

- 1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.5 V.; Maximum Voltage =4.2 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-17 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

### A2. WCDMA

### Peak-to-Average Ratio


| Mode       | WCDMA Band V(dB) | WCDMA Band II(dB) | WCDMA Band IV(dB) | Limit: 13dB |
|------------|------------------|-------------------|-------------------|-------------|
| Mod.       | RMC 12.2Kbps     | RMC 12.2Kbps      | RMC 12.2Kbps      | Result      |
| Lowest CH  | 2.72             | 2.76              | 3.12              |             |
| Middle CH  | 3.08             | 3.08              | 2.72              | PASS        |
| Highest CH | 3.08             | 2.84              | 2.96              |             |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-18 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.1

Report No.: FG640702

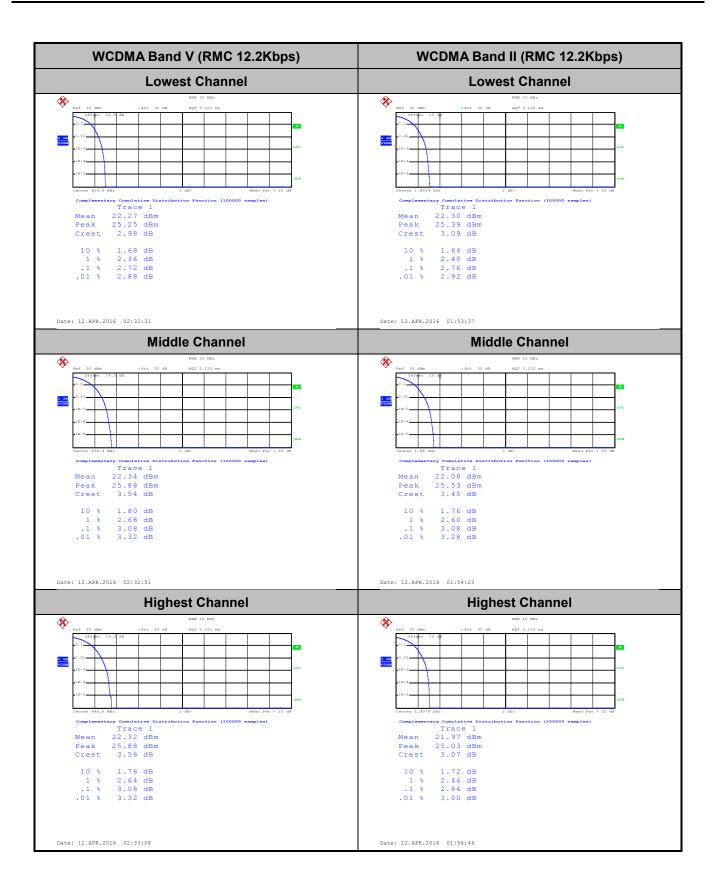

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-19 of 35 Report Issued Date: May 20, 2016 Report Version : Rev. 01

WCDMA Band IV (RMC 12.2Kbps) **Lowest Channel** \* Peak Crest 10 % 1 % .1 % Date: 12.APR.2016 02:02:55 **Middle Channel** \* 1.64 dB 2.32 dB 2.72 dB 2.88 dB **Highest Channel %** Trace 1 22.25 dBm 25.53 dBm 3.28 dB Date: 12.APR.2016 02:03:33

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-20 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No. : FG640702

## 26dB Bandwidth

| Mode       | WCDMA Band V(MHz) | WCDMA Band II(MHz) | WCDMA Band IV(MHz) |
|------------|-------------------|--------------------|--------------------|
| Mod.       | RMC 12.2Kbps      | RMC 12.2Kbps       | RMC 12.2Kbps       |
| Lowest CH  | 4.68              | 4.69               | 4.69               |
| Middle CH  | 4.68              | 4.69               | 4.69               |
| Highest CH | 4.68              | 4.69               | 4.68               |

SPORTON INTERNATIONAL (SHENZHEN) INC.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Report Issued Date: May 20, 2016 Report Version : Rev. 01

Page Number

Report Template No.: BU5-FG22/24/27/90 Version 1.1


: A-21 of 35

FCC RF Test Report Report No.: FG640702 WCDMA Band V (RMC 12.2Kbps) WCDMA Band II (RMC 12.2Kbps) **Lowest Channel Lowest Channel** 

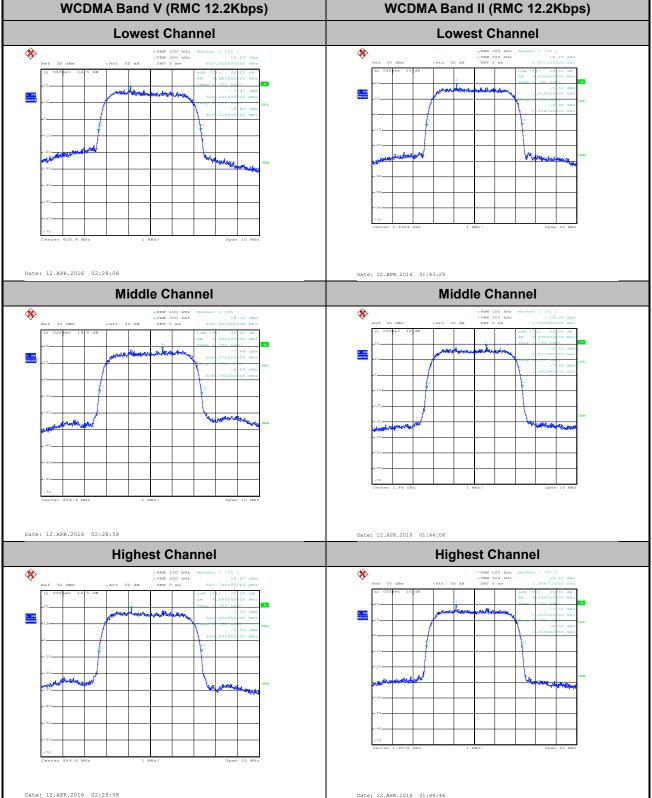

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-22 of 35 Report Issued Date: May 20, 2016 Report Version : Rev. 01

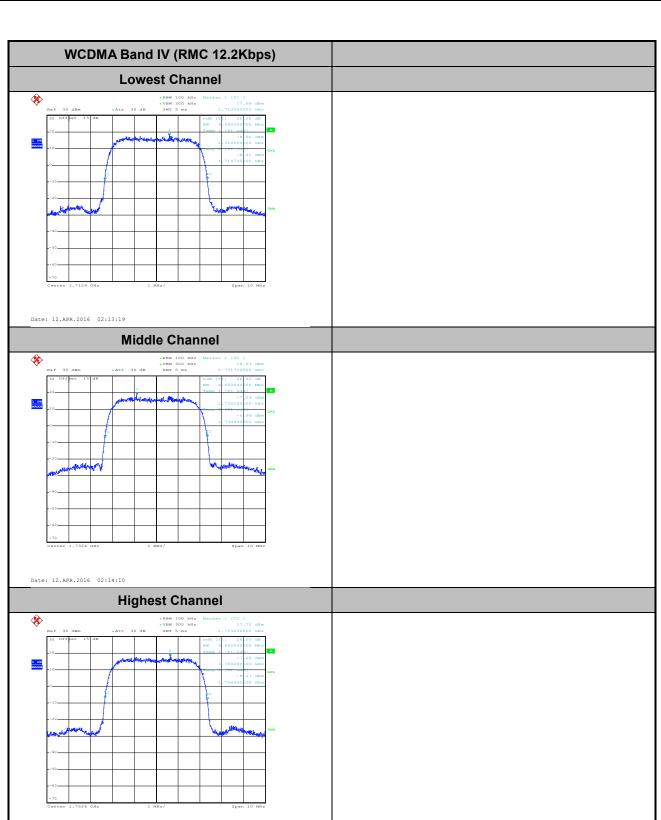

Date: 12.APR.2016 02:14:53

Page Number : A-23 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

## Occupied Bandwidth

| Mode       | WCDMA Band V | WCDMA Band II | WCDMA Band IV |
|------------|--------------|---------------|---------------|
| Mod.       | RMC 12.2Kbps | RMC 12.2Kbps  | RMC 12.2Kbps  |
| Lowest CH  | 4.16         | 4.16          | 4.16          |
| Middle CH  | 4.15         | 4.15          | 4.16          |
| Highest CH | 4.16         | 4.17          | 4.16          |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-24 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01
Report Template No.: BU5-FG22/24/27/90 Version 1.1

WCDMA Band V (RMC 12.2Kbps) WCDMA Band II (RMC 12.2Kbps) **Lowest Channel Lowest Channel** \* Date: 12.APR.2016 01:45:35 Middle Channel **Middle Channel** Date: 12.APR.2016 02:31:22 **Highest Channel Highest Channel** \* **%** 

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD


Date: 12.APR.2016 02:31:58

Page Number : A-25 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

Report Template No.: BU5-FG22/24/27/90 Version 1.1

Date: 12.APR.2016 01:46:48

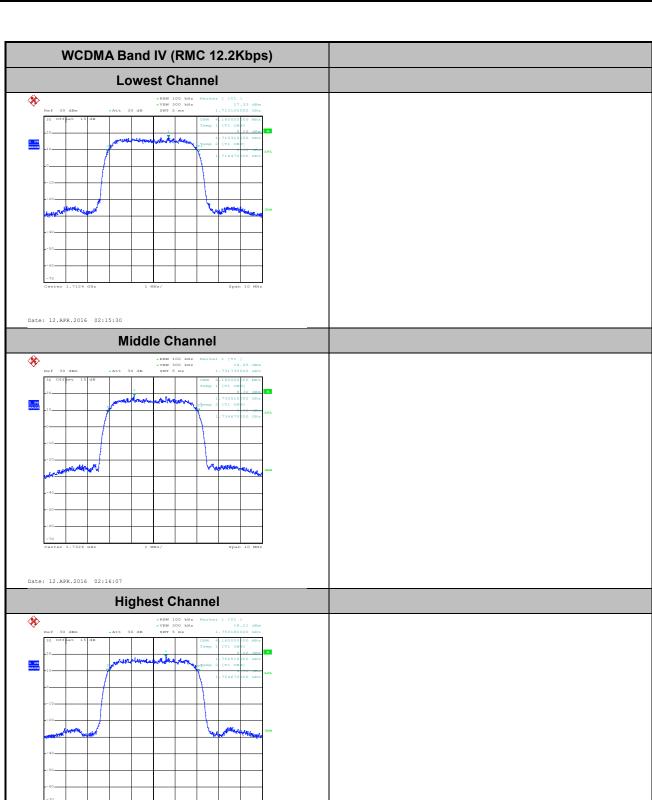

Date: 12.APR.2016 02:16:43

Page Number : A-26 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01


Report No.: FG640702

## **Conducted Band Edge**

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-27 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.1

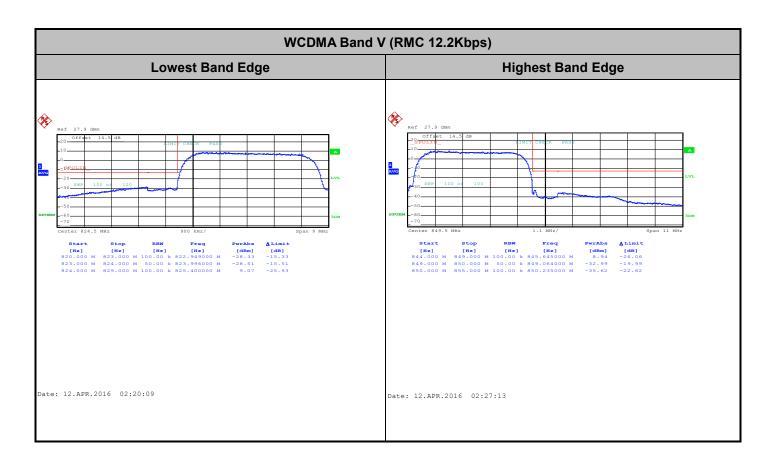


Report Issued Date: May 20, 2016
Report Version: Rev. 01

Page Number


Report Template No.: BU5-FG22/24/27/90 Version 1.1

: A-28 of 35

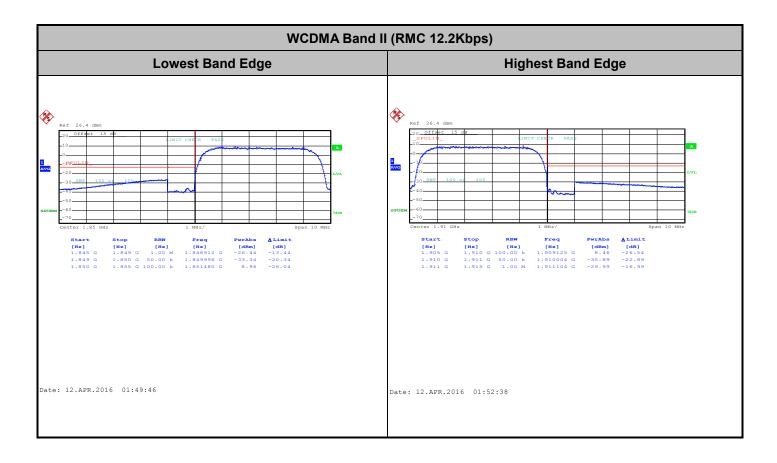

Page Number : A-29 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

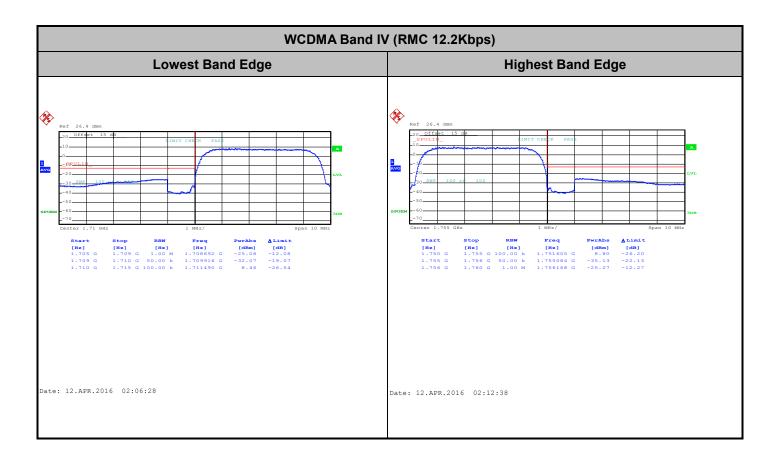

Page Number : A-30 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.1


# **Conducted Spurious Emission**

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-31 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01


Report Template No.: BU5-FG22/24/27/90 Version 1.1

FCC RF Test Report

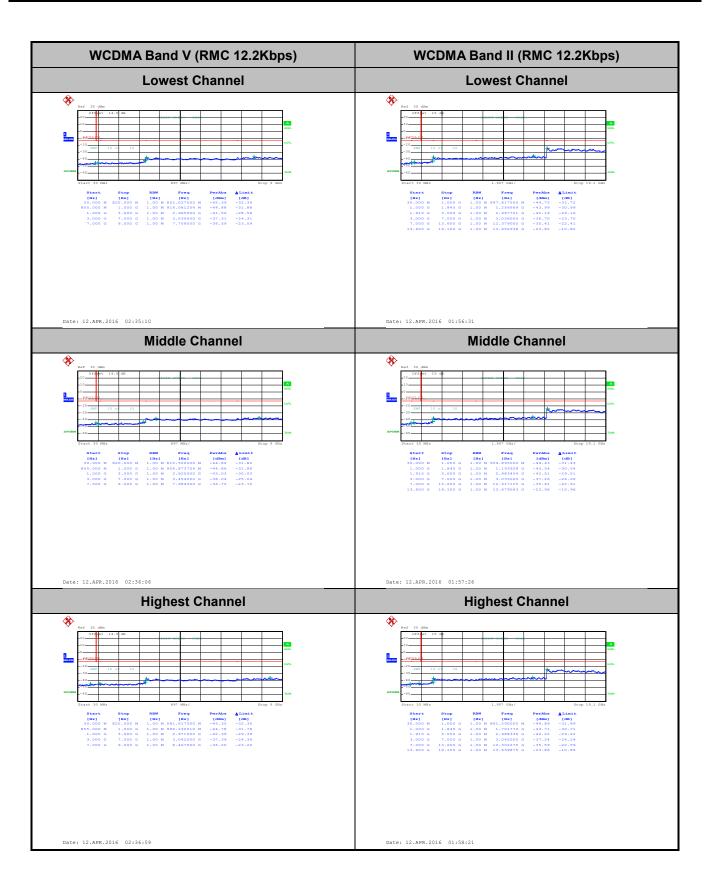

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-32 of 35 Report Issued Date: May 20, 2016 Report Version : Rev. 01

**Report No. : FG640702** 

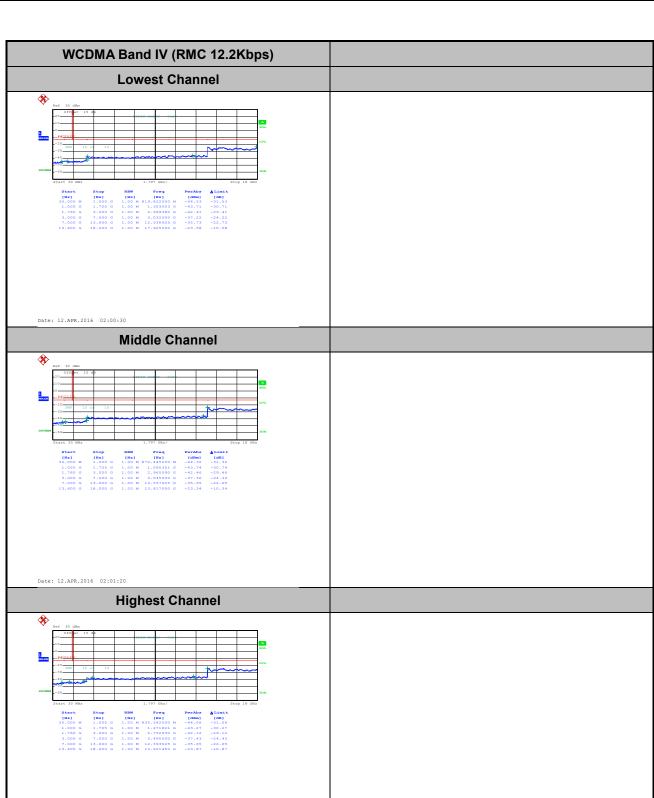

Date: 12.APR.2016 02:02:09

Page Number : A-33 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

## Frequency Stability

| Test Conditions  | Middle Channel    | WCDMA Band V<br>(RMC 12.2KbpsRMC 12.2Kbps) | Limit<br>2.5ppm |
|------------------|-------------------|--|-----------------|
| Temperature (°C) | Voltage (Volt)    | Deviation (ppm)                            | Result          |
| 50               | Normal Voltage    | 0.0060                                     |                 |
| 40               | Normal Voltage    | 0.0048                                     |                 |
| 30               | Normal Voltage    | 0.0024                                     |                 |
| 20(Ref.)         | Normal Voltage    | 0.0000                                     |                 |
| 10               | Normal Voltage    | 0.0012                                     |                 |
| 0                | Normal Voltage    | 0.0024                                     |                 |
| -10              | Normal Voltage    | 0.0036                                     | PASS            |
| -20              | Normal Voltage    | 0.0048                                     |                 |
| -30              | Normal Voltage    | 0.0060                                     |                 |
| 20               | Maximum Voltage   | 0.0012                                     |                 |
| 20               | Normal Voltage    | 0.0000                                     |                 |
| 20               | Battery End Point | 0.0012                                     |                 |

| Test Conditions  | Middle Channel    | WCDMA Band II<br>(RMC 12.2Kbps) | Limit<br>Note 2. |
|------------------|-------------------|---------------------------------|------------------|
| Temperature (°C) | Voltage (Volt)    | Deviation (ppm)                 | Result           |
| 50               | Normal Voltage    | 0.0036                          |                  |
| 40               | Normal Voltage    | 0.0024                          |                  |
| 30               | Normal Voltage    | 0.0012                          |                  |
| 20(Ref.)         | Normal Voltage    | 0.0000                          |                  |
| 10               | Normal Voltage    | 0.0084                          |                  |
| 0                | Normal Voltage    | 0.0096                          |                  |
| -10              | Normal Voltage    | 0.0108                          | PASS             |
| -20              | Normal Voltage    | 0.0120                          |                  |
| -30              | Normal Voltage    | 0.0132                          |                  |
| 20               | Maximum Voltage   | 0.0012                          |                  |
| 20               | Normal Voltage    | 0.0000                          |                  |
| 20               | Battery End Point | 0.0012                          |                  |

#### Note:

- 1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.5 V.; Maximum Voltage =4.2 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL : 86-755-8637-9589 FAX : 86-755-8637-9595 FCC ID : YHLBLUGRAND55HD Page Number : A-34 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

| Test Conditions  | Middle Channel    | WCDMA Band IV<br>(RMC 12.2Kbps) | Limit<br>Note 2. |
|------------------|-------------------|---------------------------------|------------------|
| Temperature (°C) | Voltage (Volt)    | Deviation (ppm)                 | Result           |
| 50               | Normal Voltage    | 0.0072                          |                  |
| 40               | Normal Voltage    | 0.0048                          |                  |
| 30               | Normal Voltage    | 0.0024                          |                  |
| 20(Ref.)         | Normal Voltage    | 0.0000                          |                  |
| 10               | Normal Voltage    | 0.0012                          |                  |
| 0                | Normal Voltage    | 0.0024                          |                  |
| -10              | Normal Voltage    | 0.0036                          | PASS             |
| -20              | Normal Voltage    | 0.0048                          |                  |
| -30              | Normal Voltage    | 0.0060                          |                  |
| 20               | Maximum Voltage   | 0.0012                          |                  |
| 20               | Normal Voltage    | 0.0000                          |                  |
| 20               | Battery End Point | 0.0012                          |                  |

#### Note:

- 1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.5 V.; Maximum Voltage =4.2 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : A-35 of 35
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

### **Appendix B. Test Results of Radiated Test**

## **ERP/EIRP**

| Channel | Mode                      | Horiz    | ontal  | Vertical    |        |  |
|---------|---------------------------|----------|--------|-------------|--------|--|
| Channel | Wiode                     | ERP(dBm) | ERP(W) | ERP(dBm)    | ERP(W) |  |
| Lowest  | GSM850                    | 25.42    | 0.3487 | 15.65       | 0.0368 |  |
| Middle  | GSIVI850                  | 25.61    | 0.3639 | 16.20       | 0.0417 |  |
| Highest | GSW                       | 26.70    | 0.4682 | 17.26       | 0.0532 |  |
| Lowest  | 0014050                   | 22.01    | 0.1587 | 12.15       | 0.0164 |  |
| Middle  | GSM850<br>EDGE class 8    | 22.67    | 0.1848 | 12.96       | 0.0198 |  |
| Highest | EDGE Class 6              | 22.88    | 0.1939 | 13.21       | 0.0210 |  |
| Lowest  | MCDMA Bond V              | 15.57    | 0.0360 | 5.99        | 0.0040 |  |
| Middle  | WCDMA Band V RMC 12.2Kbps | 16.29    | 0.0425 | 7.13        | 0.0052 |  |
| Highest |                           | 17.08    | 0.0511 | 8.19        | 0.0066 |  |
| Limit   | ERP < 7W                  | Result   |        | Result PASS |        |  |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : B1 of B9
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

| Channel | Mode                       | Horiz     | ontal   | Vertical  |         |  |
|---------|----------------------------|-----------|---------|-----------|---------|--|
| Channel | Wiode                      | EIRP(dBm) | EIRP(W) | EIRP(dBm) | EIRP(W) |  |
| Lowest  | CCM4000                    | 26.58     | 0.4554  | 27.82     | 0.6047  |  |
| Middle  | GSM1900<br>GSM             | 27.79     | 0.6010  | 29.09     | 0.8100  |  |
| Highest | GSIVI                      | 27.76     | 0.5974  | 28.72     | 0.7448  |  |
| Lowest  | 0.0144,000                 | 24.41     | 0.2762  | 25.78     | 0.3786  |  |
| Middle  | GSM1900<br>EDGE class 8    | 24.38     | 0.2744  | 25.66     | 0.3682  |  |
| Highest | EDGE Class 6               | 23.84     | 0.2421  | 24.86     | 0.3064  |  |
| Lowest  | WCDMA Bond II              | 19.81     | 0.0957  | 21.09     | 0.1284  |  |
| Middle  | WCDMA Band II RMC 12.2Kbps | 20.45     | 0.1108  | 21.82     | 0.1520  |  |
| Highest |                            | 20.25     | 0.1058  | 21.57     | 0.1435  |  |
| Limit   | EIRP < 2W                  | Result    |         | PASS      |         |  |

| Channal | Mode          | Horiz     | ontal   | Vertical  |         |  |
|---------|---------------|-----------|---------|-----------|---------|--|
| Channel | Wiode         | EIRP(dBm) | EIRP(W) | EIRP(dBm) | EIRP(W) |  |
| Lowest  | WCDMA Band IV | 20.79     | 0.1199  | 20.89     | 0.1226  |  |
| Middle  |               | 20.51     | 0.1125  | 21.03     | 0.1266  |  |
| Highest | RMC 12.2Kbps  | 20.67     | 0.1166  | 21.23     | 0.1328  |  |
| Limit   | EIRP < 1W     | Result    |         | PA        | SS      |  |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : B2 of B9
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

## Radiated Spurious Emission

|          |                    |                |                  | GSM8                    | 50 (GSM)                |                          |                      |                             |                       |
|----------|--------------------|----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------|-----------------------------|-----------------------|
| Channel  | Frequency<br>(MHz) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable loss ( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |
|          | 1648.4             | -34.93         | -13              | -21.93                  | -41.36                  | -33.36                   | 4.92                 | 5.50                        | Н                     |
|          | 2472.6             | -25.54         | -13              | -12.54                  | -36.27                  | -23.08                   | 6.11                 | 5.80                        | Н                     |
|          | 3296.8             | -43.09         | -13              | -30.09                  | -54.21                  | -41.71                   | 7.33                 | 8.10                        | Н                     |
|          | 4121               | -33.71         | -13              | -20.71                  | -48.40                  | -32.26                   | 8                    | 8.70                        | Н                     |
| Lowest   | 4945.2             | -46.53         | -13              | -33.53                  | -61.59                  | -45.52                   | 8.96                 | 10.10                       | Н                     |
| Lowest   | 1648.4             | -39.53         | -13              | -26.53                  | -45.79                  | -37.96                   | 4.92                 | 5.50                        | V                     |
|          | 2472.6             | -33.02         | -13              | -20.02                  | -43.22                  | -30.56                   | 6.11                 | 5.80                        | V                     |
|          | 3296.8             | -49.25         | -13              | -36.25                  | -58.03                  | -47.87                   | 7.33                 | 8.10                        | V                     |
|          | 4121               | -33.63         | -13              | -20.63                  | -48.33                  | -32.18                   | 8.00                 | 8.70                        | V                     |
|          | 4945.2             | -47.43         | -13              | -34.43                  | -61.55                  | -46.42                   | 8.96                 | 10.10                       | V                     |
|          | 1672               | -41.33         | -13              | -28.33                  | -47.06                  | -39.76                   | 4.92                 | 5.50                        | Н                     |
|          | 2510               | -33.39         | -13              | -20.39                  | -43.76                  | -30.93                   | 6.11                 | 5.80                        | Н                     |
|          | 3346               | -48.51         | -13              | -35.51                  | -57.23                  | -47.13                   | 7.33                 | 8.10                        | Н                     |
|          | 4182               | -32.75         | -13              | -19.75                  | -47.54                  | -31.30                   | 8                    | 8.70                        | Н                     |
| Middle   | 5018.4             | -49.65         | -13              | -36.65                  | -64.71                  | -48.64                   | 8.96                 | 10.10                       | Н                     |
| Middle   | 1672               | -46.69         | -13              | -33.69                  | -51.73                  | -45.12                   | 4.92                 | 5.50                        | V                     |
|          | 2510               | -31.70         | -13              | -18.70                  | -41.94                  | -29.24                   | 6.11                 | 5.80                        | V                     |
|          | 3346               | -53.12         | -13              | -40.12                  | -61.35                  | -51.74                   | 7.33                 | 8.10                        | V                     |
|          | 4182               | -36.04         | -13              | -23.04                  | -50.38                  | -34.59                   | 8.00                 | 8.70                        | V                     |
|          | 5018.4             | -49.43         | -13              | -36.43                  | -63.55                  | -48.42                   | 8.96                 | 10.10                       | V                     |
|          | 1697.6             | -48.98         | -13              | -35.98                  | -53.05                  | -47.41                   | 4.92                 | 5.50                        | Н                     |
|          | 2546.4             | -38.13         | -13              | -25.13                  | -48.04                  | -35.67                   | 6.11                 | 5.80                        | Н                     |
|          | 3395.2             | -49.59         | -13              | -36.59                  | -58.31                  | -48.21                   | 7.33                 | 8.10                        | Н                     |
|          | 4244               | -38.98         | -13              | -25.98                  | -52.68                  | -37.53                   | 8                    | 8.70                        | Н                     |
| Lliaboot | 5092.8             | -50.25         | -13              | -37.25                  | -65.31                  | -49.24                   | 8.96                 | 10.10                       | Н                     |
| Highest  | 1697.6             | -54.54         | -13              | -41.54                  | -57.13                  | -52.97                   | 4.92                 | 5.50                        | V                     |
|          | 2546.4             | -31.03         | -13              | -18.03                  | -41.30                  | -28.57                   | 6.11                 | 5.80                        | V                     |
|          | 3395.2             | -53.78         | -13              | -40.78                  | -62.01                  | -52.40                   | 7.33                 | 8.10                        | V                     |
|          | 4244               | -38.96         | -13              | -25.96                  | -52.66                  | -37.51                   | 8.00                 | 8.70                        | V                     |
|          | 5092.8             | -49.53         | -13              | -36.53                  | -63.65                  | -48.52                   | 8.96                 | 10.10                       | V                     |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : B3 of B9
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

|            | GSM850 (EDGE class 8) |              |                  |                         |                         |                          |                      |                             |                       |  |  |  |
|------------|-----------------------|--------------|------------------|-------------------------|-------------------------|--------------------------|----------------------|-----------------------------|-----------------------|--|--|--|
| Channel    | Frequency<br>( MHz )  | ERP<br>(dBm) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable loss ( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |  |  |  |
|            | 1648.4                | -37.65       | -13              | -24.65                  | -43.81                  | -36.08                   | 4.92                 | 5.50                        | Н                     |  |  |  |
|            | 2472.6                | -35.32       | -13              | -22.32                  | -45.50                  | -32.86                   | 6.11                 | 5.80                        | Н                     |  |  |  |
|            | 3296.8                | -52.05       | -13              | -39.05                  | -60.77                  | -50.67                   | 7.33                 | 8.10                        | Н                     |  |  |  |
| Lowest     | 4121                  | -46.85       | -13              | -33.85                  | -58.97                  | -45.40                   | 8                    | 8.70                        | Н                     |  |  |  |
| Lowest     | 1648.4                | -40.86       | -13              | -27.86                  | -47.02                  | -39.29                   | 4.92                 | 5.50                        | V                     |  |  |  |
|            | 2472.6                | -39.54       | -13              | -26.54                  | -49.02                  | -37.08                   | 6.11                 | 5.80                        | V                     |  |  |  |
|            | 3296.8                | -55.23       | -13              | -42.23                  | -63.46                  | -53.85                   | 7.33                 | 8.10                        | V                     |  |  |  |
|            | 4121                  | -49.99       | -13              | -36.99                  | -61.63                  | -48.54                   | 8.00                 | 8.70                        | V                     |  |  |  |
|            | 1672                  | -35.00       | -13              | -22.00                  | -41.42                  | -33.43                   | 4.92                 | 5.50                        | Н                     |  |  |  |
|            | 2510                  | -31.85       | -13              | -18.85                  | -42.36                  | -29.39                   | 6.11                 | 5.80                        | Н                     |  |  |  |
|            | 3346                  | -55.94       | -13              | -42.94                  | -64.66                  | -54.56                   | 7.33                 | 8.10                        | Н                     |  |  |  |
| Middle     | 4182                  | -52.03       | -13              | -39.03                  | -64.15                  | -50.58                   | 8                    | 8.70                        | Н                     |  |  |  |
| Middle     | 1672                  | -40.93       | -13              | -27.93                  | -47.09                  | -39.36                   | 4.92                 | 5.50                        | V                     |  |  |  |
|            | 2510                  | -38.18       | -13              | -25.18                  | -47.76                  | -35.72                   | 6.11                 | 5.80                        | V                     |  |  |  |
|            | 3346                  | -57.75       | -13              | -44.75                  | -65.98                  | -56.37                   | 7.33                 | 8.10                        | V                     |  |  |  |
|            | 4182                  | -50.82       | -13              | -37.82                  | -62.46                  | -49.37                   | 8.00                 | 8.70                        | V                     |  |  |  |
|            | 1697.6                | -36.94       | -13              | -23.94                  | -43.16                  | -35.37                   | 4.92                 | 5.50                        | Н                     |  |  |  |
|            | 2546.4                | -31.65       | -13              | -18.65                  | -42.16                  | -29.19                   | 6.11                 | 5.80                        | Н                     |  |  |  |
|            | 3395.2                | -56.53       | -13              | -43.53                  | -65.25                  | -55.15                   | 7.33                 | 8.10                        | Н                     |  |  |  |
| l limb oot | 4244                  | -48.75       | -13              | -35.75                  | -60.87                  | -47.30                   | 8                    | 8.70                        | Н                     |  |  |  |
| Highest    | 1697.6                | -42.98       | -13              | -29.98                  | -48.82                  | -41.41                   | 4.92                 | 5.50                        | V                     |  |  |  |
|            | 2546.4                | -37.11       | -13              | -24.11                  | -46.92                  | -34.65                   | 6.11                 | 5.80                        | V                     |  |  |  |
|            | 3395.2                | -57.80       | -13              | -44.80                  | -66.03                  | -56.42                   | 7.33                 | 8.10                        | V                     |  |  |  |
|            | 4244                  | -50.90       | -13              | -37.90                  | -62.54                  | -49.45                   | 8.00                 | 8.70                        | V                     |  |  |  |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : B4 of B9
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

|         | GSM1900 (GSM)      |                 |                  |                         |                         |                          |                      |                             |                       |  |  |  |
|---------|--------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------|-----------------------------|-----------------------|--|--|--|
| Channel | Frequency<br>(MHz) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable loss ( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |  |  |  |
|         | 3700.4             | -46.20          | -13              | -33.20                  | -59.75                  | -52.21                   | 6.59                 | 12.60                       | Н                     |  |  |  |
|         | 5550.6             | -40.08          | -13              | -27.08                  | -56.02                  | -45.18                   | 8                    | 13.10                       | Н                     |  |  |  |
| Lowest  | 7400.8             | -48.59          | -13              | -35.59                  | -67.33                  | -50.32                   | 9.57                 | 11.30                       | Н                     |  |  |  |
| Lowest  | 3700.4             | -44.66          | -13              | -31.66                  | -58.01                  | -50.70                   | 6.56                 | 12.6                        | V                     |  |  |  |
|         | 5550.6             | -38.13          | -13              | -25.13                  | -55.48                  | -43.23                   | 8                    | 13.1                        | V                     |  |  |  |
|         | 7400.8             | -49.01          | -13              | -36.01                  | -67.41                  | -50.74                   | 9.57                 | 11.3                        | V                     |  |  |  |
|         | 3760               | -39.62          | -13              | -26.62                  | -53.89                  | -45.66                   | 6.56                 | 12.60                       | Н                     |  |  |  |
|         | 5640               | -39.35          | -13              | -26.35                  | -55.77                  | -44.45                   | 8                    | 13.10                       | Н                     |  |  |  |
| Middle  | 7520               | -47.84          | -13              | -34.84                  | -66.58                  | -49.57                   | 9.57                 | 11.30                       | Н                     |  |  |  |
| Middle  | 3760               | -38.17          | -13              | -25.17                  | -52.84                  | -44.21                   | 6.56                 | 12.6                        | V                     |  |  |  |
|         | 5640               | -38.29          | -13              | -25.29                  | -56.15                  | -43.39                   | 8                    | 13.1                        | V                     |  |  |  |
|         | 7520               | -48.19          | -13              | -35.19                  | -66.59                  | -49.92                   | 9.57                 | 11.3                        | V                     |  |  |  |
|         | 3819.6             | -37.40          | -13              | -24.40                  | -52.17                  | -43.44                   | 6.56                 | 12.60                       | Н                     |  |  |  |
|         | 5729.4             | -47.22          | -13              | -34.22                  | -63.16                  | -52.32                   | 8                    | 13.10                       | Н                     |  |  |  |
| Highest | 7639.2             | -47.58          | -13              | -34.58                  | -66.32                  | -49.31                   | 9.57                 | 11.30                       | Н                     |  |  |  |
|         | 3819.6             | -39.01          | -13              | -26.01                  | -53.58                  | -45.05                   | 6.56                 | 12.6                        | V                     |  |  |  |
|         | 5729.4             | -44.38          | -13              | -31.38                  | -61.73                  | -49.48                   | 8                    | 13.1                        | V                     |  |  |  |
|         | 7639.2             | -48.30          | -13              | -35.30                  | -66.7                   | -50.03                   | 9.57                 | 11.3                        | V                     |  |  |  |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : B5 of B9
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report No.: FG640702

|         | GSM1900 (EDGE class 8) |                 |                  |                         |                         |                        |                    |                             |                       |  |  |  |
|---------|------------------------|-----------------|------------------|-------------------------|-------------------------|------------------------|--------------------|-----------------------------|-----------------------|--|--|--|
| Channel | Frequency<br>( MHz )   | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>(dBm) | TX Cable loss (dB) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |  |  |  |
|         | 3700.4                 | -47.10          | -13              | -34.10                  | -60.65                  | -53.14                 | 6.56               | 12.60                       | Н                     |  |  |  |
|         | 5550.6                 | -44.89          | -13              | -31.89                  | -60.83                  | -49.99                 | 8                  | 13.10                       | Н                     |  |  |  |
| Lowest  | 7400.8                 | -48.63          | -13              | -35.63                  | -67.37                  | -50.36                 | 9.57               | 11.30                       | Н                     |  |  |  |
| Lowest  | 3700.4                 | -49.79          | -13              | -36.79                  | -63.14                  | -55.83                 | 6.56               | 12.6                        | V                     |  |  |  |
|         | 5550.6                 | -45.08          | -13              | -32.08                  | -62.43                  | -50.18                 | 8                  | 13.1                        | V                     |  |  |  |
|         | 7400.8                 | -48.76          | -13              | -35.76                  | -67.16                  | -50.49                 | 9.57               | 11.3                        | V                     |  |  |  |
|         | 3760                   | -47.89          | -13              | -34.89                  | -61.44                  | -53.93                 | 6.56               | 12.60                       | Н                     |  |  |  |
|         | 5640                   | -48.05          | -13              | -35.05                  | -63.99                  | -53.15                 | 8                  | 13.10                       | Н                     |  |  |  |
| Middle  | 7520                   | -48.68          | -13              | -35.68                  | -67.42                  | -50.41                 | 9.57               | 11.30                       | Н                     |  |  |  |
| Middle  | 3760                   | -46.25          | -13              | -33.25                  | -59.6                   | -52.29                 | 6.56               | 12.6                        | V                     |  |  |  |
|         | 5640                   | -44.72          | -13              | -31.72                  | -62.07                  | -49.82                 | 8                  | 13.1                        | V                     |  |  |  |
|         | 7520                   | -48.54          | -13              | -35.54                  | -66.94                  | -50.27                 | 9.57               | 11.3                        | V                     |  |  |  |
|         | 3819.6                 | -46.87          | -13              | -33.87                  | -60.42                  | -52.91                 | 6.56               | 12.60                       | Н                     |  |  |  |
|         | 5729.4                 | -47.87          | -13              | -34.87                  | -63.81                  | -52.97                 | 8                  | 13.10                       | Н                     |  |  |  |
| Highest | 7639.2                 | -47.79          | -13              | -34.79                  | -66.53                  | -49.52                 | 9.57               | 11.30                       | Н                     |  |  |  |
|         | 3819.6                 | -45.51          | -13              | -32.51                  | -58.86                  | -51.55                 | 6.56               | 12.6                        | V                     |  |  |  |
|         | 5729.4                 | -46.32          | -13              | -33.32                  | -63.67                  | -51.42                 | 8                  | 13.1                        | V                     |  |  |  |
|         | 7639.2                 | -48.15          | -13              | -35.15                  | -66.55                  | -49.88                 | 9.57               | 11.3                        | V                     |  |  |  |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : B6 of B9
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1



|         |                    |                | WC               | DMA Band \              | V(RMC 12.2F             | (bps)                    |                      |                             |                       |
|---------|--------------------|----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------|-----------------------------|-----------------------|
| Channel | Frequency<br>(MHz) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable loss ( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |
|         | 1652.8             | -61.28         | -13              | -48.28                  | -63.59                  | -59.71                   | 4.92                 | 5.50                        | Н                     |
|         | 2479.2             | -53.36         | -13              | -40.36                  | -59.65                  | -50.90                   | 6.11                 | 5.80                        | Н                     |
| Lowoot  | 3305.6             | -53.50         | -13              | -40.50                  | -62.22                  | -52.12                   | 7.33                 | 8.10                        | Н                     |
| Lowest  | 1652.8             | -56.44         | -13              | -43.44                  | -58.92                  | -54.87                   | 4.92                 | 5.50                        | V                     |
|         | 2479.2             | -56.34         | -13              | -43.34                  | -61.92                  | -53.88                   | 6.11                 | 5.80                        | V                     |
|         | 3305.6             | -55.50         | -13              | -42.50                  | -63.73                  | -54.12                   | 7.33                 | 8.10                        | V                     |
|         | 1672.8             | -55.30         | -13              | -42.30                  | -57.61                  | -53.73                   | 4.92                 | 5.50                        | Н                     |
|         | 2509.2             | -50.59         | -13              | -37.59                  | -57.57                  | -48.13                   | 6.11                 | 5.80                        | Н                     |
| Middle  | 3345.6             | -55.21         | -13              | -42.21                  | -63.93                  | -53.83                   | 7.33                 | 8.10                        | Н                     |
| Middle  | 1672.8             | -61.09         | -13              | -48.09                  | -63.57                  | -59.52                   | 4.92                 | 5.50                        | V                     |
|         | 2509.2             | -55.25         | -13              | -42.25                  | -60.83                  | -52.79                   | 6.11                 | 5.80                        | V                     |
|         | 3345.6             | -57.75         | -13              | -44.75                  | -65.98                  | -56.37                   | 7.33                 | 8.10                        | V                     |
|         | 1693.2             | -55.25         | -13              | -42.25                  | -57.56                  | -53.68                   | 4.92                 | 5.50                        | Н                     |
|         | 2539.8             | -48.16         | -13              | -35.16                  | -55.78                  | -45.70                   | 6.11                 | 5.80                        | Н                     |
| Highest | 3386.4             | -54.68         | -13              | -41.68                  | -63.40                  | -53.30                   | 7.33                 | 8.10                        | Н                     |
|         | 1693.2             | -60.04         | -13              | -47.04                  | -62.52                  | -58.47                   | 4.92                 | 5.50                        | V                     |
|         | 2539.8             | -54.90         | -13              | -41.90                  | -60.48                  | -52.44                   | 6.11                 | 5.80                        | V                     |
|         | 3386.4             | -55.45         | -13              | -42.45                  | -63.68                  | -54.07                   | 7.33                 | 8.10                        | V                     |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : B7 of B9
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

|         | WCDMA Band II(RMC 12.2Kbps) |                 |                  |                         |                         |                        |                    |                             |                       |  |  |  |
|---------|-----------------------------|-----------------|------------------|-------------------------|-------------------------|------------------------|--------------------|-----------------------------|-----------------------|--|--|--|
| Channel | Frequency<br>( MHz )        | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>(dBm) | TX Cable loss (dB) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |  |  |  |
|         | 3704.8                      | -49.94          | -13              | -36.94                  | -63.49                  | -55.98                 | 6.56               | 12.60                       | Н                     |  |  |  |
|         | 5557.2                      | -48.14          | -13              | -35.14                  | -64.08                  | -53.24                 | 8                  | 13.10                       | Н                     |  |  |  |
| Lowest  | 7409.6                      | -48.51          | -13              | -35.51                  | -67.25                  | -50.24                 | 9.57               | 11.30                       | Н                     |  |  |  |
| Lowest  | 3704.8                      | -49.57          | -13              | -36.57                  | -62.92                  | -55.61                 | 6.56               | 12.6                        | V                     |  |  |  |
|         | 5557.2                      | -45.93          | -13              | -32.93                  | -63.28                  | -51.03                 | 8                  | 13.1                        | V                     |  |  |  |
|         | 7409.6                      | -47.34          | -13              | -34.34                  | -65.74                  | -49.07                 | 9.57               | 11.3                        | V                     |  |  |  |
|         | 3760                        | -47.98          | -13              | -34.98                  | -61.53                  | -54.02                 | 6.56               | 12.60                       | Н                     |  |  |  |
|         | 5640                        | -48.38          | -13              | -35.38                  | -64.32                  | -53.48                 | 8                  | 13.10                       | Н                     |  |  |  |
| Middle  | 7520                        | -48.26          | -13              | -35.26                  | -67.00                  | -49.99                 | 9.57               | 11.30                       | Н                     |  |  |  |
| Middle  | 3760                        | -46.76          | -13              | -33.76                  | -60.11                  | -52.80                 | 6.56               | 12.6                        | V                     |  |  |  |
|         | 5640                        | -44.05          | -13              | -31.05                  | -61.4                   | -49.15                 | 8                  | 13.1                        | V                     |  |  |  |
|         | 7520                        | -47.99          | -13              | -34.99                  | -66.39                  | -49.72                 | 9.57               | 11.3                        | V                     |  |  |  |
|         | 3815.2                      | -41.34          | -13              | -28.34                  | -54.97                  | -47.38                 | 6.56               | 12.60                       | Н                     |  |  |  |
|         | 5722.8                      | -48.41          | -13              | -35.41                  | -64.35                  | -53.51                 | 8                  | 13.10                       | Н                     |  |  |  |
| Highest | 7630.4                      | -47.68          | -13              | -34.68                  | -66.42                  | -49.41                 | 9.57               | 11.30                       | Н                     |  |  |  |
|         | 3815.2                      | -38.48          | -13              | -25.48                  | -53.11                  | -44.52                 | 6.56               | 12.6                        | V                     |  |  |  |
|         | 5722.8                      | -45.67          | -13              | -32.67                  | -63.02                  | -50.77                 | 8                  | 13.1                        | V                     |  |  |  |
|         | 7630.4                      | -47.34          | -13              | -34.34                  | -65.74                  | -49.07                 | 9.57               | 11.3                        | V                     |  |  |  |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : B8 of B9
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

|         | WCDMA Band IV(RMC 12.2Kbps) |                 |                  |                         |                         |                        |                      |                             |                       |  |  |  |
|---------|-----------------------------|-----------------|------------------|-------------------------|-------------------------|------------------------|----------------------|-----------------------------|-----------------------|--|--|--|
| Channel | Frequency<br>(MHz)          | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>(dBm) | TX Cable loss ( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |  |  |  |
|         | 3424.8                      | -51.73          | -13              | -38.73                  | -66.48                  | -58.15                 | 6.18                 | 12.60                       | Н                     |  |  |  |
|         | 5137.2                      | -49.38          | -13              | -36.38                  | -67.38                  | -54.34                 | 7.74                 | 12.70                       | Н                     |  |  |  |
| Lowest  | 6849.6                      | -46.85          | -13              | -33.85                  | -65.66                  | -49.55                 | 9                    | 11.70                       | Н                     |  |  |  |
| Lowest  | 3424.8                      | -55.55          | -13              | -42.55                  | -66.5                   | -61.97                 | 6.18                 | 12.60                       | V                     |  |  |  |
|         | 5137.2                      | -54.53          | -13              | -41.53                  | -67.53                  | -59.49                 | 7.74                 | 12.70                       | V                     |  |  |  |
|         | 6849.6                      | -49.62          | -13              | -36.62                  | -66.33                  | -52.32                 | 9                    | 11.70                       | V                     |  |  |  |
|         | 3465.2                      | -51.60          | -13              | -38.60                  | -66.35                  | -58.02                 | 6.18                 | 12.60                       | Н                     |  |  |  |
|         | 5197.8                      | -49.20          | -13              | -36.20                  | -67.20                  | -54.16                 | 7.74                 | 12.70                       | Н                     |  |  |  |
| Middle  | 6930.4                      | -47.05          | -13              | -34.05                  | -65.86                  | -49.75                 | 9                    | 11.70                       | Н                     |  |  |  |
| Middle  | 3465.2                      | -55.35          | -13              | -42.35                  | -66.3                   | -61.77                 | 6.18                 | 12.60                       | V                     |  |  |  |
|         | 5197.8                      | -54.34          | -13              | -41.34                  | -67.34                  | -59.30                 | 7.74                 | 12.70                       | V                     |  |  |  |
|         | 6930.4                      | -50.19          | -13              | -37.19                  | -66.9                   | -52.89                 | 9                    | 11.70                       | V                     |  |  |  |
|         | 3505.2                      | -50.98          | -13              | -37.98                  | -65.73                  | -57.40                 | 6.18                 | 12.60                       | Н                     |  |  |  |
|         | 5257.8                      | -48.94          | -13              | -35.94                  | -66.94                  | -53.90                 | 7.74                 | 12.70                       | Н                     |  |  |  |
| Highest | 7010.4                      | -47.68          | -13              | -34.68                  | -66.49                  | -50.38                 | 9                    | 11.70                       | Н                     |  |  |  |
|         | 3505.2                      | -53.82          | -13              | -40.82                  | -64.77                  | -60.24                 | 6.18                 | 12.60                       | V                     |  |  |  |
|         | 5257.8                      | -53.03          | -13              | -40.03                  | -66.03                  | -57.99                 | 7.74                 | 12.70                       | V                     |  |  |  |
|         | 7010.4                      | -49.66          | -13              | -36.66                  | -66.37                  | -52.36                 | 9                    | 11.70                       | V                     |  |  |  |

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUGRAND55HD Page Number : B9 of B9
Report Issued Date : May 20, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1