

FCC PART 15.247 TEST REPORT

For

BLU Products, Inc.

10814 NW 33rd St # 100 Doral, FL 33172, United States

FCC ID: YHLBLUSTUDIOXL2

Report Type: Product Type:

Original Report Mobile phone

Report Number: RSZ160826003-00B

Report Date: 2016-10-19

Oscar Ye

Reviewed By: Engineer

Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan)

Chenghu Road, Kunshan Development Zone

Oscar. Ye

No.248, Kunshan, Jiangsu, China

Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

Report No.: RSZ160826003-00B

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT Exercise Software	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
External I/O Cable	
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE	
APPLICABLE STANDARD	10
FCC §15.203 – ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP	
EMI TEST RECEIVER SETUP.	
TEST PROCEDURE	12
CORRECTED FACTOR & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS	16
APPLICABLE STANDARD	16
EUT Setup	
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST RESULTS SUMMARY	
TEST DATA	
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	
APPLICABLE STANDARD	20
TEST PROCEDURE	
Test Data	20

TEST DATA 54

Report No.: RSZ160826003-00B

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *BLU Products, Inc.*'s product, model number: *STUDIO XL 2 (FCC ID: YHLBLUSTUDIOXL2)* or the "EUT" in this report was a *Mobile phone*, which was measured approximately: 165 mm (L) × 83 mm (W) × 9 mm (H), rated with input voltage: DC 3.8 V battery or DC 5V from adapter.

Report No.: RSZ160826003-00B

Adapter Information:

Model: TPA-46050200UU

Input: AC 100-240V, 50/60Hz, 0.3A

Output: DC 5V, 2A

*All measurement and test data in this report was gathered from production sample serial number: 1603095 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-08-26.

Objective

This test report is prepared on behalf of *BLU Products, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 22H & 24E & 27 PCE, Part 15.247 DTS and Part 15B JBP submissions with FCC ID: YHLBLUSTUDIOXL2.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15.247 Page 4 of 57

Measurement Uncertainty

	Item	Uncertainty	
AC Power Line	s Conducted Emissions	±3.26 dB	
RF conducte	d test with spectrum	±0.9dB	
RF Output Po	wer with Power meter	±0.5dB	
D. F. t. L indian	30MHz~1GHz	±5.91dB	
Radiated emission	Above 1G	±4.92dB	
Occupi	ied Bandwidth	±0.5kHz	
Те	mperature	±1.0℃	
H	Iumidity	±6%	

Report No.: RSZ160826003-00B

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Lake Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 15.247 Page 5 of 57

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

No exercise software was made to the EUT tested.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	nufacturer Description Model		Serial Number
N/A	N/A	N/A	N/A

Report No.: RSZ160826003-00B


External I/O Cable

Cable Description	Length (m)	From Port	То
Un-Shielding Detachable USB Cable	0.8	EUT	Adapter
Un-Shielding Detachable Earphone Cable	1.2	EUT	Earphone

FCC Part 15.247 Page 6 of 57

Block Diagram of Test Setup

For conducted emission:

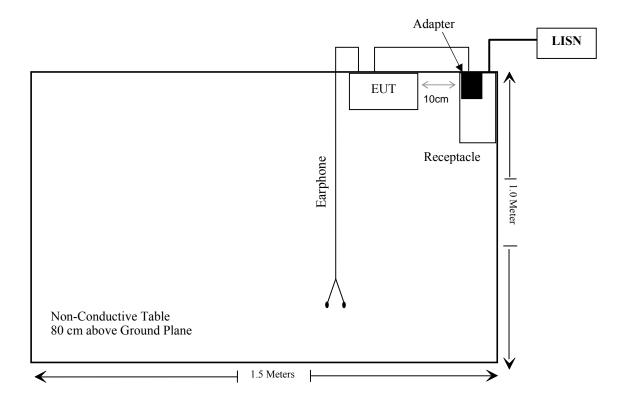

Report No.: RSZ160826003-00B

FCC Part 15.247 Page 7 of 57

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
\$15.205, \$15.209 & \$15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

Report No.: RSZ160826003-00B

FCC Part 15.247 Page 8 of 57

TEST EQUIPMENT LIST

Manufacturer	acturer Description Model Serial Number		Serial Number	Calibration Date	Calibration Due Date
	AC Li	ne Conducted tes	t		
Rohde & Schwarz	EMI Test Receiver	ESCS30	934115/007	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2015-11-12	2016-11-11
Rohde & Schwarz	Pulse limiter	ESH3-Z2	879940/0058	2016-06-19	2017-06-18
MICRO-COAX	Coaxial line	UFB-293B-1- 0480-50X50	97F0173	2016-09-01	2017-09-01
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	NCR	NCR
	R	adiation test			
Sonoma Instrunent	Amplifier	330	171377	2016-09-16	2017-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2015-11-07	2016-11-06
Mini	Pre-amplifier	ZVA-183-S+	857001418	2016-09-16	2017-09-15
DUCOMMUN	COMMUN Pre-amplifier		990147	2016-09-16	2017-09-15
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2016-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Rohde & Schwarz	Signal Analyzer	FSV40	FSV40 101116		2017-07-03
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
BACL	RF cable	KS-LAB-010	KS-LAB-010	2015-12-16	2016-12-15
	RF	Conducted test			
BACL	TS 8997 Cable-01	T-KS- EMC086	T-KS- EMC086	2015-12-10	2016-12-09
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
WEINSCHEL	3dB Attenuator	5326	N/A	2016-06-18	2017-06-18
Rohde & Schwarz	OSP120 BASE UNIT	OSP120	101247	2016-07-04	2017-07-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131	2016-09-21	2017-09-21

Report No.: RSZ160826003-00B

FCC Part 15.247 Page 9 of 57

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Report No.: RSZ160826003-00B

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

Frequency	Maximum Tune-up power		Calculated Distance	Calculated	Threshold	SAR Test	
(MHz)	(dBm)	(mW)	(mm)	value	(1-g SAR)	Exclusion	
2480	5.5	3.55	5.0	1.1	3.0	Yes	

Result: No Standalone SAR test is required

FCC Part 15.247 Page 10 of 57

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: RSZ160826003-00B

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 0.1 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC Part 15.247 Page 11 of 57

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup



Report No.: RSZ160826003-00B

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

FCC Part 15.247 Page 12 of 57

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Report No.: RSZ160826003-00B

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	22 ℃		
Relative Humidity:	57 %		
ATM Pressure:	101.0 kPa		

The testing was performed by Chris Wang on 2016-10-18.

EUT operation mode: Transmitting

FCC Part 15.247 Page 13 of 57

AC 120V/60 Hz, Line

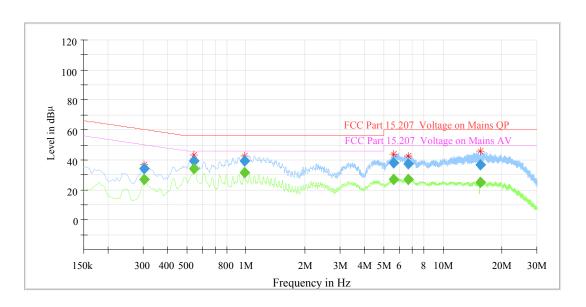


Report No.: RSZ160826003-00B

Frequency (MHz)	QuasiPeak (dBµV)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.305000		26.94	9.000	L1	10.3	23.17	50.11	Compliance
0.305000	34.59		9.000	L1	10.3	25.52	60.11	Compliance
0.545000		33.96	9.000	L1	10.3	12.04	46.00	Compliance
0.545000	39.21		9.000	L1	10.3	16.79	56.00	Compliance
0.980000		31.75	9.000	L1	10.3	14.25	46.00	Compliance
0.980000	39.36		9.000	L1	10.3	16.64	56.00	Compliance
5.645000		27.19	9.000	L1	10.5	22.81	50.00	Compliance
5.645000	37.88		9.000	L1	10.5	22.12	60.00	Compliance
6.670000		27.06	9.000	L1	10.5	22.94	50.00	Compliance
6.670000	37.36		9.000	L1	10.5	22.64	60.00	Compliance
15.450000		24.98	9.000	L1	10.4	25.02	50.00	Compliance
15.450000	36.82		9.000	L1	10.4	23.18	60.00	Compliance

FCC Part 15.247 Page 14 of 57

AC 120V/60 Hz, Neutral

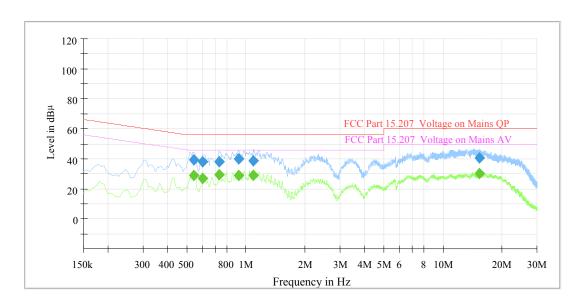

Report No.: RSZ160826003-00B

Frequency (MHz)	QuasiPeak (dBµV)	Average (dB \mu V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.545000		28.95	9.000	N	10.3	17.05	46.00	Compliance
0.545000	39.56		9.000	N	10.3	16.44	56.00	Compliance
0.605000		26.68	9.000	N	10.3	19.32	46.00	Compliance
0.605000	38.22		9.000	N	10.3	17.78	56.00	Compliance
0.730000		29.52	9.000	N	10.3	16.48	46.00	Compliance
0.730000	37.78		9.000	N	10.3	18.22	56.00	Compliance
0.915000		28.80	9.000	N	10.3	17.20	46.00	Compliance
0.915000	39.73		9.000	N	10.3	16.27	56.00	Compliance
1.095000		29.33	9.000	N	10.3	16.67	46.00	Compliance
1.095000	38.90		9.000	N	10.3	17.10	56.00	Compliance
15.380000		29.82	9.000	N	10.5	20.18	50.00	Compliance
15.380000	40.46		9.000	N	10.5	19.54	60.00	Compliance

Note:

- 1) Correction Factor =LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor3) Margin = Limit Corrected Amplitude

FCC Part 15.247 Page 15 of 57

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:



Report No.: RSZ160826003-00B

Above 1GHz:



The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

FCC Part 15.247 Page 16 of 57

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
Above I GHZ	1 MHz	10 Hz	/	Ave.

Report No.: RSZ160826003-00B

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.</u>

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} ++ U_{(Lm)} \leq L_{\rm lim} ++ U_{\rm cispr}$$

In BACL, $U_{(Lm)}$ is less than + U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

FCC Part 15.247 Page 17 of 57

Test Data

Environmental Conditions

Temperature:	22 ℃
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2016-10-18.

EUT operation mode: Transmitting

30 MHz - 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK mode, the worst case as below)

Frequency	Re	eceiver	Turntable	Rx An	tenna		Corrected	15.247	C Part /205/209
(MHz)	Reading (dBµV)	Detector (PK/QP/Ave.)	Degree	Height (m)	Polar (H/V)	Factor (dB)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
			Low Ch	annel (2	2402 M	Hz)			
190.63	37.99	QP	295	1.4	V	-12.32	25.67	43.5	17.83
2402.00	89.65	PK	92	2.5	Н	-3.04	86.61	/	/
2402.00	78.50	Ave.	92	2.5	Н	-3.04	75.46	/	/
2402.00	90.38	PK	163	2.4	V	-3.04	87.34	/	/
2402.00	79.16	Ave.	163	2.4	V	-3.04	76.12	/	/
2334.52	40.41	PK	46	2.2	V	-3.09	37.32	74	36.68
2334.52	27.22	Ave.	46	2.2	V	-3.09	24.13	54	29.87
2348.47	41.51	PK	254	2.0	Н	-3.08	38.43	74	35.57
2348.47	27.21	Ave.	254	2.0	Н	-3.08	24.13	54	29.87
2498.54	41.22	PK	179	2.3	Н	-2.98	38.24	74	35.76
2498.54	27.61	Ave.	179	2.3	Н	-2.98	24.63	54	29.37
4804.00	42.38	PK	134	1.7	V	7.16	49.54	74	24.46
4804.00	26.76	Ave.	134	1.7	V	7.16	33.92	54	20.08

Report No.: RSZ160826003-00B

FCC Part 15.247 Page 18 of 57

Frequency	Re	eceiver	Turntable	Rx An	itenna		Corrected		C Part //205/209
(MHz)	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)	Factor (dB)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
			Middle C	hannel	(2441 N	MHz)			
190.63	38.30	QP	249	2.0	V	-12.32	25.98	43.5	17.52
2441.00	92.16	PK	235	2.5	Н	-3.02	89.14	/	/
2441.00	81.28	Ave.	235	2.5	Н	-3.02	78.26	/	/
2441.00	93.08	PK	336	1.9	V	-3.02	90.06	/	/
2441.00	81.89	Ave.	336	1.9	V	-3.02	78.87	/	/
2374.12	41.55	PK	145	2.1	V	-3.06	38.49	74	35.51
2374.12	27.53	Ave.	145	2.1	V	-3.06	24.47	54	29.53
2489.84	41.06	PK	160	2.0	V	-2.99	38.07	74	35.93
2489.84	26.28	Ave.	160	2.0	V	-2.99	23.29	54	30.71
2495.33	41.78	PK	299	1.8	Н	-2.98	38.80	74	35.20
2495.33	27.61	Ave.	299	1.8	Н	-2.98	24.63	54	29.37
4882.00	42.42	PK	332	1.3	V	7.28	49.70	74	24.30
4882.00	26.63	Ave.	332	1.3	V	7.28	33.91	54	20.09
	•		High Ch	annel (2480 M	Hz)			
190.63	38.18	QP	242	1.2	V	-12.32	25.86	43.5	17.64
2480.00	92.63	PK	60	1.9	Н	-2.99	89.64	/	/
2480.00	81.31	Ave.	60	1.9	Н	-2.99	78.32	/	/
2480.00	93.49	PK	195	1.2	V	-2.99	90.50	/	/
2480.00	82.40	Ave.	195	1.2	V	-2.99	79.41	/	/
2364.82	41.43	PK	331	1.2	Н	-3.07	38.36	74	35.64
2364.82	27.54	Ave.	331	1.2	Н	-3.07	24.47	54	29.53
2483.59	58.63	PK	68	2.4	V	-2.99	55.64	74	18.36
2483.59	39.01	Ave.	68	2.4	V	-2.99	36.02	54	17.98
2484.06	57.00	PK	358	2.4	Н	-2.99	54.01	74	19.99
2484.06	36.74	Ave.	358	2.4	Н	-2.99	33.75	54	20.25
4960.00	43.42	PK	300	2.1	V	7.40	50.82	74	23.18
4960.00	27.51	Ave.	300	2.1	V	7.40	34.91	54	19.09

Report No.: RSZ160826003-00B

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

FCC Part 15.247 Page 19 of 57

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ160826003-00B

Test Procedure

- Set the EUT in transmitting mode, maxhold the channel. Set the adjacent channel of the EUT and maxhold another trace.
- 3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	24 ℃
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2016-09-27.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

FCC Part 15.247 Page 20 of 57

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
	Low	2402	1.004	0.633	Pass
	Adjacent	2403	1.004	0.033	Pass
BDR	Middle	2441	1.004	0.622	D
(GFSK)	Adjacent	2442	1.004	0.633	Pass
	High	2480	1.004	0.621	D
	Adjacent	2479	1.004	0.631	Pass
	Low	2402	1.004	0.046	D
	Adjacent	2403	1.004	0.846	Pass
EDR	Middle	2441	1.004	0.850 0.854	Pass Pass
(π/4-DQPSK)	Adjacent	2442	1.004		
	High	2480	1.004		
	Adjacent	2479	1.004		
	Low	2402	1.004	0.054	D
	Adjacent	2403	1.004	0.854	Pass
EDR (8DPSK)	Middle	2441	1.004	0.050	Pass
	Adjacent	2442	1.004	0.850	
	High	2480	1.004	0.850	Pass
	Adjacent	2479	1.004		


Report No.: RSZ160826003-00B

Note: Limit = 20 dB bandwidth *2/3


FCC Part 15.247 Page 21 of 57

BDR (GFSK): Low Channel

Report No.: RSZ160826003-00B

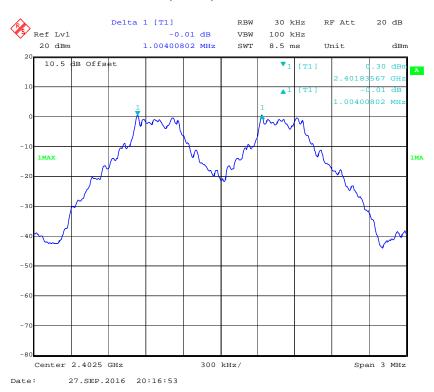


BDR (GFSK): Middle Channel

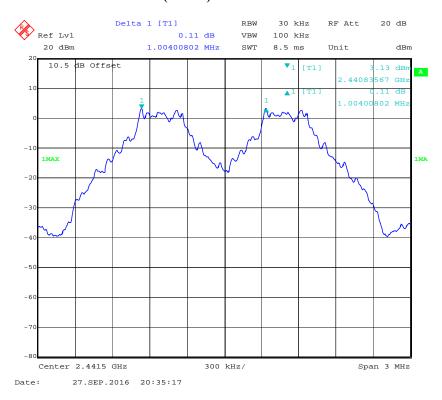

FCC Part 15.247 Page 22 of 57

BDR (GFSK): High Channel

Report No.: RSZ160826003-00B

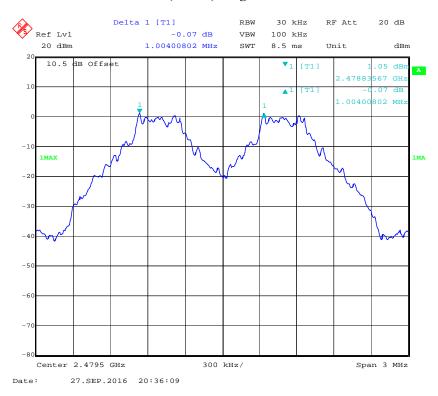


EDR ($\pi/4$ -DQPSK): Low Channel



FCC Part 15.247 Page 23 of 57

EDR (π/4-DQPSK): Middle Channel

Report No.: RSZ160826003-00B

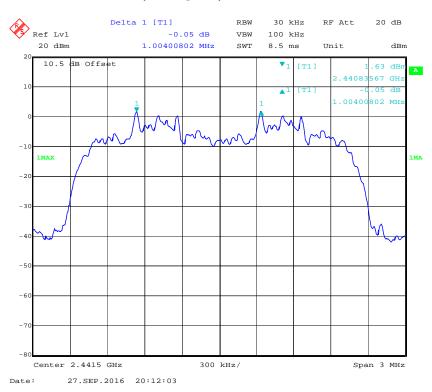

EDR ($\pi/4$ -DQPSK): High Channel




FCC Part 15.247 Page 24 of 57

EDR (8DPSK): Low Channel

Report No.: RSZ160826003-00B



EDR (8DPSK): Middle Channel

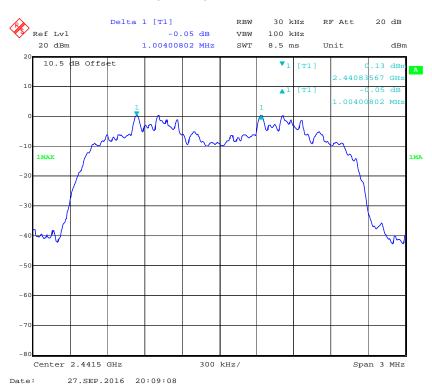

FCC Part 15.247 Page 25 of 57

EDR (8DPSK): High Channel

Report No.: RSZ160826003-00B



FCC Part 15.247 Page 26 of 57

FCC $\S15.247(a)$ (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ160826003-00B

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	24 ℃
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2016-09-27.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots

FCC Part 15.247 Page 27 of 57

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
	Low	2402	0.950
BDR (GFSK)	Middle	2441	0.950
(GFSK)	High	2480	0.946
EDR (π/4-DQPSK)	Low	2402	1.269
	Middle	2441	1.275
	High	2480	1.281
	Low	2402	1.281
EDR (8DPSK)	Middle	2441	1.275
	High	2480	1.275

Report No.: RSZ160826003-00B


BDR (GFSK): Low Channel

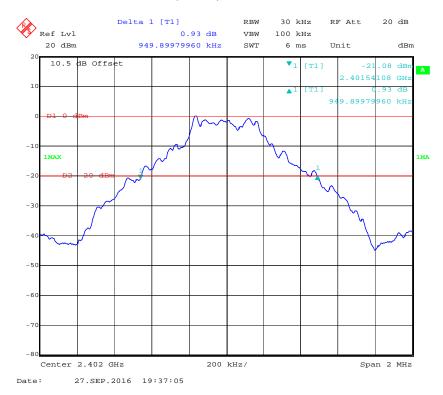


FCC Part 15.247 Page 28 of 57

BDR (GFSK): Middle Channel

Report No.: RSZ160826003-00B

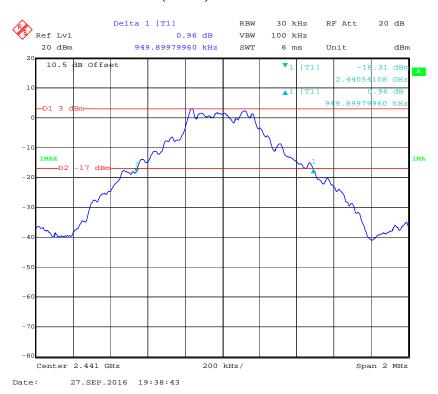


BDR (GFSK): High Channel

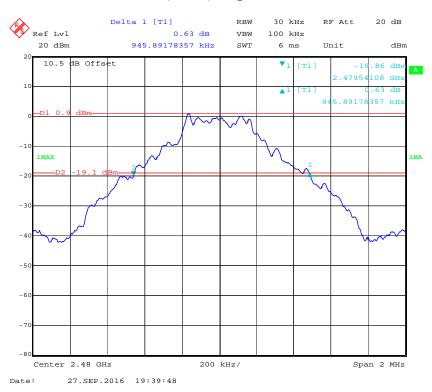

FCC Part 15.247 Page 29 of 57

EDR ($\pi/4$ -DQPSK): Low Channel

Report No.: RSZ160826003-00B

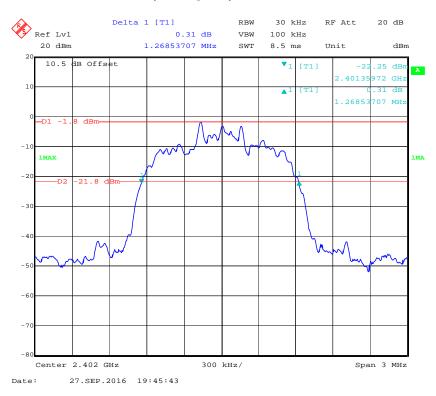

EDR ($\pi/4$ -DQPSK): Middle Channel




FCC Part 15.247 Page 30 of 57

EDR (π/4-DQPSK): High Channel

Report No.: RSZ160826003-00B




EDR (8DPSK): Low Channel

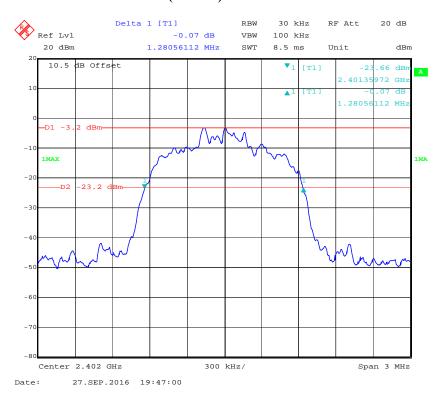


FCC Part 15.247 Page 31 of 57

EDR (8DPSK): Middle Channel

Report No.: RSZ160826003-00B

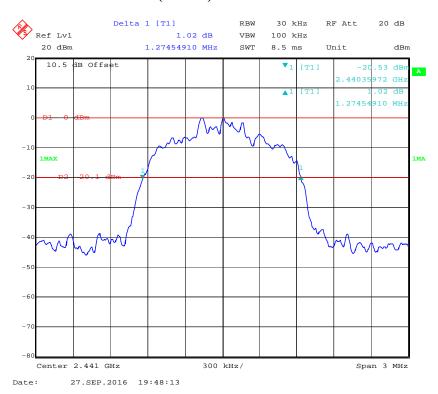

EDR (8DPSK): High Channel

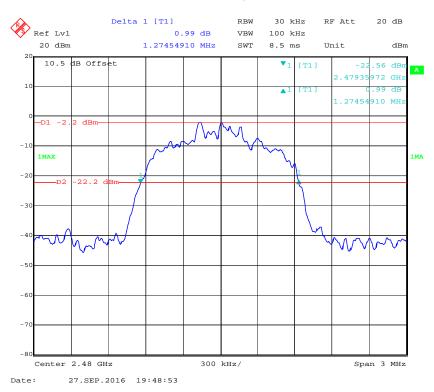

FCC Part 15.247 Page 32 of 57

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ160826003-00B

Test Procedure

- 1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 2. Set the EUT in hopping mode from first channel to last.
- 3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions

Temperature:	24 ℃
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2016-09-27.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots

FCC Part 15.247 Page 33 of 57

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

Report No.: RSZ160826003-00B


BDR (GFSK): Number of Hopping Channels

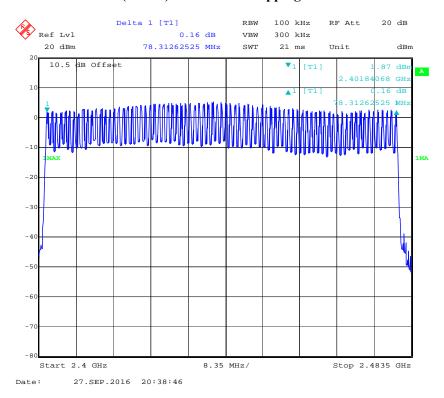


FCC Part 15.247 Page 34 of 57

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

Report No.: RSZ160826003-00B

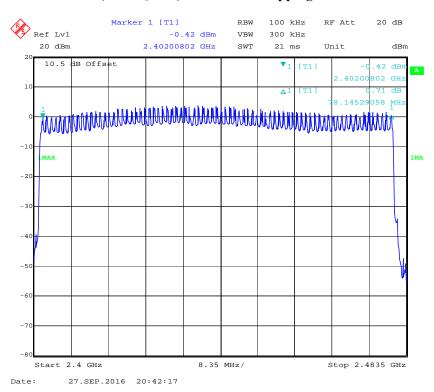

EDR (8DPSK): Number of Hopping Channels

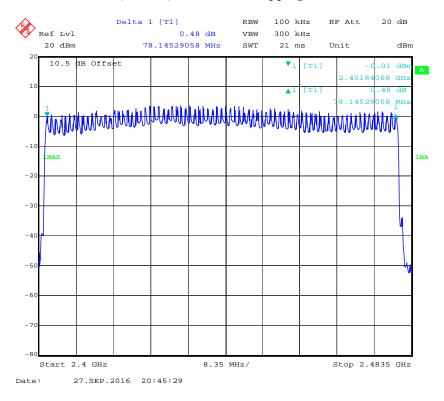

FCC Part 15.247 Page 35 of 57

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ160826003-00B

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Data

Environmental Conditions

Temperature:	24 ℃
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2016-09-27.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

FCC Part 15.247 Page 36 of 57


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)		Low	0.395	0.126	0.4	Pass
	DH 1	Middle	0.395	0.126	0.4	Pass
		High	0.395	0.126	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.651	0.264	0.4	Pass
		Middle	1.651	0.264	0.4	Pass
		High	1.651	0.264	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.912	0.311	0.4	Pass
		Middle	2.912	0.311	0.4	Pass
		High	2.912	0.311	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
	2DH 1	Low	0.395	0.126	0.4	Pass
		Middle	0.395	0.126	0.4	Pass
		High	0.395	0.126	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH 3	Low	1.651	0.264	0.4	Pass
EDR		Middle	1.651	0.264	0.4	Pass
$(\pi/4\text{-DQPSK})$		High	1.651	0.264	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH 5	Low	2.912	0.311	0.4	Pass
		Middle	2.912	0.311	0.4	Pass
		High	2.912	0.311	0.4	Pass
		Note:2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH 1	Low	0.395	0.126	0.4	Pass
		Middle	0.395	0.126	0.4	Pass
		High	0.395	0.126	0.4	Pass
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH 3	Low	1.651	0.264	0.4	Pass
		Middle	1.651	0.264	0.4	Pass
		High	1.651	0.264	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5	Low	2.912	0.311	0.4	Pass
		Middle	2.912	0.311	0.4	Pass
		High	2.912	0.311	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

Report No.: RSZ160826003-00B


FCC Part 15.247 Page 37 of 57

BDR (GFSK): Pulse time, Low Channel, DH1

Report No.: RSZ160826003-00B

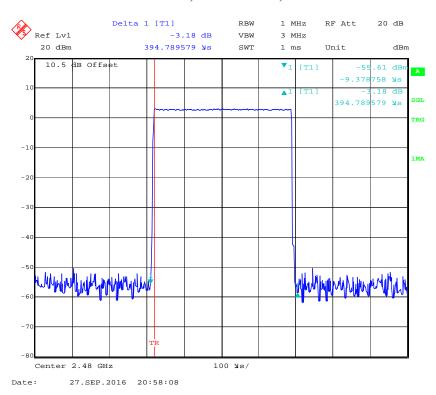


Pulse time, Middle Channel, DH1

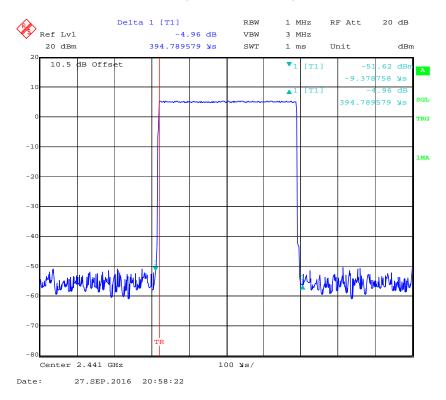


FCC Part 15.247 Page 38 of 57

Pulse time, High Channel, DH1

Report No.: RSZ160826003-00B

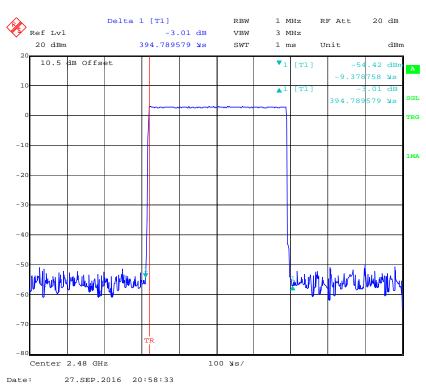


Pulse time, Low Channel, DH3

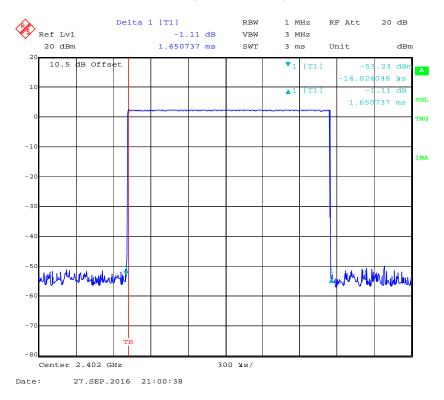


FCC Part 15.247 Page 39 of 57

Pulse time, Middle Channel, DH3

Report No.: RSZ160826003-00B

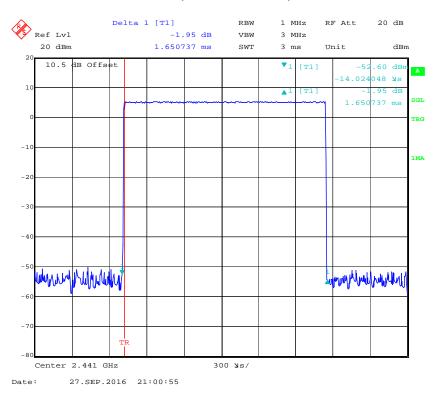


Pulse time, High Channel, DH3

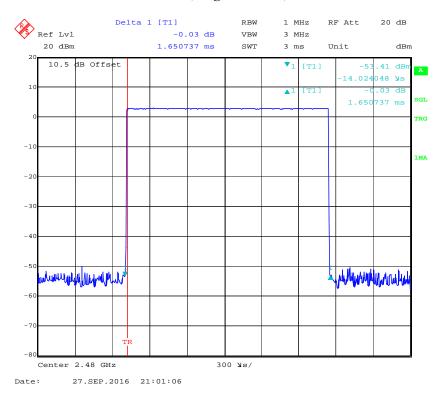


FCC Part 15.247 Page 40 of 57

Pulse time, Low Channel, DH5

Report No.: RSZ160826003-00B

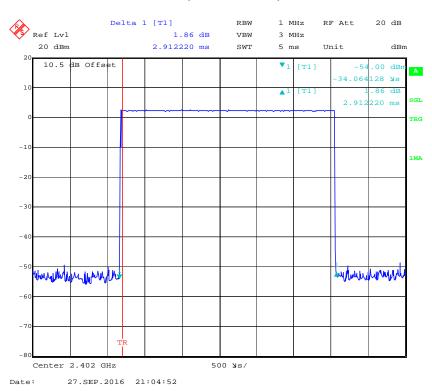


Pulse time, Middle Channel, DH5

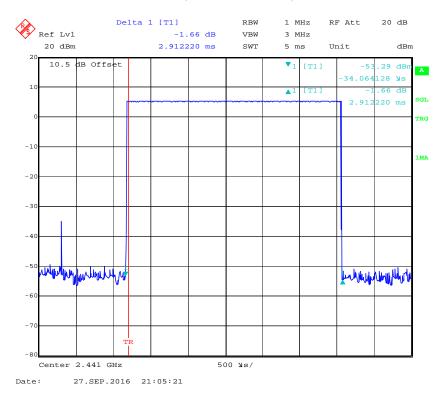


FCC Part 15.247 Page 41 of 57

Pulse time, High Channel, DH5

Report No.: RSZ160826003-00B

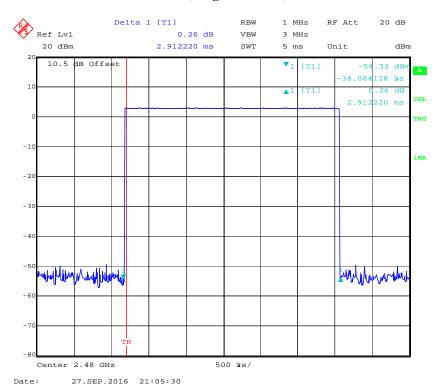


EDR ($\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1

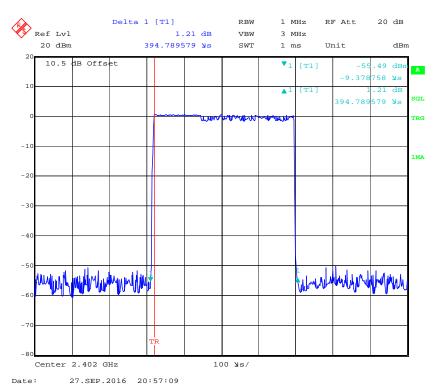


FCC Part 15.247 Page 42 of 57

Pulse time, Middle Channel, 2DH1

Report No.: RSZ160826003-00B

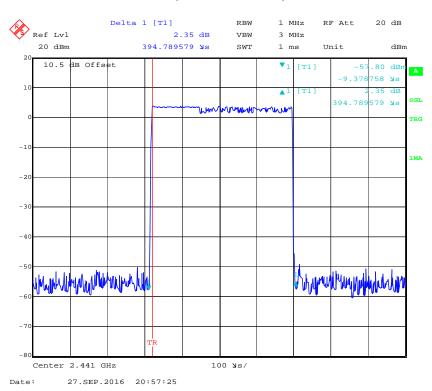


Pulse time, High Channel, 2DH1

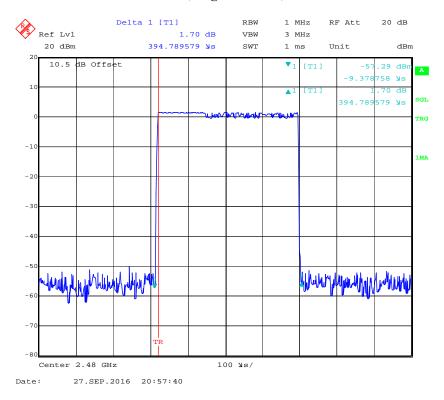


FCC Part 15.247 Page 43 of 57

Pulse time, Low Channel, 2DH3

Report No.: RSZ160826003-00B

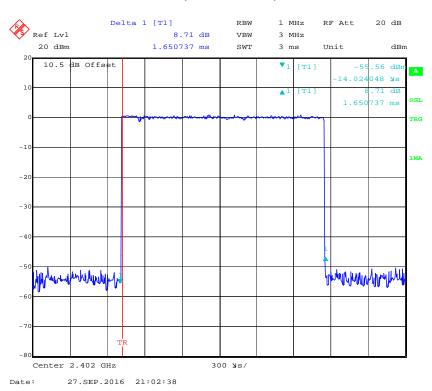


Pulse time, Middle Channel, 2DH3

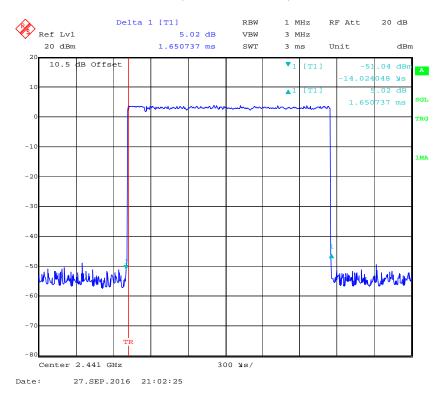


FCC Part 15.247 Page 44 of 57

Pulse time, High Channel, 2DH3

Report No.: RSZ160826003-00B

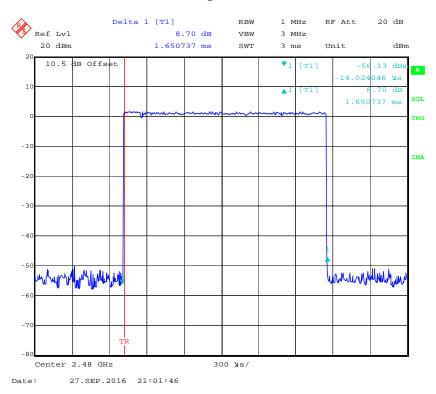


Pulse time, Low Channel, 2DH5

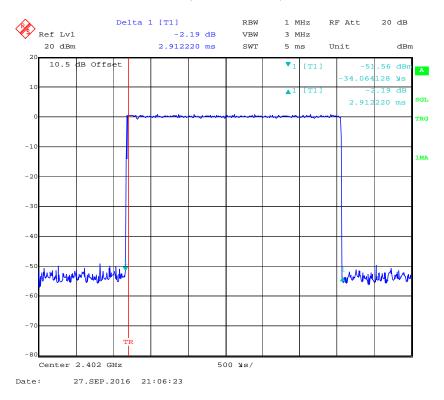


FCC Part 15.247 Page 45 of 57

Pulse time, Middle Channel, 2DH5

Report No.: RSZ160826003-00B

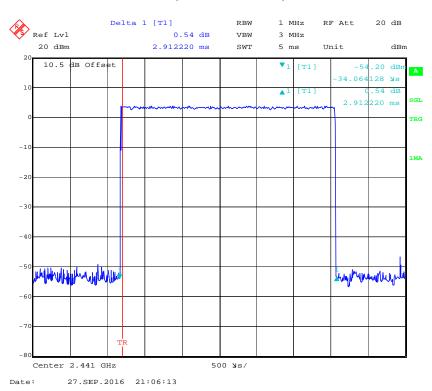


Pulse time, High Channel, 2DH5

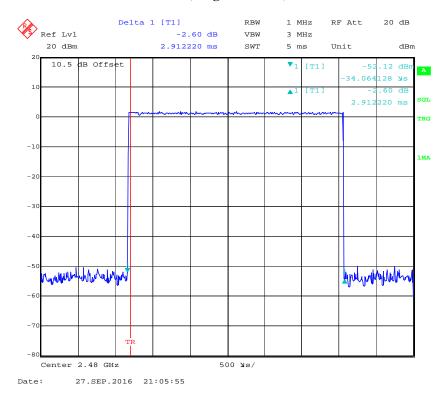


FCC Part 15.247 Page 46 of 57

EDR (8DPSK): Pulse time, Low Channel, 3DH1

Report No.: RSZ160826003-00B

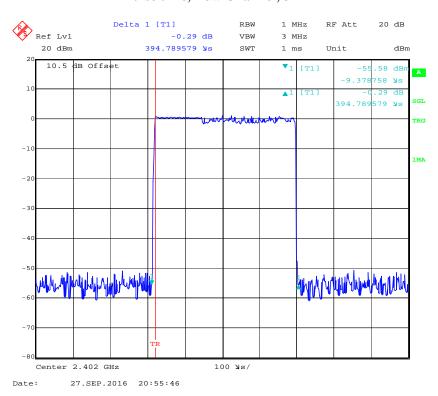


Pulse time, Middle Channel, 3DH1

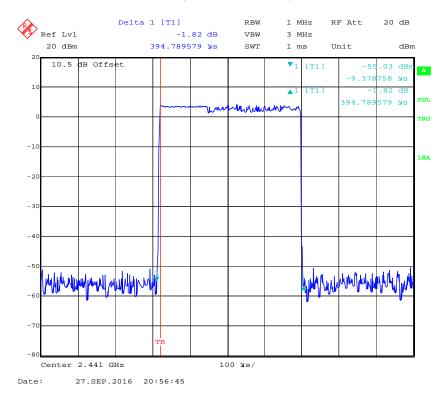


FCC Part 15.247 Page 47 of 57

Pulse time, High Channel, 3DH1

Report No.: RSZ160826003-00B

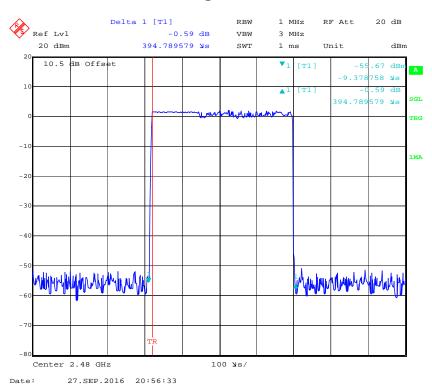


Pulse time, Low Channel, 3DH3

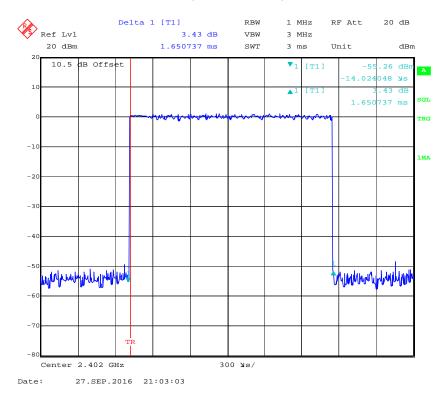


FCC Part 15.247 Page 48 of 57

Pulse time, Middle Channel, 3DH3

Report No.: RSZ160826003-00B

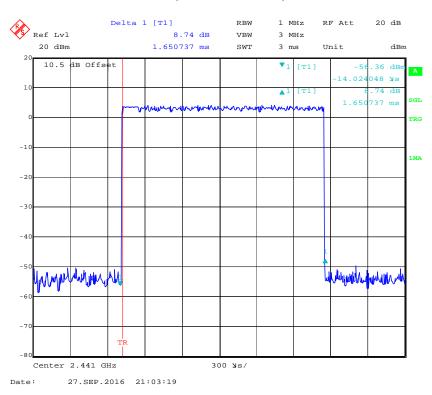


Pulse time, High Channel, 3DH3

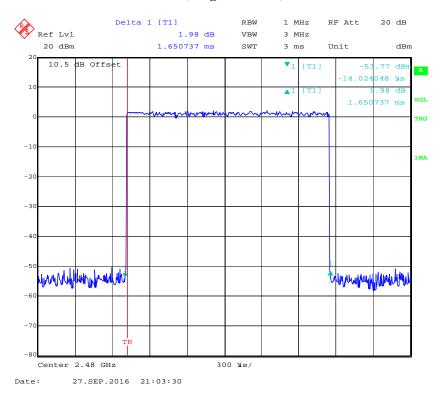


FCC Part 15.247 Page 49 of 57

Pulse time, Low Channel, 3DH5

Report No.: RSZ160826003-00B

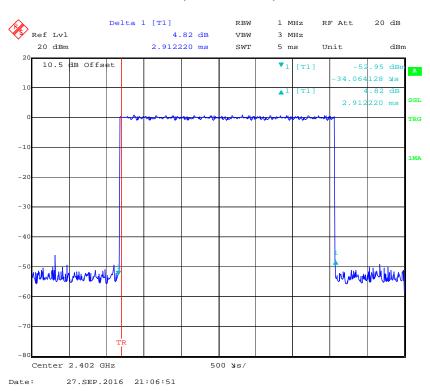


Pulse time, Middle Channel, 3DH5

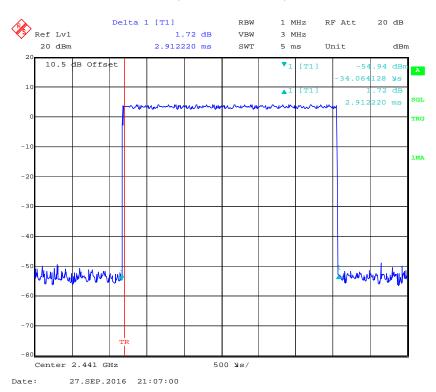

FCC Part 15.247 Page 50 of 57

Pulse time, High Channel, 3DH5

Report No.: RSZ160826003-00B

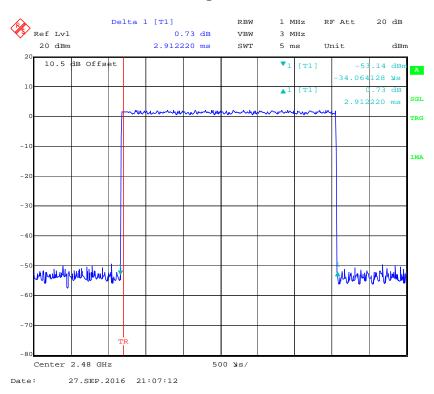

FCC Part 15.247 Page 51 of 57

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Report No.: RSZ160826003-00B

Test Procedure

- 1. Place the EUT on a bench and set in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	22 ℃	
Relative Humidity:	57 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Chris Wang on 2016-10-18.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

FCC Part 15.247 Page 52 of 57

Mode	Channel	Frequency	Peak Output Power		Limit
		(MHz)	(dBm)	(mW)	(mW)
BDR (GFSK)	Low	2402	2.30	1.70	1000
	Middle	2441	5.17	3.29	1000
	High	2480	2.80	1.91	1000
EDR (π/4-DQPSK)	Low	2402	0.65	1.16	1000
	Middle	2441	3.72	2.36	1000
	High	2480	1.64	1.46	1000
EDR (8DPSK)	Low	2402	0.84	1.21	1000
	Middle	2441	3.85	2.43	1000
	High	2480	3.71	2.35	1000

Report No.: RSZ160826003-00B

FCC Part 15.247 Page 53 of 57

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Report No.: RSZ160826003-00B

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete

Test Data

Environmental Conditions

Temperature:	24 ℃	
Relative Humidity:	53 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Chris Wang on 2016-09-27.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


FCC Part 15.247 Page 54 of 57

BDR (GFSK): Band Edge-Left Side

Report No.: RSZ160826003-00B

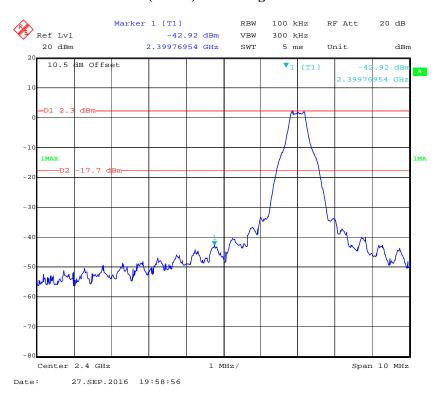


BDR (GFSK): Band Edge-Right Side

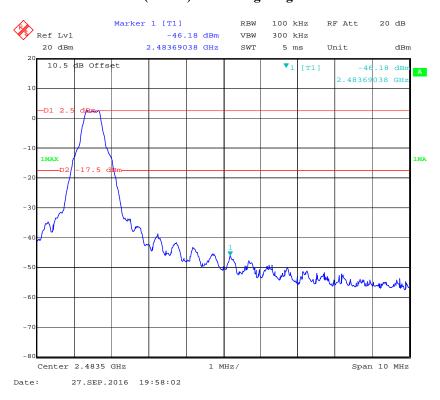


FCC Part 15.247 Page 55 of 57

EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

Report No.: RSZ160826003-00B

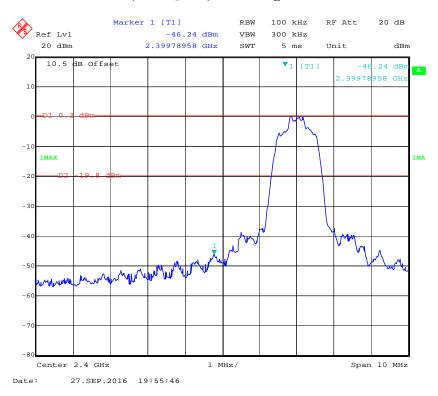


EDR (π /4-DQPSK): Band Edge-Right Side

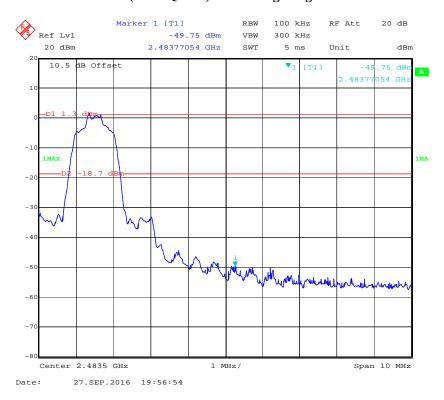


FCC Part 15.247 Page 56 of 57

EDR (8DPSK): Band Edge-Left Side

Report No.: RSZ160826003-00B

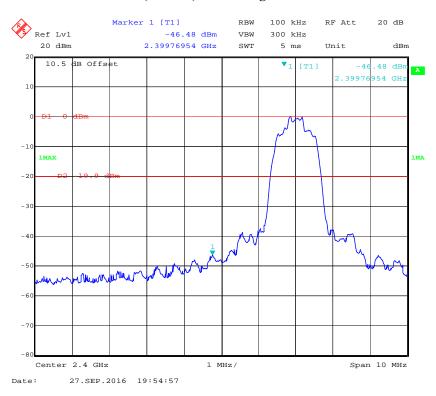

BDR (8DPSK): Band Edge-Right Side

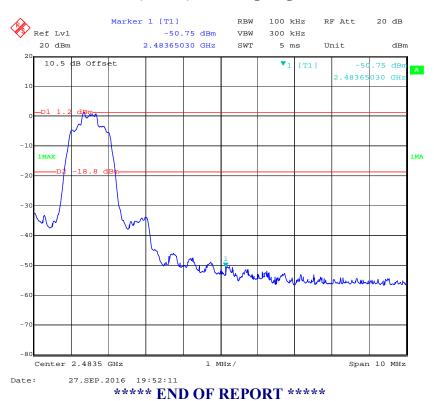

FCC Part 15.247 Page 57 of 57