## **FCC RF Test Report**

APPLICANT : BLU Products, Inc.

**EQUIPMENT**: Mobile phone

BRAND NAME : BLU

MODEL NAME : ENERGY X 2

FCC ID : YHLBLUENERGYX2

STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jan. 05, 2016 and testing was completed on Jan. 11, 2016. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Prepared by: Andy Yeh / Manager

Andy Jeh

Approved by: Jones Tsai / Manager

### SPORTON INTERNATIONAL (SHENZHEN) INC.

1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 1 of 24
Report Issued Date : Jan. 26, 2016

Testing Laboratory 2353

**Report No.: FG610501** 

Report Version : Rev. 01
Report Template No.: BU5-FG22/24/27 Version 1.1

#### **TABLE OF CONTENTS**

RE	visio	N HISTORY	3			
SU	MMAF	RY OF TEST RESULT	4			
1	GEN	GENERAL DESCRIPTION				
	1.1 1.2 1.3 1.4	Applicant	6			
	1.5 1.6 1.7 1.8	Modification of EUT	8 8			
2	TES1	CONFIGURATION OF EQUIPMENT UNDER TEST	10			
	2.1 2.2 2.3 2.4	Test Mode  Connection Diagram of Test System  Support Unit used in test configuration  Measurement Results Explanation Example	11 12			
3	CONDUCTED TEST RESULT					
	3.1 3.2 3.3 3.4 3.5 3.6 3.7 3.8 3.9	Measuring Instruments Test Setup Test Result of Conducted Test Conducted Output Power Peak-to-Average Ratio 99% Occupied Bandwidth and 26dB Bandwidth Measurement Conducted Band Edge Conducted Spurious Emission Frequency Stability	1314141516			
4		ATED TEST ITEMS				
-	4.1 4.2 4.3 4.4 4.5	Measuring Instruments Test Setup Test Result of Radiated Test Effective Radiated Power and Effective Isotropic Radiated Power Measurement Field Strength of Spurious Radiation Measurement	19 19 19			
5	LIST	OF MEASURING EQUIPMENT	23			
	PEND	ERTAINTY OF EVALUATIONIX A. TEST RESULTS OF CONDUCTED TEST IX B. TEST RESULTS OF RADIATED TEST	24			
ΑP	PEND	IX C. TEST SETUP PHOTOGRAPHS				

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 2 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

## **REVISION HISTORY**

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG610501	Rev. 01	Initial issue of report	Jan. 26, 2016

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 3 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

**Report No. : FG610501** 

## **SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.4	§2.1046	RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.5)	Conducted Output Power	Reporting Only	PASS	-
3.5	§24.232(d)	RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.5)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b) §27.53(g)	RSS-GEN(6.6) RSS-132(3.1) RSS-133(3.1) RSS-139 (3.1)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.6)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.6)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
	§2.1055 RSS-GEN(6.11) §22.355 RSS-132 (5.3)	_	< 2.5 ppm for Part 22H			
3.9	§2.1055 §24.235 §27.54	RSS-GEN(6.11) RSS-133 (6.3) RSS-139 (6.4)	Frequency Stability for — Temperature & Voltage	Within Authorized Band	PASS	-

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 4 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
4.4	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	RSS-139 (6.5) SRSP-513(5.1.2)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
4.5	§2.1053 §22.917(a) §24.238(a) §27.53(h)	RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.6)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 16.75 dB at 11101.200 MHz

Page Number : 5 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

## 1 General Description

## 1.1 Applicant

**BLU Products, Inc.** 

10814 NW 33rd St # 100 Doral, FL 33172

#### 1.2 Manufacturer

**BLU Products, Inc.** 

10814 NW 33rd St # 100 Doral, FL 33172

## 1.3 Product Feature of Equipment Under Test

	Product Feature
Equipment	Mobile phone
Brand Name	BLU
Model Name	ENERGY X 2
FCC ID	YHLBLUENERGYX2
	GSM/GPRS/EGPRS/
	WCDMA/HSPA/HSPA+(16QAM uplink is not supported)
EUT supports Radios application	WLAN2.4GHz 802.11b/g/n HT20/HT40
	Bluetooth v3.0+EDR
	Bluetooth v4.0 LE
	Conducted: 354147042000092/354147042035098
IMEI Code	Radiation: 354147042000241/354147042035247
	ERP/EIRP: 354147042000241/354147042035247
HW Version	ENERGY X 2_MAINBOARD_P3
SW Version	ENERGY_X_2_0103_V5448
EUT Stage	Pre-Production

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

 ${\it SPORTON\ INTERNATIONAL\ (SHENZHEN)\ INC.}$ 

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 6 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

## 1.4 Product Specification of Equipment Under Test

Standards	-related Pro	oduct Specification	
	GSM/GPRS/EDGE:		
	850:	824.2 MHz ~ 848.8 MHz	
	1900:	1850.2 MHz ~ 1909.8MHz	
Tx Frequency	WCDMA:		
	Band V:	826.4 MHz ~ 846.6 MHz	
	Band II:	1852.4 MHz ~ 1907.6 MHz	
	Band IV:	1712.4 MHz ~ 1752.6 MHz	
	GSM/GPF	RS/EDGE:	
	850:	869.2 MHz ~ 893.8 MHz	
	1900:	1930.2 MHz ~ 1989.8 MHz	
Rx Frequency	WCDMA:		
	Band V:	871.4 MHz ~ 891.6 MHz	
	Band II:	1932.4 MHz ~ 1987.6 MHz	
	Band IV:	2112.4 MHz ~ 2152.6 MHz	
	GSM/GPRS/EDGE:		
	850:	32.30 dBm	
	1900:	29.49 dBm	
Maximum Output Power to Antenna	WCDMA:		
	Band V:	22.81 dBm	
	Band II:	22.47 dBm	
	Band IV:	22.80 dBm	
Antenna Type	Fixed Interr	nal Antenna	
	GSM: GMS		
	GPRS: GM		
	EDGE: GM		
Type of Modulation	WCDMA: QPSK (Uplink)		
	HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink)		
	HSPA+: 16QAM (Uplink is not supported)		

 ${\it SPORTON\ INTERNATIONAL\ (SHENZHEN)\ INC.}$ 

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 7 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

**Report No.: FG610501** 

#### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

# 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22H	GSM850 GSM	GMSK	0.9931	0.0478 ppm	246KGXW
Part 22H	GSM850 EDGE class 8	8PSK	0.3631	0.0359 ppm	246KG7W
Part 22H	WCDMA Band V RMC 12.2Kbps	QPSK	0.1312	0.0239 ppm	4M16F9W
Part 24E	GSM1900 GSM	GMSK	1.4521	0.0372 ppm	248KGXW
Part 24E	GSM1900 EDGE class 8	8PSK	0.2588	0.0271 ppm	245KG7W
Part 24E	WCDMA Band II RMC 12.2Kbps	QPSK	0.2070	0.0149 ppm	4M16F9W
Part 27L	WCDMA Band IV RMC 12.2Kbps	QPSK	0.1919	0.0173 ppm	4M17F9W

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 8 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

#### 1.7 Testing Location

Test Site SPORTON INTERNATIONAL (SHENZHEN) INC.			
	1F & 2F,Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,		
	Nanshan District, Shenzhen, Guangdong, P. R. China		
Test Site Location	TEL: +86-755-8637-9589		
	FAX: +86-755-8637-9595		
Toot Site No	Sporton Site No.		
Test Site No.	TH01-SZ		

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
	No. 3-2, PingXiang Road, Kunshan, Jiangsu Pro	vince, P. R. China		
Test Site Location	TEL: +86-0512-5790-0158			
	FAX: +86-0512-5790-0958			
Took Cita No	Sporton Site No.	FCC/IC Registration No.		
Test Site No.	03CH03-KS	306251/4086E		

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- IC RSS-132 Issue 3
- IC RSS-133 Issue 6
- IC RSS-139 Issue 3
- IC RSS-Gen Issue 4

#### Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 9 of 24
Report Issued Date : Jan. 26, 2016

Report No.: FG610501

Report Version : Rev. 01
Report Template No.: BU5-FG22/24/27 Version 1.1

## 2 Test Configuration of Equipment Under Test

#### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

- 1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
- 2. 30 MHz to 10th harmonic for WCDMA Band IV.
- 3. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:


Test Modes						
Band	Radiated TCs	Conducted TCs				
GSM 850	■ GSM Link	■ GSM Link				
GSIVI 650	■ EDGE class 8 Link	■ EDGE class 8 Link				
GSM 1900	■ GSM Link	■ GSM Link				
GSW 1900	■ EDGE class 8 Link	■ EDGE class 8 Link				
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link				
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link				
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link				

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 10 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01


Report No.: FG610501

## 2.2 Connection Diagram of Test System

#### For 22H.24E

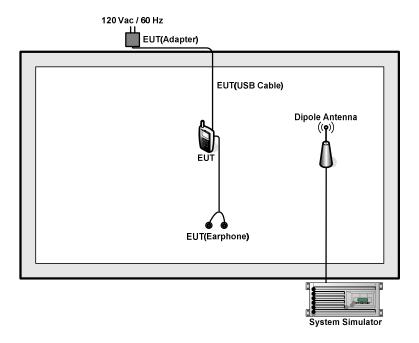

For 27L

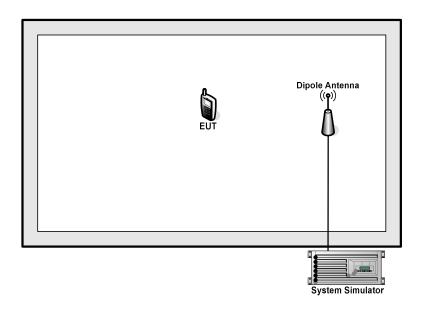

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 11 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

#### 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m

#### 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.5 dB and a 10dB attenuator.

#### Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$ = 4.5 + 10 = 14.5 (dB)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 12 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

**Report No.: FG610501** 


#### 3 Conducted Test Result

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


#### 3.2.1 Conducted Output Power



# 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

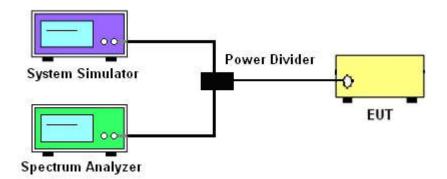

#### 3.2.3 Frequency Stability

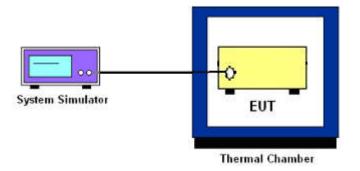

#### 3.3 Test Result of Conducted Test

Please refer to Appendix A.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 13 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No. : FG610501

#### 3.4 Conducted Output Power

#### 3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

#### 3.4.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

#### 3.5 Peak-to-Average Ratio

#### 3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 3.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 3. Set EUT to transmit at maximum output power.
- 4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
- 5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

#### 3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.6.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
   The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 5. Set the detection mode to peak, and the trace mode to max hold.
- 6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
- 7. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

#### 3.7 Conducted Band Edge

#### 3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

#### 3.7.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.The path loss was compensated to the results for each measurement.
- 4. The band edges of low and high channels for the highest RF powers were measured.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
  - = P(W) [43 + 10log(P)] (dB)
  - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
  - = -13dBm.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 16 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

**Report No.: FG610501** 

#### 3.8 Conducted Spurious Emission

#### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.8.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4. The middle channel for the highest RF power within the transmitting frequency was measured.
- 5. The conducted spurious emission for the whole frequency range was taken.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
- = P(W) [43 + 10log(P)] (dB)
- = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
- = -13dBm.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 17 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

#### 3.9 Frequency Stability

#### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

#### 3.9.2 Test Procedures for Temperature Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.9.3 Test Procedures for Voltage Variation

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
- 2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2

TEL: 86-755-8637-9589

Page Number : 18 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

**Report No.: FG610501** 


#### 4 Radiated Test Items

#### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

## 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

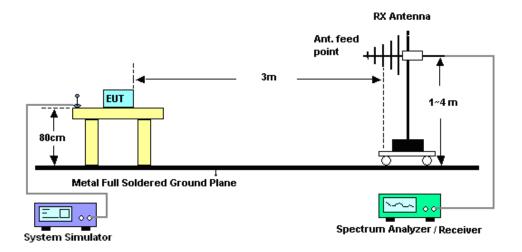

#### 4.2.2 For radiated test above 1GHz

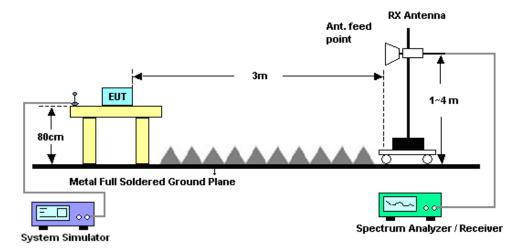

#### 4.3 Test Result of Radiated Test

Please refer to Appendix B.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 19 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

**Report No.: FG610501** 

#### 4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

#### 4.4.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-D-2010, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).

#### 4.4.2 Test Procedures

- 1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-D-2010 Section 2.2.17.
- 2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
- 3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
- 4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, EIRP = LVL + Correction factor and ERP = EIRP - 2.15. Take the record of the output power at substitution antenna.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2

TEL: 86-755-8637-9589

Report Issued Date: Jan. 26, 2016 Report Version : Rev. 01

Page Number

Report Template No.: BU5-FG22/24/27 Version 1.1

: 20 of 24

	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

Page Number : 21 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

#### 4.5 Field Strength of Spurious Radiation Measurement

#### 4.5.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

**Report No.: FG610501** 

#### 4.5.2 Test Procedures

- The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
- 2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
- The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12.ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Page Number

Report Version

: 22 of 24

: Rev. 01

Report Issued Date: Jan. 26, 2016

- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)
  - = P(W) [43 + 10log(P)] (dB)
  - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
  - = -13dBm.

## **5** List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Jan. 28, 2015	Jan. 07, 2016~ Jan. 08, 2016	Jan. 27, 2016	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Aug. 07, 2015	Jan. 07, 2016~ Jan. 08, 2016	Aug. 06, 2016	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44GHz	Jun. 05, 2015	Jan. 10, 2016~ Jan. 11, 2016	Jun. 04, 2016	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	25MHz-2GHz	Jan. 17, 2015	Jan. 10, 2016~ Jan. 11, 2016	Jan. 16, 2016	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Jun. 25, 2015	Jan. 10, 2016~ Jan. 11, 2016	Jun. 24, 2016	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz ~40GHz	Mar. 03, 2015	Jan. 10, 2016~ Jan. 11, 2016	Mar. 02, 2016	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102212	0.01MHz-3000MHz	Aug. 10, 2015	Jan. 10, 2016~ Jan. 11, 2016	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 24, 2015	Jan. 10, 2016~ Jan. 11, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jan. 10, 2016~ Jan. 11, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 10, 2016~ Jan. 11, 2016	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 10, 2016~ Jan. 11, 2016	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 23 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

**Report No.: FG610501** 

## 6 Uncertainty of Evaluation

<u>Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)</u>

	· I	
Measuring Uncertainty for a Level of	4.5.40	
_	4.5 dB	
Confidence of 95% (U = 2Uc(y))		

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : 24 of 24
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.1

## **Appendix A. Test Results of Conducted Test**

## Conducted Output Power(Average power)

#### **SIM 1:**

	Conducted Power (*Unit: dBm)							
Band		GSM850			GSM1900			
Channel	128	189	251	512	661	810		
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8		
GSM	32.30	32.26	32.29	29.34	29.42	<mark>29.49</mark>		
GPRS class 8	32.20	32.09	32.14	29.29	29.30	29.31		
GPRS class 10	31.33	31.28	31.29	28.46	28.47	28.53		
GPRS class 11	29.47	29.44	29.46	26.50	26.52	26.58		
GPRS class 12	28.35	28.30	28.30	25.30	25.32	25.38		
EGPRS class 8	26.45	26.65	26.48	24.98	24.80	25.32		
EGPRS class 10	25.33	25.43	25.22	23.90	23.77	24.01		
EGPRS class 11	22.92	23.00	22.81	21.53	21.52	21.68		
EGPRS class 12	21.55	21.67	21.40	20.19	20.02	20.25		

	Conducted Power (*Unit: dBm)									
Band	WC	DMA Bar	nd V	WC	DMA Bai	nd II	WCI	WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513	
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6	
AMR 12.2K	22.73	22.79	22.80	22.31	22.08	21.99	22.42	22.37	22.79	
RMC 12.2K	22.75	22.80	<b>22.81</b>	<mark>22.47</mark>	22.14	22.02	22.43	22.39	<mark>22.80</mark>	
HSDPA Subtest-1	21.53	21.63	21.80	20.82	20.57	20.43	21.00	20.98	21.50	
HSDPA Subtest-2	21.53	21.58	21.76	20.83	20.56	20.41	20.94	20.93	21.45	
HSDPA Subtest-3	21.02	21.11	21.31	20.37	20.08	19.92	20.49	20.46	20.99	
HSDPA Subtest-4	21.00	21.08	21.26	20.32	20.04	19.86	20.47	20.45	20.97	
HSUPA Subtest-1	19.50	19.55	19.63	18.74	18.43	18.35	18.96	18.97	19.38	
HSUPA Subtest-2	19.47	19.54	19.59	18.70	18.40	18.29	18.95	18.93	19.38	
HSUPA Subtest-3	20.48	20.51	20.60	19.71	19.45	19.31	19.91	19.90	20.36	
HSUPA Subtest-4	18.93	19.02	19.07	18.22	17.91	17.78	18.46	18.44	18.84	
HSUPA Subtest-5	21.50	21.50	21.70	20.70	20.50	20.30	20.90	20.90	21.40	

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-1 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

#### **SIM 2:**

	Conducted Power (*Unit: dBm)							
Band		GSM850		GSM1900				
Channel	128	189	251	512	661	810		
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8		
GSM	<b>32.28</b>	32.25	32.27	29.31	29.41	<mark>29.46</mark>		
GPRS class 8	32.17	32.08	32.12	29.27	29.28	29.30		
GPRS class 10	31.31	31.25	31.28	28.43	28.45	28.50		
GPRS class 11	29.46	29.43	29.44	26.48	26.51	26.56		
GPRS class 12	28.28	28.20	28.25	25.29	25.31	25.35		
EGPRS class 8	26.44	26.62	26.47	24.96	24.78	25.31		
EGPRS class 10	25.31	25.39	25.20	23.89	23.74	24.00		
EGPRS class 11	22.91	22.98	22.80	21.51	21.50	21.65		
EGPRS class 12	21.52	21.66	21.37	20.17	20.01	20.24		

	Conducted Power (*Unit: dBm)								
Band	WC	DMA Bar	nd V	WC	DMA Bai	nd II	WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
AMR 12.2K	22.71	22.77	22.79	22.30	22.06	21.98	22.40	22.36	22.77
RMC 12.2K	22.73	22.78	<b>22.80</b>	<mark>22.45</mark>	22.13	22.01	22.41	22.38	<mark>22.79</mark>
HSDPA Subtest-1	21.52	21.61	21.78	20.81	20.56	20.41	20.98	20.97	21.49
HSDPA Subtest-2	21.50	21.57	21.75	20.80	20.54	20.38	20.91	20.89	21.42
HSDPA Subtest-3	21.01	21.09	21.29	20.36	20.05	19.90	20.47	20.44	20.97
HSDPA Subtest-4	20.98	21.05	21.27	20.30	20.02	19.83	20.46	20.42	20.95
HSUPA Subtest-1	19.49	19.52	19.62	18.72	18.42	18.31	18.93	18.95	19.34
HSUPA Subtest-2	19.45	19.53	19.57	18.65	18.36	18.27	18.93	18.92	19.35
HSUPA Subtest-3	20.47	20.47	20.57	19.69	19.44	19.28	19.86	19.86	20.34
HSUPA Subtest-4	18.91	18.99	19.06	18.17	17.88	17.76	18.45	18.41	18.82
HSUPA Subtest-5	21.47	21.46	21.68	20.67	20.46	20.27	20.87	20.86	21.39

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-2 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

**Report No. : FG610501** 

## Peak-to-Average Ratio

Mode	GSN	Limit: 13dB	
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.20	3.44	
Middle CH	0.24	3.24	PASS
Highest CH	0.20	3.32	

Mode	GSM	Limit: 13dB	
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.20	3.32	
Middle CH	0.24	3.24	PASS
Highest CH	0.20	3.12	


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	2.88	2.68	2.96	
Middle CH	3.08	3.08	2.96	PASS
Highest CH	2.80	2.88	2.84	

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-3 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.0

FCC RF Test Report

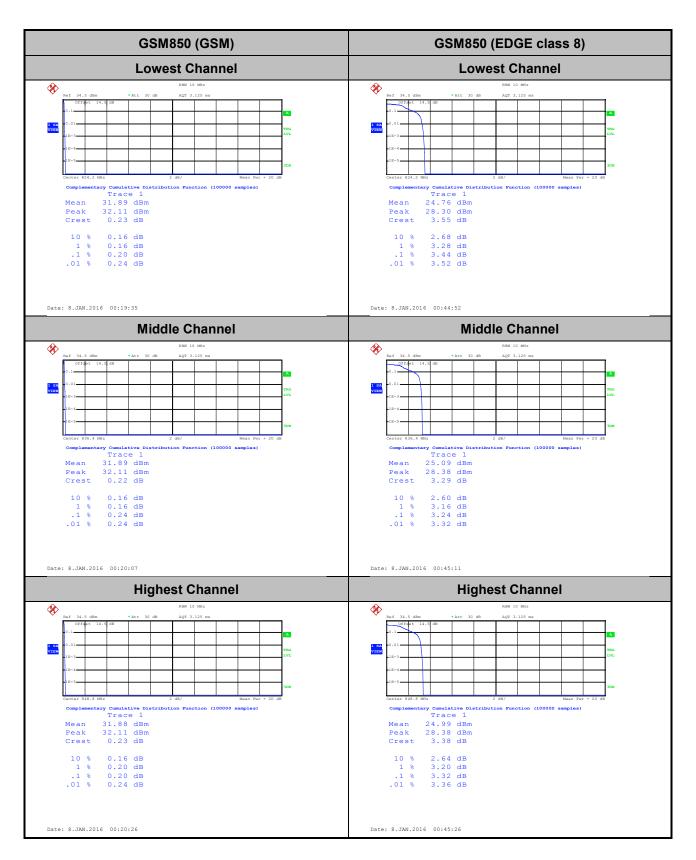

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-4 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

**GSM1900 (GSM)** GSM1900 (EDGE class 8) **Lowest Channel Lowest Channel % %** Trace 1
28.77 dBm
29.02 dBm
0.25 dB Peak Crest Peak Crest 2.60 dB 3.20 dB 3.32 dB 3.40 dB 10 % 0.20 dB 0.20 dB 0.20 dB **Middle Channel Middle Channel %** \* Trace 1 23.11 dBm 26.41 dBm 3.29 dB Trace 1 28.67 dBm 28.88 dBm 0.21 dB Peak Crest Peak Crest 0.16 dB 0.24 dB 0.24 dB 10 % 1 % .1 % 2.60 dB 3.12 dB 3.24 dB Date: 7.JAN.2016 23:23:28 Date: 8.JAN.2016 00:06:06 **Highest Channel Highest Channel % %** Trace 1
23.01 dBm
26.19 dBm
3.19 dB Trace 1
28.61 dBm
28.88 dBm
0.26 dB Peak Crest Peak Crest 0.16 dB 0.20 dB 0.20 dB 0.20 dB 10 % 1 % .1 % 2.52 dB 3.00 dB 3.12 dB 3.16 dB

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2

Date: 7.JAN.2016 23:23:42

Page Number : A-5 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

Report Template No.: BU5-FG22/24/27/90 Version 1.0

Date: 8.JAN.2016 00:06:31

WCDMA Band V (RMC 12.2Kbps) WCDMA Band II (RMC 12.2Kbps) **Lowest Channel Lowest Channel % %** Trace 1
23.13 dBm
26.34 dBm
3.22 dB Trace 1 22.62 dBm 25.57 dBm 2.95 dB Crest Crest 10 % Date: 8.JAN.2016 19:54:12 Date: 8.JAN.2016 01:46:35 **Middle Channel Middle Channel** \* **%** 22.41 dBm 25.92 dBm 3.51 dB 1.80 dB 2.64 dB 3.08 dB 3.28 dB 1.76 dB 2.60 dB 3.08 dB 3.28 dB 10 % 1 % .1 % Date: 8.JAN.2016 19:54:37 **Highest Channel Highest Channel % %** Trace 1 22.96 dBm 26.13 dBm 5 3.17 dB Trace 1 22.39 dBm 25.50 dBm 3.11 dB

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2


Date: 8.JAN.2016 19:55:24

Page Number : A-6 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

Report Template No.: BU5-FG22/24/27/90 Version 1.0

Date: 8.JAN.2016 01:47:33

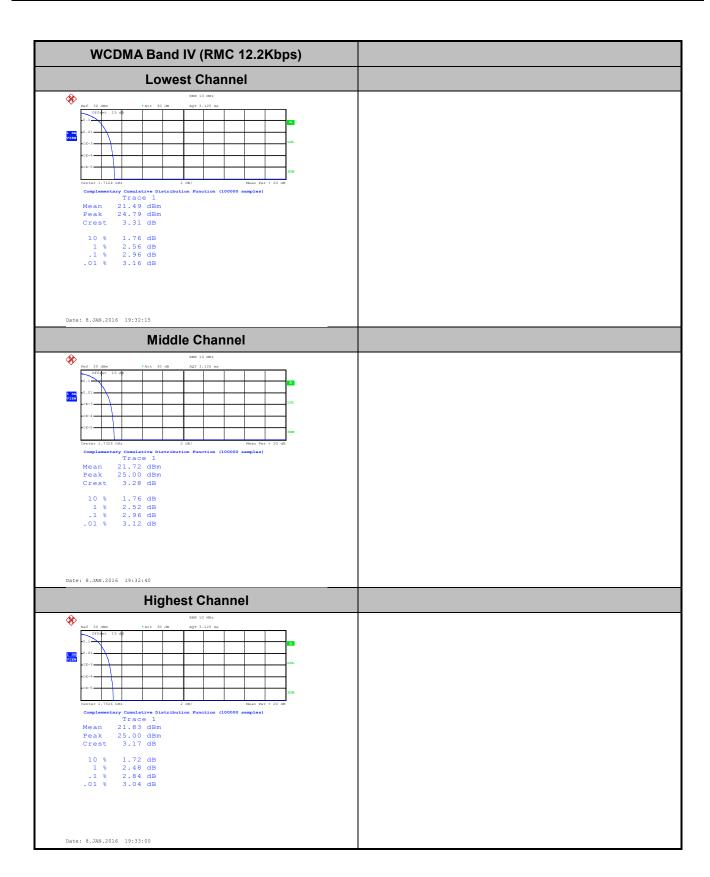

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-7 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

## 26dB Bandwidth

Mode	GSM850				
Mod.	GSM	EDGE class 8			
Lowest CH	0.308	0.299			
Middle CH	0.314	0.287			
Highest CH	0.294	0.287			


Mode	GSM1900				
Mod.	GSM	EDGE class 8			
Lowest CH	0.306	0.299			
Middle CH	0.298	0.297			
Highest CH	0.312	0.295			

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.68	4.71	4.67
Middle CH	4.68	4.68	4.68
Highest CH	4.69	4.68	4.69

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-8 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

**Report No.: FG610501** 

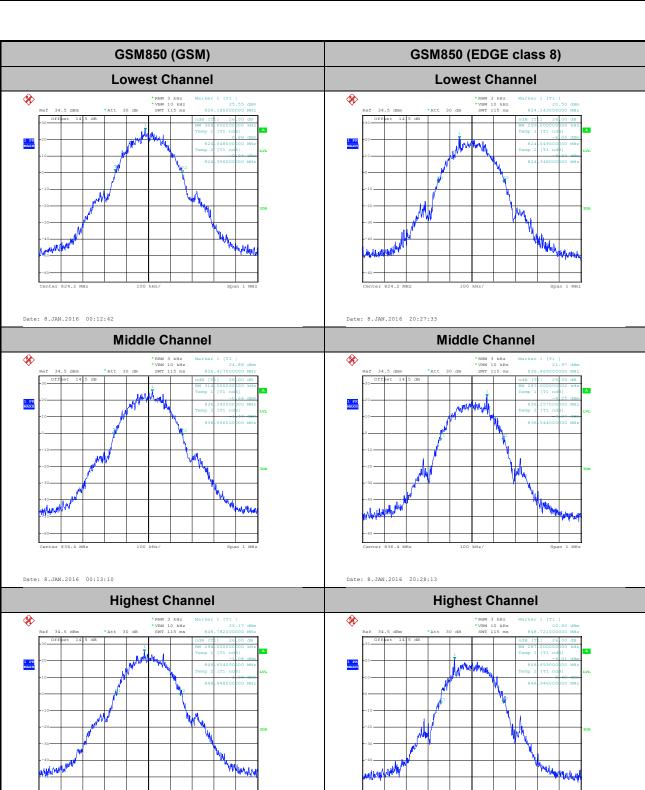


Date: 8.JAN.2016 00:13:38


Page Number : A-9 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501


Report Template No.: BU5-FG22/24/27/90 Version 1.0

Date: 8.JAN.2016 20:28:59



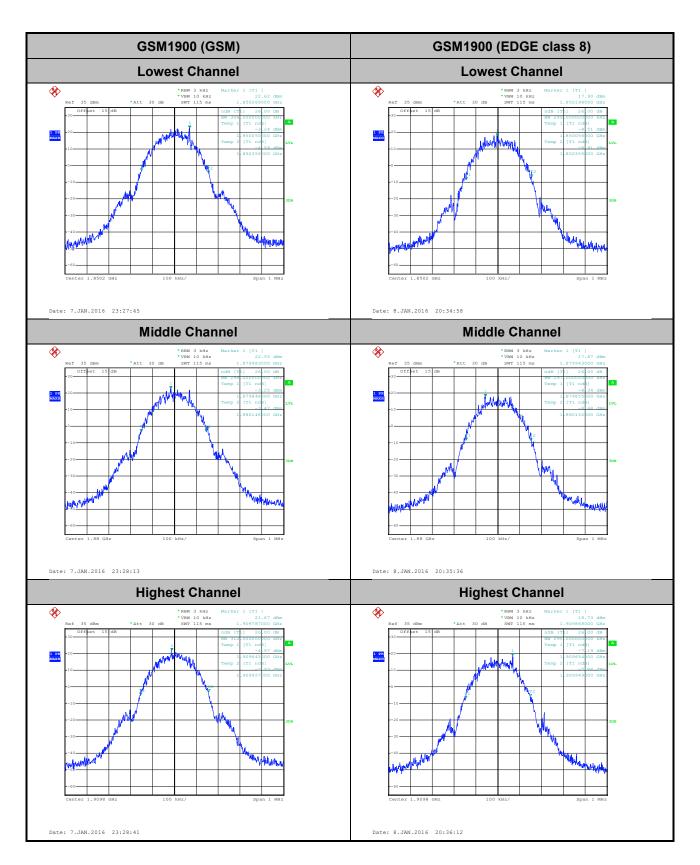


Page Number : A-10 of 28 Report Issued Date: Jan. 26, 2016 Report Version : Rev. 01

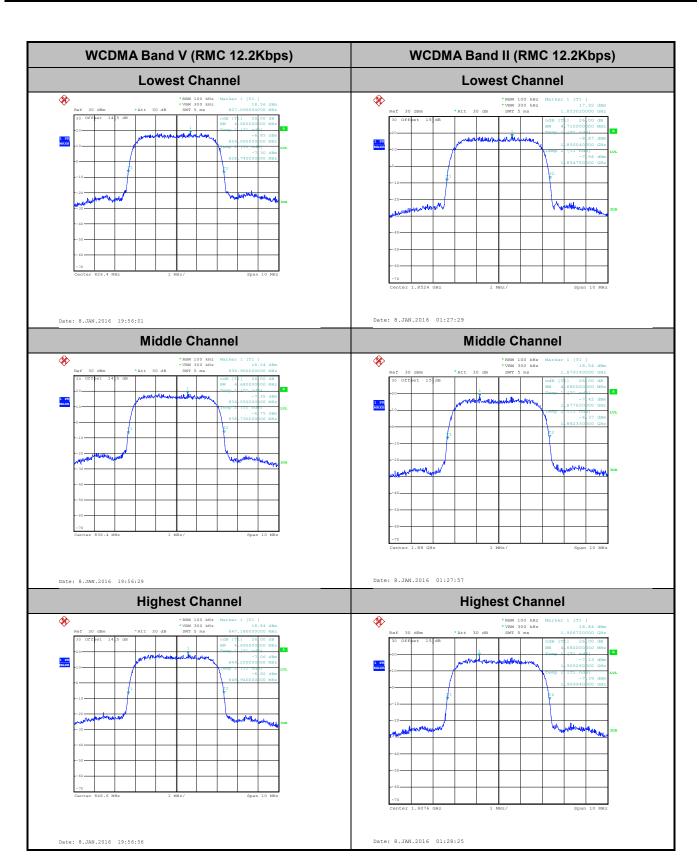

Page Number : A-11 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

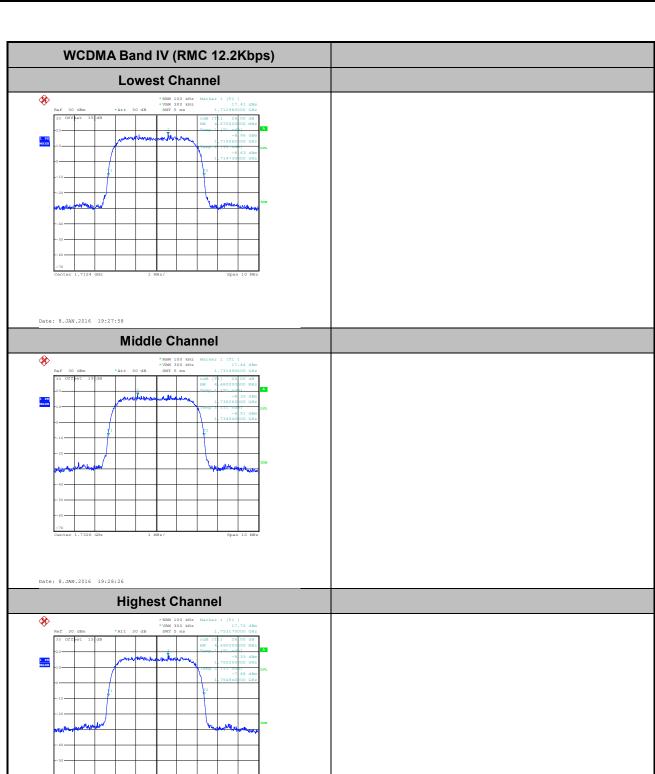

Date: 8.JAN.2016 19:28:54

Page Number : A-12 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

# Occupied Bandwidth

Mode	GSM850				
Mod.	GSM	EDGE class 8			
Lowest CH	0.246	0.244			
Middle CH	0.242	0.243			
Highest CH	0.246	0.246			

Mode	GSM1900				
Mod.	GSM	EDGE class 8			
Lowest CH	0.245	0.240			
Middle CH	0.246	0.245			
Highest CH	0.248	0.245			


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.16	4.16	4.16
Middle CH	4.16	4.16	4.17
Highest CH	4.14	4.16	4.16

SPORTON INTERNATIONAL (SHENZHEN) INC.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-13 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.0

Report No.: FG610501

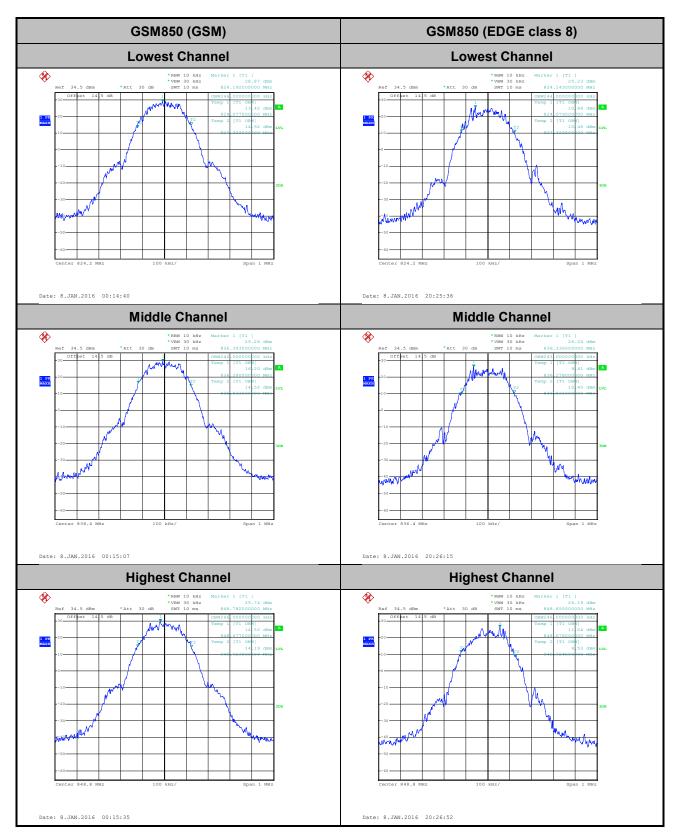

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-14 of 28 Report Issued Date : Jan. 26, 2016 Report Version : Rev. 01

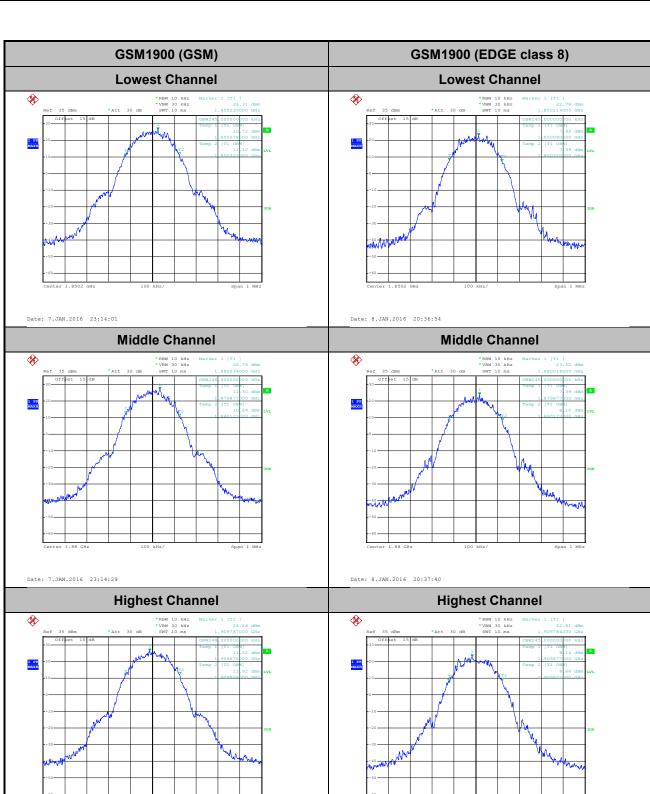


Date: 7.JAN.2016 23:14:57

Page Number : A-15 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

Report Template No.: BU5-FG22/24/27/90 Version 1.0

Date: 8.JAN.2016 20:38:16

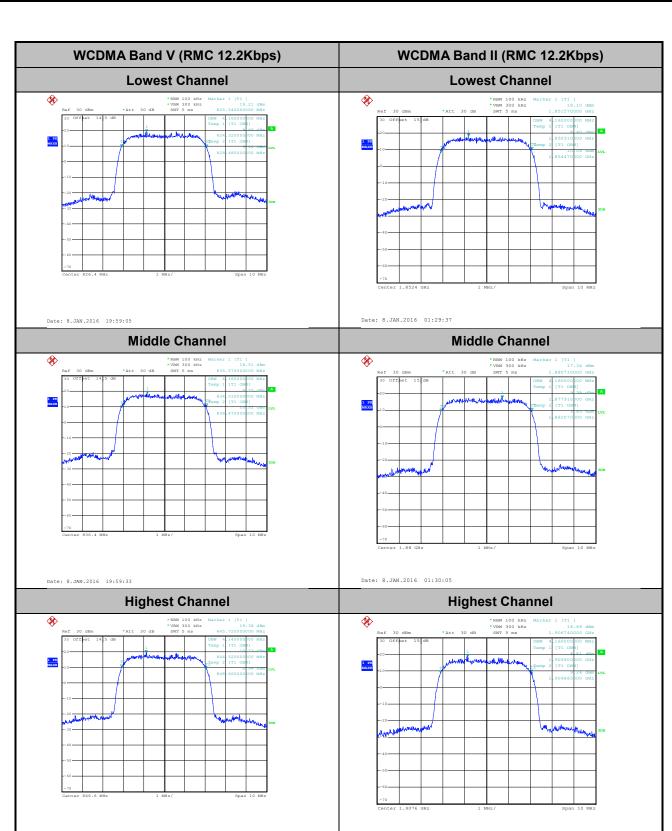


Date: 8.JAN.2016 20:00:01

Page Number : A-16 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

Report Template No.: BU5-FG22/24/27/90 Version 1.0


Date: 8.JAN.2016 01:30:33

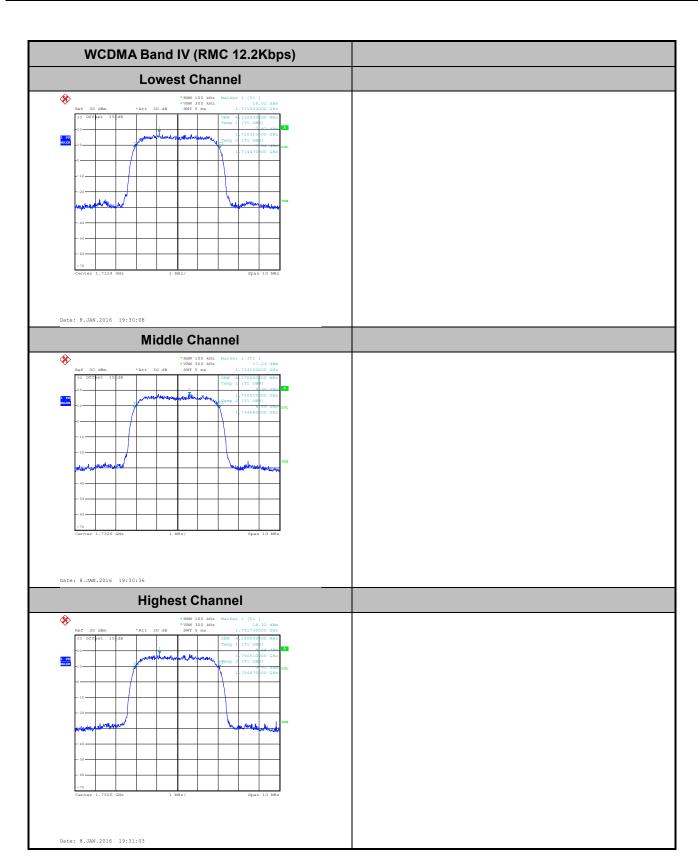

Page Number : A-17 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

## **Conducted Band Edge**

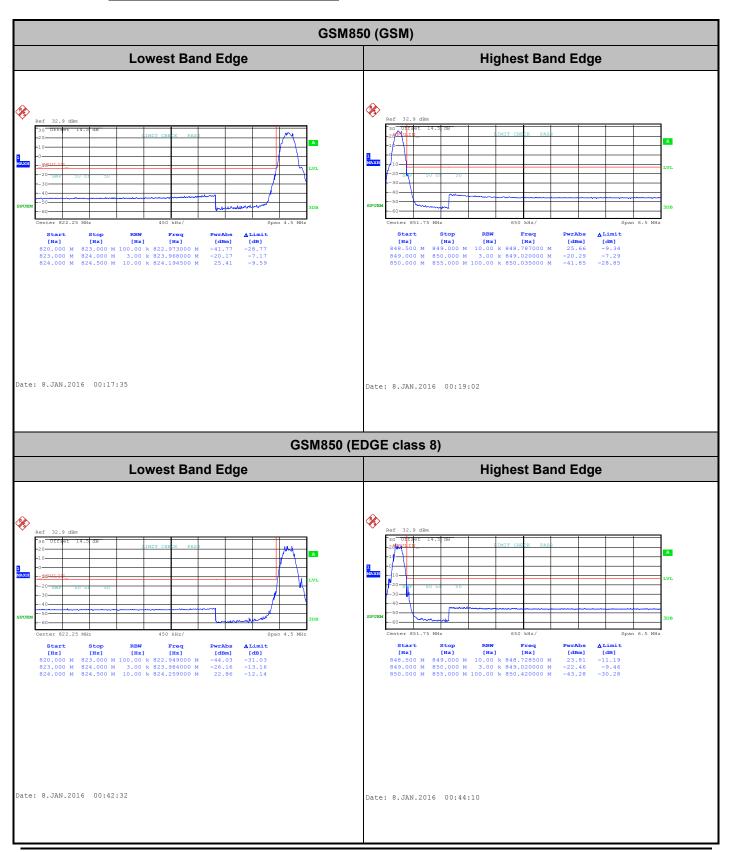

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-18 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01


Report No.: FG610501

**GSM1900 (GSM) Lowest Band Edge Highest Band Edge %** Date: 7.JAN.2016 23:18:55 Date: 7.JAN.2016 23:21:47 GSM1900 (EDGE class 8) **Lowest Band Edge Highest Band Edge** Date: 7.JAN.2016 23:58:38 Date: 8.JAN.2016 00:02:17

SPORTON INTERNATIONAL (SHENZHEN) INC.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-19 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

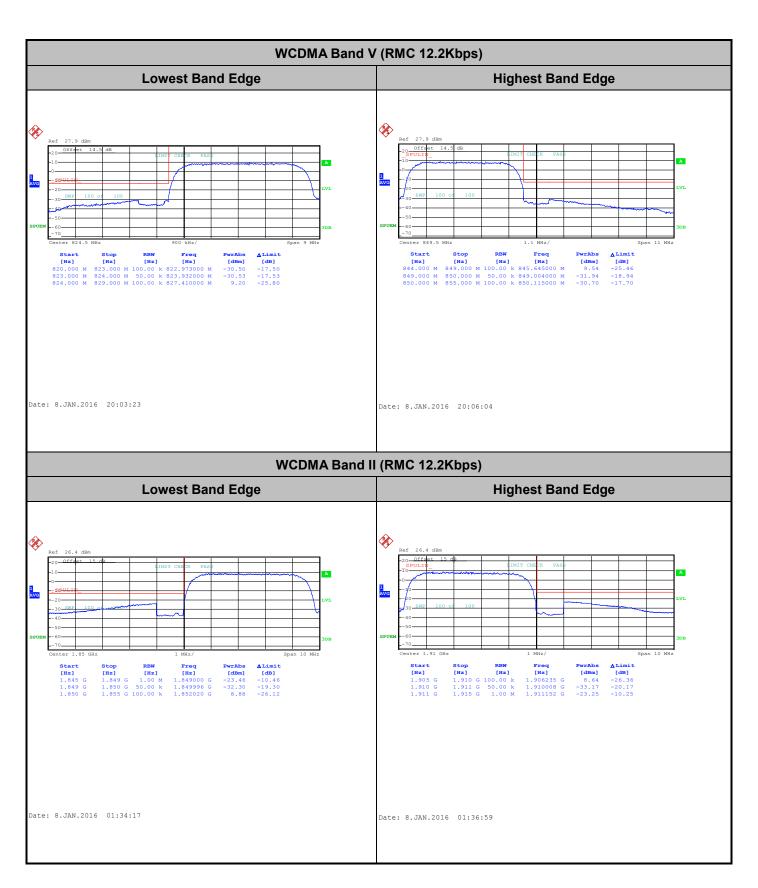

Page Number : A-20 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01


Report No.: FG610501

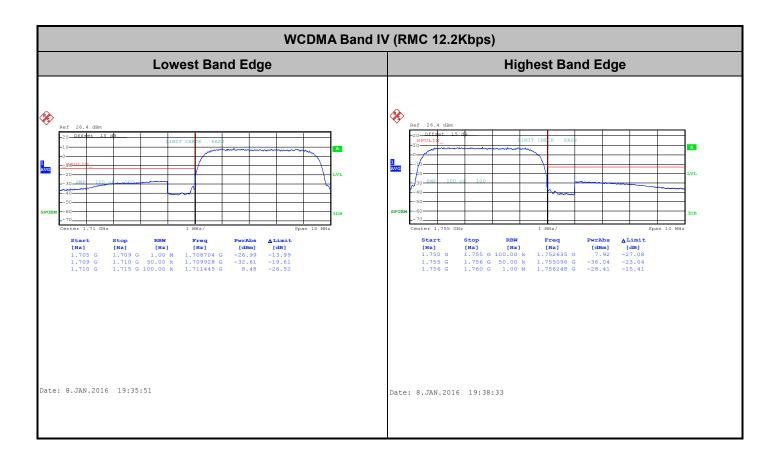

Page Number : A-21 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27/90 Version 1.0

### **Conducted Spurious Emission**

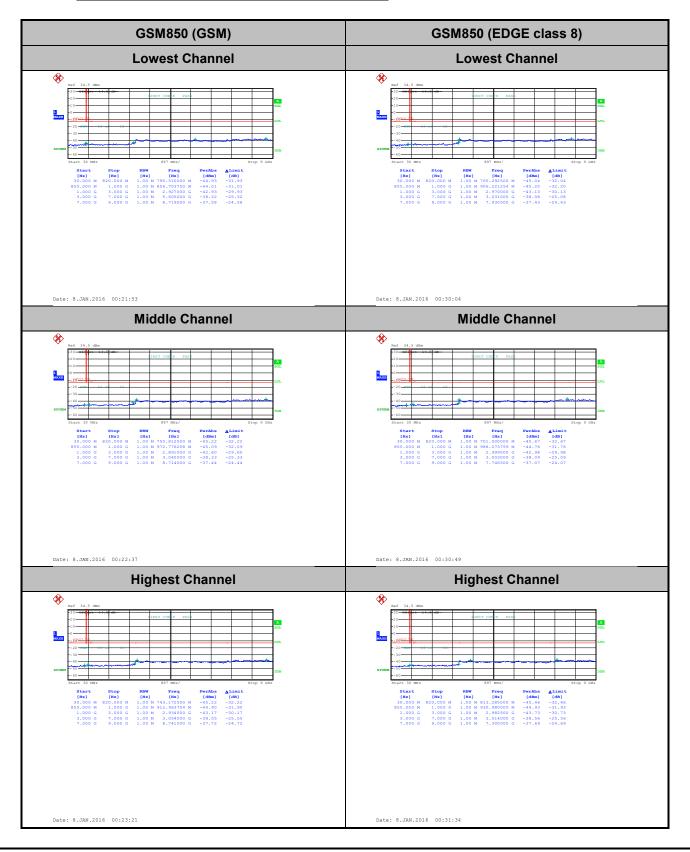


SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-22 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501


FCC RF Test Report

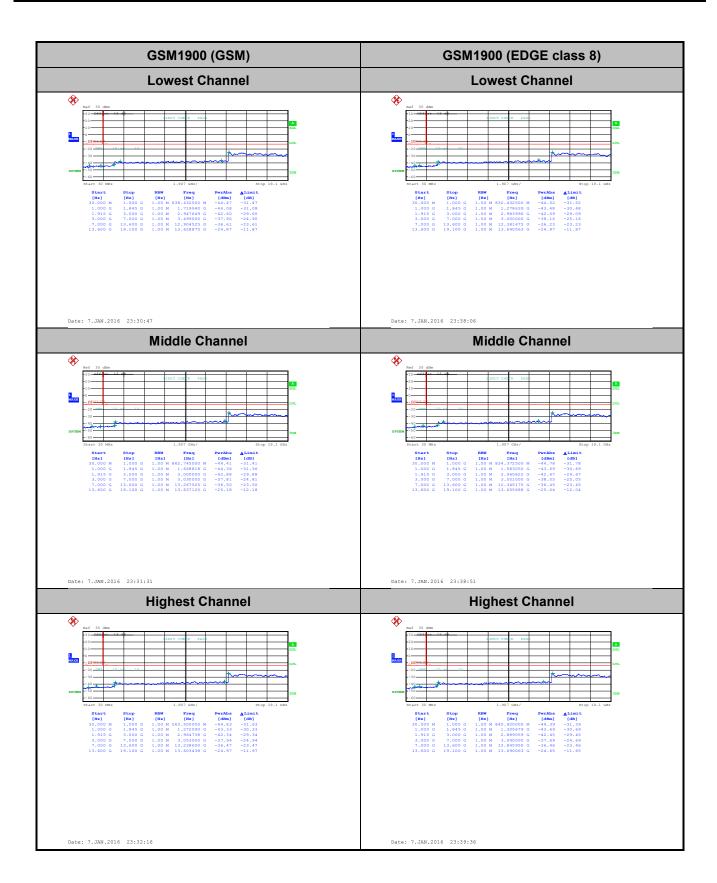

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-23 of 28 Report Issued Date: Jan. 26, 2016 Report Version : Rev. 01


Report No.: FG610501


FCC RF Test Report

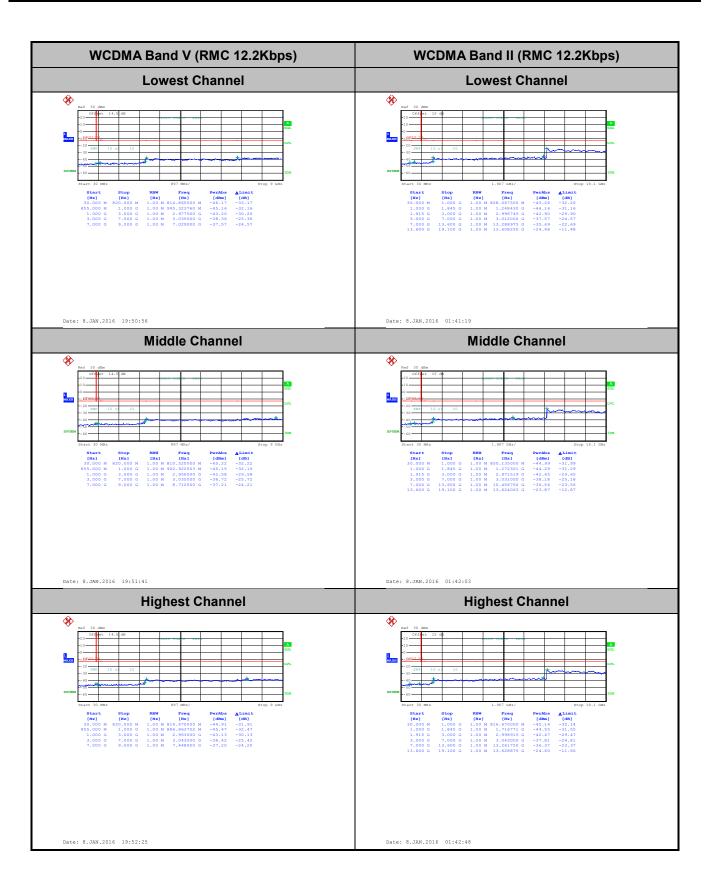

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-24 of 28 Report Issued Date: Jan. 26, 2016 Report Version : Rev. 01

Report No.: FG610501



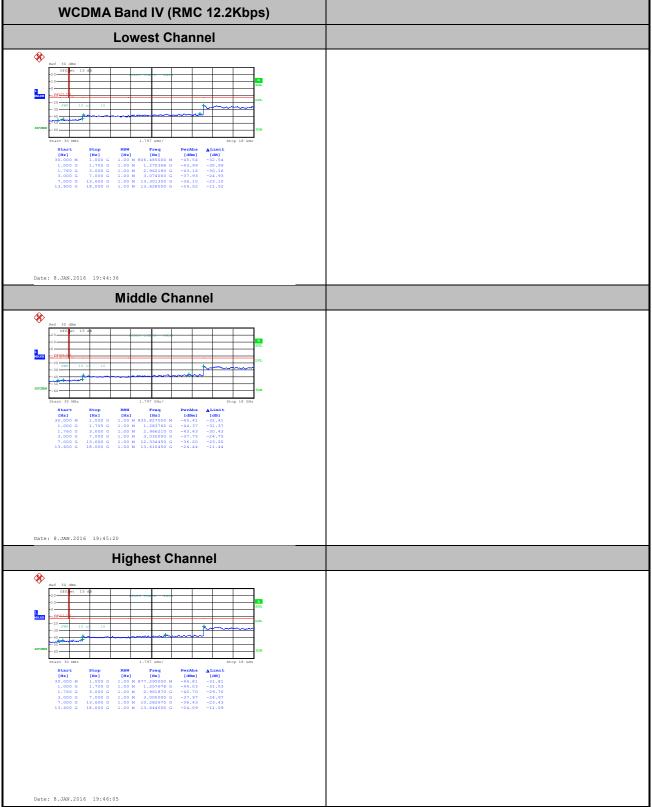

Page Number : A-25 of 28 Report Issued Date: Jan. 26, 2016 Report Version : Rev. 01

### Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviatio	n (ppm)	Result
50	Normal Voltage	0.0048	0.0024	
40	Normal Voltage	0.0454	0.0359	
30	Normal Voltage	0.0012	0.0012	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0036	0.0347	
0	Normal Voltage	0.0407	0.0359	
-10	Normal Voltage	0.0000	0.0036	PASS
-20	Normal Voltage	0.0036	0.0060	
-30	Normal Voltage	0.0478	0.0084	
20	Maximum Voltage	0.0012	0.0012	
20	Normal Voltage	0.0012	0.0012	
20	Battery End Point	0.0024	0.0036	

Note: Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.35 V

Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation	n (ppm)	Result
50	Normal Voltage	0.0090	0.0027	
40	Normal Voltage	0.0362	0.0250	
30	Normal Voltage	0.0005	0.0005	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0016	0.0245	
0	Normal Voltage	0.0346	0.0021	
-10	Normal Voltage	0.0367	0.0027	PASS
-20	Normal Voltage	0.0027	0.0043	
-30	Normal Voltage	0.0032	0.0271	
20	Maximum Voltage	0.0011	0.0011	
20	Normal Voltage	0.0000	0.0005	
20	Battery End Point	0.0372	0.0016	

#### Note:

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.35 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-26 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0239	
40	Normal Voltage	0.0227	
30	Normal Voltage	0.0203	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0191	
0	Normal Voltage	0.0215	
-10	Normal Voltage	0.0048	PASS
-20	Normal Voltage	0.0060	
-30	Normal Voltage	0.0227	
20	Maximum Voltage	0.0215	
20	Normal Voltage	0.0191	
20	Battery End Point	0.0203	

Note: Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.35 V

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0005	
40	Normal Voltage	0.0133	
30	Normal Voltage	0.0011	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0005	
0	Normal Voltage	0.0016	
-10	Normal Voltage	0.0149	PASS
-20	Normal Voltage	0.0011	
-30	Normal Voltage	0.0027	
20	Maximum Voltage	0.0005	
20	Normal Voltage	0.0005	
20	Battery End Point	0.0011	

#### Note:

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.35 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : A-27 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0173	
40	Normal Voltage	0.0156	
30	Normal Voltage	0.0162	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0012	
0	Normal Voltage	0.0167	
-10	Normal Voltage	0.0150	PASS
-20	Normal Voltage	0.0023	
-30	Normal Voltage	0.0035	
20	Maximum Voltage	0.0156	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0167	

#### Note:

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.35V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2

TEL: 86-755-8637-9589

Page Number : A-28 of 28
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

### **Appendix B. Test Results of Radiated Test**

### **ERP/EIRP**

Channel	Mode	Horiz	ontal	Vertical		
Channel	Mode	ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)	
Lowest	CCMOEO	26.71	0.4688	29.97	0.9931	
Middle	GSM850	27.59	0.5741	29.40	0.8710	
Highest	- GSM	26.54	0.4508	29.59	0.9099	
Lowest	GSM850	22.02	0.1592	25.02	0.3177	
Middle		23.55	0.2265	24.52	0.2831	
Highest	- EDGE class 8	21.80	0.1514	25.60	0.3631	
Lowest	MODAA Dand M	13.50	0.0224	21.18	0.1312	
Middle	WCDMA Band V RMC 12.2Kbps	14.00	0.0251	20.85	0.1216	
Highest		14.25	0.0266	20.82	0.1208	
Limit	ERP < 7W	Result		PASS		

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : B1 of B9
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report No.: FG610501

Channal	Mode	Horiz	ontal	Vertical		
Channel	Mode	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)	
Lowest	CCM4000	29.44	0.8790	31.62	1.4521	
Middle	GSM1900	29.08	0.8091	30.50	1.1220	
Highest	- GSM	28.80	0.7586	30.07	1.0162	
Lowest	GSM1900	24.13	0.2588	22.92	0.1959	
Middle		23.64	0.2312	22.52	0.1786	
Highest	EDGE class 8	23.58	0.2280	20.03	0.1007	
Lowest	WCDMA Dand II	19.08	0.0809	23.16	0.2070	
Middle	WCDMA Band II RMC 12.2Kbps	19.12	0.0817	22.17	0.1648	
Highest		18.14	0.0652	21.97	0.1574	
Limit	EIRP < 2W	Re	sult	PA	SS	

Channel	Mode	Horiz	ontal	Vertical		
	Wode	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)	
Lowest	WCDMA Dand IV	21.22	0.1324	21.37	0.1371	
Middle	WCDMA Band IV	21.78	0.1507	21.67	0.1469	
Highest	RMC 12.2Kbps	22.08	0.1614	22.83	0.1919	
Limit	EIRP < 1W	Result		PA	SS	

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : B2 of B9
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01
Report Template No.: BU5-FG22/24 Version 1.1

# Radiated Spurious Emission

				GSM8	50 (GSM)				
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
	1648.4	-53.62	-13	-40.62	-55.18	-60.31	0.56	9.40	Н
	2472.6	-41.30	-13	-28.30	-47.33	-49.00	0.75	10.60	Н
	3296.8	-52.63	-13	-39.63	-61.93	-62.23	0.85	12.60	Н
	4121	-48.18	-13	-35.18	-59.00	-57.74	0.89	12.60	Н
Lowoot	4945.2	-50.88	-13	-37.88	-64.30	-60.49	0.94	12.70	Н
Lowest	1648.4	-48.71	-13	-35.71	-52.90	-55.40	0.56	9.40	V
	2472.6	-38.81	-13	-25.81	-46.91	-46.51	0.75	10.60	V
	3296.8	-53.97	-13	-40.97	-60.83	-63.57	0.85	12.60	V
	4121	-46.19	-13	-33.19	-56.48	-55.75	0.89	12.60	V
	4945.2	-50.92	-13	-37.92	-62.91	-60.53	0.94	12.70	V
	1672	-46.27	-13	-33.27	-49.36	-52.96	0.56	9.40	Н
	2510	-34.66	-13	-21.66	-41.00	-42.36	0.75	10.60	Н
	3346	-50.55	-13	-37.55	-59.85	-60.15	0.85	12.60	Н
	4182	-49.12	-13	-36.12	-59.94	-58.68	0.89	12.60	Н
Middle	5018	-49.83	-13	-36.83	-63.25	-59.44	0.94	12.70	Н
Middle	1672	-48.00	-13	-35.00	-52.20	-54.69	0.56	9.40	V
	2510	-42.37	-13	-29.37	-49.80	-50.07	0.75	10.60	V
	3346	-54.03	-13	-41.03	-60.89	-63.63	0.85	12.60	V
	4182	-47.08	-13	-34.08	-57.37	-56.64	0.89	12.60	V
	5018	-52.12	-13	-39.12	-64.11	-61.73	0.94	12.70	V
	1697.6	-48.93	-13	-35.93	-51.65	-55.62	0.56	9.40	Н
	2546.4	-41.40	-13	-28.40	-47.41	-49.10	0.75	10.60	Н
	3395.2	-51.22	-13	-38.22	-60.52	-60.82	0.85	12.60	Н
	4244	-44.52	-13	-31.52	-55.36	-54.08	0.89	12.60	Н
l limbaat	5092.8	-50.76	-13	-37.76	-64.18	-60.37	0.94	12.70	Н
Highest	1697.6	-42.17	-13	-29.17	-47.56	-48.86	0.56	9.40	V
	2546.4	-42.33	-13	-29.33	-49.75	-50.03	0.75	10.60	V
	3395.2	-53.97	-13	-40.97	-60.83	-63.57	0.85	12.60	V
	4244	-46.25	-13	-33.25	-56.54	-55.81	0.89	12.60	V
	5092.8	-53.84	-13	-40.84	-65.83	-63.45	0.94	12.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : B3 of B9
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

GSM850 (EDGE class 8)											
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)		
	1648.4	-55.37	-13	-42.37	-56.98	-62.06	0.56	9.40	Н		
	2472.6	-41.25	-13	-28.25	-47.29	-48.95	0.75	10.60	Н		
	3296.8	-55.53	-13	-42.53	-64.83	-65.13	0.85	12.60	Н		
	4121	-49.03	-13	-36.03	-59.85	-58.59	0.89	12.60	Н		
Lowest	4945.2	-50.71	-13	-37.71	-64.13	-60.32	0.94	12.70	Н		
Lowest	1648.4	-49.29	-13	-36.29	-53.42	-55.98	0.56	9.40	V		
	2472.6	-42.83	-13	-29.83	-50.32	-50.53	0.75	10.60	V		
	3296.8	-56.16	-13	-43.16	-63.02	-65.76	0.85	12.60	V		
	4121	-48.72	-13	-35.72	-59.01	-58.28	0.89	12.60	V		
	4945.2	-54.38	-13	-41.38	-66.37	-63.99	0.94	12.70	V		
	1672	-54.68	-13	-41.68	-56.29	-61.37	0.56	9.40	Н		
	2510	-43.73	-13	-30.73	-49.47	-51.43	0.75	10.60	Н		
	3346	-57.15	-13	-44.15	-66.45	-66.75	0.85	12.60	Н		
	4182	-48.72	-13	-35.72	-59.54	-58.28	0.89	12.60	Н		
Middle	5018	-53.15	-13	-40.15	-66.57	-62.76	0.94	12.70	Н		
Middle	1672	-47.85	-13	-34.85	-52.12	-54.54	0.56	9.40	V		
	2510	-44.45	-13	-31.45	-51.58	-52.15	0.75	10.60	V		
	3346	-55.32	-13	-42.32	-62.18	-64.92	0.85	12.60	V		
	4182	-50.85	-13	-37.85	-61.14	-60.41	0.89	12.60	V		
	5018	-51.92	-13	-38.92	-63.91	-61.53	0.94	12.70	V		
	1697.6	-52.70	-13	-39.70	-54.27	-59.39	0.56	9.40	Н		
	2546.4	-45.89	-13	-32.89	-51.36	-53.59	0.75	10.60	Н		
	3395.2	-51.98	-13	-38.98	-61.28	-61.58	0.85	12.60	Н		
	4245.2	-48.98	-13	-35.98	-59.80	-58.54	0.89	12.60	Н		
l limb a at	5092.8	-50.05	-13	-37.05	-63.47	-59.66	0.94	12.70	Н		
Highest	1697.6	-46.46	-13	-33.46	-51.28	-53.15	0.56	9.40	V		
	2546.4	-45.08	-13	-32.08	-52.19	-52.78	0.75	10.60	V		
	3395.2	-53.35	-13	-40.35	-60.21	-62.95	0.85	12.60	V		
	4245.2	-45.00	-13	-32.00	-55.48	-54.56	0.89	12.60	V		
	5092.8	-53.51	-13	-40.51	-65.50	-63.12	0.94	12.70	V		

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : B4 of B9
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

	GSM1900 (GSM)											
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)			
	3700.4	-42.41	-13	-29.41	-53.66	-54.14	0.87	12.60	Н			
	5550.6	-36.79	-13	-23.79	-53.70	-48.82	1.07	13.10	Н			
	7400.8	-47.54	-13	-34.54	-65.86	-57.15	1.69	11.30	Н			
	9251	-36.53	-13	-23.53	-59.96	-46.60	1.83	11.90	Н			
Lowest	11101.2	-29.75	-13	-16.75	-54.73	-39.36	1.89	11.50	Н			
Lowest	3700.4	-41.30	-13	-28.30	-53.99	-53.03	0.87	12.60	V			
	5550.6	-34.13	-13	-21.13	-51.8	-46.16	1.07	13.10	V			
	7400.8	-46.59	-13	-33.59	-64.81	-56.20	1.69	11.30	V			
	9251	-36.56	-13	-23.56	-59.37	-46.63	1.83	11.90	V			
	11101.2	-36.52	-13	-23.52	-59.32	-46.13	1.89	11.50	V			
	3760	-45.23	-13	-32.23	-56.48	-56.96	0.87	12.60	Н			
	5640	-36.35	-13	-23.35	-53.19	-48.38	1.07	13.10	Н			
	7520	-46.95	-13	-33.95	-65.27	-56.56	1.69	11.30	Н			
	9400	-36.27	-13	-23.27	-59.70	-46.34	1.83	11.90	Н			
	11280	-33.11	-13	-20.11	-56.86	-42.72	1.89	11.50	Н			
Middle	13160	-43.80	-13	-30.80	-67.73	-55.47	1.93	13.60	Н			
Middle	3760	-45.63	-13	-32.63	-58.1	-57.36	0.87	12.60	V			
	5640	-34.51	-13	-21.51	-52.06	-46.54	1.07	13.10	V			
	7520	-42.73	-13	-29.73	-60.95	-52.34	1.69	11.30	V			
	9400	-34.00	-13	-21.00	-57.19	-44.07	1.83	11.90	V			
	11280	-38.68	-13	-25.68	-61.48	-48.29	1.89	11.50	V			
	13160	-43.95	-13	-30.95	-67.6	-55.62	1.93	13.60	V			
	3819.6	-47.20	-13	-34.20	-58.45	-58.93	0.87	12.60	Н			
	5729.4	-36.60	-13	-23.60	-53.48	-48.63	1.07	13.10	Н			
	7639.2	-44.35	-13	-31.35	-62.67	-53.96	1.69	11.30	Н			
	9549	-34.36	-13	-21.36	-58.08	-44.43	1.83	11.90	Н			
l limboot	11458.8	-36.90	-13	-23.90	-59.95	-46.51	1.89	11.50	Н			
Highest	3819.6	-49.71	-13	-36.71	-62.18	-61.44	0.87	12.60	V			
	5729.4	-33.68	-13	-20.68	-51.52	-45.71	1.07	13.10	V			
	7639.2	-42.20	-13	-29.20	-60.42	-51.81	1.69	11.30	V			
	9549	-32.08	-13	-19.08	-55.91	-42.15	1.83	11.90	V			
	11458.8	-38.73	-13	-25.73	-61.53	-48.34	1.89	11.50	V			

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : B5 of B9
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

	GSM1900 (EDGE class 8)											
Channel	Frequency (MHz)	EIRP (dBm)	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)			
	3700.4	-48.24	-13	-35.24	-59.49	-59.97	0.87	12.60	Н			
	5550.6	-39.16	-13	-26.16	-55.52	-51.19	1.07	13.10	Н			
Lowoot	7400.8	-49.91	-13	-36.91	-68.23	-59.52	1.69	11.30	Н			
Lowest	3700.4	-44.72	-13	-31.72	-57.19	-56.45	0.87	12.60	V			
	5550.6	-36.19	-13	-23.19	-53.49	-48.22	1.07	13.10	V			
	7400.8	-50.25	-13	-37.25	-68.47	-59.86	1.69	11.30	V			
	3760	-48.70	-13	-35.70	-59.95	-60.43	0.87	12.60	Н			
	5640	-40.63	-13	-27.63	-56.51	-52.66	1.07	13.10	Н			
Middle	7520	-50.13	-13	-37.13	-68.45	-59.74	1.69	11.30	Н			
Middle	3760	-50.07	-13	-37.07	-62.54	-61.80	0.87	12.60	V			
	5640	-37.79	-13	-24.79	-54.63	-49.82	1.07	13.10	V			
	7520	-50.22	-13	-37.22	-68.44	-59.83	1.69	11.30	V			
	3819.6	-48.64	-13	-35.64	-59.89	-60.37	0.87	12.60	Н			
	5729.4	-38.29	-13	-25.29	-54.76	-50.32	1.07	13.10	Н			
l liada a at	7639.2	-50.42	-13	-37.42	-68.74	-60.03	1.69	11.30	Н			
Highest	3819.6	-51.84	-13	-38.84	-64.31	-63.57	0.87	12.60	V			
	5729.4	-34.69	-13	-21.69	-52.18	-46.72	1.07	13.10	V			
	7639.2	-50.49	-13	-37.49	-68.71	-60.10	1.69	11.30	V			

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : B6 of B9
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

	WCDMA Band V(RMC 12.2Kbps)											
Channel	Frequency (MHz)	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)			
	1652.8	-58.20	-13	-45.20	-59.81	-64.89	0.56	9.40	Н			
	2479.2	-60.36	-13	-47.36	-64.26	-68.06	0.75	10.60	Н			
Lowoot	3305.6	-57.32	-13	-44.32	-66.62	-66.92	0.85	12.60	Н			
Lowest	1652.8	-55.01	-13	-42.01	-57.46	-61.70	0.56	9.40	V			
	2479.2	-60.24	-13	-47.24	-64.62	-67.94	0.75	10.60	V			
	3305.6	-59.97	-13	-46.97	-66.83	-69.57	0.85	12.60	V			
	1672	-57.21	-13	-44.21	-58.82	-63.90	0.56	9.40	Н			
	2510	-60.75	-13	-47.75	-64.65	-68.45	0.75	10.60	Н			
Middle	3346	-57.77	-13	-44.77	-67.07	-67.37	0.85	12.60	Н			
Middle	1672	-53.75	-13	-40.75	-56.72	-60.44	0.56	9.40	V			
	2510	-59.92	-13	-46.92	-64.30	-67.62	0.75	10.60	V			
	3346	-60.30	-13	-47.30	-67.16	-69.90	0.85	12.60	V			
	1693.2	-55.86	-13	-42.86	-57.47	-62.55	0.56	9.40	Н			
	2539.8	-59.89	-13	-46.89	-63.79	-67.59	0.75	10.60	Н			
Himbook	3386.4	-57.32	-13	-44.32	-66.62	-66.92	0.85	12.60	Н			
Highest	1693.2	-51.86	-13	-38.86	-55.18	-58.55	0.56	9.40	V			
	2539.8	-58.81	-13	-45.81	-63.19	-66.51	0.75	10.60	V			
	3386.4	-60.43	-13	-47.43	-67.29	-70.03	0.85	12.60	V			

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : B7 of B9
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

	WCDMA Band II(RMC 12.2Kbps)											
Channel	Frequency (MHz)	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)			
	3704.8	-45.80	-13	-32.80	-57.05	-57.53	0.87	12.60	Н			
	5557.2	-42.14	-13	-29.14	-58.02	-54.17	1.07	13.10	Н			
Lowest	7409.6	-49.87	-13	-36.87	-68.19	-59.48	1.69	11.30	Н			
Lowest	3704.8	-44.99	-13	-31.99	-57.46	-56.72	0.87	12.60	V			
	5557.2	-43.86	-13	-30.86	-60.18	-55.89	1.07	13.10	V			
	7409.6	-50.37	-13	-37.37	-68.59	-59.98	1.69	11.30	V			
	3760	-45.79	-13	-32.79	-57.04	-57.52	0.87	12.60	Н			
	5640	-44.47	-13	-31.47	-60.35	-56.50	1.07	13.10	Н			
Middle	7520	-50.24	-13	-37.24	-68.56	-59.85	1.69	11.30	Н			
Middle	3760	-44.04	-13	-31.04	-56.51	-55.77	0.87	12.60	V			
	5640	-46.23	-13	-33.23	-62.55	-58.26	1.07	13.10	V			
	7520	-50.07	-13	-37.07	-68.29	-59.68	1.69	11.30	V			
	3815.2	-44.94	-13	-31.94	-56.19	-56.67	0.87	12.60	Н			
	5722.8	-42.35	-13	-29.35	-58.23	-54.38	1.07	13.10	Н			
l limbac <sup>‡</sup>	7630.4	-49.88	-13	-36.88	-68.20	-59.49	1.69	11.30	Н			
Highest	3815.2	-42.56	-13	-29.56	-55.03	-54.29	0.87	12.60	V			
	5722.8	-43.39	-13	-30.39	-59.71	-55.42	1.07	13.10	V			
	7630.4	-50.06	-13	-37.06	-68.28	-59.67	1.69	11.30	V			

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : B8 of B9
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

	WCDMA Band IV(RMC 12.2Kbps)											
Channel	Frequency (MHz)	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)			
	3424.8	-50.28	-13	-37.28	-62.08	-62.03	0.85	12.60	Н			
	5137.2	-45.32	-13	-32.32	-61.19	-57.07	0.95	12.70	Н			
Lowest	6849.6	-52.32	-13	-39.32	-68.95	-62.84	1.18	11.70	Н			
Lowest	3424.8	-53.47	-13	-40.47	-63.7	-65.22	0.85	12.60	V			
	5137.2	-47.76	-13	-34.76	-60.36	-59.51	0.95	12.70	V			
	6849.6	-51.74	-13	-38.74	-68.92	-62.26	1.18	11.70	V			
	3465	-48.02	-13	-35.02	-59.82	-59.77	0.85	12.60	Н			
	5197.5	-43.93	-13	-30.93	-59.80	-55.68	0.95	12.70	Н			
Middle	6930	-51.38	-13	-38.38	-68.01	-61.90	1.18	11.70	Н			
Middle	3465	-50.41	-13	-37.41	-60.64	-62.16	0.85	12.60	V			
	5197.5	-44.81	-13	-31.81	-58.68	-56.56	0.95	12.70	V			
	6930	-50.88	-13	-37.88	-68.06	-61.40	1.18	11.70	V			
	3505.2	-49.01	-13	-36.01	-60.81	-60.76	0.85	12.60	Н			
	5257.8	-45.28	-13	-32.28	-61.15	-57.03	0.95	12.70	Н			
Himbook	7010.4	-51.58	-13	-38.58	-68.21	-62.10	1.18	11.70	Н			
Highest	3505.2	-50.59	-13	-37.59	-60.82	-62.34	0.85	12.60	V			
	5257.8	-49.63	-13	-36.63	-62.23	-61.38	0.95	12.70	V			
	7010.4	-50.27	-13	-37.27	-67.45	-60.79	1.18	11.70	V			

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUENERGYX2 Page Number : B9 of B9
Report Issued Date : Jan. 26, 2016
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1