


1. If use Micro SD connector ,mount R13/0 ohm to GND.
2. If use Normal SD connector ,don't mount R13/0 ohm and connect this trace to WP pin of Normal SD connector

This schematic is for reference only. Realtek Semiconductor Corp. makes no warranty for the use of its products and bears no responsibility for any error that appear in this document. This schematic is subject to change without notice.



## 6. Referencing Application Circuit

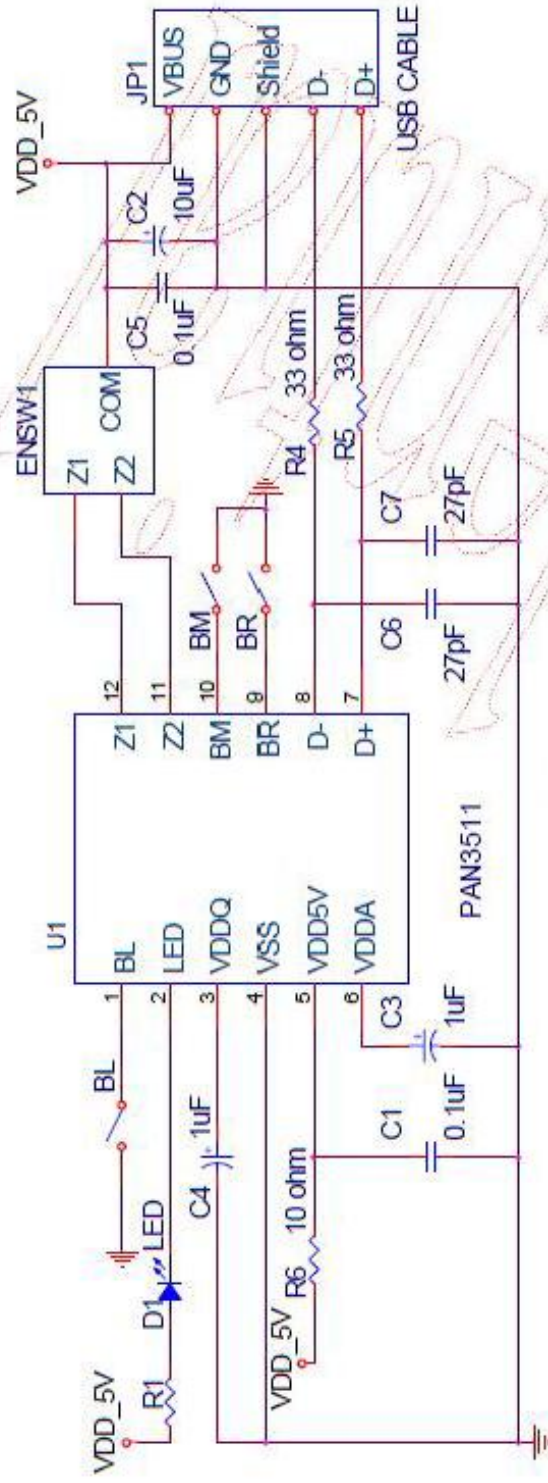

Note:

1. R4, R5, C6, C7 are for EMC immunity
2. USB cable connector JP1 is suggested to have the pin sequence like this:  
VBUS, GND, Shield, D-, D+

Figure 8. Application Circuit for PAN3511