

APPLICATION CERTIFICATION FCC Part 15C  
On Behalf of  
XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO., LTD

Massage Chair  
Model No.: EC-624C, OS-Pro Maxim

FCC ID: YMX-EC624C

Prepared for : XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO.,  
LTD  
Address : NO.168, QIANPU ROAD, SIMING DISTRICT, XIAMEN, FUJIAN,  
CHINA  
  
Prepared by : Shenzhen Accurate Technology Co., Ltd.  
Address : 1/F., Building A, Changyuan New Material Port, Science & Industry  
Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report No. : ATE20161133 002  
Date of Test : December 5, 2017  
Date of Report of Rev. 1 : July 11, 2016  
Date of Report of Rev. 2 : December 7, 2017

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Carrier Frequency of Channels .....	5
1.3. Special Accessory and Auxiliary Equipment .....	5
1.4. Description of Test Facility .....	6
1.5. Measurement Uncertainty .....	6
<b>2. DESCRIPTION OF VERSION.....</b>	<b>7</b>
<b>3. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>8</b>
<b>4. OPERATION OF EUT DURING TESTING .....</b>	<b>9</b>
4.1. Operating Mode .....	9
4.2. Configuration and peripherals .....	9
<b>5. TEST PROCEDURES AND RESULTS .....</b>	<b>10</b>
<b>6. POWER LINE CONDUCTED MEASUREMENT .....</b>	<b>11</b>
6.1. Block Diagram of Test Setup.....	11
6.2. Power Line Conducted Emission Measurement Limits.....	11
6.3. Configuration of EUT on Measurement .....	11
6.4. Operating Condition of EUT .....	11
6.5. Test Procedure .....	12
6.6. Power Line Conducted Emission Measurement Results .....	12
<b>7. RADIATED SPURIOUS EMISSION TEST .....</b>	<b>16</b>
7.1. Block Diagram of Test Setup.....	16
7.2. The Limit For Section 15.247(d) .....	17
7.3. Restricted bands of operation .....	18
7.4. Configuration of EUT on Measurement .....	18
7.5. Operating Condition of EUT .....	18
7.6. Test Procedure .....	19
7.7. The Field Strength of Radiation Emission Measurement Results .....	19

## Test Report Certification

Applicant : XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO., LTD  
Manufacturer : XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO., LTD  
EUT Description : Massage Chair  
Model No. : EC-624C, OS-Pro Maxim  
Trade Mark : N/A

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247: 2017**  
**ANSI C63.10: 2013**

The EUT was tested according to DTS test procedure of Apr 05, 2017 KDB558074 D01 DTS Meas Guidance v04 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test :	December 5, 2017
Date of Report of Rev. 1:	July 11, 2016
Date of Report of Rev. 2:	December 7, 2017

Prepared by :

Bob Wang  
  
(Bob Wang, Engineer)

Approved & Authorized Signer :

  
(Sean Liu, Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	:	Massage Chair
Model Number	:	EC-624C, OS-Pro Maxim
		(Note: These samples are same except for the screen size is different for the marketing requirement. So we prepare the EC-624C for test.)
Bluetooth version	:	Bluetooth V4.0 BLE
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	40
Antenna Gain	:	1dBi
Antenna type	:	PCB Antenna
Power Supply	:	AC 110-120V; 60Hz
Modulation mode	:	GFSK
Applicant	:	XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO., LTD
Address	:	NO.168, QIANPU ROAD, SIMING DISTRICT, XIAMEN, FUJIAN, CHINA
Manufacturer	:	XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO., LTD
Address	:	NO.168, QIANPU ROAD, SIMING DISTRICT, XIAMEN, FUJIAN, CHINA
Date of sample received	:	December 2, 2017
Date of Test	:	December 5, 2017

## 1.2.Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

## 1.3.Special Accessory and Auxiliary Equipment

N/A

#### 1.4. Description of Test Facility

EMC Lab	:	Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358  Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2  Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193  Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	:	Shenzhen Accurate Technology Co., Ltd.
Site Location	:	1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

#### 1.5. Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2


## 2. DESCRIPTION OF VERSION

Edition No.	Date of Rev.	Summary	Report No.
REV.1	July 11, 2016	Original Report	ATE20161133
REV.2	December 7, 2017	Replace motherboard	ATE20161133 002


Remark for Rev. 2

1. This report is an additional version with original report number ATE20161133. The different with original report please see the above table of REV.2.
2. Compared with the original report ATE20161133, sample of the new provision is exactly the same as the old one. Through evaluation of the above difference, Conducted Emission and Radiated emission (Below 1GHz) is need to retest, portion test data and test pictures would refer to ATE20161133.
3. This report is based on report of ATE20161133.
4. For testing items not reflected in this report, Please refer to the original report.

Original motherboard

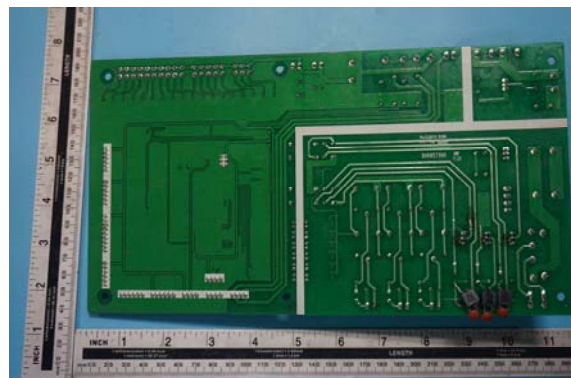

Replace motherboard

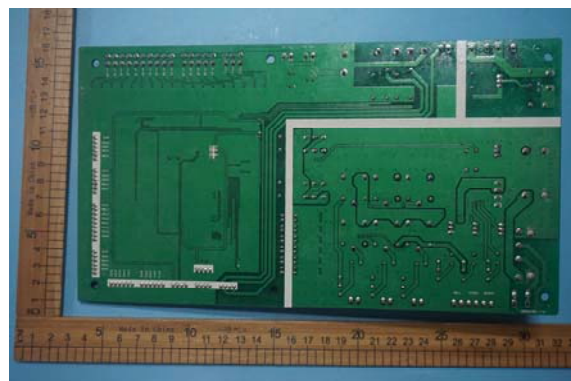

Note: The circuits and software programs of two motherboards are differently.

### 3. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 7, 2017	1 Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 7, 2017	1 Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 7, 2017	1 Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 7, 2017	1 Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 13, 2017	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 13, 2017	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 13, 2017	1 Year
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 13, 2017	1 Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 7, 2017	1 Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 7, 2017	1 Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 7, 2017	1 Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 7, 2017	1 Year



## 4. OPERATION OF EUT DURING TESTING

### 4.1.Operating Mode


The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

### 4.2.Configuration and peripherals

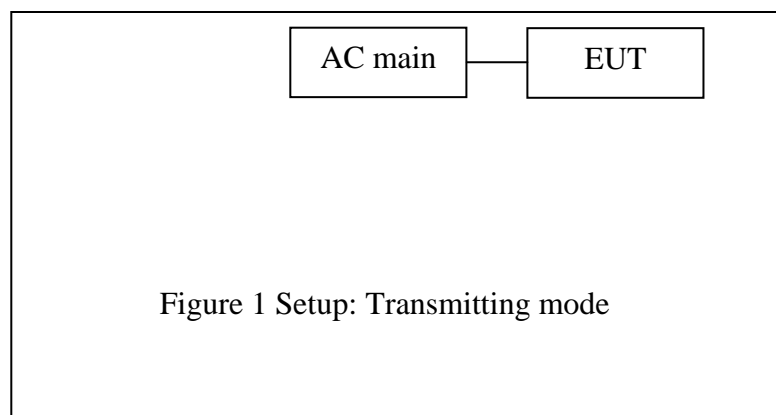


## 5. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	refer to the original report
Section 15.247(e)	Power Spectral Density Test	refer to the original report
Section 15.247(b)(3)	Maximum Peak Output Power Test	refer to the original report
Section 15.247(d)	Band Edge Compliance Test	refer to the original report
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	refer to the original report(Above 1GHz test data)
Section 15.247(d)	Conducted Spurious Emission Test	refer to the original report
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	refer to the original report

## 6. POWER LINE CONDUCTED MEASUREMENT

### 6.1. Block Diagram of Test Setup

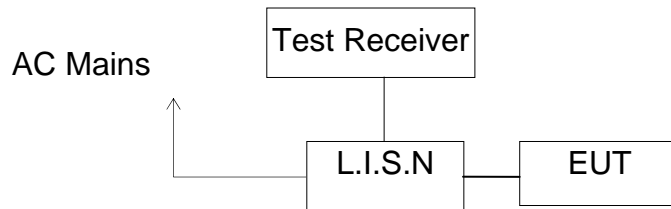

(EUT: Massage Chair)

### 6.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.  
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 6.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 5.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in test mode and measure it.

### 6.5. Test Procedure

The EUT is put on the plane 0.1 m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2014 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 6.6. Power Line Conducted Emission Measurement Results

**PASS.**

The frequency range from 150kHz to 30MHz is checked.

Test mode : BT communicating(AC 120V/60Hz)  
EUT mode : EC-624C

**MEASUREMENT RESULT: "2274-02\_fin"**

2017-12-5 18:13

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	56.90	10.8	66	9.1	QP	L1	GND
0.775500	35.80	11.1	56	20.2	QP	L1	GND
1.113000	32.30	11.2	56	23.7	QP	L1	GND
3.138000	28.00	11.3	56	28.0	QP	L1	GND
10.878000	29.50	11.6	60	30.5	QP	L1	GND
12.417000	28.60	11.6	60	31.4	QP	L1	GND

**MEASUREMENT RESULT: "2274-02\_fin2"**

2017-12-5 18:13

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.181500	41.90	10.8	54	12.5	AV	L1	GND
0.775500	31.90	11.1	46	14.1	AV	L1	GND
1.369500	28.30	11.2	46	17.7	AV	L1	GND
2.107500	22.90	11.3	46	23.1	AV	L1	GND
10.684500	21.00	11.6	50	29.0	AV	L1	GND
12.304500	20.70	11.6	50	29.3	AV	L1	GND

**MEASUREMENT RESULT: "2274-01\_fin"**

2017-12-5 18:09

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	56.90	10.8	66	9.1	QP	N	GND
0.681000	30.00	11.1	56	26.0	QP	N	GND
1.324500	32.60	11.2	56	23.4	QP	N	GND
2.206500	27.50	11.3	56	28.5	QP	N	GND
10.864500	29.10	11.6	60	30.9	QP	N	GND
12.880500	27.90	11.6	60	32.1	QP	N	GND

**MEASUREMENT RESULT: "2274-01\_fin2"**

2017-12-5 18:09

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.181500	41.80	10.8	54	12.6	AV	N	GND
0.775500	31.70	11.1	46	14.3	AV	N	GND
1.338000	27.30	11.2	46	18.7	AV	N	GND
2.080500	22.90	11.3	46	23.1	AV	N	GND
10.716000	18.50	11.6	50	31.5	AV	N	GND
16.026000	19.30	11.7	50	30.7	AV	N	GND

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

## CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Massage Chair M/N:EC-624C  
 Manufacturer: COMFORT  
 Operating Condition: BT communicating  
 Test Site: 1#Shielding Room  
 Operator: star  
 Test Specification: L 120V/60Hz  
 Comment: Report NO.:ATE20161133 002  
 Start of Test: 2017-12-5 / 18:10:50

### SCAN TABLE: "V 150K-30MHZ fin"

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

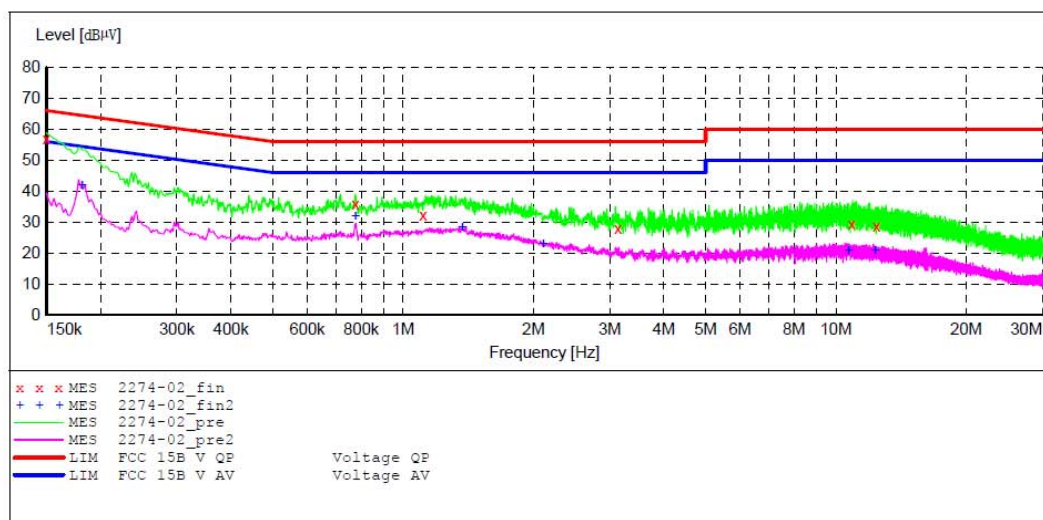

### MEASUREMENT RESULT: "2274-02\_fin"

2017-12-5 18:13

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	56.90	10.8	66	9.1	QP	L1	GND
0.775500	35.80	11.1	56	20.2	QP	L1	GND
1.113000	32.30	11.2	56	23.7	QP	L1	GND
3.138000	28.00	11.3	56	28.0	QP	L1	GND
10.878000	29.50	11.6	60	30.5	QP	L1	GND
12.417000	28.60	11.6	60	31.4	QP	L1	GND

### MEASUREMENT RESULT: "2274-02\_fin2"

2017-12-5 18:13

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.181500	41.90	10.8	54	12.5	AV	L1	GND
0.775500	31.90	11.1	46	14.1	AV	L1	GND
1.369500	28.30	11.2	46	17.7	AV	L1	GND
2.107500	22.90	11.3	46	23.1	AV	L1	GND
10.684500	21.00	11.6	50	29.0	AV	L1	GND
12.304500	20.70	11.6	50	29.3	AV	L1	GND


## ACCURATE TECHNOLOGY CO., LTD

### CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Massage Chair M/N:EC-624C  
 Manufacturer: COMFORT  
 Operating Condition: BT communicating  
 Test Site: 1#Shielding Room  
 Operator: star  
 Test Specification: N 120V/60Hz  
 Comment: Report NO.:ATE20161133 002  
 Start of Test: 2017-12-5 / 18:06:31

### SCAN TABLE: "V 150K-30MHz fin"

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

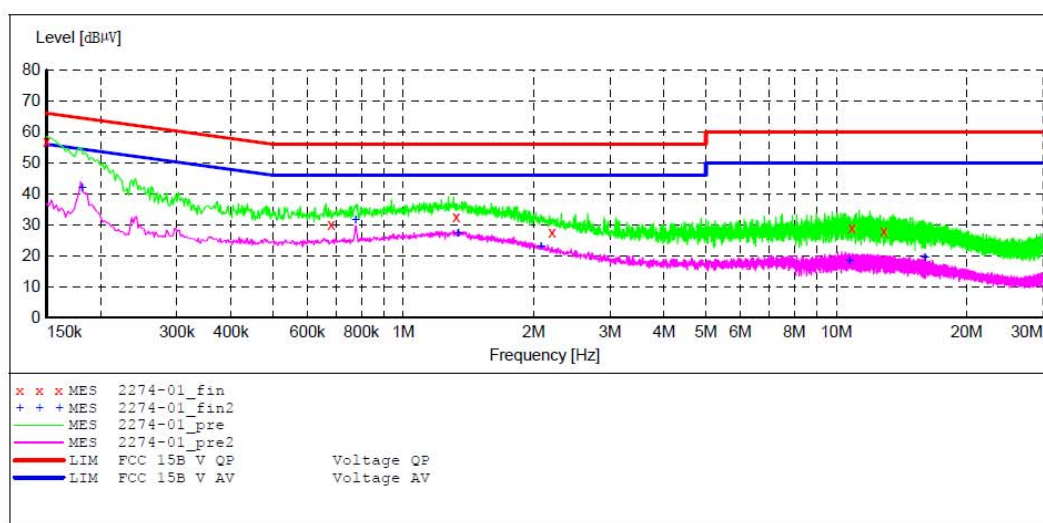

### MEASUREMENT RESULT: "2274-01\_fin"

2017-12-5 18:09

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	56.90	10.8	66	9.1	QP	N	GND
0.681000	30.00	11.1	56	26.0	QP	N	GND
1.324500	32.60	11.2	56	23.4	QP	N	GND
2.206500	27.50	11.3	56	28.5	QP	N	GND
10.864500	29.10	11.6	60	30.9	QP	N	GND
12.880500	27.90	11.6	60	32.1	QP	N	GND

### MEASUREMENT RESULT: "2274-01\_fin2"

2017-12-5 18:09


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.181500	41.80	10.8	54	12.6	AV	N	GND
0.775500	31.70	11.1	46	14.3	AV	N	GND
1.338000	27.30	11.2	46	18.7	AV	N	GND
2.080500	22.90	11.3	46	23.1	AV	N	GND
10.716000	18.50	11.6	50	31.5	AV	N	GND
16.026000	19.30	11.7	50	30.7	AV	N	GND



## 7. RADIATED SPURIOUS EMISSION TEST


### 7.1. Block Diagram of Test Setup

#### 7.1.1. Block diagram of connection between the EUT and peripherals

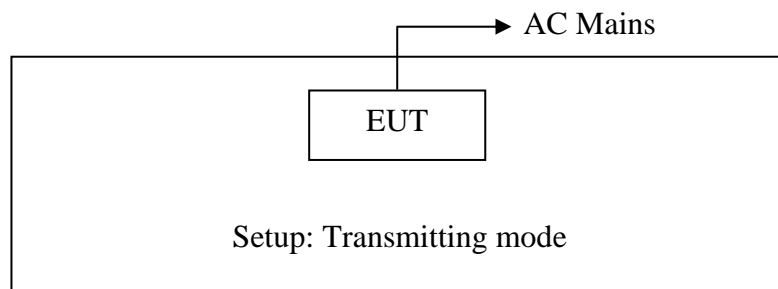


#### 7.1.2. Semi-Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test Set-Up, Frequency below 30MHz

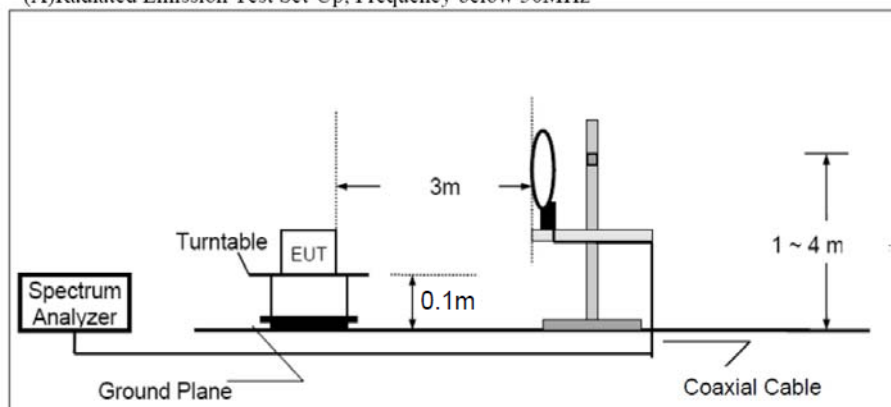


(B) Radiated Emission Test Set-Up, Frequency 30MHz-1GHz

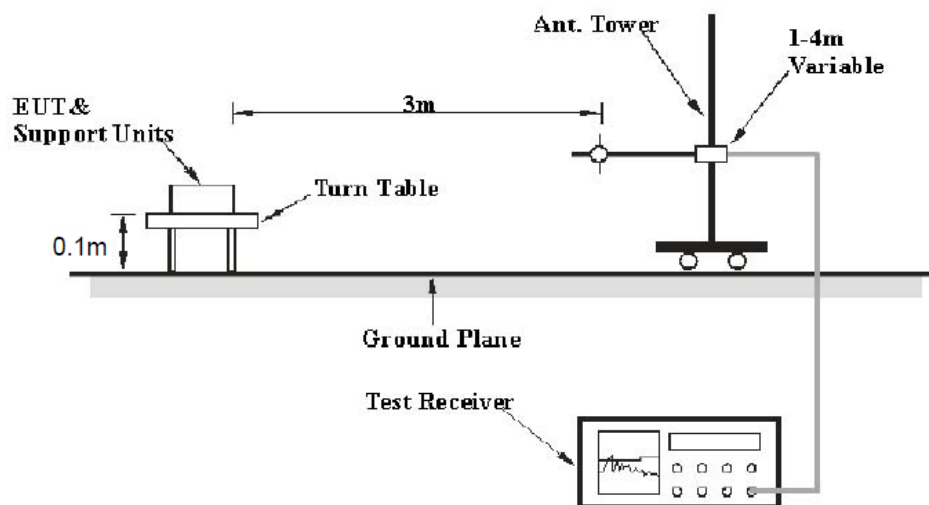



(C) Radiated Emission Test Set-Up, Frequency above 1GHz

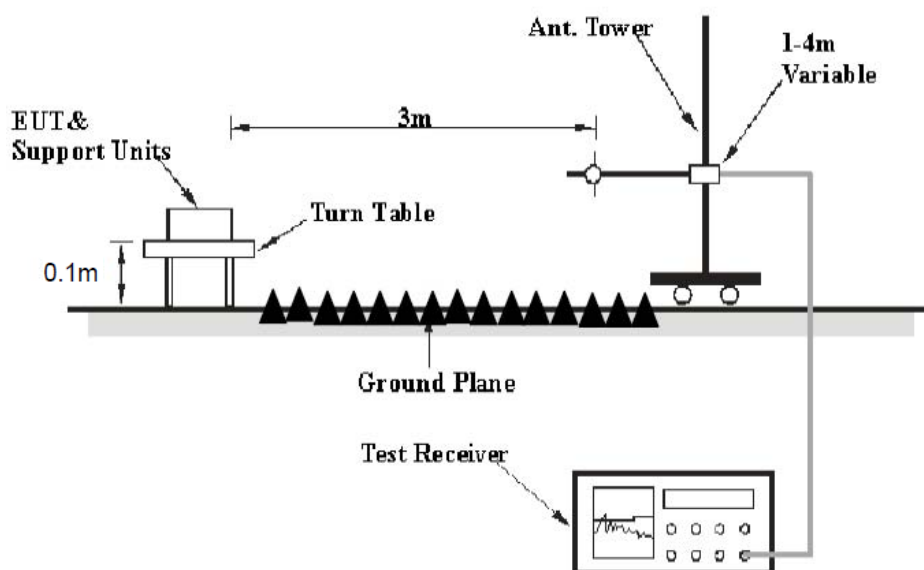

## 7.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 7.3.Restricted bands of operation

#### 7.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510

<sup>2</sup>Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 7.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 7.5.Operating Condition of EUT

7.5.1.Setup the EUT and simulator as shown as Section 10.1.

7.5.2.Turn on the power of all equipment.

7.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

## 7.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.1 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 0.1 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

## 7.7. The Field Strength of Radiation Emission Measurement Results

PASS.

**Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**

**2. \*: Denotes restricted band of operation.**

**3. The radiation emissions from 9kHz-30MHz and 18-26.5GHz are not reported, because the test values lower than the limits of 20dB.**

**4. Above 1GHz test data please refer to the original report.**



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #360

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Massage Chair

Mode: TX 2402MHz

Model: EC-624C

Manufacturer: COMFORT

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 17/12/05/

Time: 19/48/25

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20161133 002

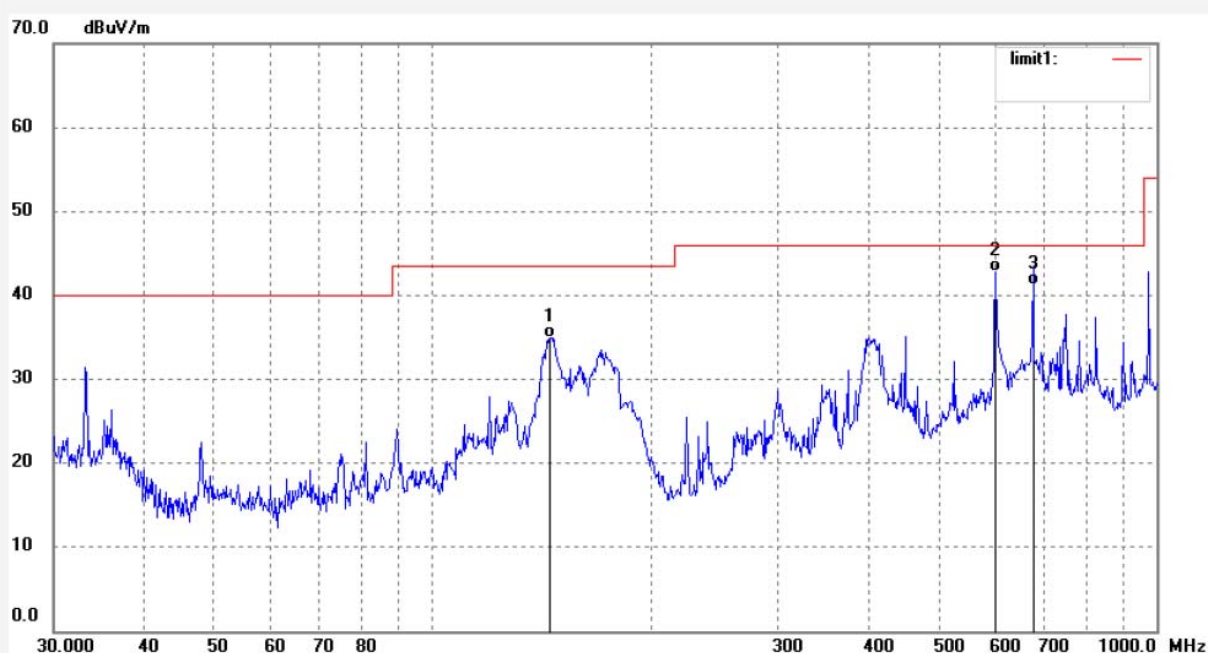

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	145.3506	50.19	-15.23	34.96	43.50	-8.54	QP			
2	599.3212	45.82	-2.97	42.85	46.00	-3.15	QP			
3	675.2080	43.25	-2.07	41.18	46.00	-4.82	QP			

Job No.: DING #361

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Massage Chair

Mode: TX 2402MHz

Model: EC-624C

Manufacturer: COMFORT

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 17/12/05/

Time: 19/50/29

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20161133 002

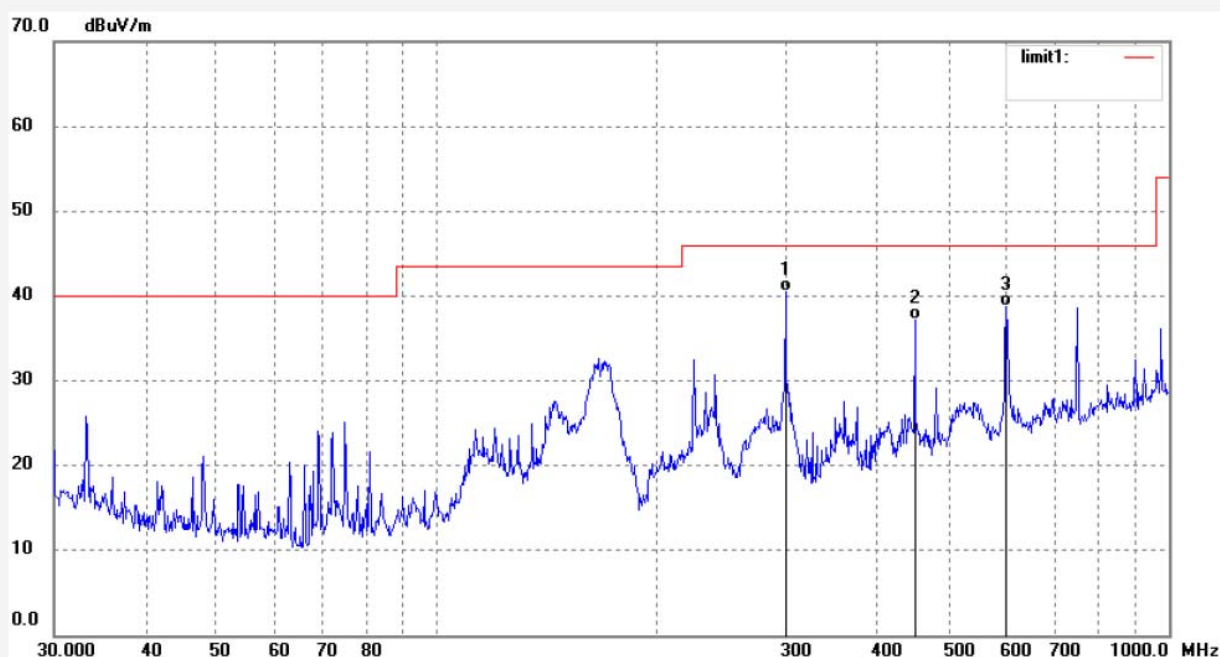

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	299.3158	49.77	-9.29	40.48	46.00	-5.52	QP			
2	449.5558	42.99	-5.78	37.21	46.00	-8.79	QP			
3	599.3212	41.65	-2.97	38.68	46.00	-7.32	QP			



Job No.: DING #362

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Massage Chair

Mode: TX 2440MHz

Model: EC-624C

Manufacturer: COMFORT

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 17/12/05/

Time: 19/51/41

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20161133 002

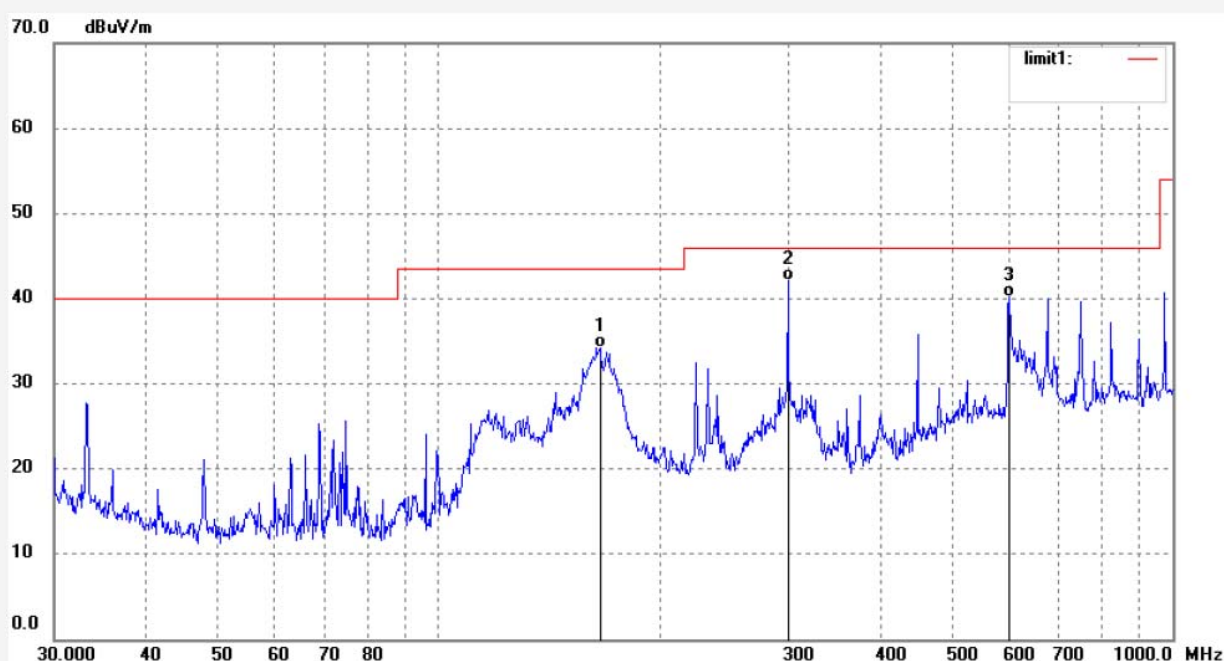

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	166.0680	48.58	-14.30	34.28	43.50	-9.22	QP			
2	299.3158	51.40	-9.29	42.11	46.00	-3.89	QP			
3	599.3212	43.08	-2.97	40.11	46.00	-5.89	QP			



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #363

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Massage Chair

Mode: TX 2440MHz

Model: EC-624C

Manufacturer: COMFORT

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 17/12/05/

Time: 19/53/16

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20161133 002

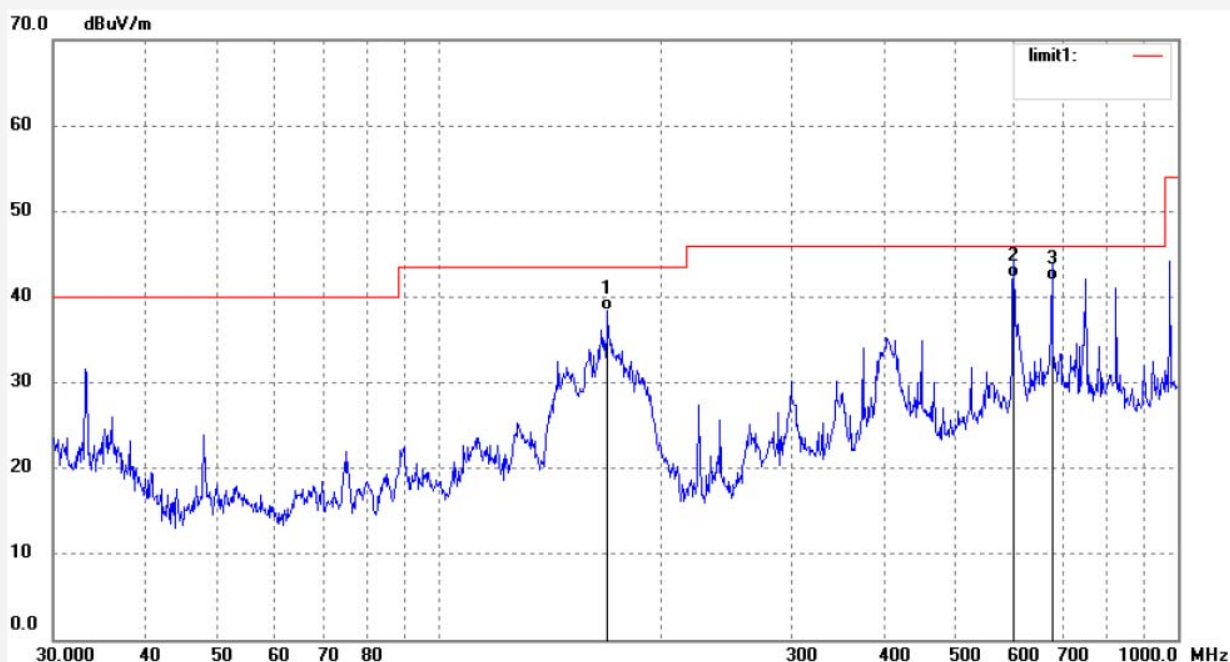

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	169.0054	52.29	-13.84	38.45	43.50	-5.05	QP			
2	599.3212	45.21	-2.97	42.24	46.00	-3.76	QP			
3	675.2080	43.96	-2.07	41.89	46.00	-4.11	QP			



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #364

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Massage Chair

Mode: TX 2480MHz

Model: EC-624C

Manufacturer: COMFORT

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 17/12/05/

Time: 19/55/26

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20161133 002

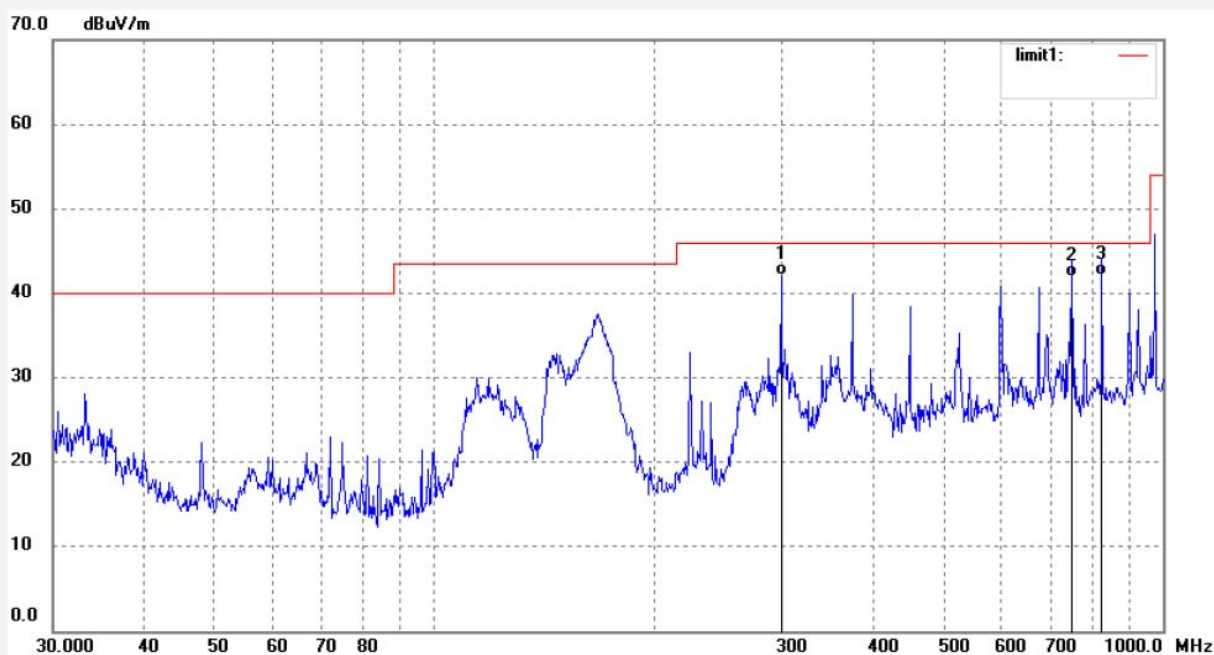

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	299.3158	51.42	-9.29	42.13	46.00	-3.87	QP			
2	750.1083	42.96	-1.03	41.93	46.00	-4.07	QP			
3	824.5968	41.68	0.42	42.10	46.00	-3.90	QP			





## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #365

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Massage Chair

Mode: TX 2480MHz

Model: EC-624C

Manufacturer: COMFORT

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 17/12/05/

Time: 19/56/36

Engineer Signature: Ding

Distance: 3m

Note: Report NO.:ATE20161133 002

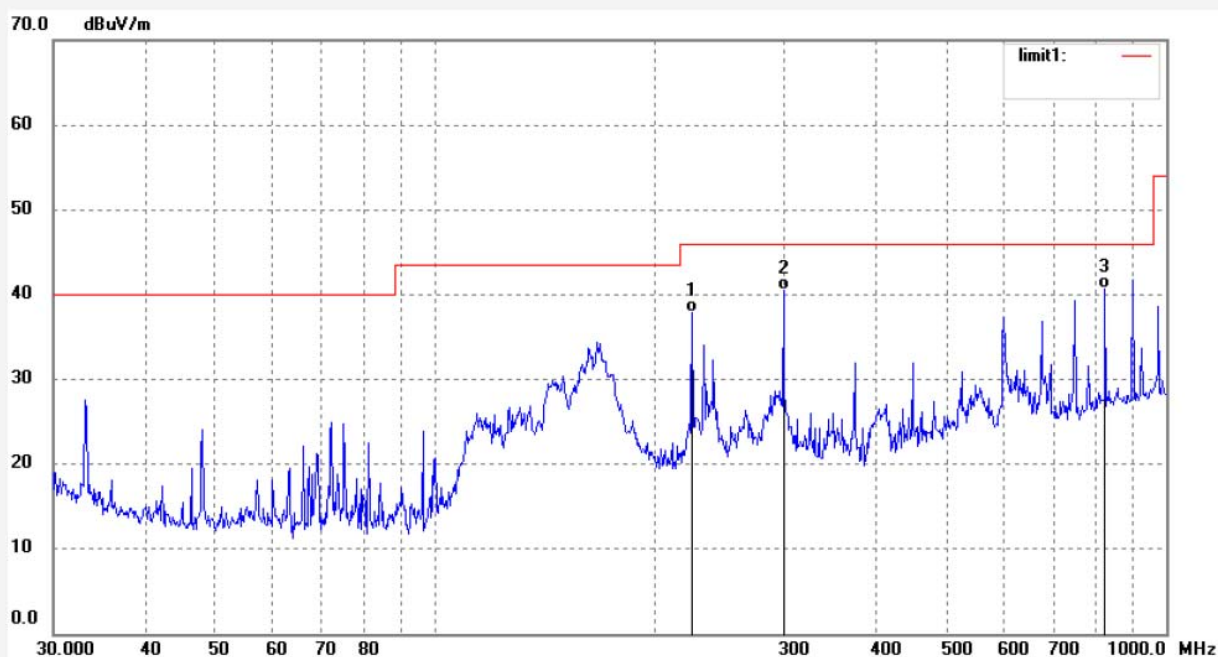

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	224.5193	49.32	-11.46	37.86	46.00	-8.14	QP			
2	299.3158	49.72	-9.29	40.43	46.00	-5.57	QP			
3	824.5968	40.27	0.42	40.69	46.00	-5.31	QP			

----- THE END OF TEST REPORT -----