




Model	G02	V1.0.0
Title	1-RF	1 of 11
DRAWN		2010-7-7

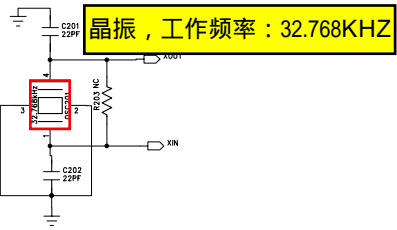


TESTMODE,XBOOT,FSOURCE,SECU_EN?低?平。VCCQ接VDD。系??于正常模式。

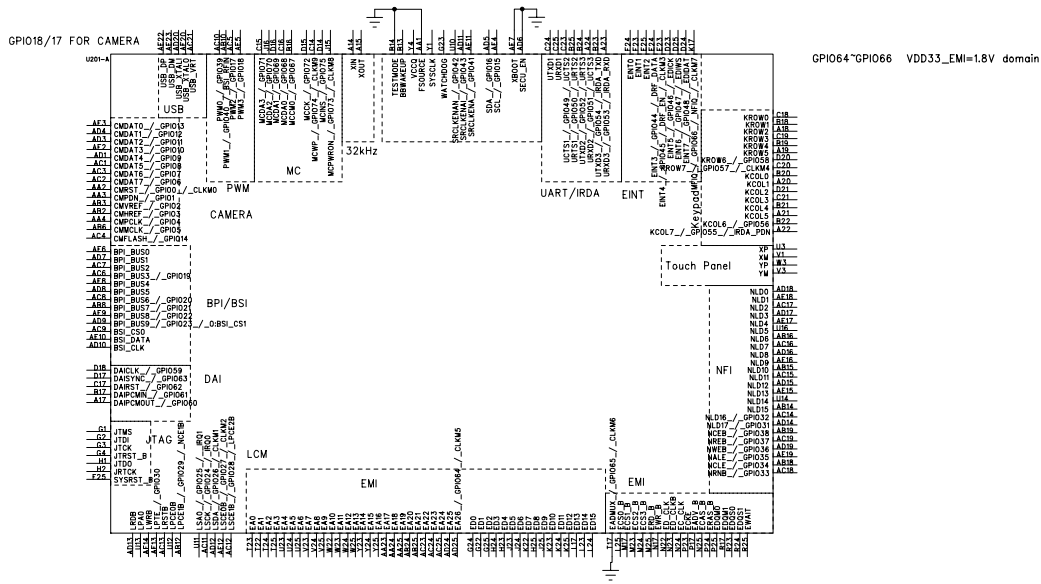


Model	G02	V1.0.0
Title	2-WT6235_BB	2 of 11
DRAWN	2010-7-7	

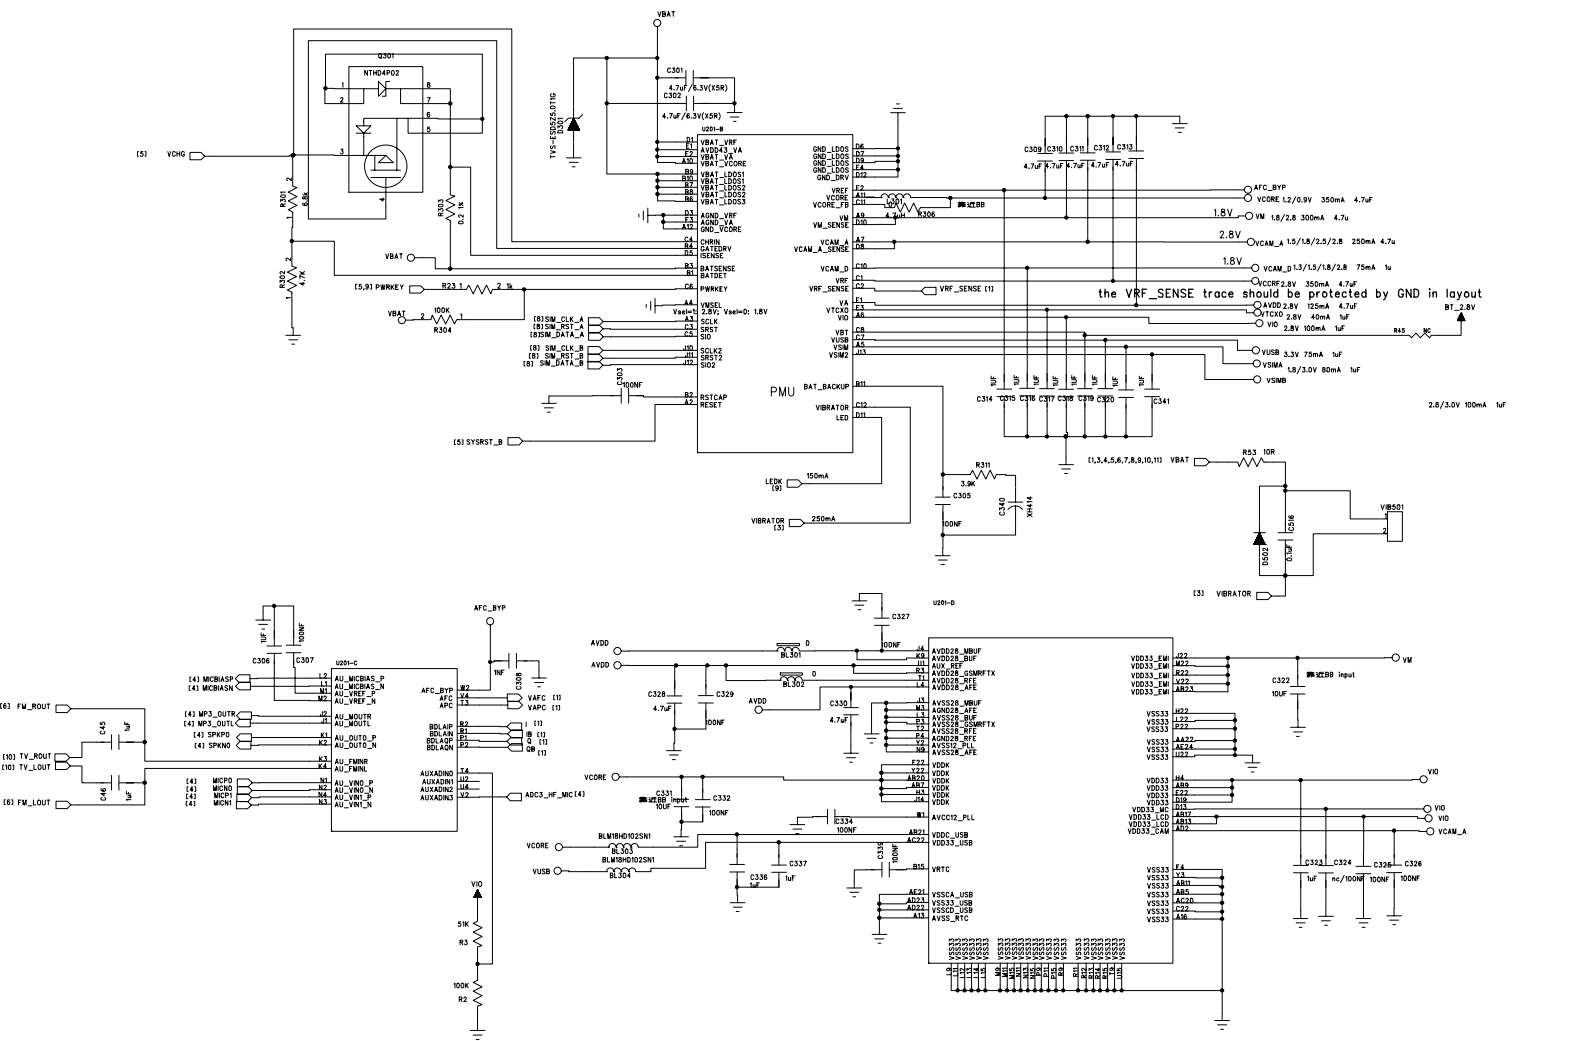



Model	G02	V1.0.0
Title	3-WT6235_PMU	3 of 11
DRAWN		2010-7-7

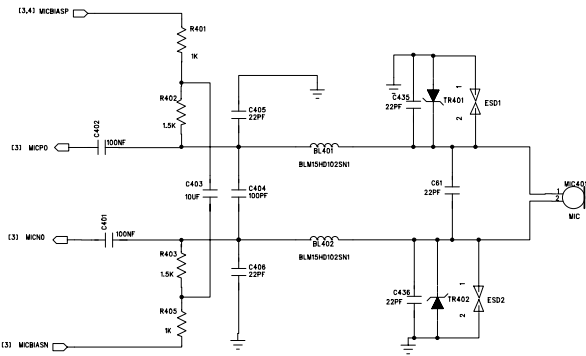


NORMAL MODE SPEECH

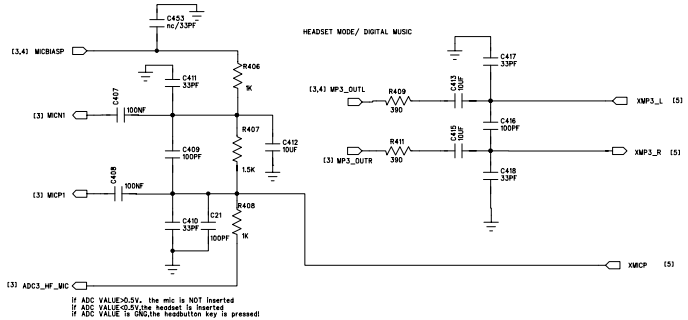



RECEIVER

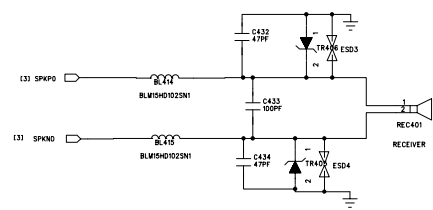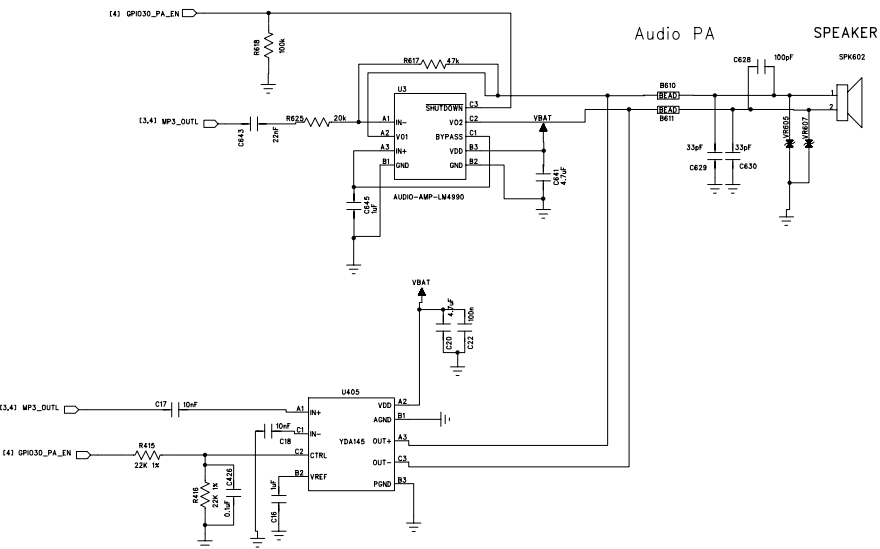



Model	G02	V1.0.0
Title	4-AUDIO	4 of 11
DRAWN		2010-7-7

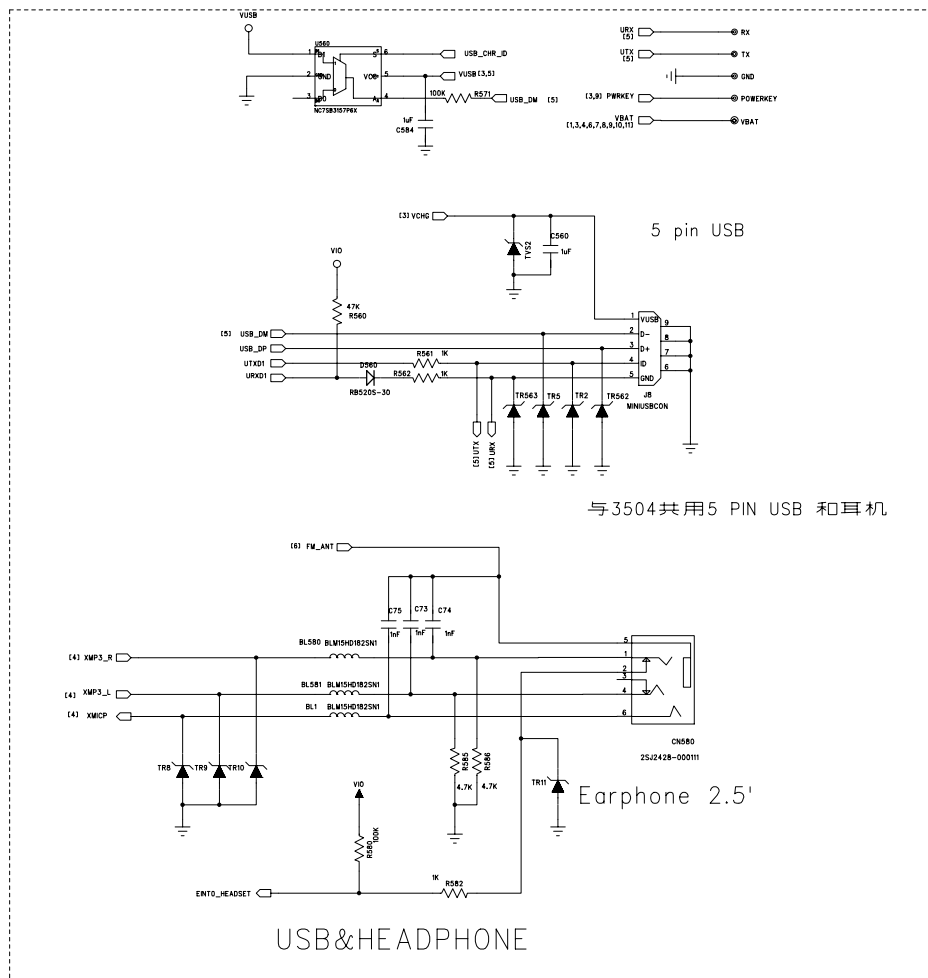

Model	G02	V1.0.0
Title	5-MEMORY/IO	5 of 11
DRAWN	2010-7-7	

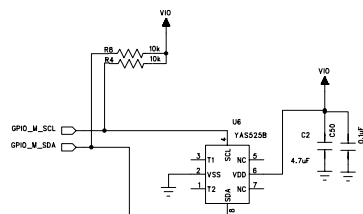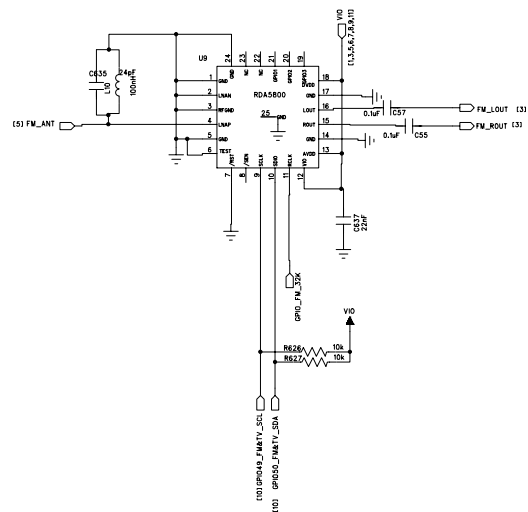

Model	G02 V1.0.0
Title	6-BT/FM/G-SENSOR/G-SENSOR
DRAWN	2010-7-7

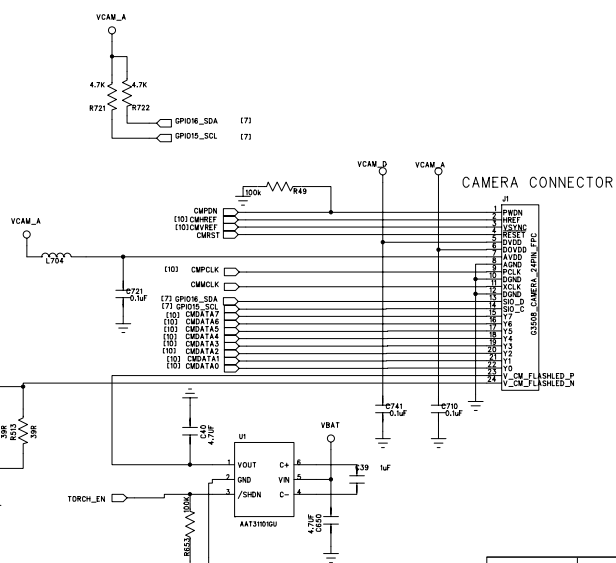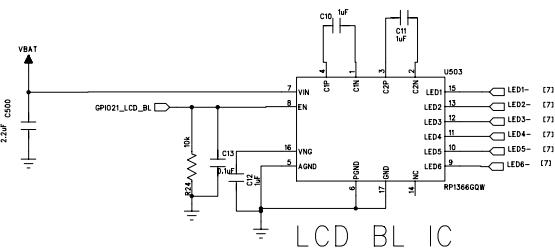


Model	G02	V1.0.0
Title	7-LCM/CAMERA	7 of 11
DRAWN	2010-7-7	




Model	G02	V1.0.0
Title	8-DUAL-SIM/T-FLASH/BATTERY-CON	
DRAWN	2010-7-7	

A1174 can be replaced by AN48840B on soldering method
PCB pad have compatible design for AN48840B with A1174
AN48840B's pin4 solder on A1174's pin1
AN48840B's pin5 solder on A1174's pin3

Track Ball

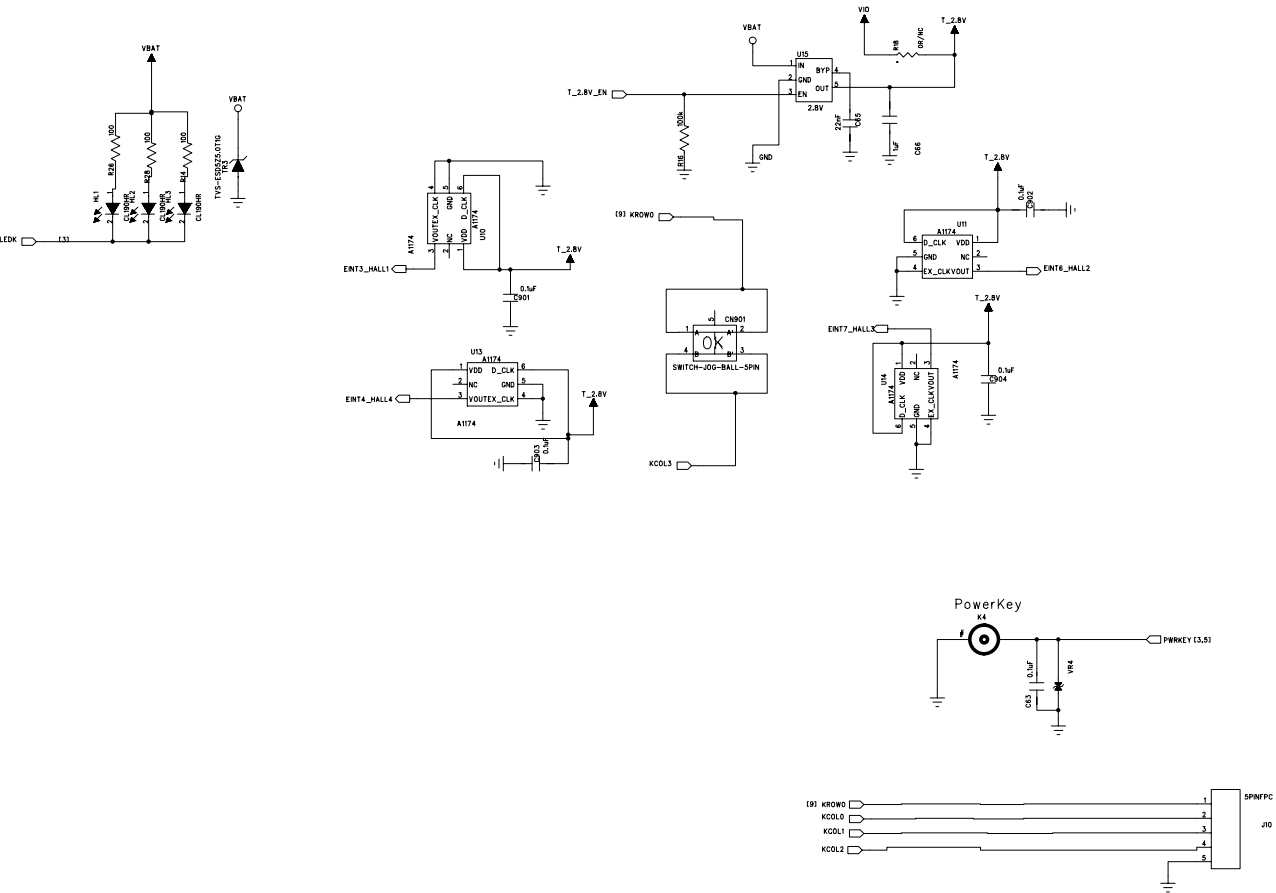

Model	G02 V1.0.0
Title	9-KEY/TRACKBALL 9 of 11
DRAWN	2010-7-7

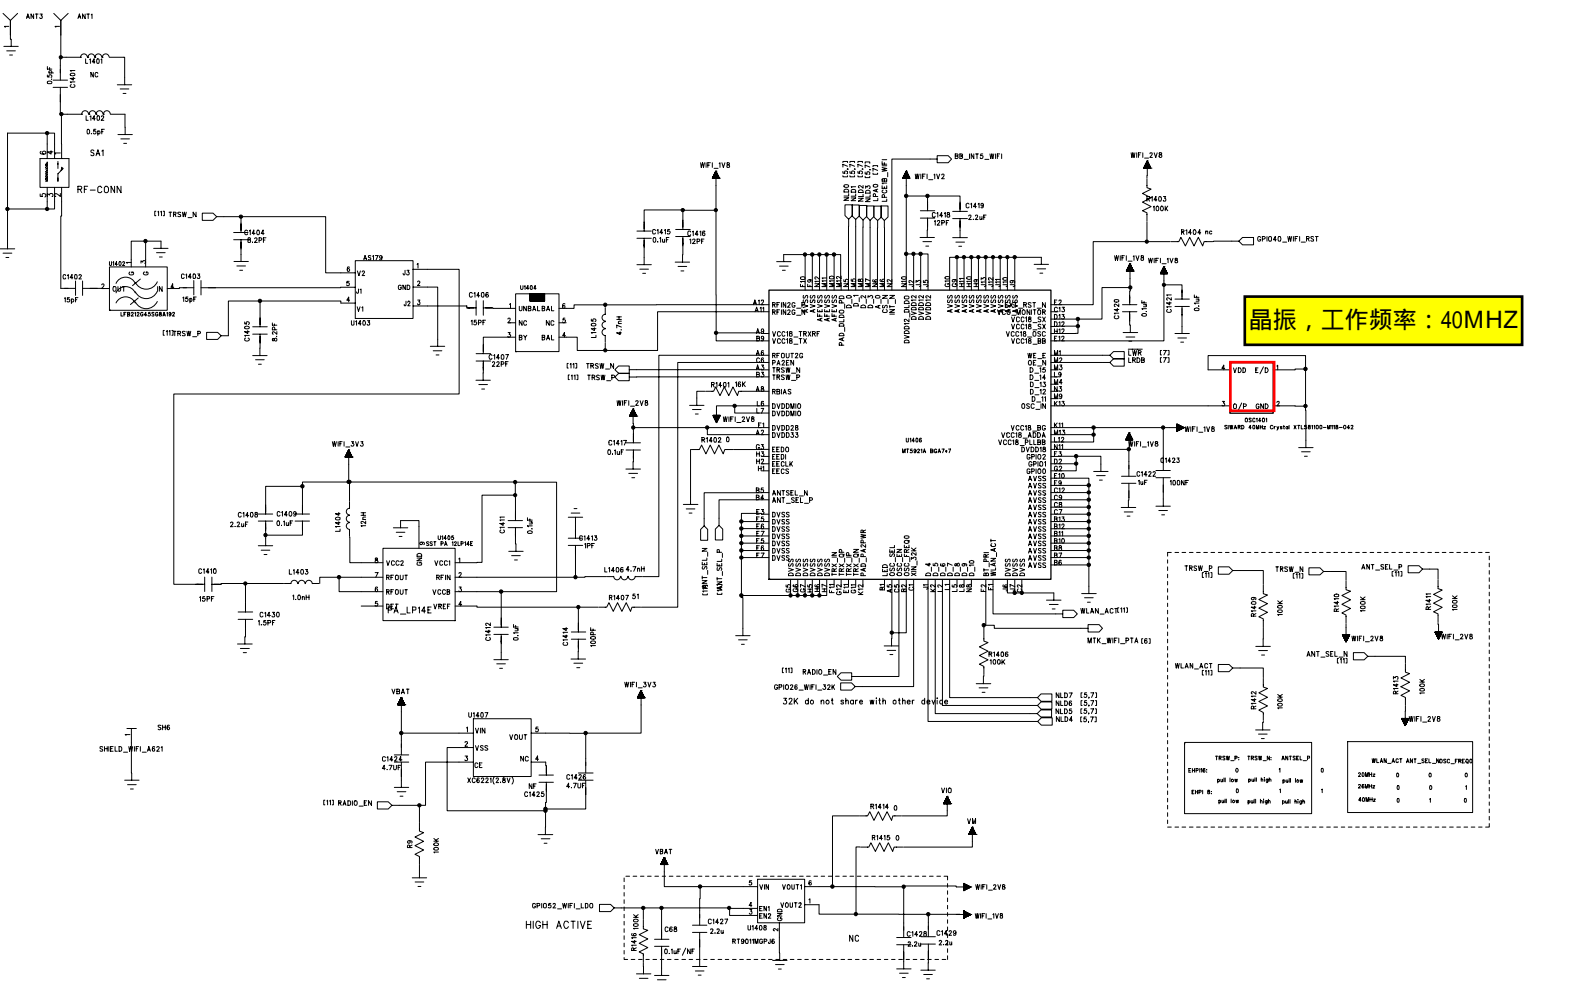

Model	G02	V1.0.0
Title	11-WFL_W15921A	11 of 11
DRAWN	2010-7-7	