

# FCC Part 15C

## Measurement and Test Report

For

### MONARCH MERCHANT LLC

14521 DICKENS STREET, STE.1, SHERMAN OAKS, CALIFORNIA

**FCC ID: YNNTRAV777**

|  |  |
|--|--|
| <b>Report Concerns:</b><br>Original Report | <b>Equipment Type:</b><br>Mobile Phone   |
| <b>Model:</b>                              | <u>TRAVELER</u>  |
| <b>Report No.:</b>                         | <u>STR10078118I-2</u>  |
| <b>Test Date:</b>                          | <u>2010-07-17 to 2010-07-28</u>  |
| <b>Issue Date:</b>                         | <u>2010-08-12</u>  |
| <b>Test Engineer:</b>                      | <u>John Zhi</u>   |
| <b>Reviewed By:</b>                        | <u>Lahm Peng</u>    |
| <b>Approved &amp; Authorized By:</b>       | <u>Jandy so/PSQ Manager</u>   |
| <b>Prepared By:</b>                        | <b>Shenzhen SEM.Test Electronic Service Co., Ltd</b><br>3/F, Jinbao Commerce Building, Xin'an Fanshen Road,<br>Bao'an District, Shenzhen, P.R.C. (518101)<br>Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: <a href="http://www.semtest.com.cn">www.semtest.com.cn</a> |

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd.

**TABLE OF CONTENTS**

|   |           |
|---|-----------|
| <b>1. GENERAL INFORMATION.....</b>                          | <b>3</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 3         |
| 1.2 TEST STANDARDS.....                                     | 3         |
| 1.3 RELATED SUBMITTAL(S)/GRANT(S) .....                     | 4         |
| 1.4 TEST METHODOLOGY .....                                  | 4         |
| 1.5 TEST FACILITY .....                                     | 4         |
| 1.6 EUT EXERCISE SOFTWARE .....                             | 4         |
| 1.7 ACCESSORIES EQUIPMENT LIST AND DETAILS .....            | 4         |
| 1.8 EUT CABLE LIST AND DETAILS .....                        | 4         |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                     | <b>5</b>  |
| <b>3. CONDUCTED EMISSIONS .....</b>                         | <b>6</b>  |
| 3.1 MEASUREMENT UNCERTAINTY .....                           | 6         |
| 3.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 6         |
| 3.3 TEST PROCEDURE.....                                     | 6         |
| 3.4 BASIC TEST SETUP BLOCK DIAGRAM.....                     | 6         |
| 3.5 ENVIRONMENTAL CONDITIONS .....                          | 7         |
| 3.6 SUMMARY OF TEST RESULTS/PLOTS .....                     | 7         |
| 3.7 CONDUCTED EMISSIONS TEST DATA.....                      | 7         |
| <b>4. §15.203 - ANTENNA REQUIREMENT.....</b>                | <b>10</b> |
| 4.1 STANDARD APPLICABLE.....                                | 10        |
| 4.2 TEST RESULT.....  | 10        |
| <b>5. POWER SPECTRAL DENSITY .....</b>                      | <b>11</b> |
| 5.1 STANDARD APPLICABLE.....                                | 11        |
| 5.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 11        |
| 5.3 TEST PROCEDURE.....                                     | 11        |
| 5.4 ENVIRONMENTAL CONDITIONS .....                          | 11        |
| 5.5 SUMMARY OF TEST RESULTS/PLOTS .....                     | 12        |
| <b>6. 6-DB BANDWIDTH.....</b>                               | <b>16</b> |
| 6.1 STANDARD APPLICABLE.....                                | 16        |
| 6.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 16        |
| 6.3 TEST PROCEDURE.....                                     | 16        |
| 6.4 ENVIRONMENTAL CONDITIONS .....                          | 16        |
| 6.5 SUMMARY OF TEST RESULTS/PLOTS .....                     | 16        |
| <b>7. POWER OUTPUT.....</b>                                 | <b>20</b> |
| 7.1 STANDARD APPLICABLE.....                                | 20        |
| 7.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 20        |
| 7.3 TEST PROCEDURE.....                                     | 20        |
| 7.4 ENVIRONMENTAL CONDITIONS .....                          | 20        |
| 7.5 SUMMARY OF TEST RESULTS/PLOTS .....                     | 21        |
| <b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS .....</b>        | <b>28</b> |
| 8.1 MEASUREMENT UNCERTAINTY .....                           | 28        |
| 8.2 STANDARD APPLICABLE.....                                | 28        |
| 8.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 28        |
| 8.4 TEST PROCEDURE.....                                     | 28        |
| 8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....           | 29        |
| 8.6 ENVIRONMENTAL CONDITIONS .....                          | 29        |
| 8.7 SUMMARY OF TEST RESULTS/PLOTS .....                     | 29        |
| <b>9. OUT OF BAND EMISSIONS.....</b>                        | <b>44</b> |
| 9.1 STANDARD APPLICABLE.....                                | 44        |
| 9.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 44        |
| 9.3 TEST PROCEDURE.....                                     | 44        |
| 9.4 ENVIRONMENTAL CONDITIONS .....                          | 44        |
| 9.5 SUMMARY OF TEST RESULTS/PLOTS .....                     | 45        |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: MONARCH MERCHANT LLC  
Address of applicant: 14521 DICKENS STREET, STE.1, SHERMAN OAKS,  
CALIFORNIA

Manufacturer: MONARCH MERCHANT LLC  
Address of manufacturer: 14521 DICKENS STREET, STE.1, SHERMAN OAKS,  
CALIFORNIA

#### General Description of E.U.T

| Items               | Description      |
|---------------------|------------------|
| EUT Description:    | Mobile Phone     |
| Trade Name:         | MONARCH          |
| Model No.:          | TRAVELER         |
| Add Model:          | MU9700           |
| Rated Voltage:      | DC 3.7V          |
| RF Output Power     | Max. 12.52dBm    |
| Antenna Gain:       | 0.21dBi          |
| Frequency range:    | 2412MHz~2462MHz  |
| Number of channels: | 11               |
| Channel Separation: | 5MHz             |
| Type of Antenna:    | Integral Antenna |
| Size:               | 10.3X5.5X1.4cm   |

*Note: The test data is gathered from a production sample, provided by the manufacture. The others models listed in the report have different appearance only of TRAVELER without circuit and electronic construction changed, declared by the manufacturer.*

### 1.2 Test Standards

The following report is prepared on behalf of the MONARCH MERCHANT LLC in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

### 1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

### 1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted with Low Channel, Middle Channel and High Channel, accordingly in reference to the Operating Instructions.

### 1.5 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

### 1.6 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components.

### 1.7 Accessories Equipment List and Details

| Manufacturer | Description | Model       | Serial Number |
|--------------|-------------|-------------|---------------|
| ASUS         | Notebook PC | X85E66Se-SL | /             |
| /            | /           | /           | /             |

### 1.8 EUT Cable List and Details

| Cable Description | Length (M) | Shielded/Unshielded | With Core/Without Core |
|-------------------|------------|---------------------|------------------------|
| USB Cable         | 1.0        | Unshielded          | Without Core           |
| Earphone          | 1.1        | Unshielded          | Without Core           |

## 2. SUMMARY OF TEST RESULTS

| FCC RULES                   | DESCRIPTION OF TEST    | RESULT    |
|-----------------------------|------------------------|-----------|
| § 15.203; § 15.247(c)(1)(i) | Antenna Requirement    | Compliant |
| § 15.207                    | Conducted Emission     | Compliant |
| § 15.247(e)                 | Power Spectral Density | Compliant |
| § 15.247(a)(2)              | 6 dB Bandwidth         | Compliant |
| § 15.247(b)(3)              | Power Output           | Compliant |
| § 15.209(a)(d)              | Radiated Emission      | Compliant |
| § 15.247(d)                 | Band edge              | Compliant |

### 3. CONDUCTED EMISSIONS

#### 3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 0.5$  dB.

#### 3.2 Test Equipment List and Details


| Description       | Manufacturer    | Model    | Serial Number | Cal. Date  | Due. Date  |
|-------------------|-----------------|----------|---------------|------------|------------|
| EMI Test Receiver | Rohde & Schwarz | ESPI     | 101611        | 2009-08-12 | 2010-08-11 |
| Puls Limiter      | Rohde & Schwarz | ESH3-Z2  | 100911        | 2009-08-12 | 2010-08-11 |
| L.I.S.N.          | SCHWARZBECK     | NSLK8126 | 8126-224      | 2009-08-12 | 2010-08-11 |
| L.I.S.N.          | EMCO            | 3825/2   | 11967C        | 2009-08-12 | 2010-08-11 |

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

#### 3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

#### 3.4 Basic Test Setup Block Diagram

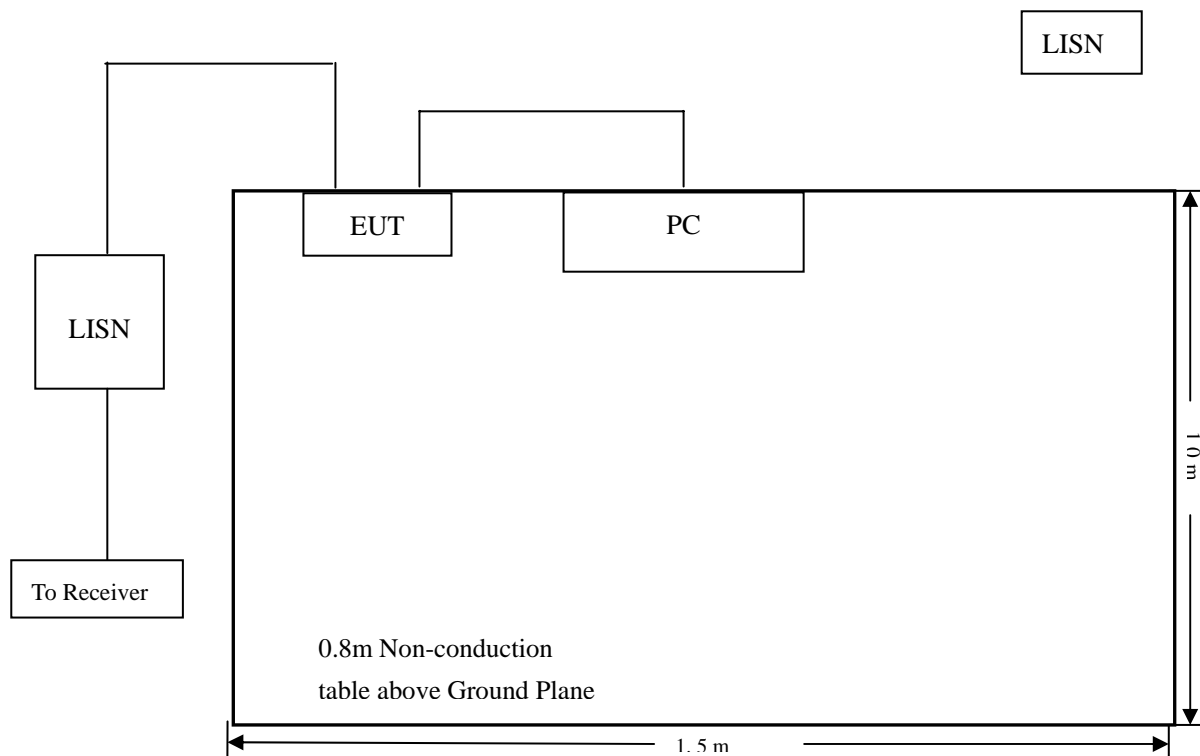

### 3.5 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 20° C     |
| Relative Humidity: | 52%       |
| ATM Pressure:      | 1011 mbar |


### 3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:

**-4.8 dB $\mu$ V at 0.15 MHz in the Neutral QP Detector, 0.15-30MHz**

### 3.7 Conducted Emissions Test Data


| LINE CONDUCTED EMISSIONS |            |           |              | FCC 15.207 |        |
|--------------------------|------------|-----------|--------------|------------|--------|
| Frequency                | Amplitude  | Detector  | Phase        | Limit      | Margin |
| MHz                      | dB $\mu$ V | QP/Ave/Pk | Line/Neutral | dB $\mu$ V | dB     |
| 0.15                     | 61.2       | QP        | Neutral      | 66         | -4.8   |
| 0.15                     | 58.1       | QP        | Line         | 66         | -8.0   |
| 29.98                    | 39.8       | AV        | Neutral      | 50         | -10.2  |
| 23.98                    | 38.2       | AV        | Line         | 50         | -11.8  |
| 0.16                     | 39.3       | AV        | Neutral      | 55.46      | -16.2  |
| 29.98                    | 43.0       | QP        | Neutral      | 60         | -17.0  |
| 0.16                     | 35.4       | AV        | Line         | 55.46      | -20.0  |
| 0.38                     | 38.2       | QP        | Neutral      | 58.28      | -20.1  |
| 0.24                     | 31.1       | AV        | Line         | 52.1       | -21.0  |
| 0.38                     | 36.8       | QP        | Line         | 58.28      | -21.4  |
| 0.71                     | 21.9       | AV        | Neutral      | 46         | -24.1  |

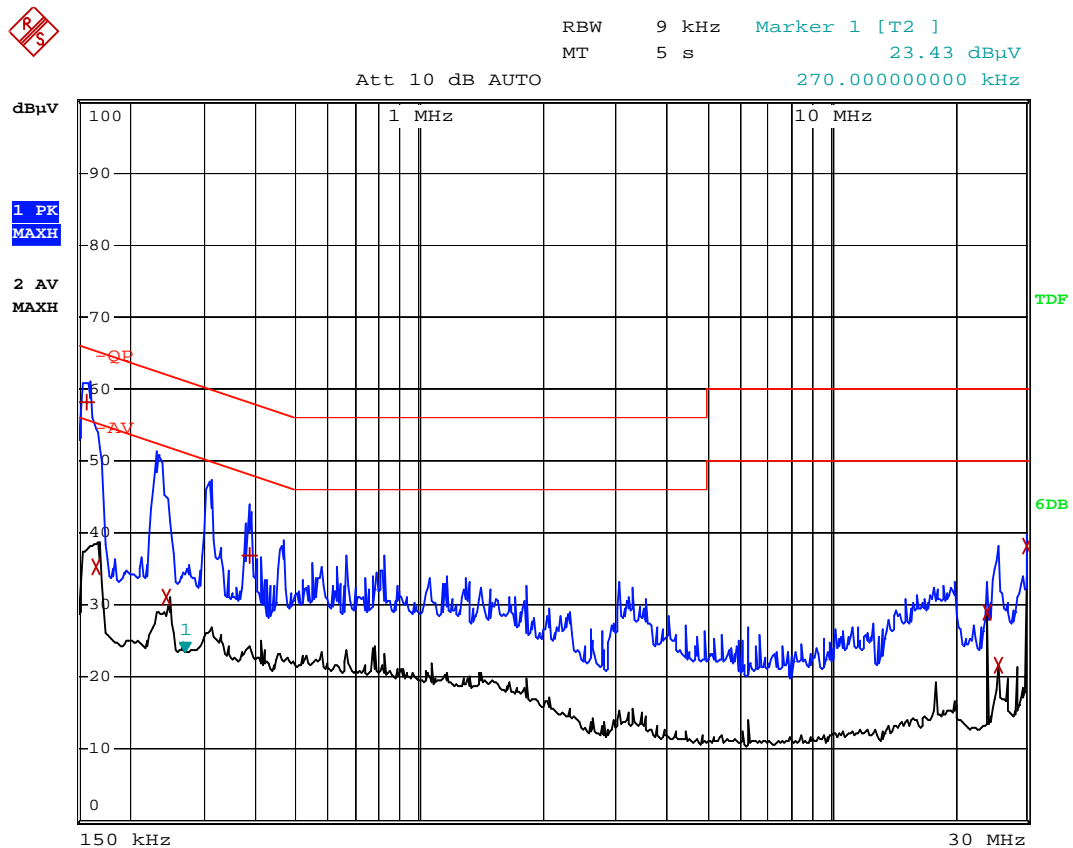**Plot of Conducted Emissions Test Data***Conducted Disturbance**EUT: Mobile Phone**M/N: TRAVELER**Operating Condition: Transmitting**Test Specification: L**Comment: AC 120V/60Hz/Adapter 5V*



Plot of Conducted Emissions Test Data

Conducted Disturbance  
EUT: Mobile Phone  
M/N: TRAVELER  
Operating Condition: Transmitting  
Test Specification: N  
Comment: AC 120V/60Hz/Adapter 5V

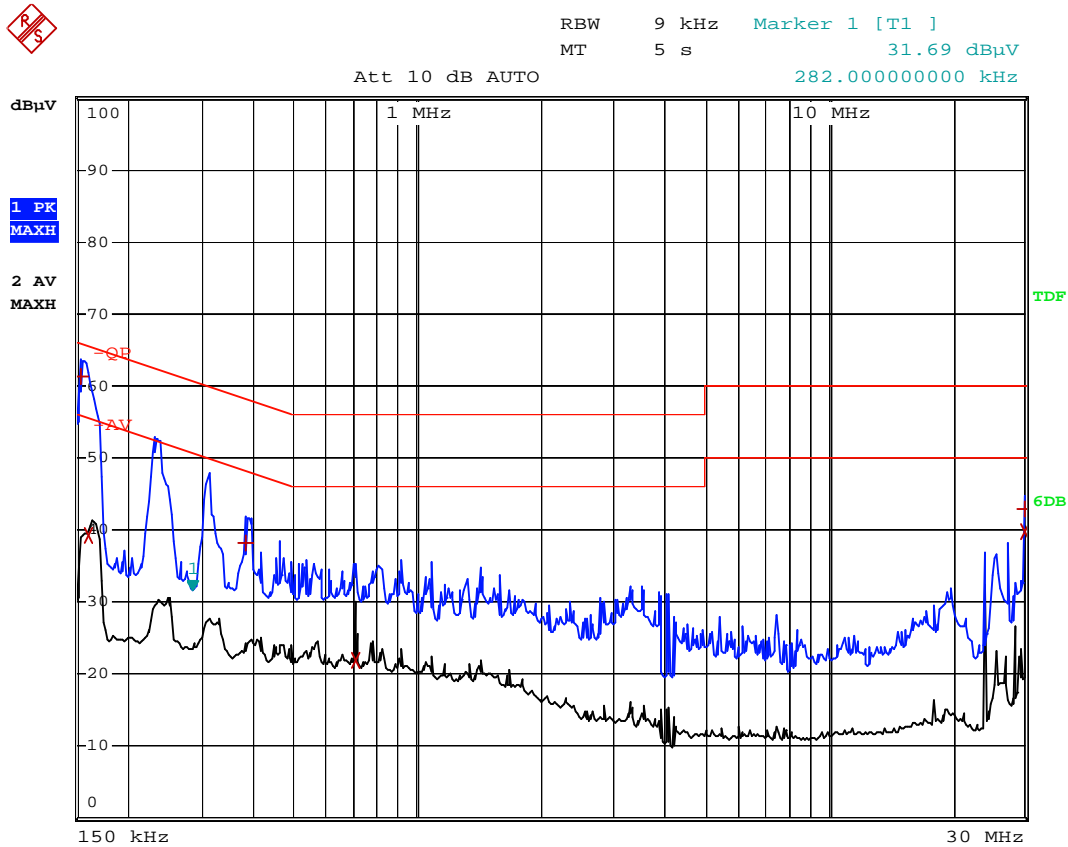

## **4. §15.203 - ANTENNA REQUIREMENT**

---

### **4.1 Standard Applicable**

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Test Result**

This product has a integral antenna, fulfill the requirement of this section.

## 5. POWER SPECTRAL DENSITY

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Equipment List and Details

| Description        | Manufacturer    | Model  | Serial Number | Cal. Date  | Due. Date  |
|--------------------|-----------------|--------|---------------|------------|------------|
| Spectrum Analyzer  | Agilent         | E4402B | US41192821    | 2009-08-12 | 2010-08-11 |
| RF Limiter         | Agilent         | 11867A | MY42241685    | 2009-08-12 | 2010-08-11 |
| RMS/PEAK Voltmeter | Rohde & Schwarz | URE3   | 826135/008    | 2009-08-12 | 2010-08-11 |

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 5.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=3KHz, Span = 20MHz.
4. Repeat above procedures until all frequency measured was complete.

### 5.4 Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 20° C     |
| Relative Humidity: | 54%       |
| ATM Pressure:      | 1011 mbar |

**5.5 Summary of Test Results/Plots**


| Test mode | Test channel                | Reading<br>dBm/3kHz | Limit<br>dBm/3kHz |
|-----------|-----------------------------|---------------------|-------------------|
| 802.11b   | Low channel<br>(2412MHz)    | -9.848              | 8                 |
|           | Middle channel<br>(2437MHz) | -10.21              | 8                 |
|           | High channel<br>(2462MHz)   | -9.632              | 8                 |
| 802.11g   | Low channel<br>(2412MHz)    | -15.59              | 8                 |
|           | Middle channel<br>(2437MHz) | -15.19              | 8                 |
|           | High channel<br>(2462MHz)   | -15.12              | 8                 |

**For 802.11b**


Low Channel:

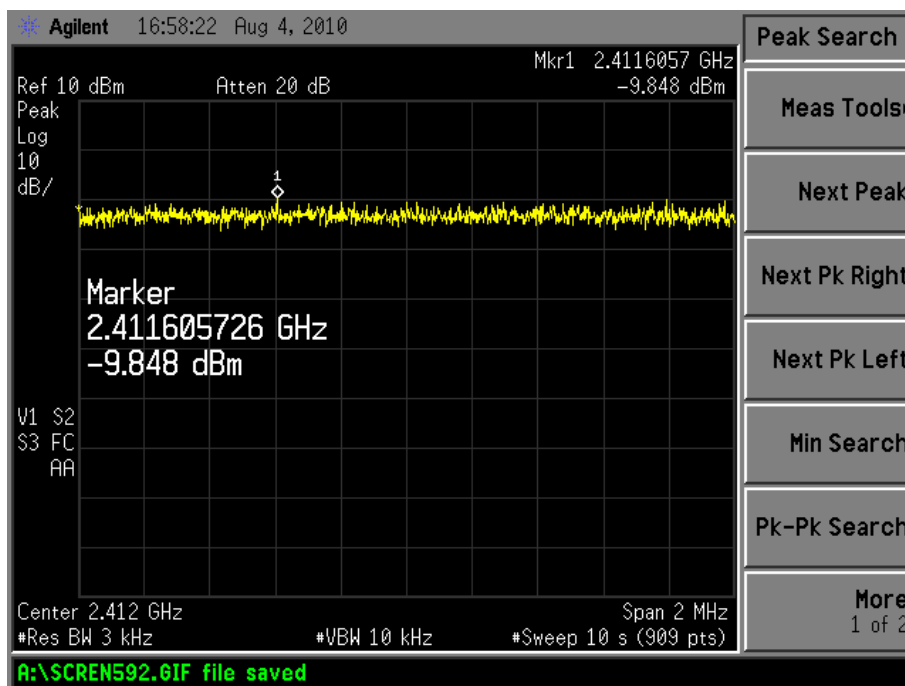

Middle Channel:

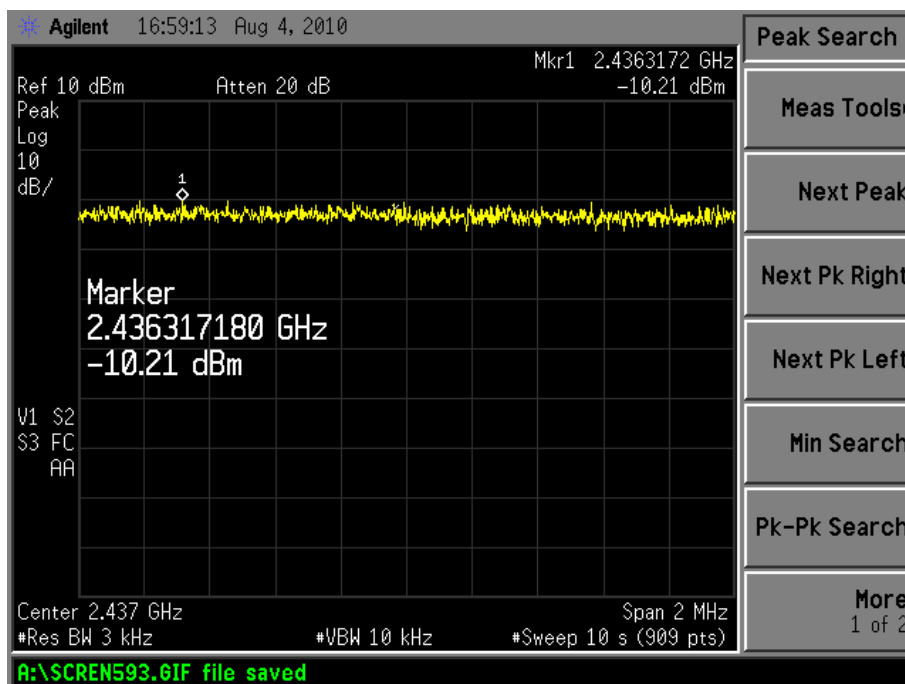


High Channel:

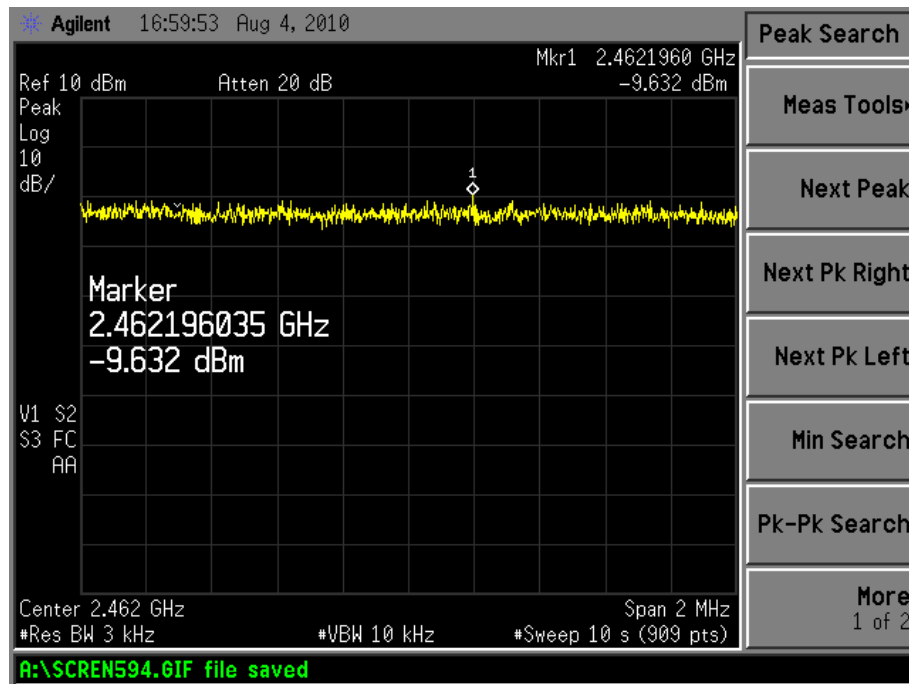


For 802.11g


Low Channel:

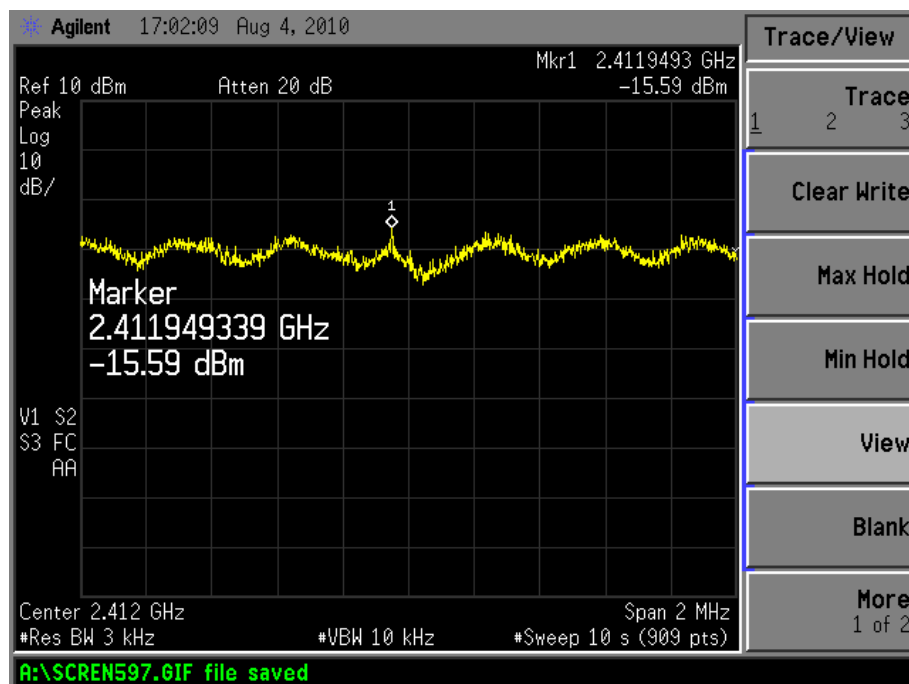

Middle Channel:

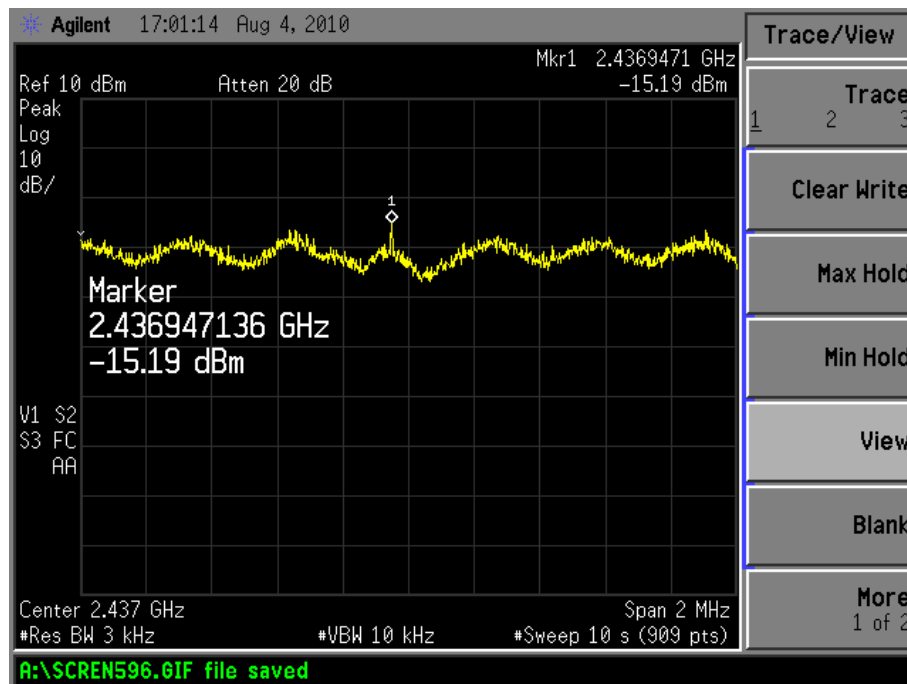

High Channel:

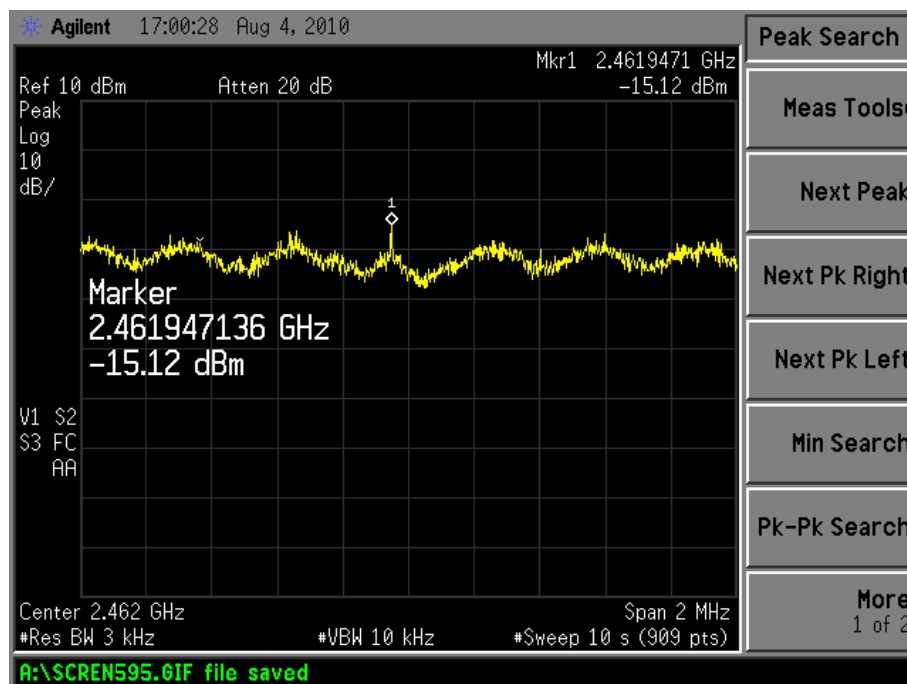

## 6. 6-dB BANDWIDTH

### 6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Equipment List and Details

| Description       | Manufacturer | Model  | Serial Number | Cal. Date  | Due. Date  |
|-------------------|--------------|--------|---------------|------------|------------|
| Spectrum Analyzer | Agilent      | E4402B | US41192821    | 2009-08-12 | 2010-08-11 |
| RF Limiter        | Agilent      | 11867A | MY42241685    | 2009-08-12 | 2010-08-11 |

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 6.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. The spectrum analyzer as RBW=300KHz (1 % of Bandwidth.), Sweep=auto
4. Mark the peak frequency and –6dB (upper and lower) frequency.

### 6.4 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24° C     |
| Relative Humidity: | 53%       |
| ATM Pressure:      | 1018 mbar |


### 6.5 Summary of Test Results/Plots

| Test mode | Frequency<br>MHz | 6 dB Bandwidth<br>kHz | Limit<br>kHz |
|-----------|------------------|-----------------------|--------------|
| 802.11b   | 2412             | 9155                  | 500          |
|           | 2437             | 10552                 | 500          |
|           | 2462             | 9425                  | 500          |
| 802.11g   | 2412             | 16455                 | 500          |
|           | 2437             | 16522                 | 500          |
|           | 2462             | 16438                 | 500          |




**For 802.11b**


Low Channel:

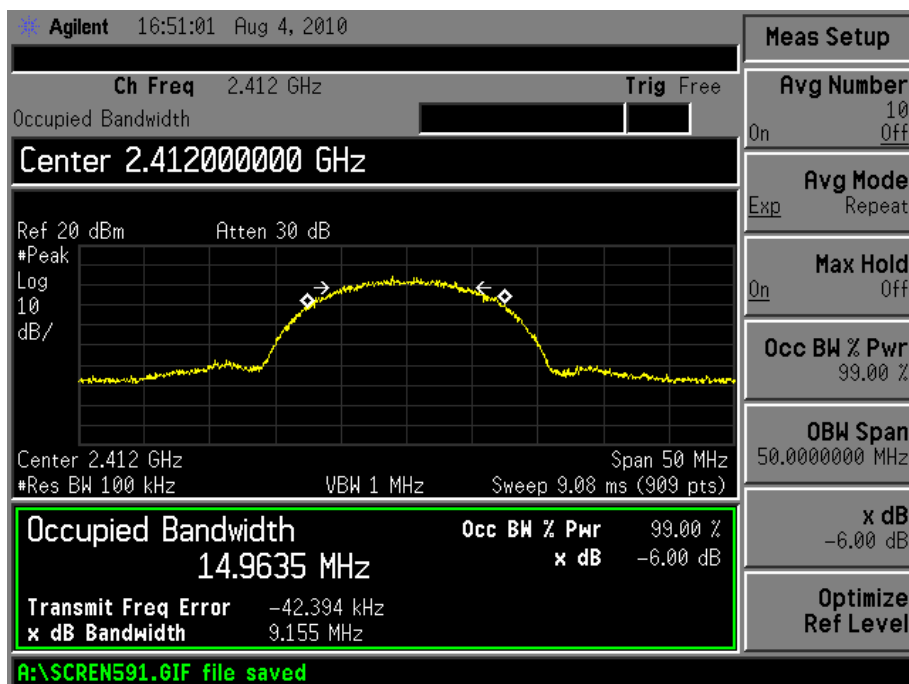

Mid Channel:

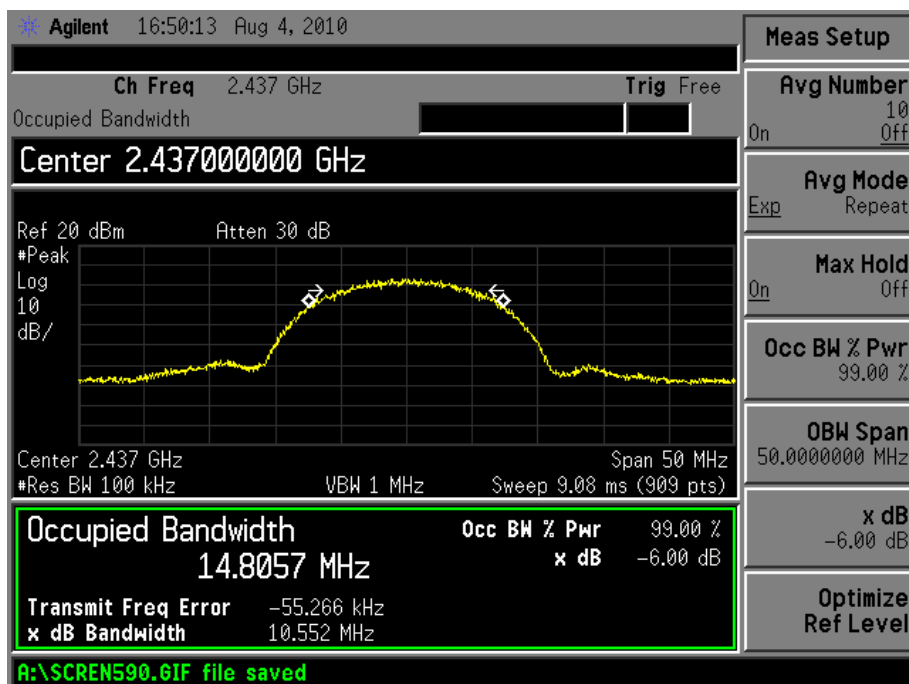


High Channel:

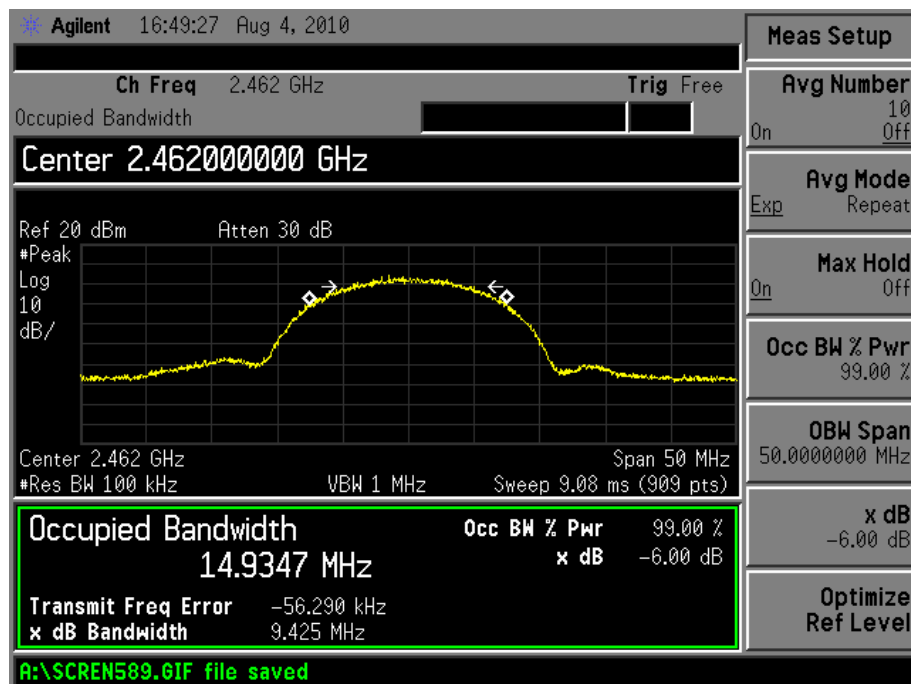


For 802.11g


Low Channel:

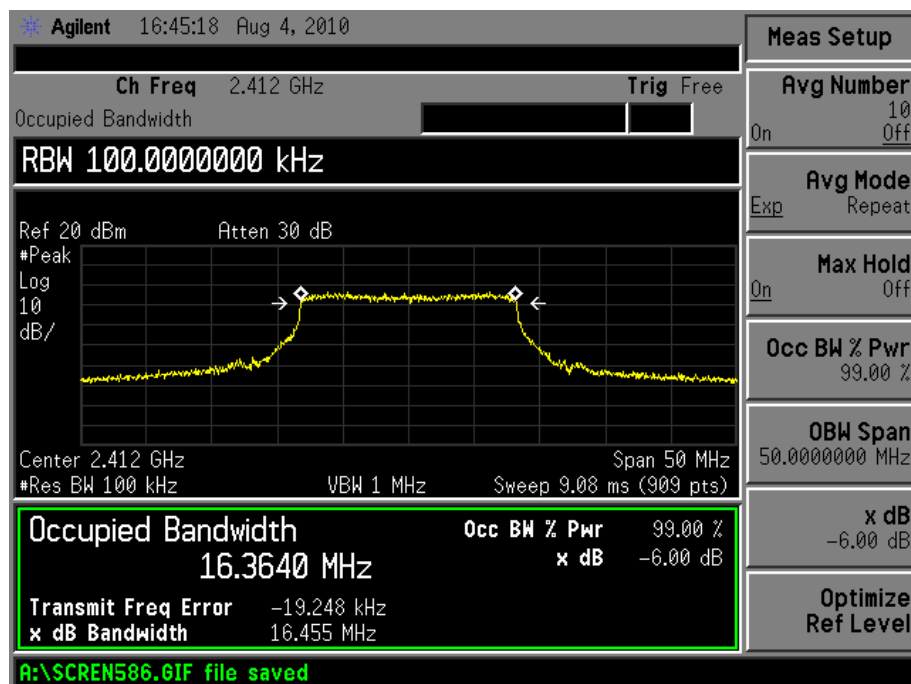

Mid Channel:

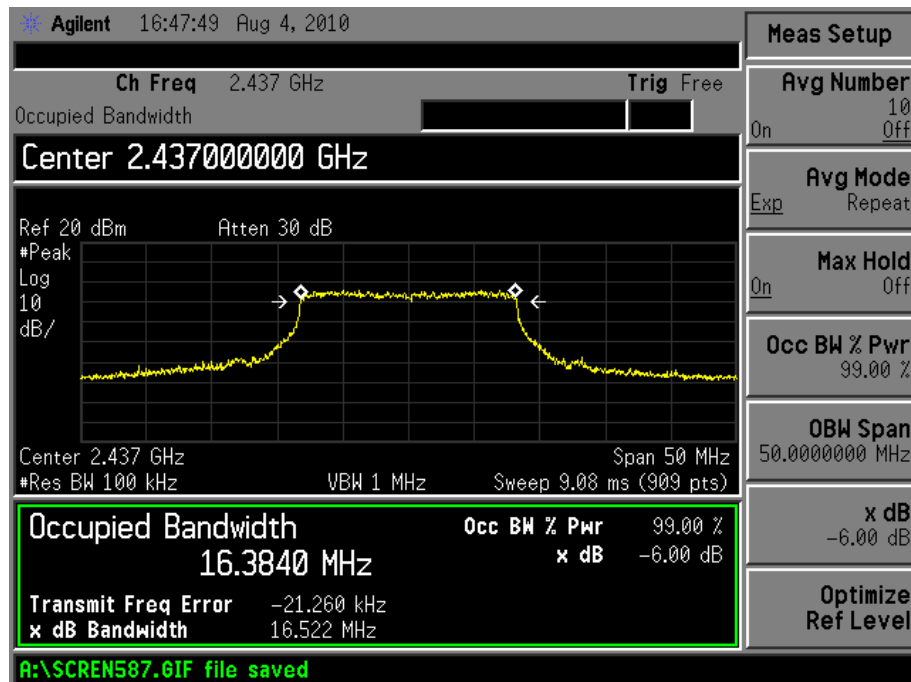

High Channel:

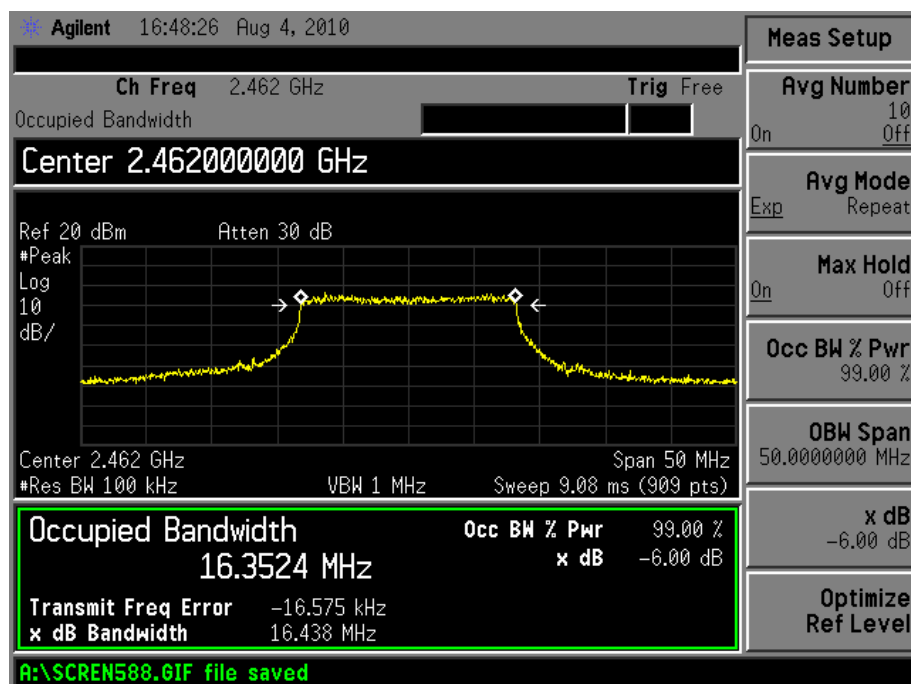

## 7. POWER OUTPUT

### 7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Equipment List and Details

| Manufacturer      | Description | Model  | Serial Number | Cal. Date  | Due. Date  |
|-------------------|-------------|--------|---------------|------------|------------|
| Spectrum Analyzer | Agilent     | E4402B | US41192821    | 2009-08-12 | 2010-08-11 |
| RF Limiter        | Agilent     | 11867A | MY42241685    | 2009-08-12 | 2010-08-11 |

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 7.3 Test Procedure

According to section 15.247(b)-power output of the KDB-558074 (2005), the method #1 of the power output option2 was used, the following is the measurement procedure.

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz.
3. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”.
4. Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode.
5. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”.
6. Trace average 100 traces in power averaging mode.
7. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges.

### 7.4 Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 21° C     |
| Relative Humidity: | 55%       |
| ATM Pressure:      | 1011 mbar |

**7.5 Summary of Test Results/Plots**


| Test mode     | Frequency<br>MHz | Reading<br>dBm | Output power<br>W | Limit<br>W |
|---------------|------------------|----------------|-------------------|------------|
| 802.11b (1M)  | 2412             | 12.26          | 0.016827          | 1          |
|               | 2437             | 11.97          | 0.01574           | 1          |
|               | 2462             | 12.52          | 0.017865          | 1          |
| 802.11b (11M) | 2412             | 12.41          | 0.017418          | 1          |
|               | 2437             | 12.13          | 0.016331          | 1          |
|               | 2462             | 12.49          | 0.017742          | 1          |
| 802.11g (6M)  | 2412             | 8.71           | 0.00743           | 1          |
|               | 2437             | 8.52           | 0.007112          | 1          |
|               | 2462             | 8.33           | 0.006808          | 1          |
| 802.11g (54M) | 2412             | 8.45           | 0.006998          | 1          |
|               | 2437             | 8.82           | 0.007621          | 1          |
|               | 2462             | 8.81           | 0.007603          | 1          |

**For 802.11b\_1M rate**


Low Channel:

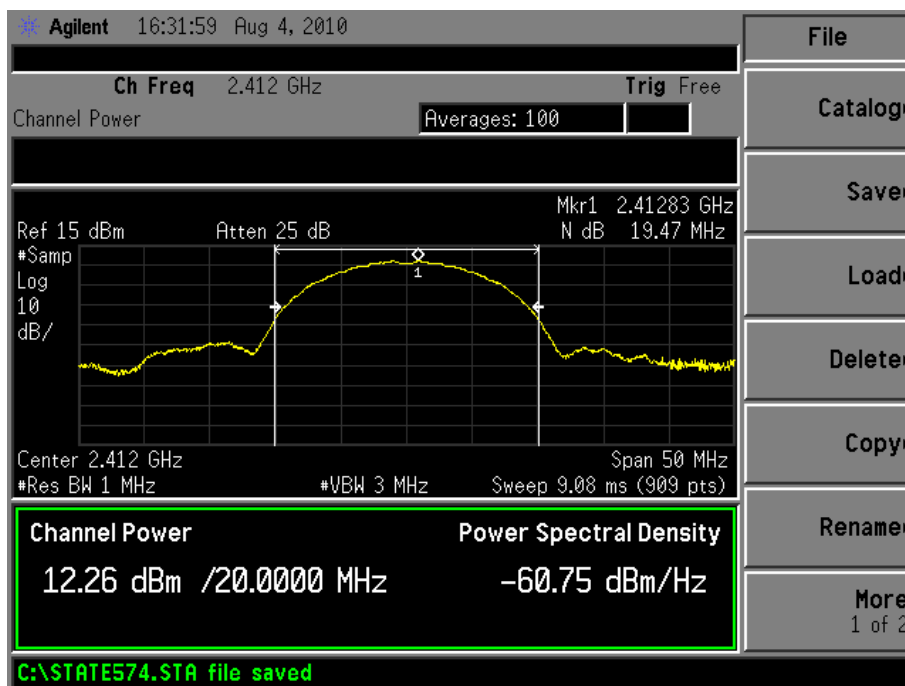

Middle Channel:

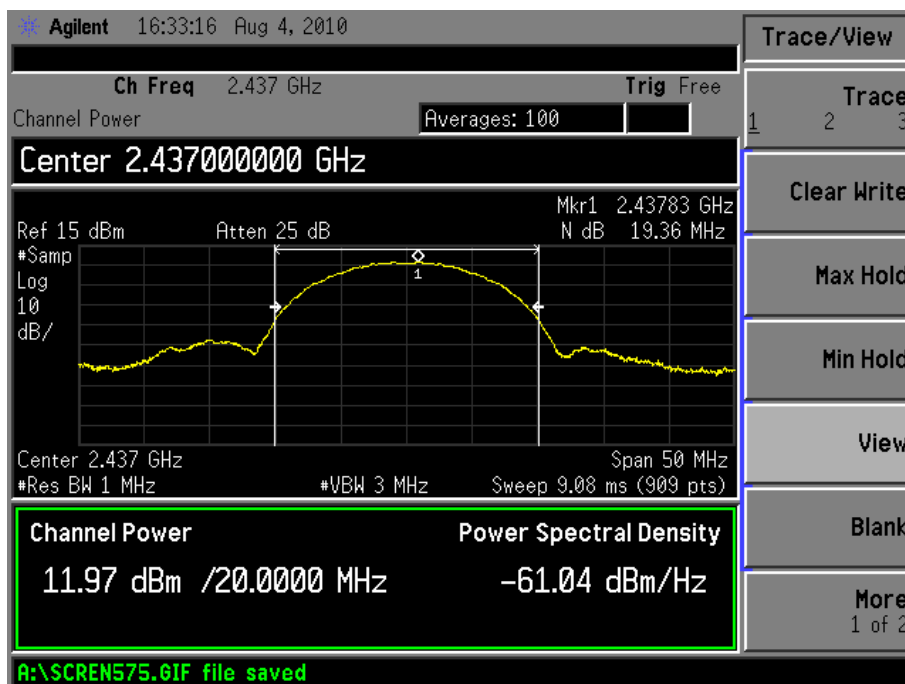


High Channel:

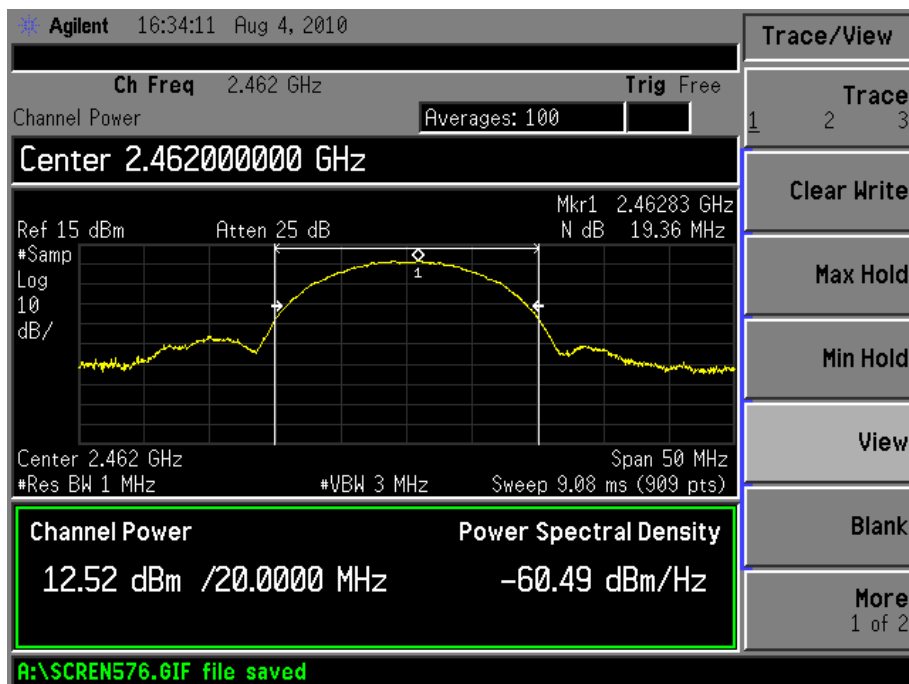


For 802.11b\_11M rate


Low Channel:

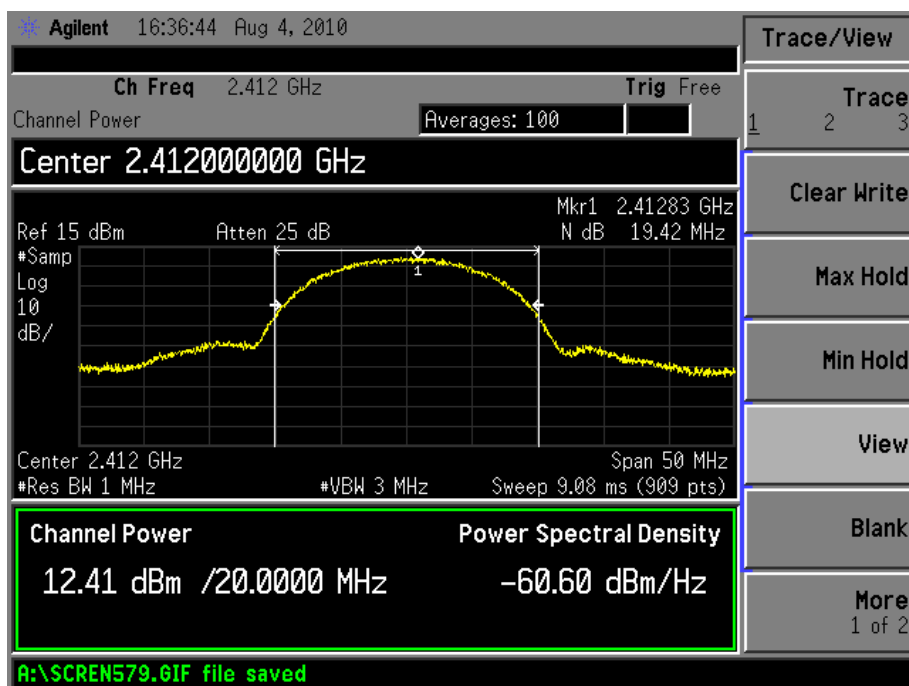

Middle Channel:

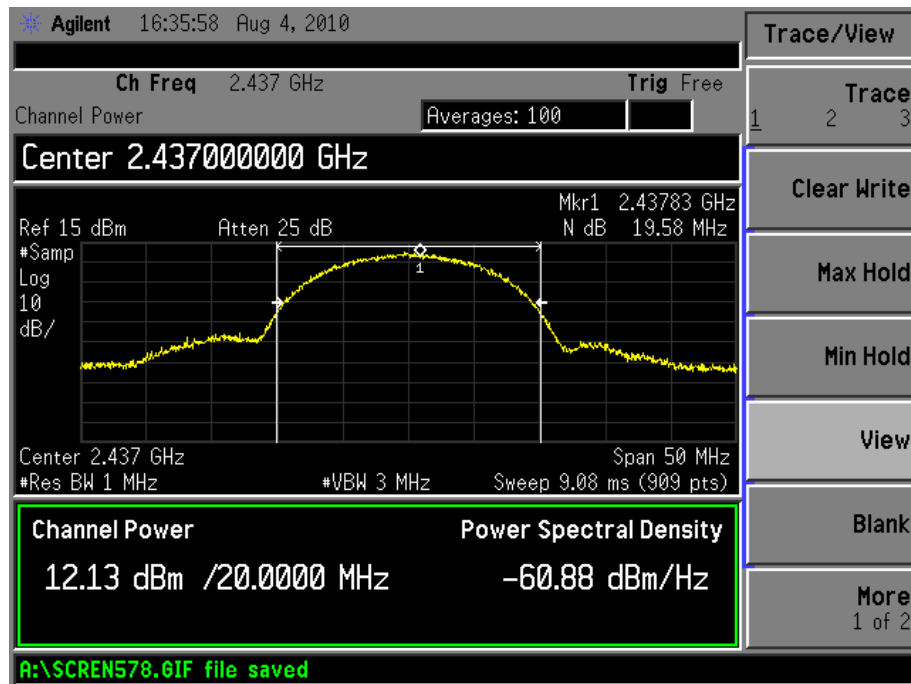


High Channel:

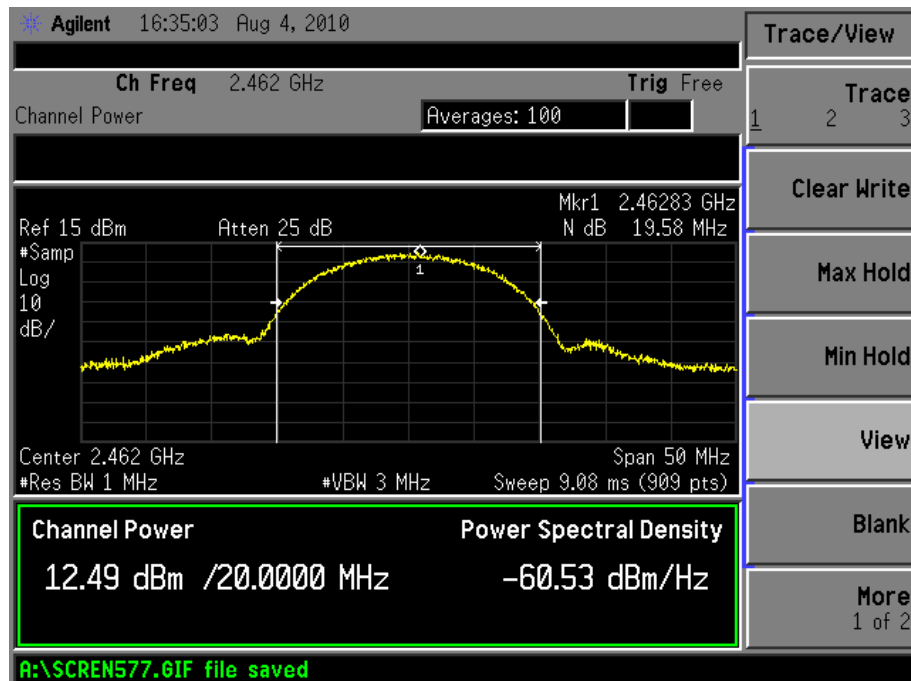




**For 802.11g\_6M rate**


Low Channel:

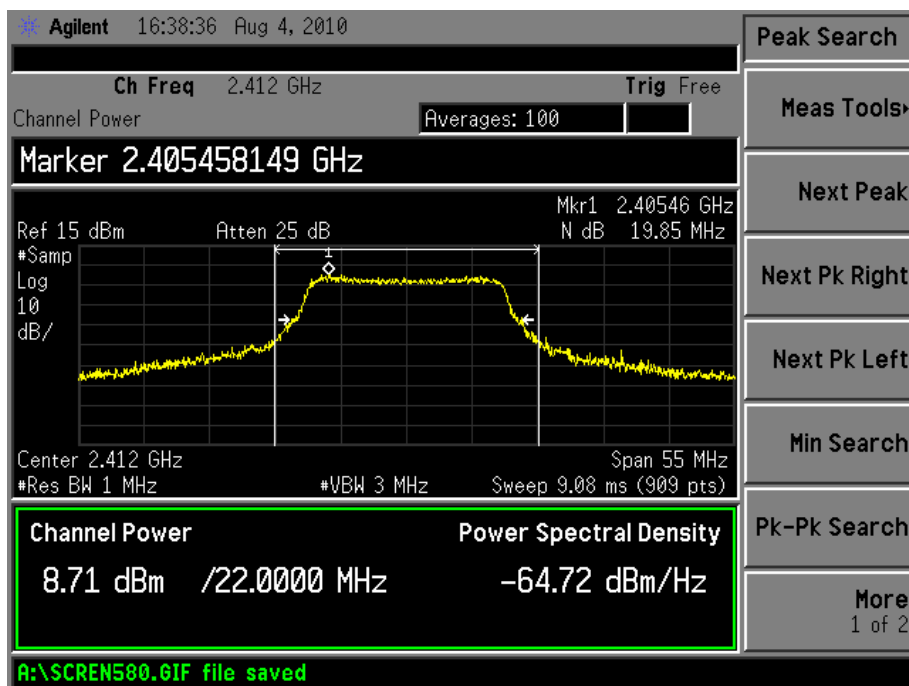

Middle Channel:

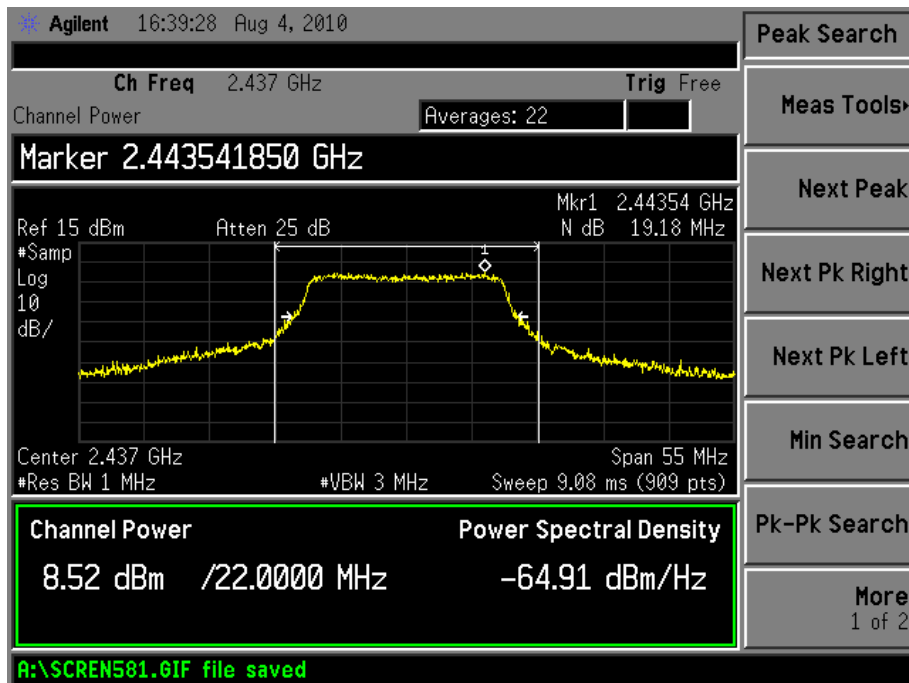


High Channel:

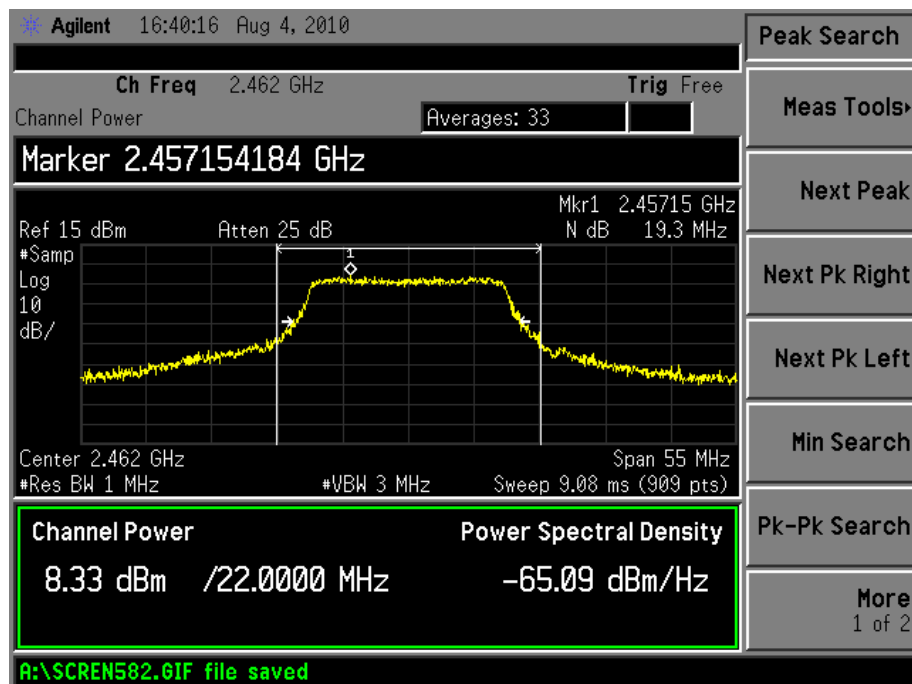


For 802.11g\_54M rate


Low Channel:

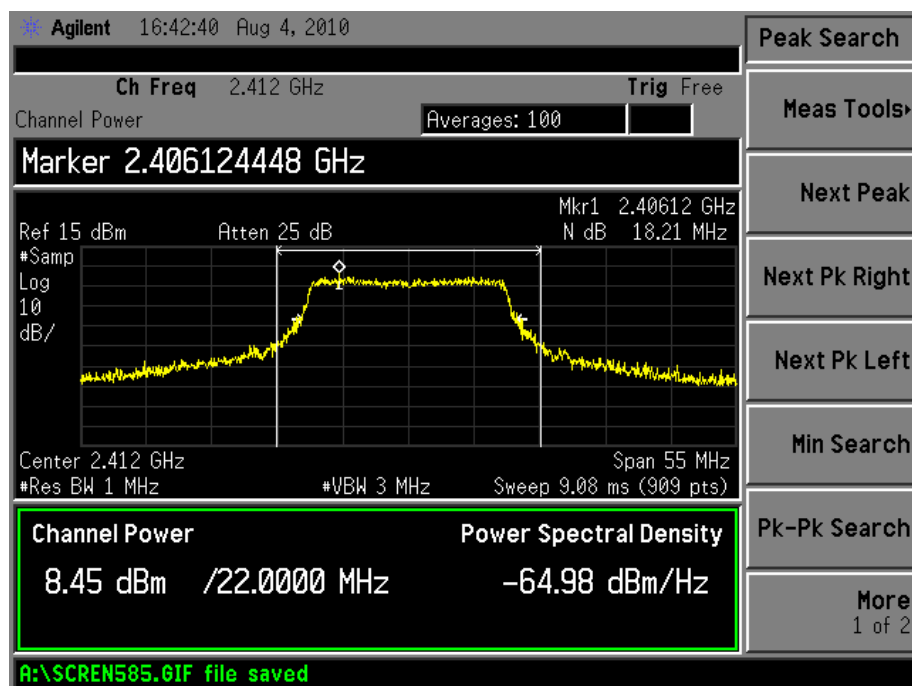

Middle Channel:

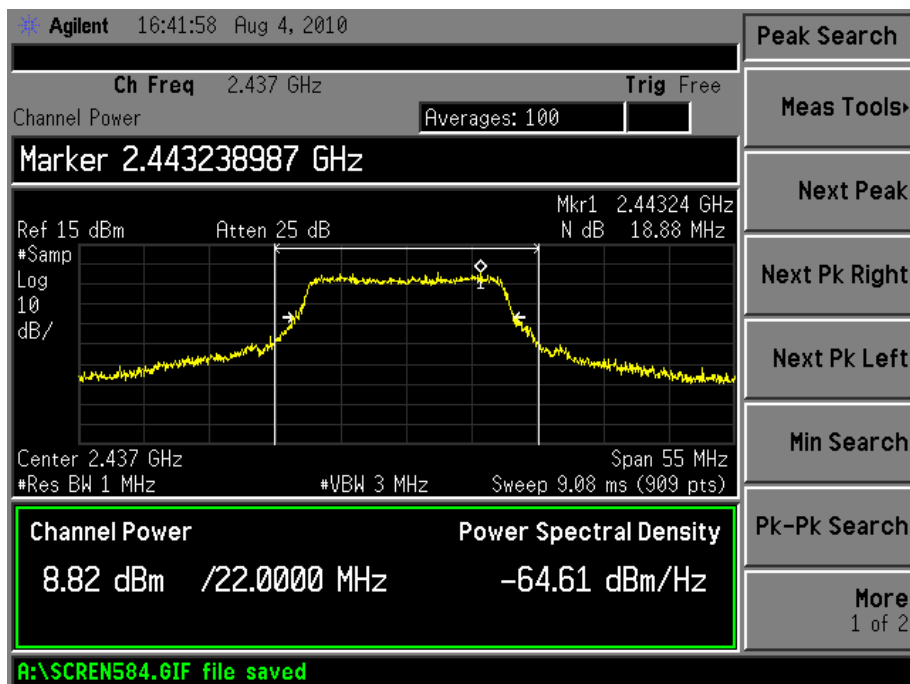

High Channel:

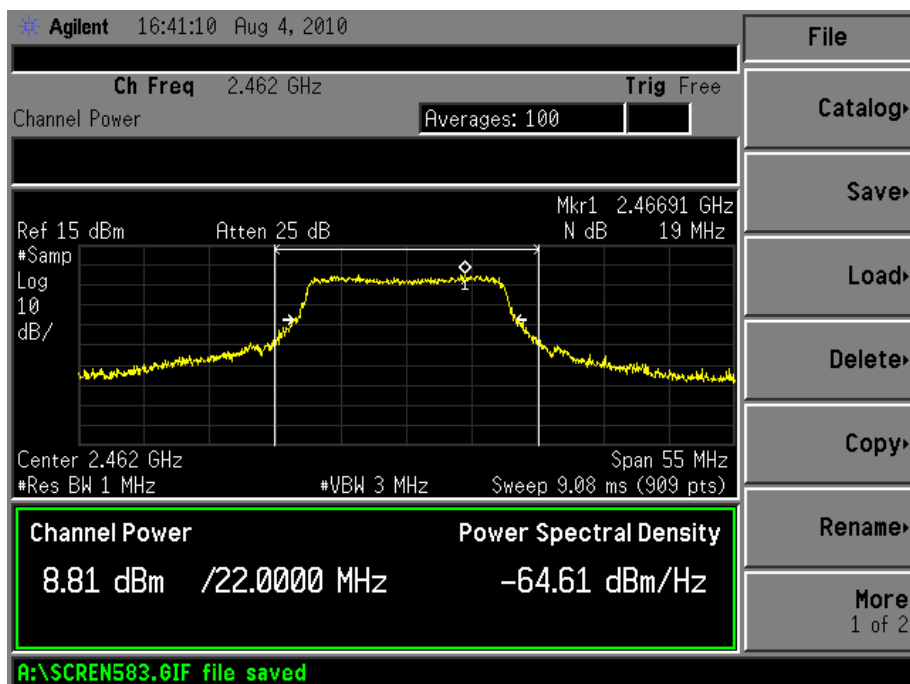

## 8. FIELD STRENGTH OF SPURIOUS EMISSIONS

### 8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.10$  dB.

### 8.2 Standard Applicable

According to §15.247(c), 15.205 15.209(b) & 15.35 (b), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Section 15.209:

30 - 88 MHz 40 dBuV/m @3M

88 -216 MHz 43.5 dBuV/m @3M

216 -960 MHz 46 dBuV/m @3M

Above 960 MHz 54dBuV/m @3M

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

### 8.3 Test Equipment List and Details


| Manufacturer             | Description   | Model     | Serial Number | Cal. Date  | Due. Date  |
|--------------------------|---------------|-----------|---------------|------------|------------|
| Spectrum Analyzer        | ROHDE&SCHWARZ | FSEA20    | DE25181       | 2009-08-12 | 2010-08-11 |
| Positioning Controller   | C&C           | CC-C-1F   | N/A           | 2009-08-12 | 2010-08-11 |
| Trilog Broadband Antenna | SCHWARZBECK   | VULB9163  | 9163-333      | 2010-07-21 | 2011-07-20 |
| Horn Antenna             | SCHWARZBECK   | BBHX 9120 | 9120-426      | 2010-07-21 | 2011-07-20 |
| RF Switch                | EM            | EMSW18    | SW060023      | 2009-08-12 | 2010-08-11 |
| Amplifier                | Agilent       | 8447F     | 3113A06717    | 2009-08-12 | 2010-08-11 |
| Coaxial Cable            | SCHWARZBECK   | AK9513    | 9513-10       | 2009-08-12 | 2010-08-11 |
| EMI Test Receiver        | ROHDE&SCHWARZ | ESPI      | 25498514      | 2009-08-12 | 2010-08-11 |

### 8.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

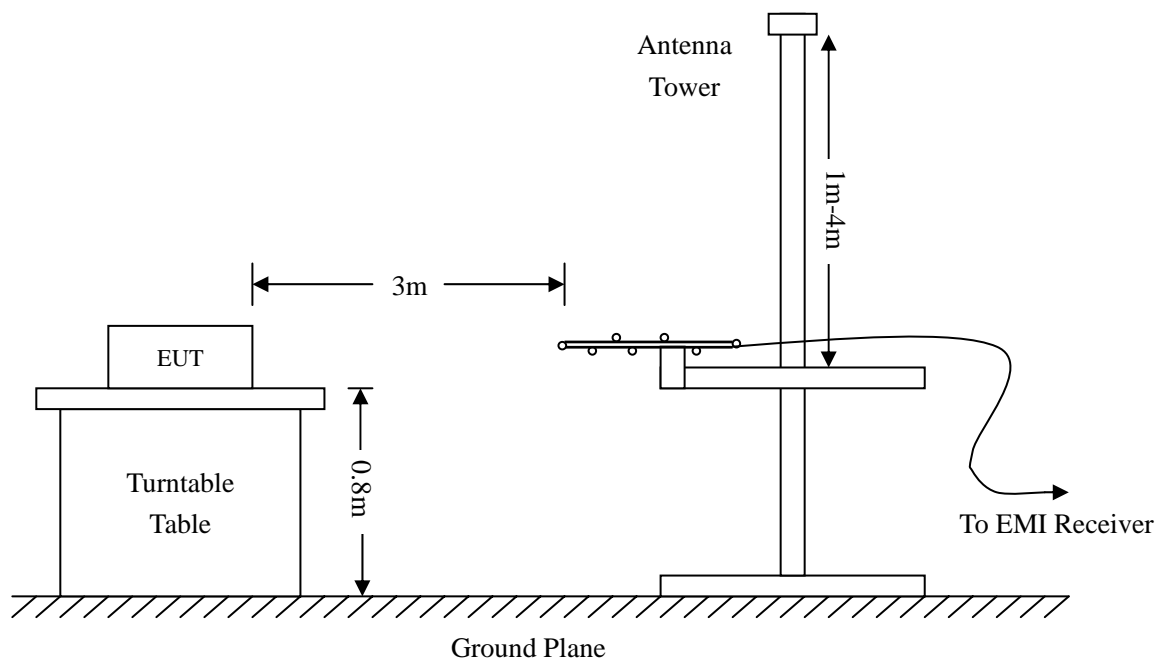

## 8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


## 8.6 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 22° C     |
| Relative Humidity: | 52%       |
| ATM Pressure:      | 1012 mbar |

## 8.7 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:

**-3.1dBμV at 7311MHz in the Horizontal polarization, Transmitting 802.11b Middle Channel test mode with, 30 MHz to 25 GHz, 3Meters**

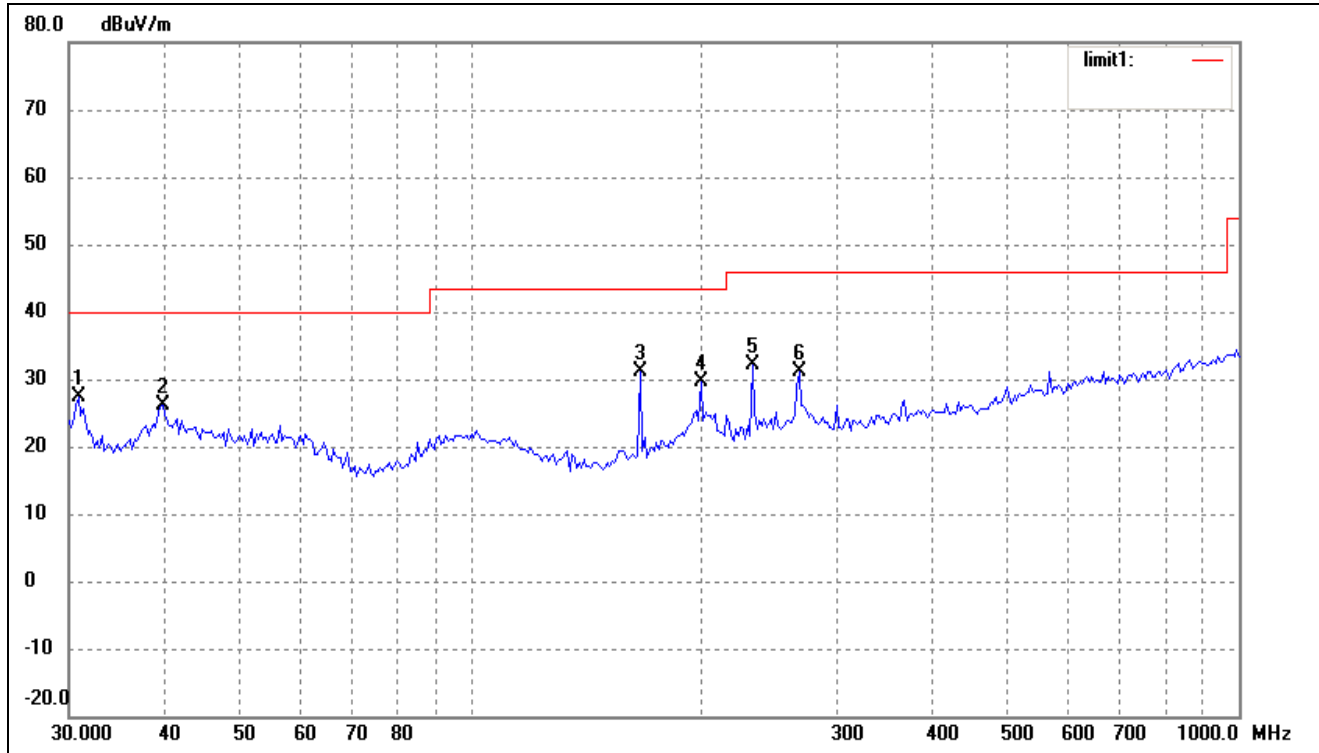*Test Result/Plots:**Spurious Emission From 30 MHz to 1 GHz**Test mode: Transmitting (802.11b) Low Channel**Comment:**Horizontal*

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>(° ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|----------------|----------------|--------|
| 1   | 30.8535            | 20.77               | 6.62            | 27.39              | 40.00             | -12.61         | 360            | 100            | peak   |
| 2   | 39.7147            | 18.35               | 7.86            | 26.21              | 40.00             | -13.79         | 360            | 100            | peak   |
| 3   | 166.0680           | 27.15               | 3.93            | 31.08              | 43.50             | -12.42         | 360            | 100            | peak   |
| 4   | 199.2855           | 23.98               | 5.68            | 29.66              | 43.50             | -13.84         | 360            | 100            | peak   |
| 5   | 232.5318           | 25.07               | 7.03            | 32.10              | 46.00             | -13.90         | 360            | 100            | peak   |
| 6   | 267.5455           | 23.01               | 8.12            | 31.13              | 46.00             | -14.87         | 360            | 100            | peak   |

Vertical

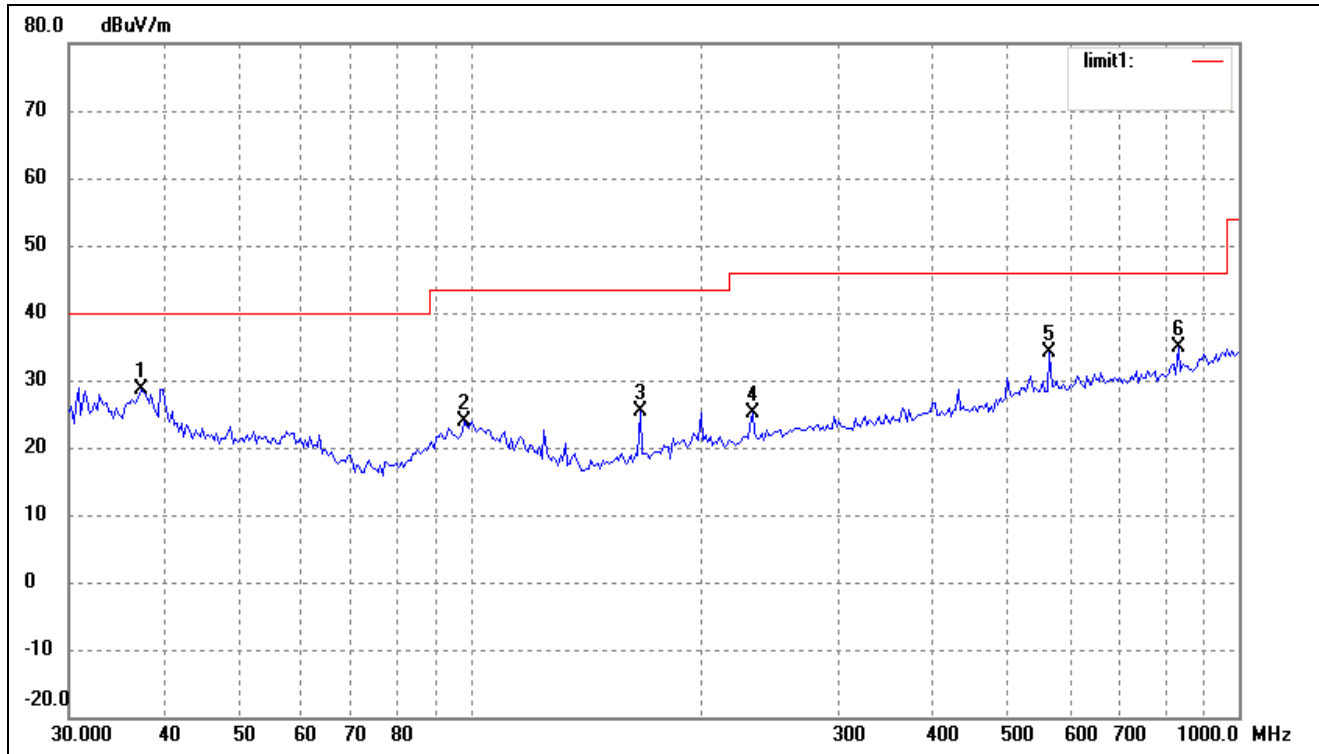


| No. | Frequency | Reading  | Correct | Result   | Limit    | Margin | Degree | Height | Remark |
|-----|-----------|----------|---------|----------|----------|--------|--------|--------|--------|
|     | (MHz)     | (dBuV/m) | dB/m    | (dBuV/m) | (dBuV/m) | (dB)   | (° )   | (cm)   |        |
| 1   | 37.2855   | 21.53    | 7.21    | 28.74    | 40.00    | -11.26 | 360    | 100    | peak   |
| 2   | 98.1419   | 16.12    | 7.69    | 23.81    | 43.50    | -19.69 | 360    | 100    | peak   |
| 3   | 166.0680  | 21.45    | 3.93    | 25.38    | 43.50    | -18.12 | 360    | 100    | peak   |
| 4   | 232.5318  | 18.18    | 7.03    | 25.21    | 46.00    | -20.79 | 360    | 100    | peak   |
| 5   | 566.6223  | 20.40    | 13.76   | 34.16    | 46.00    | -11.84 | 360    | 100    | peak   |
| 6   | 833.3171  | 18.80    | 15.98   | 34.78    | 46.00    | -11.22 | 360    | 100    | peak   |

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11b) Middle Channel

Comment:


Horizontal

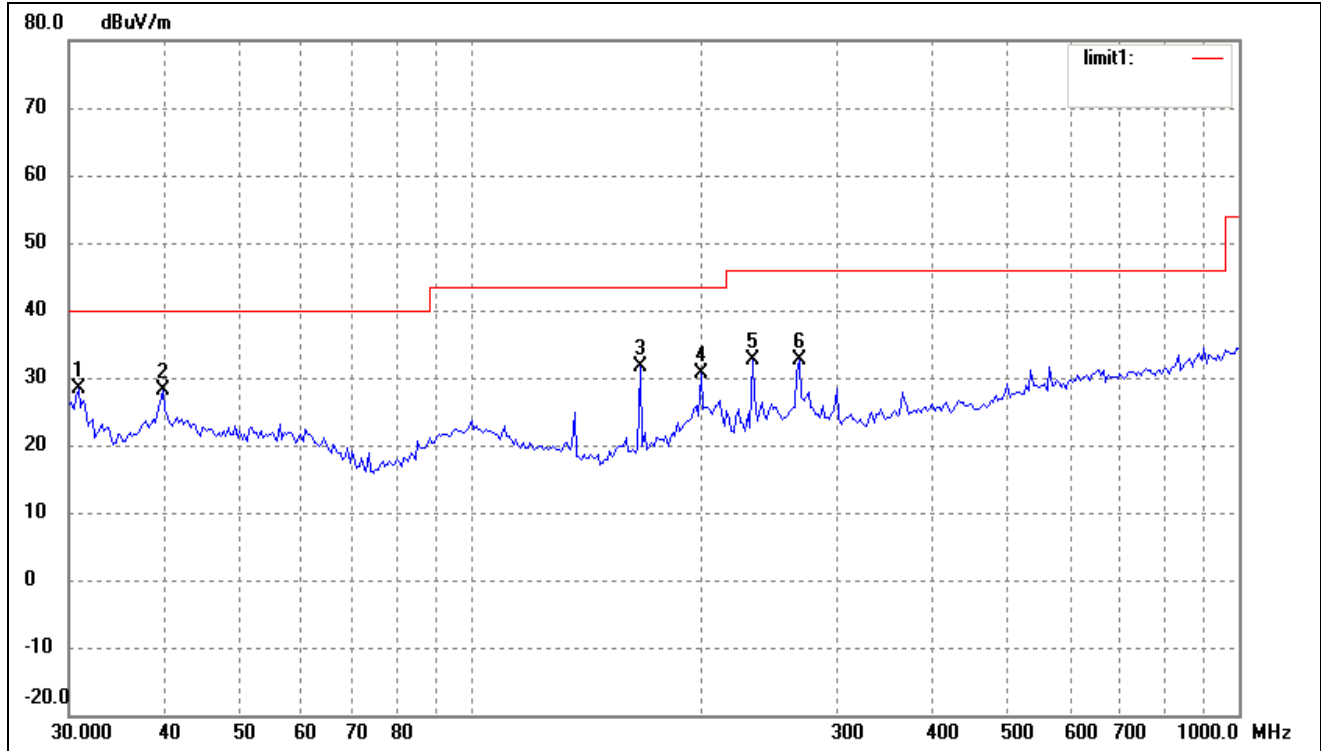

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>(° ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|----------------|----------------|--------|
| 1   | 30.8535            | 21.77               | 6.62            | 28.39              | 40.00             | -11.61         | 360            | 100            | peak   |
| 2   | 39.7147            | 20.26               | 7.86            | 28.12              | 40.00             | -11.88         | 360            | 100            | peak   |
| 3   | 166.0680           | 27.76               | 3.93            | 31.69              | 43.50             | -11.81         | 360            | 100            | peak   |
| 4   | 199.2855           | 25.02               | 5.68            | 30.70              | 43.50             | -12.80         | 360            | 100            | peak   |
| 5   | 232.5318           | 25.57               | 7.03            | 32.60              | 46.00             | -13.40         | 360            | 100            | peak   |
| 6   | 267.5455           | 24.56               | 8.12            | 32.68              | 46.00             | -13.32         | 360            | 100            | peak   |



Vertical

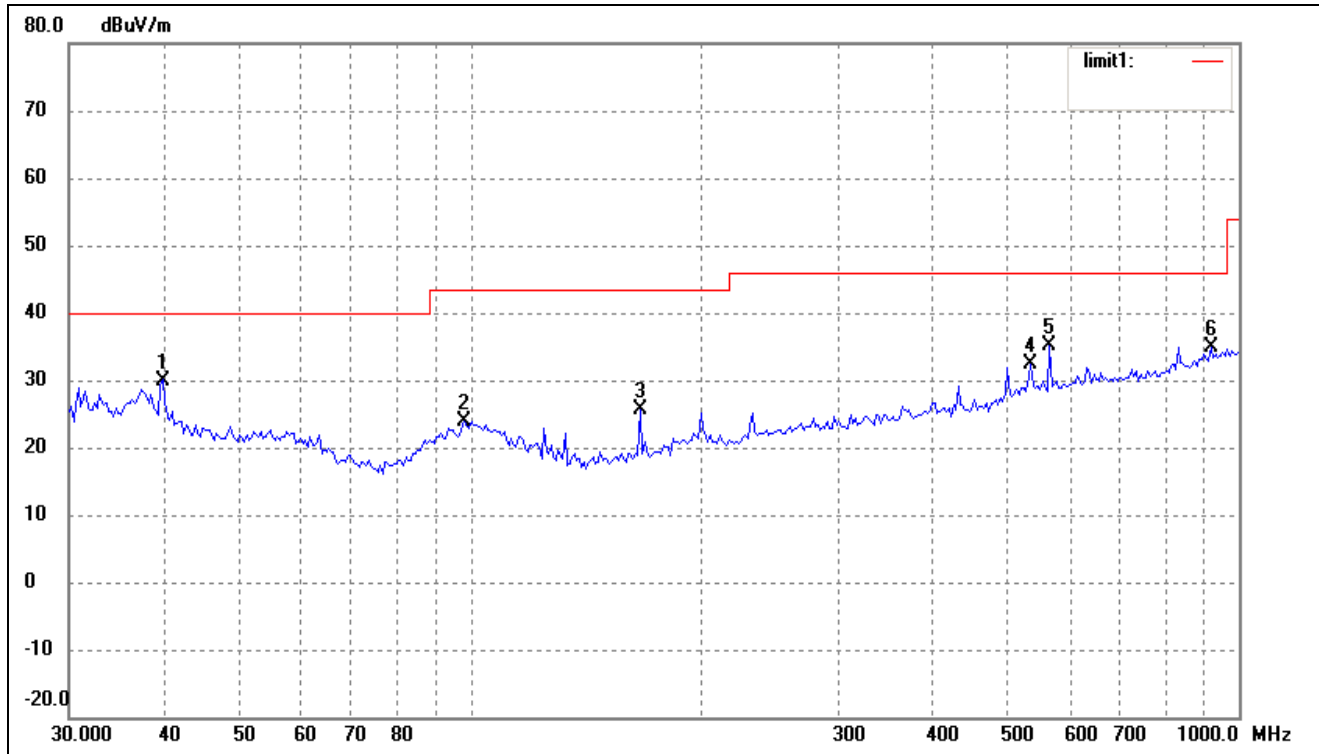


| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>(° ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|----------------|----------------|--------|
| 1   | 39.7147            | 22.14               | 7.86            | 30.00              | 40.00             | -10.00         | 360            | 100            | peak   |
| 2   | 98.1419            | 16.12               | 7.69            | 23.81              | 43.50             | -19.69         | 360            | 100            | peak   |
| 3   | 166.0680           | 21.73               | 3.93            | 25.66              | 43.50             | -17.84         | 360            | 100            | peak   |
| 4   | 535.7073           | 19.11               | 13.37           | 32.48              | 46.00             | -13.52         | 360            | 100            | peak   |
| 5   | 566.6223           | 21.27               | 13.76           | 35.03              | 46.00             | -10.97         | 360            | 100            | peak   |
| 6   | 919.2866           | 17.66               | 17.16           | 34.82              | 46.00             | -11.18         | 360            | 100            | peak   |

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11b) High Channel


Comment:

Horizontal

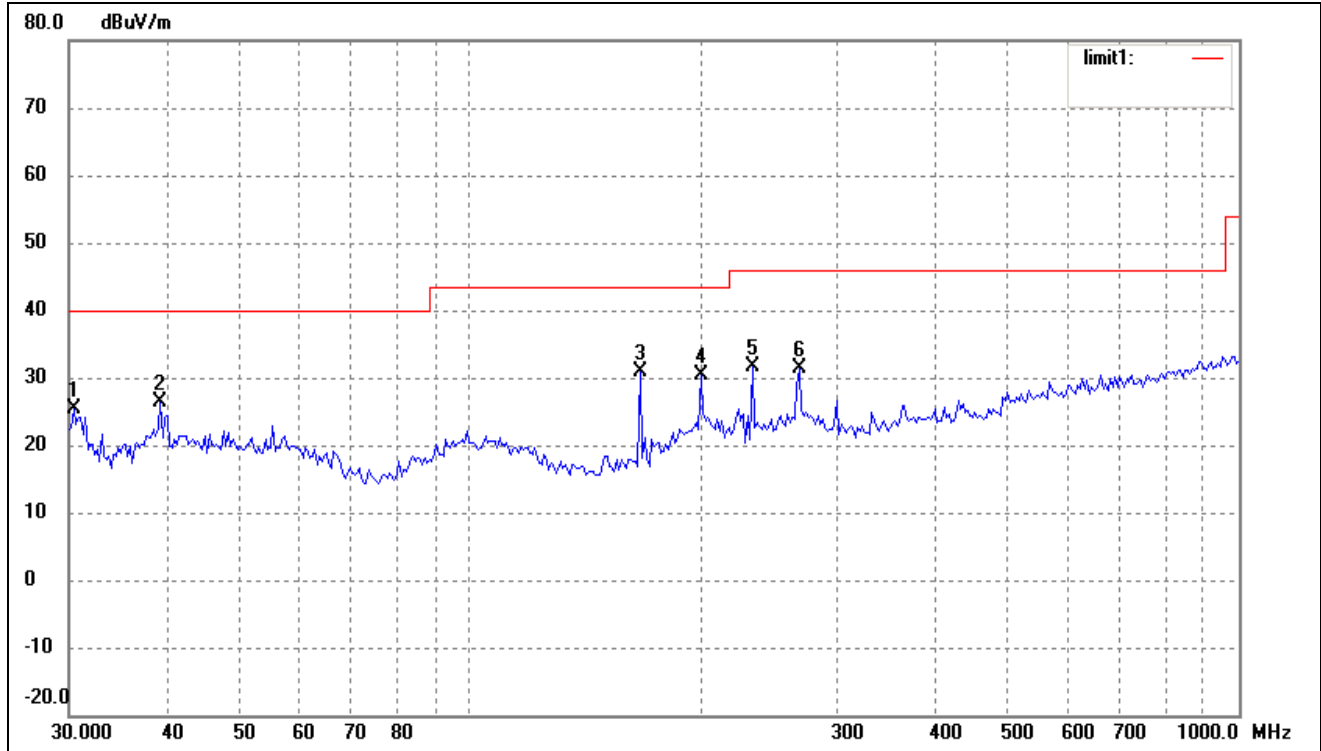

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>(° ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|----------------|----------------|--------|
| 1   | 30.4238            | 18.64               | 6.63            | 25.27              | 40.00             | -14.73         | 360            | 100            | peak   |
| 2   | 39.4372            | 18.67               | 7.78            | 26.45              | 40.00             | -13.55         | 360            | 100            | peak   |
| 3   | 166.0680           | 27.05               | 3.93            | 30.98              | 43.50             | -12.52         | 360            | 100            | peak   |
| 4   | 199.2855           | 24.77               | 5.68            | 30.45              | 43.50             | -13.05         | 360            | 100            | peak   |
| 5   | 232.5318           | 24.52               | 7.03            | 31.55              | 46.00             | -14.45         | 360            | 100            | peak   |
| 6   | 267.5455           | 23.19               | 8.12            | 31.31              | 46.00             | -14.69         | 360            | 100            | peak   |

Vertical

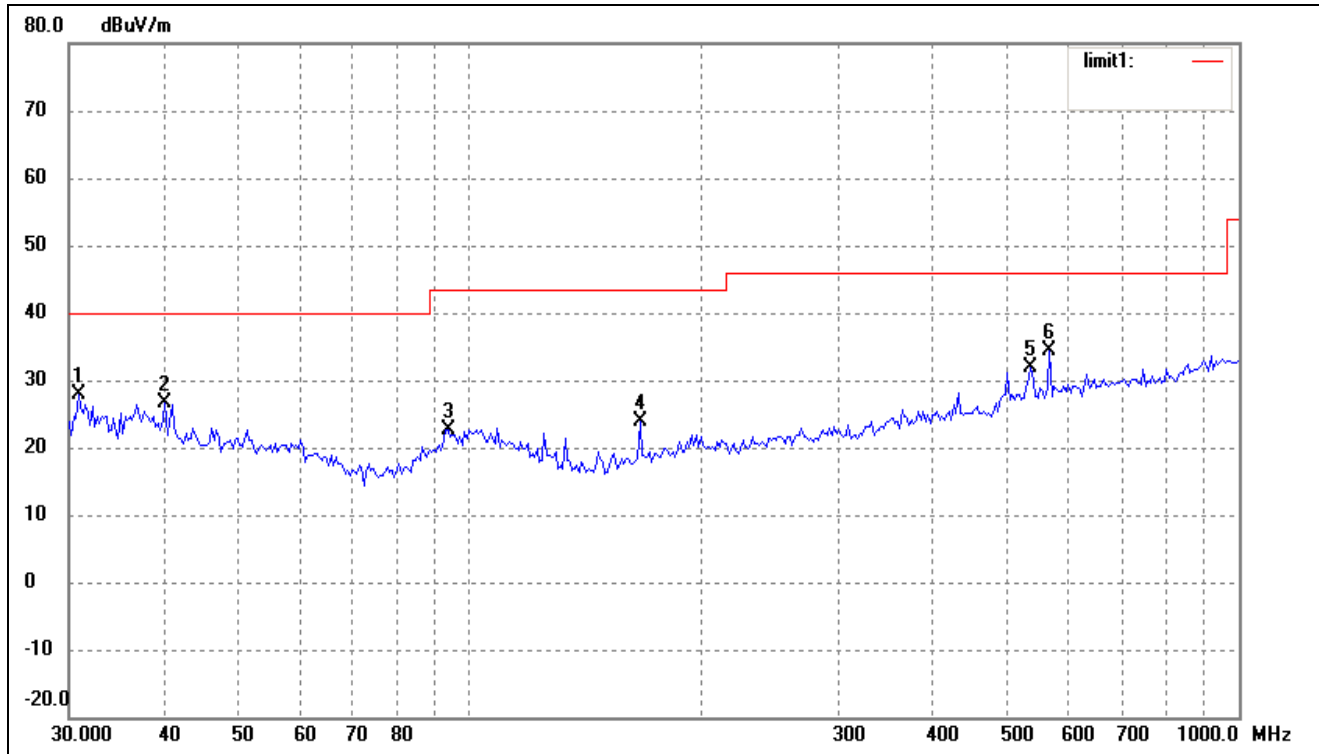


| No. | Frequency | Reading  | Correct | Result   | Limit    | Margin | Degree | Height | Remark |
|-----|-----------|----------|---------|----------|----------|--------|--------|--------|--------|
|     | (MHz)     | (dBuV/m) | dB/m    | (dBuV/m) | (dBuV/m) | (dB)   | (° )   | (cm)   |        |
| 1   | 30.8535   | 21.32    | 6.62    | 27.94    | 40.00    | -12.06 | 360    | 100    | peak   |
| 2   | 39.9942   | 18.60    | 7.93    | 26.53    | 40.00    | -13.47 | 360    | 100    | peak   |
| 3   | 93.4402   | 15.47    | 7.18    | 22.65    | 43.50    | -20.85 | 360    | 100    | peak   |
| 4   | 166.0680  | 20.06    | 3.93    | 23.99    | 43.50    | -19.51 | 360    | 100    | peak   |
| 5   | 535.7073  | 18.51    | 13.37   | 31.88    | 46.00    | -14.12 | 360    | 100    | peak   |
| 6   | 566.6223  | 20.67    | 13.76   | 34.43    | 46.00    | -11.57 | 360    | 100    | peak   |

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11g) Low Channel


Comment:

Horizontal

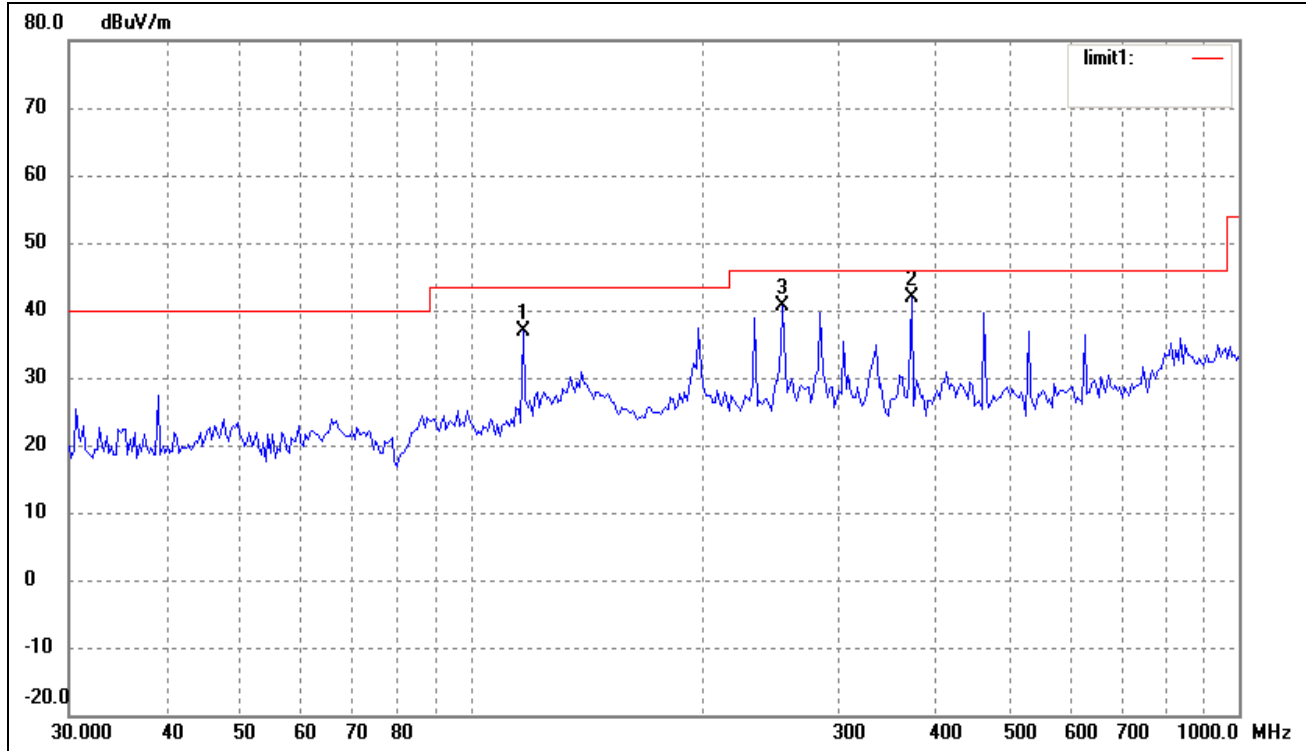

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>Factor(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ° ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------------|--------------------|-------------------|----------------|-----------------|----------------|--------|
| 1   | 116.9495           | 30.46               | 6.45                  | 36.91              | 43.50             | -6.59          | 360             | 100            | peak   |
| 2   | 374.6225           | 29.58               | 12.24                 | 41.82              | 46.00             | -4.18          | 110             | 124            | QP     |
| 3   | 254.7282           | 31.68               | 8.92                  | 40.60              | 46.00             | -5.40          | 208             | 104            | QP     |

Vertical

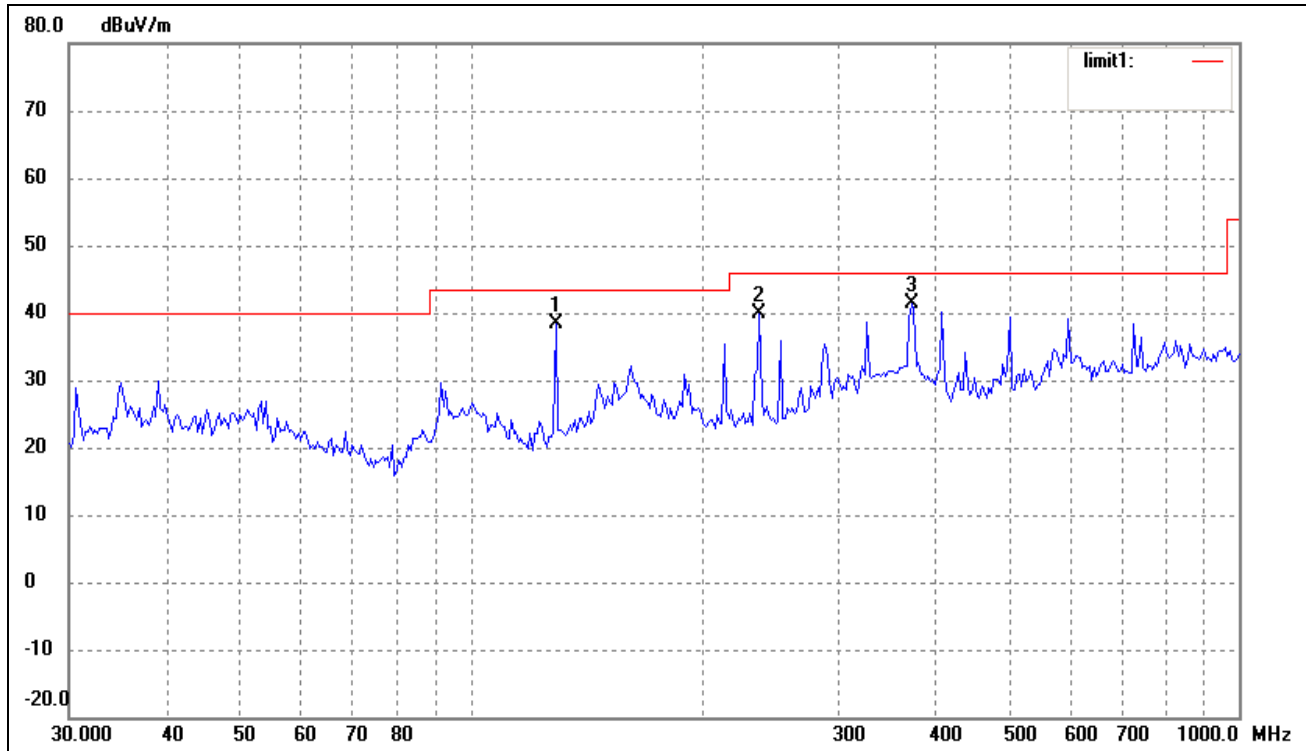


| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>Factor(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ° ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------------|--------------------|-------------------|----------------|-----------------|----------------|--------|
| 1   | 129.0146           | 33.69               | 4.70                  | 38.39              | 43.50             | -5.11          | 201             | 204            | QP     |
| 2   | 237.4760           | 31.30               | 8.68                  | 39.98              | 46.00             | -6.02          | 360             | 100            | peak   |
| 3   | 374.6226           | 29.21               | 12.24                 | 41.45              | 46.00             | -4.55          | 118             | 100            | QP     |

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11g) Middle Channel


Comment:

Horizontal

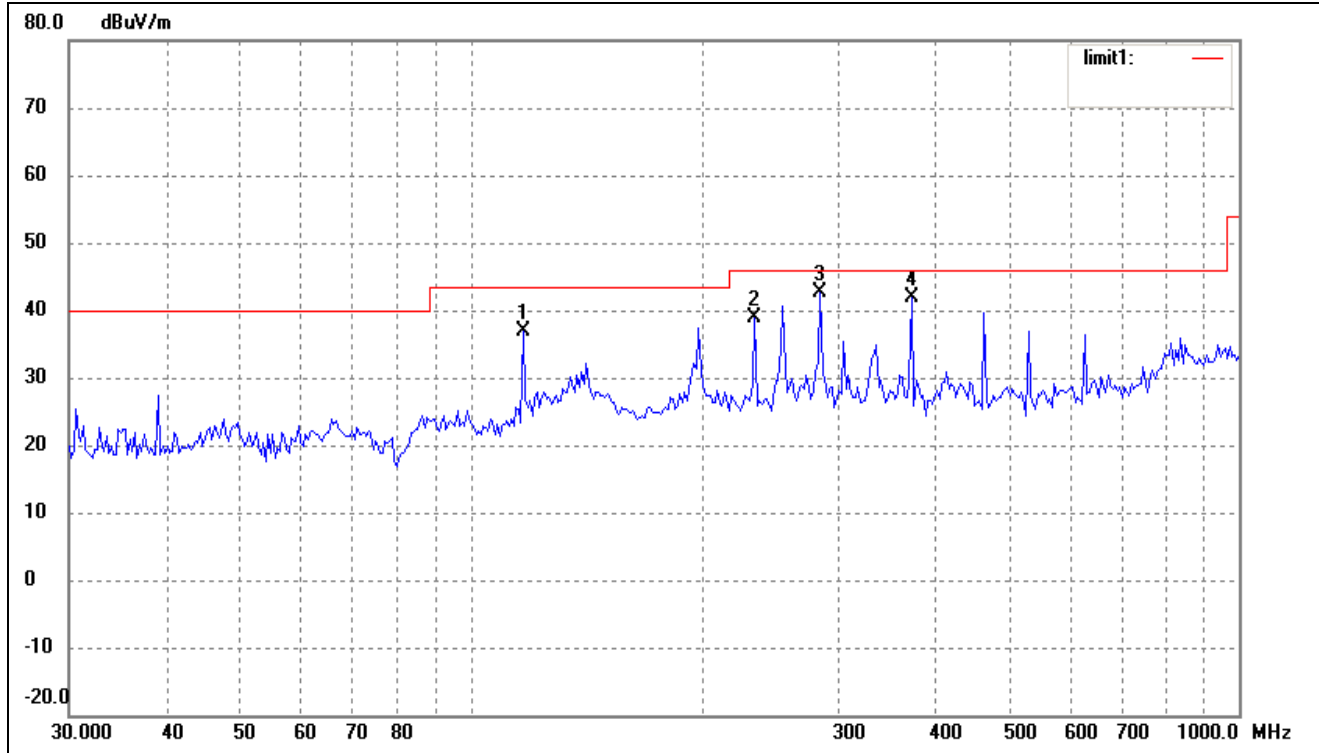

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>Factor(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ° ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------------|--------------------|-------------------|----------------|-----------------|----------------|--------|
| 1   | 116.9495           | 30.46               | 6.45                  | 36.91              | 43.50             | -6.59          | 360             | 100            | peak   |
| 2   | 234.1682           | 30.41               | 8.50                  | 38.91              | 46.00             | -7.09          | 0               | 100            | peak   |
| 3   | 284.9766           | 32.40               | 10.19                 | 42.59              | 46.00             | -3.41          | 203             | 105            | QP     |
| 4   | 374.6225           | 29.58               | 12.24                 | 41.82              | 46.00             | -4.18          | 221             | 114            | QP     |

Vertical

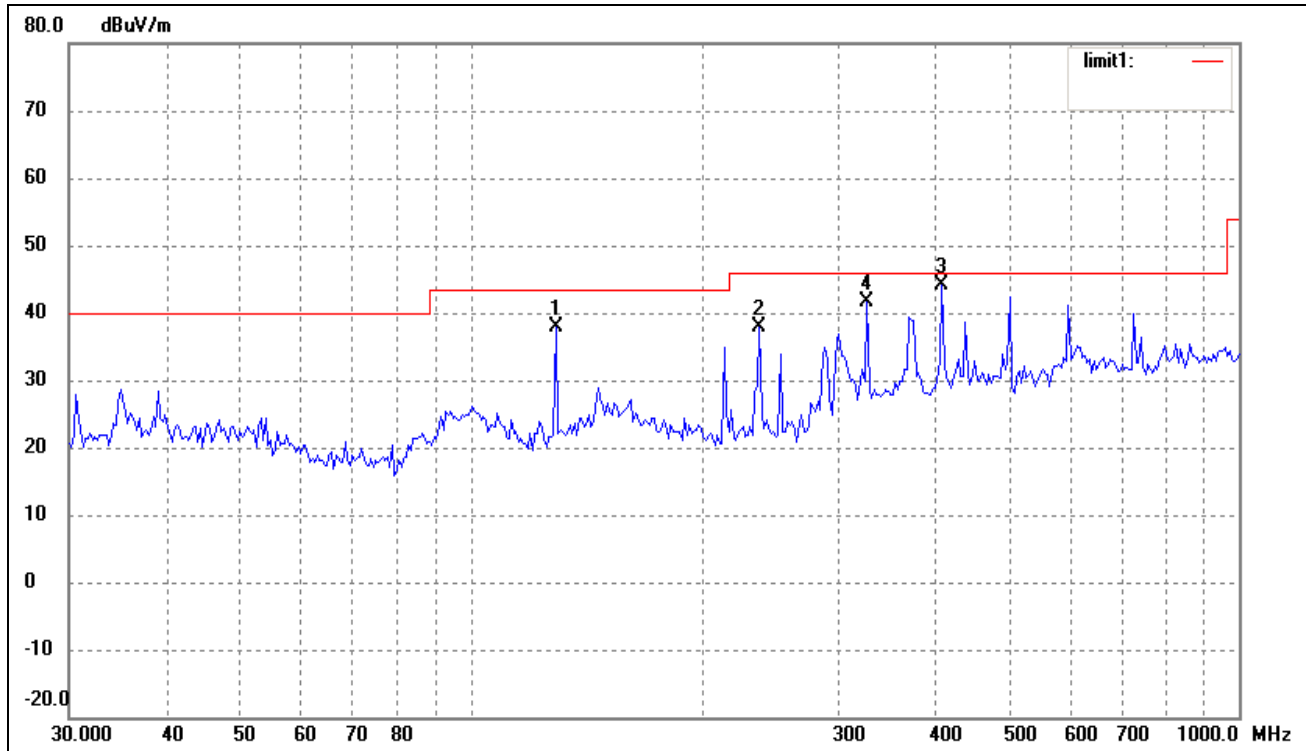


| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>Factor(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ° ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------------|--------------------|-------------------|----------------|-----------------|----------------|--------|
| 1   | 129.0146           | 33.19               | 4.70                  | 37.89              | 43.50             | -5.61          | 204             | 164            | QP     |
| 2   | 237.4759           | 29.30               | 8.68                  | 37.98              | 46.00             | -8.02          | 360             | 200            | peak   |
| 3   | 410.3824           | 31.81               | 12.30                 | 44.11              | 46.00             | -1.89          | 221             | 107            | QP     |
| 4   | 327.8872           | 30.75               | 10.88                 | 41.63              | 46.00             | -4.37          | 181             | 100            | QP     |

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11g) High Channel

Comment:


Horizontal

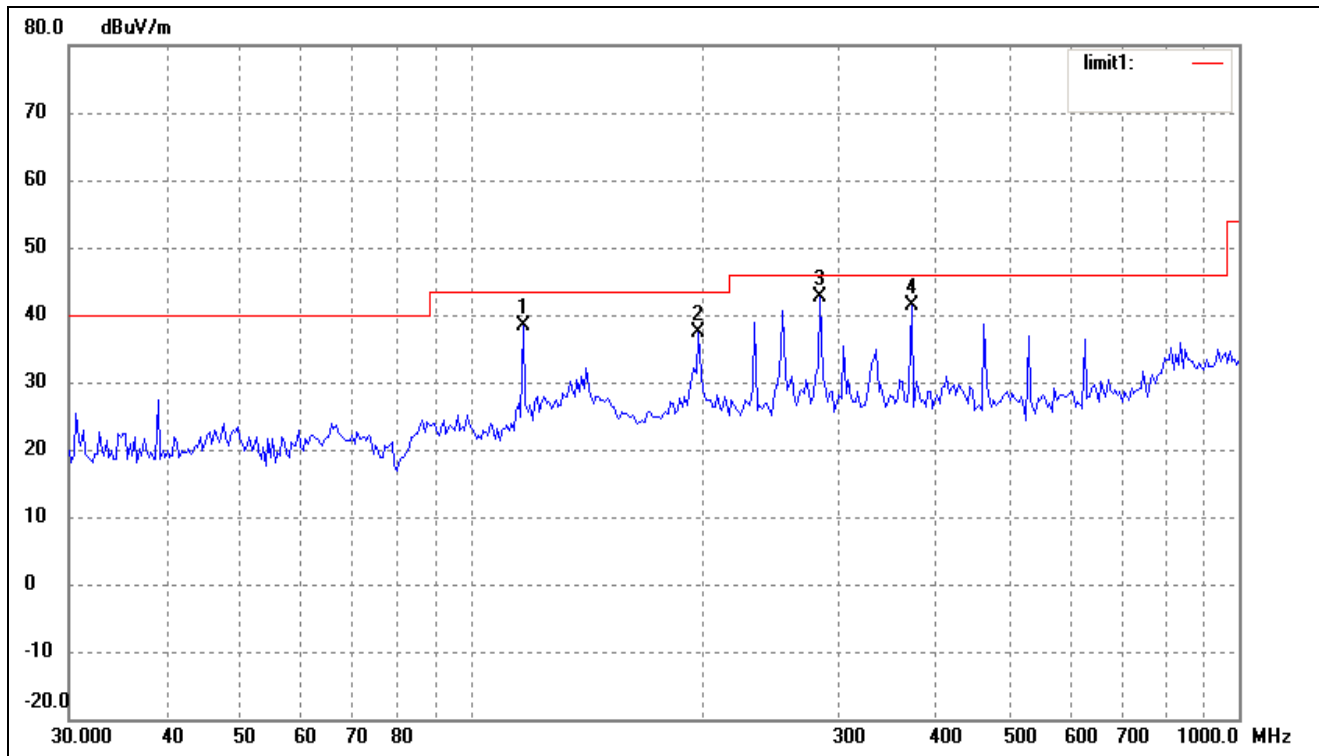

| No. | Frequency | Reading  | Correct    | Result   | Limit    | Margin | Degree | Height | Remark |
|-----|-----------|----------|------------|----------|----------|--------|--------|--------|--------|
|     | (MHz)     | (dBuV/m) | Factor(dB) | (dBuV/m) | (dBuV/m) | (dB)   | ( ° )  | (cm)   |        |
| 1   | 116.9495  | 31.96    | 6.45       | 38.41    | 43.50    | -5.09  | 216    | 206    | QP     |
| 2   | 197.8926  | 30.48    | 6.88       | 37.36    | 43.50    | -6.14  | 360    | 100    | peak   |
| 3   | 284.9766  | 32.40    | 10.19      | 42.59    | 46.00    | -3.41  | 208    | 106    | QP     |
| 4   | 374.6225  | 29.08    | 12.24      | 41.32    | 46.00    | -4.68  | 127    | 119    | QP     |



Vertical

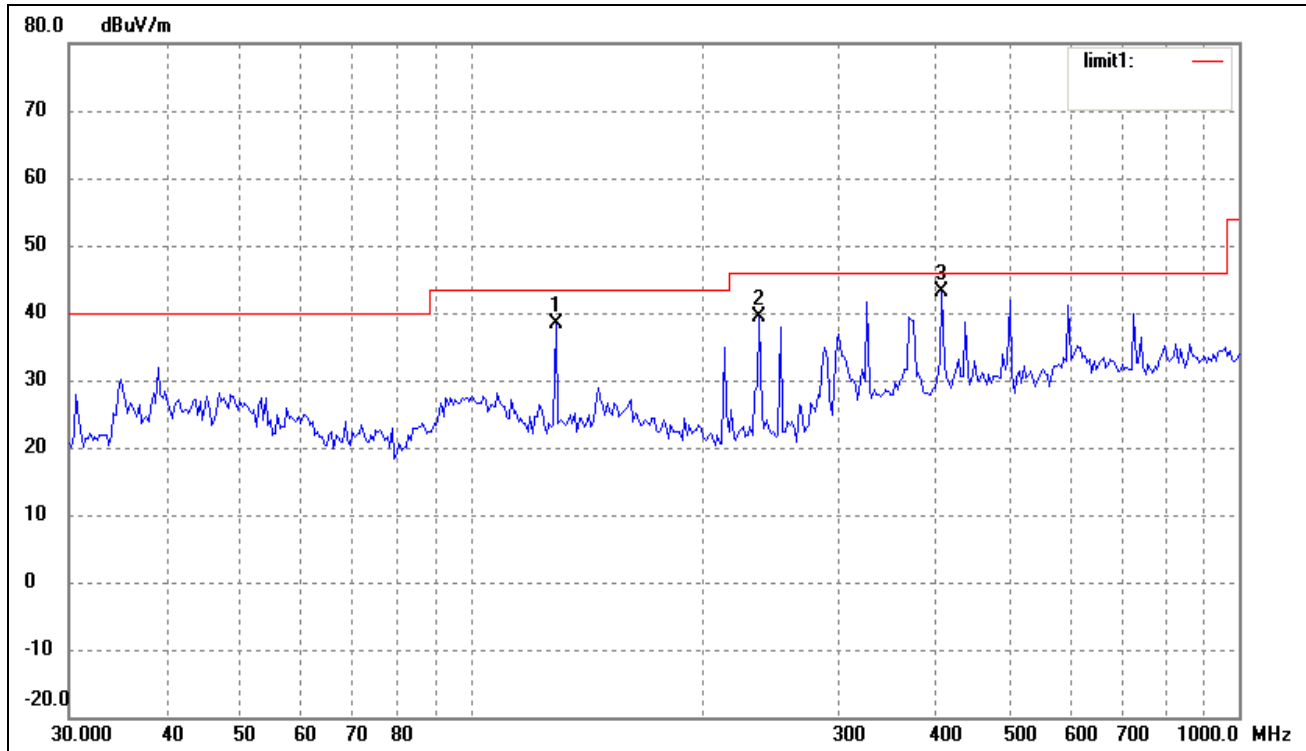

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>Factor(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ° ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------------|--------------------|-------------------|----------------|-----------------|----------------|--------|
| 1   | 129.0146           | 33.69               | 4.70                  | 38.39              | 43.50             | -5.11          | 204             | 124            | QP     |
| 2   | 237.4759           | 30.80               | 8.68                  | 39.48              | 46.00             | -6.52          | 360             | 100            | peak   |
| 3   | 410.3824           | 30.81               | 12.30                 | 43.11              | 46.00             | -2.89          | 225             | 106            | QP     |

*Spurious Emission above 1GHz**Test Mode: Transmitting (802.11b)*

| Frequency MHz                | Detector | Meter Reading dBuV | Direction Degree | Polar H / V | Antenna Loss dB | Cable loss dB | Amplifier dB | Correction Amplitude dBuV/m | Limit dBuV/m | Margin dB |
|------------------------------|----------|--------------------|------------------|-------------|-----------------|---------------|--------------|-----------------------------|--------------|-----------|
| Low Channel (1G to 25GHz)    |          |                    |                  |             |                 |               |              |                             |              |           |
| 4824.0                       | PK       | 53.7               | 90               | V           | 34.1            | 5.2           | 33.0         | 60.0                        | 74           | -14.0     |
| 7236.0                       | PK       | 51.6               | 270              | V           | 37.4            | 6.1           | 33.5         | 61.6                        | 74           | -12.4     |
| 7236.0                       | PK       | 50.4               | 180              | H           | 37.4            | 6.1           | 33.5         | 60.4                        | 74           | -13.6     |
| 4824.0                       | PK       | 52.7               | 45               | H           | 34.1            | 5.2           | 33.0         | 59.0                        | 74           | -15.0     |
| 4824.0                       | AV       | 42.5               | 270              | V           | 34.1            | 5.2           | 33.0         | 48.8                        | 54           | -5.2      |
| 7236.0                       | AV       | 40.7               | 90               | V           | 37.4            | 6.1           | 33.5         | 50.7                        | 54           | -3.3      |
| 7236.0                       | AV       | 40.2               | 45               | H           | 37.4            | 6.1           | 33.5         | 50.2                        | 54           | -3.8      |
| 4824.0                       | AV       | 42.4               | 60               | H           | 34.1            | 5.2           | 33.0         | 48.7                        | 54           | -5.3      |
| Middle Channel (1G to 25GHz) |          |                    |                  |             |                 |               |              |                             |              |           |
| 7311.0                       | PK       | 52.4               | 45               | V           | 37.4            | 6.1           | 33.5         | 62.4                        | 74           | -11.6     |
| 4874.0                       | PK       | 51.3               | 270              | V           | 34.1            | 5.2           | 33.0         | 57.6                        | 74           | -16.4     |
| 7311.0                       | PK       | 50.4               | 45               | H           | 37.4            | 6.1           | 33.5         | 60.4                        | 74           | -13.6     |
| 4874.0                       | PK       | 53.1               | 180              | H           | 34.1            | 5.2           | 33.0         | 59.4                        | 74           | -14.6     |
| 7311.0                       | AV       | 39.6               | 270              | V           | 37.4            | 6.1           | 33.5         | 49.6                        | 54           | -4.4      |
| 4874.0                       | AV       | 44.1               | 90               | V           | 34.1            | 5.2           | 33.0         | 50.4                        | 54           | -3.6      |
| 7311.0                       | AV       | 40.9               | 60               | H           | 37.4            | 6.1           | 33.5         | 50.9                        | 54           | -3.1      |
| 4874.0                       | AV       | 41.4               | 45               | H           | 34.1            | 5.2           | 33.0         | 47.7                        | 54           | -6.3      |
| High Channel (1G to 25GHz)   |          |                    |                  |             |                 |               |              |                             |              |           |
| 4924.0                       | PK       | 56.1               | 270              | V           | 34.1            | 5.2           | 33.0         | 62.4                        | 74           | -11.6     |
| 7386.0                       | PK       | 51.4               | 45               | V           | 37.4            | 6.1           | 33.5         | 61.4                        | 74           | -12.6     |
| 4924.0                       | PK       | 54.7               | 180              | H           | 34.1            | 5.2           | 33.0         | 61.0                        | 74           | -13       |
| 7386.0                       | PK       | 50.1               | 45               | H           | 37.4            | 6.1           | 33.5         | 60.1                        | 74           | -13.9     |
| 4924.0                       | AV       | 43.2               | 90               | V           | 34.1            | 5.2           | 33.0         | 49.5                        | 54           | -4.5      |
| 7386.0                       | AV       | 40.5               | 270              | V           | 37.4            | 6.1           | 33.5         | 50.5                        | 54           | -3.5      |
| 4924.0                       | AV       | 44.6               | 60               | H           | 34.1            | 5.2           | 33.0         | 50.9                        | 54           | -3.9      |
| 7386.0                       | AV       | 40.4               | 60               | H           | 37.4            | 6.1           | 33.5         | 50.4                        | 54           | -3.6      |

*Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.*

*Spurious Emission Above 1GHz**Test Mode: Transmitting (802.11g)*

| Frequency MHz                | Detector | Meter Reading dBuV | Direction Degree | Polar H / V | Antenna Loss dB | Cable loss dB | Amplifier dB | Correction Amplitude dBuV/m | Limit dBuV/m | Margin dB |
|------------------------------|----------|--------------------|------------------|-------------|-----------------|---------------|--------------|-----------------------------|--------------|-----------|
| Low Channel (1G to 25GHz)    |          |                    |                  |             |                 |               |              |                             |              |           |
| 4824.0                       | PK       | 56.4               | 90               | V           | 34.1            | 5.2           | 33.0         | 62.7                        | 74           | -11.3     |
| 7236.0                       | PK       | 52.7               | 270              | V           | 37.4            | 6.1           | 33.5         | 62.7                        | 74           | -11.3     |
| 7236.0                       | PK       | 51.2               | 180              | H           | 37.4            | 6.1           | 33.5         | 61.2                        | 74           | -12.8     |
| 4824.0                       | PK       | 57.4               | 45               | H           | 34.1            | 5.2           | 33.0         | 63.7                        | 74           | -10.3     |
| 4824.0                       | AV       | 43.1               | 270              | V           | 34.1            | 5.2           | 33.0         | 49.4                        | 54           | -4.6      |
| 7236.0                       | AV       | 38.8               | 90               | V           | 37.4            | 6.1           | 33.5         | 48.8                        | 54           | -5.2      |
| 7236.0                       | AV       | 39.4               | 45               | H           | 37.4            | 6.1           | 33.5         | 49.4                        | 54           | -4.6      |
| 4824.0                       | AV       | 42.2               | 60               | H           | 34.1            | 5.2           | 33.0         | 48.5                        | 54           | -5.5      |
| Middle Channel (1G to 25GHz) |          |                    |                  |             |                 |               |              |                             |              |           |
| 7311.0                       | PK       | 51.5               | 45               | V           | 37.4            | 6.1           | 33.5         | 61.5                        | 74           | -12.5     |
| 4874.0                       | PK       | 54.6               | 270              | V           | 34.1            | 5.2           | 33.0         | 60.9                        | 74           | -13.1     |
| 7311.0                       | PK       | 51.7               | 45               | H           | 37.4            | 6.1           | 33.5         | 61.7                        | 74           | -12.3     |
| 4874.0                       | PK       | 55.2               | 180              | H           | 34.1            | 5.2           | 33.0         | 61.5                        | 74           | -12.5     |
| 7311.0                       | AV       | 39.5               | 270              | V           | 37.4            | 6.1           | 33.5         | 49.5                        | 54           | -4.5      |
| 4874.0                       | AV       | 42.4               | 90               | V           | 34.1            | 5.2           | 33.0         | 48.7                        | 54           | -5.3      |
| 7311.0                       | AV       | 39.6               | 60               | H           | 37.4            | 6.1           | 33.5         | 49.6                        | 54           | -5.4      |
| 4874.0                       | AV       | 42.5               | 45               | H           | 34.1            | 5.2           | 33.0         | 48.8                        | 54           | -5.2      |
| High Channel (1G to 25GHz)   |          |                    |                  |             |                 |               |              |                             |              |           |
| 4924.0                       | PK       | 54.2               | 270              | V           | 34.1            | 5.2           | 33.0         | 60.5                        | 74           | -13.5     |
| 7386.0                       | PK       | 52.4               | 45               | V           | 37.4            | 6.1           | 33.5         | 62.4                        | 74           | -11.6     |
| 4924.0                       | PK       | 54.5               | 180              | H           | 34.1            | 5.2           | 33.0         | 60.8                        | 74           | -13.2     |
| 7386.0                       | PK       | 50.5               | 45               | H           | 37.4            | 6.1           | 33.5         | 60.5                        | 74           | -13.5     |
| 4924.0                       | AV       | 43.1               | 90               | V           | 34.1            | 5.2           | 33.0         | 49.4                        | 54           | -4.6      |
| 7386.0                       | AV       | 39.1               | 270              | V           | 37.4            | 6.1           | 33.5         | 49.1                        | 54           | -4.9      |
| 4924.0                       | AV       | 43.5               | 60               | H           | 34.1            | 5.2           | 33.0         | 49.8                        | 54           | -4.2      |
| 7386.0                       | AV       | 40.5               | 60               | H           | 37.4            | 6.1           | 33.5         | 50.5                        | 54           | -3.5      |

*Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.*

## 9. OUT OF BAND EMISSIONS

### 9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 9.2 Test Equipment List and Details

| Manufacturer             | Description   | Model    | Serial Number | Cal. Date  | Due. Date  |
|--------------------------|---------------|----------|---------------|------------|------------|
| Spectrum Analyzer        | ROHDE&SCHWARZ | FSEA20   | DE25181       | 2009-08-12 | 2010-08-11 |
| Positioning Controller   | C&C           | CC-C-1F  | N/A           | 2009-08-12 | 2010-08-11 |
| Trilog Broadband Antenna | SCHWARZBECK   | VULB9163 | 9163-333      | 2010-07-21 | 2011-07-20 |
| Horn Antenna             | ETS           | 3117     | 00086197      | 2010-07-21 | 2011-07-20 |
| RF Switch                | EM            | EMSW18   | SW060023      | 2009-08-12 | 2010-08-11 |
| Amplifier                | Agilent       | 8447F    | 3113A06717    | 2009-08-12 | 2010-08-11 |
| Coaxial Cable            | SCHWARZBECK   | AK9513   | 9513-10       | 2009-08-12 | 2010-08-11 |
| Spectrum Analyzer        | ROHDE&SCHWARZ | FSP      | 836079/035    | 2010-04-16 | 2011-04-15 |

### 9.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW, VBW=100KHz, Span=50MHz, Sweep = auto
3. Set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, then mark the higher-level emission for comparing with the FCC rules.

### 9.4 Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 21° C     |
| Relative Humidity: | 54%       |
| ATM Pressure:      | 1011 mbar |

## 9.5 Summary of Test Results/Plots

| Test mode | Frequency<br>MHz | Limit<br>dBuV /dB | Result |
|-----------|------------------|-------------------|--------|
| 802.11b   | 2390.00          | <54dBuv           | Pass   |
|           | 2400.00          | >20dB             | Pass   |
|           | 2483.50          | <54dBuv           | Pass   |
| 802.11g   | 2390.00          | <54dBuv           | Pass   |
|           | 2400.00          | >20dB             | Pass   |
|           | 2483.50          | <54dBuv           | Pass   |


### For 802.11b

Lowest Bandedge

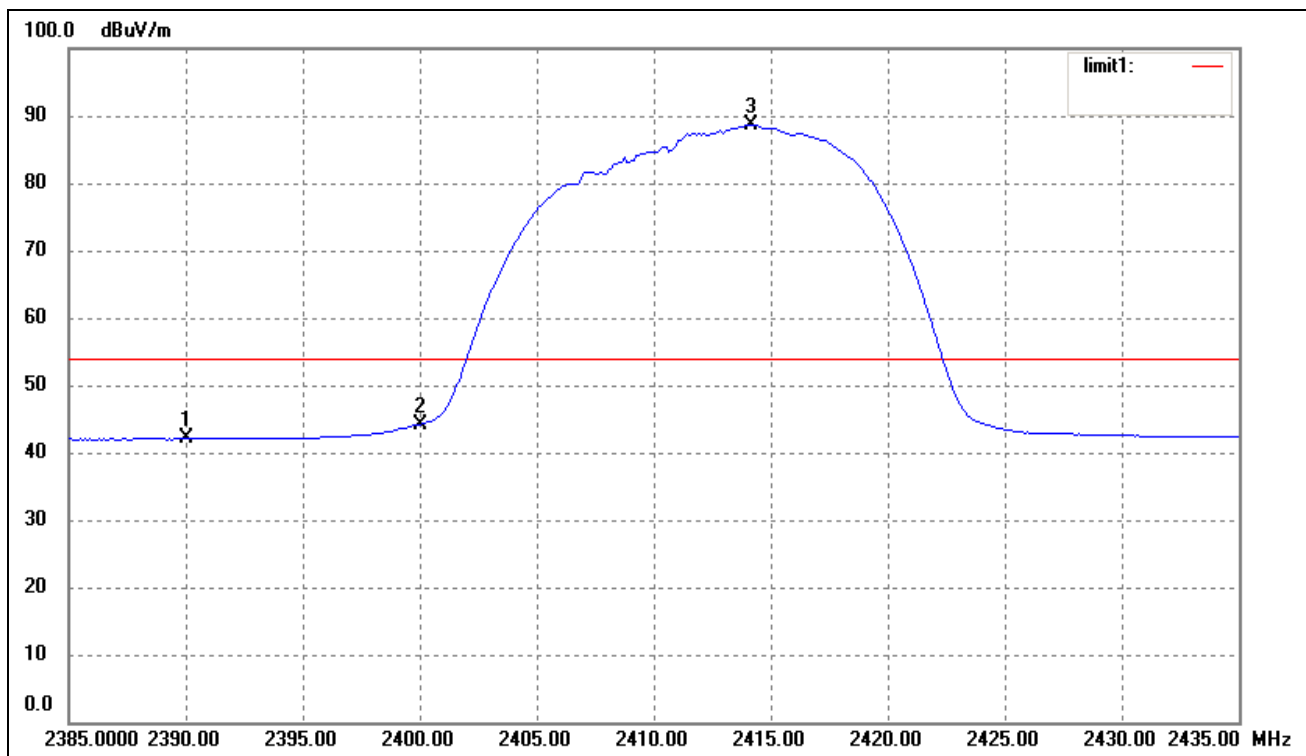


| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>Factor(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ° ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------------|--------------------|-------------------|----------------|-----------------|----------------|--------|
| 1   | 2390.000           | 6.49                | 35.59                 | 42.08              | 54.00             | -11.92         | 226             | 100            | Ave    |
|     | 2390.000           | 15.65               | 35.59                 | 51.24              | 74.00             | -22.76         | 226             | 100            | peak   |
| 2   | 2400.000           | 8.54                | 35.68                 | 44.22              | 54.00             | -9.78          | 154             | 100            | Ave    |
| 3   | 2414.158           | 52.91               | 35.73                 | 88.64              | /                 | /              | /               | /              | Ave    |

For 802.11b  
Highest Bandedge

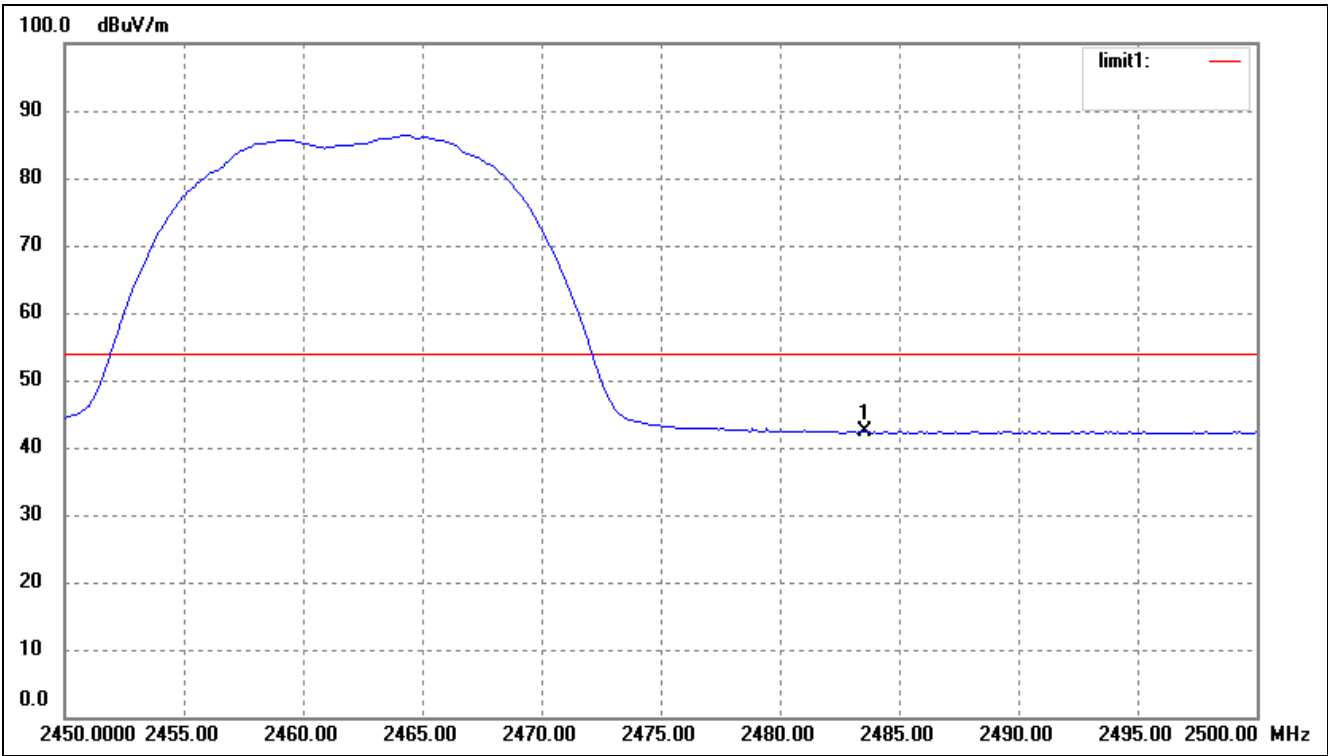


| No. | Frequency | Reading  | Correct    | Result   | Limit    | Margin | Degree | Height | Remark |
|-----|-----------|----------|------------|----------|----------|--------|--------|--------|--------|
|     | (MHz)     | (dBuV/m) | Factor(dB) | (dBuV/m) | (dBuV/m) | (dB)   | ( ° )  | (cm)   |        |
| 1   | 2483.500  | 6.29     | 35.97      | 42.26    | 54.00    | -11.74 | 55     | 100    | Ave    |
|     | 2483.500  | 15.70    | 35.97      | 51.67    | 74.00    | -22.33 | 55     | 100    | peak   |

For 802.11g  
Lowest Bandedge

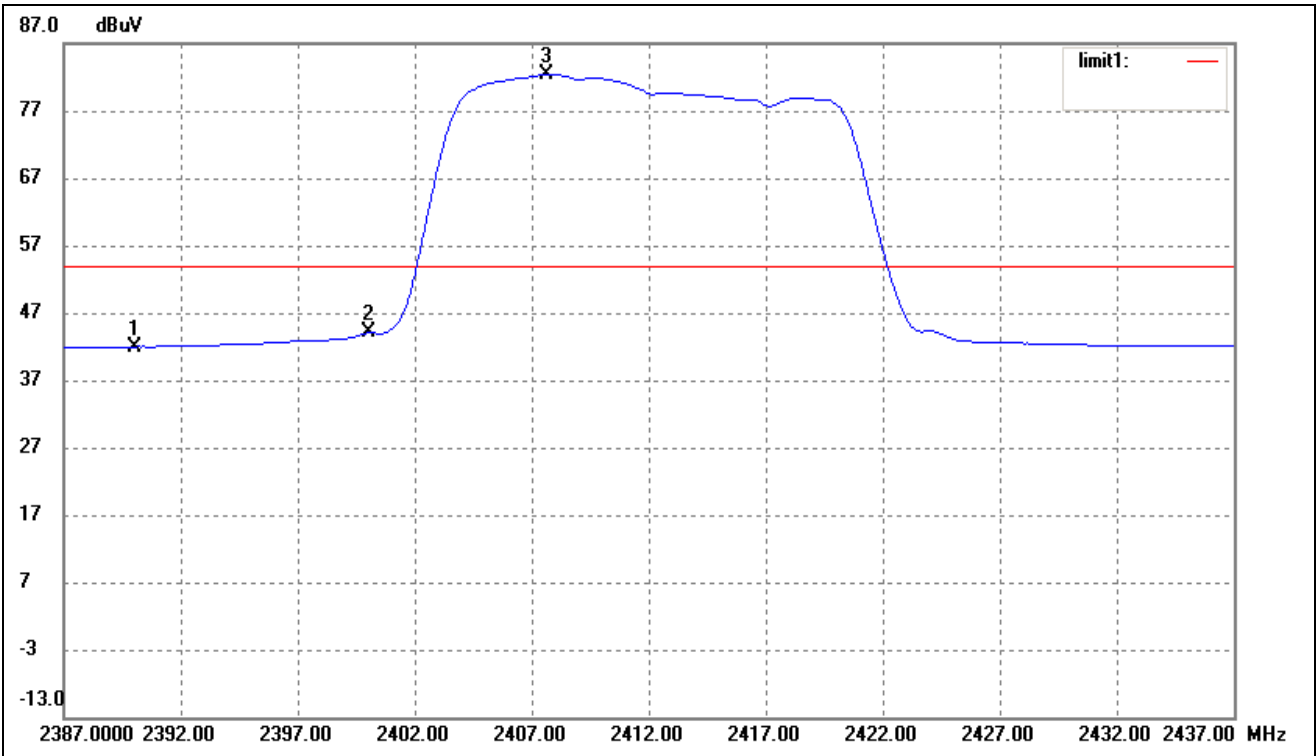

| No. | Frequency | Reading | Correct    | Result | Limit  | Margin | Degree | Height | Remark |
|-----|-----------|---------|------------|--------|--------|--------|--------|--------|--------|
|     | (MHz)     | (dBuV)  | Factor(dB) | (dBuV) | (dBuV) | (dB)   | ( ° )  | (cm)   |        |
| 1   | 2390.000  | 7.39    | 34.59      | 41.98  | 54.00  | -12.02 | 125    | 114    | Ave    |
|     | 2390.000  | 28.19   | 34.67      | 62.86  | 74.00  | -11.14 | 360    | 200    | peak   |
| 2   | 2400.000  | 9.35    | 34.68      | 44.03  | 54.00  | -9.97  | 360    | 100    | Ave    |
| 3   | 2407.641  | 47.70   | 34.71      | 82.41  | /      | /      | /      | /      | Ave    |

Highest Bandedge

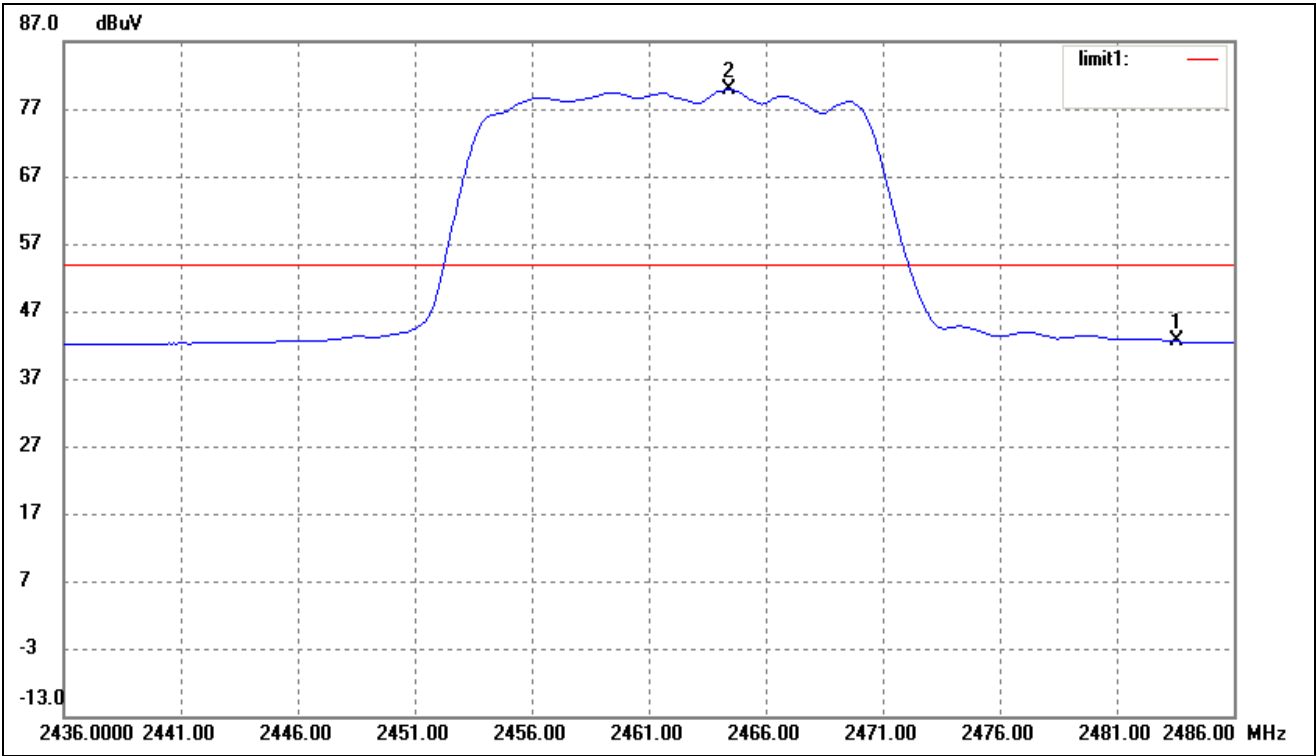

| No. | Frequency | Reading | Correct    | Result | Limit  | Margin | Degree | Height | Remark |
|-----|-----------|---------|------------|--------|--------|--------|--------|--------|--------|
|     | (MHz)     | (dBuV)  | Factor(dB) | (dBuV) | (dBuV) | (dB)   | ( ° )  | (cm)   |        |
| 1   | 2483.500  | 7.57    | 34.97      | 42.54  | 54.00  | -11.46 | 203    | 118    | Ave    |
|     | 2483.500  | 28.61   | 34.97      | 63.58  | 74.00  | -10.42 | 360    | 200    | peak   |
| 2   | 2464.457  | 44.93   | 34.91      | 79.84  | /      | /      | /      | /      | Ave    |

\*\*\*\*\* END OF REPORT \*\*\*\*\*