



# FCC SAR TEST REPORT

Report No: STS1601148H01

Issued for

ITALCOM GROUP

1728 Coral Way, Coral Gables, Miami, Florida, United States  
33145

Product Name:	SMART PHONE
Brand Name:	Nyx Mobile
Model No.:	A1
Series Model:	N/A
FCC ID:	YPVITALCOMA1
Test Standard:	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 ( 2.1093)
	IEEE 1528: 2013
Max. Report SAR (1g):	Head:0.539 W/kg
	Body:1.239 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





## Test Report Certification

**Applicant's name** ..... : ITALCOM GROUP  
**Address** ..... : 1728 Coral Way, Coral Gables, Miami, Florida, United States  
33145  
**Manufacture's Name** ..... : Vitsmo. Co. Ltd.  
**Address** ..... : Dongwon Tower 14FL., 13, Teheran-ro 81-gil, Gangnam-gu,  
Seoul, Korea 135-090

### Product description

**Product name** ..... : SMART PHONE  
**Trademark** ..... : Nyx Mobile  
**Model and/or type reference** : A1  
**Series Model** : N/A

**Standards** ..... : ANSI/IEEE Std. C95.1-1992  
FCC 47 CFR Part 2 ( 2.1093)  
IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Date of Test** ..... :  
**Date (s) of performance of tests** ..... : 22 Feb. 2016  
**Date of Issue** ..... : 24 Feb. 2016  
**Test Result** ..... : **Pass**

Testing Engineer :

*Allen Chen*

(Allen Chen)

Technical Manager :

*John Zou*

(John Zou)

Authorized Signatory :

*Bovey Yang*

(Bovey Yang)





## TABLE OF CONTENTS

1. General Information	4
1.1 EUT Description	4
1.2 Test Environment	6
1.3 Test Facility	6
2. Test Standards And Limits	7
3. SAR Measurement System	8
3.1 Definition Of Specific Absorption Rate (SAR)	8
3.2 SAR System	8
3.2.1 Probe	9
3.2.2 Phantom	10
3.2.3 Device Holder	10
4. Tissue Simulating Liquids	11
4.1 Simulating Liquids Parameter Check	11
5. SAR System Validation	13
5.1 Validation System	13
5.2 Validation Result	13
6. SAR Evaluation Procedures	14
7. EUT Antenna Location Sketch	15
7.1 SAR TEST EXCLUSION CONSIDER TABLE	16
8. EUT Test Position	18
8.1 Define Two Imaginary Lines On The Handset	18
8.2 Hotspot mode exposure position condition	19
9. Uncertainty	20
9.1 Measurement Uncertainty	20
9.2 System validation Uncertainty	22
10. Conducted Power Measurement	24
11. EUT And Test Setup Photo	32
11.1 EUT Photo	32
11.2 Setup Photo	35
12. SAR Result Summary	42
12.1 Head SAR	42
12.2 Body-worn SAR	43
12.3 Body Hotspot SAR	44
13. Equipment List	49
Appendix A. System Validation Plots	50
Appendix B. SAR Test Plots	66
Appendix C. Probe Calibration And Dipole Calibration Report	78



## 1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

### 1.1 EUT Description

Equipment	SMART PHONE				
Brand Name	Nyx Mobile				
Model No.	A1				
Serial Model	N/A				
FCC ID	YPVITALCOMA1				
Model Difference	N/A				
Adapter	Input: AC100-240V, 150m A, 50/60 Hz Output: DC 5V, 700mA				
Battery	Rated Voltage: 3.7V; Charge Limit: 4.2V; Capacity: 2300mAh				
Device Category	Portable				
Product stage	Production unit				
RF Exposure Environment	General Population / Uncontrolled				
IMEI	354546070000678				
Hardware Version	NYX_A1_001				
Software Version	A1_AMXNYX_V001R				
Frequency Range	GSM 850:824.2~848.8MHz PCS1900:1850.2~1909.8MHz WCDMA Band II:1852.4~1907.6MHz WCDMA Band V:826.4~846.6MHz		LTE Band 4:1710.7~1754.3MHz WLAN 802.11b/g/n(HT20):2412~2462MHz WLAN 802.11n(HT40):2422~2452MHz Bluetooth:2402~ 2480MHz		
Max. Reported SAR(1g):	Band	Mode	Head (W/kg)	Body worn(W/kg)	Body Hotspot(W/kg)
	PCE	GSM 850	0.193	0.730	0.275
	PCE	GSM 1900	0.066	0.918	0.451
	PCE	WCDMA Band II	0.075	1.239	0.556
	PCE	WCDMA Band V	0.122	0.415	0.140
	PCE	LTE Band 4	0.207	1.203	0.757
	DTS	WIFI	0.539	0.262	0.251
1-g Sum SAR			0.746	1.501	1.008
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter (DSS) Digital Transmission System (DTS)				
Operating Mode:	GSM: GSM Voice; GPRS; EGPRS Class 12; WCDMA:RMC,HSDPA,HSUPA Release 6; LTE:QPSK,16QAM; WLAN: 802.11 b/g/n(HT20) /n(HT40); Bluetooth: V3.0 + EDR (GFSK + $\pi$ /4DQPSK+8DPSK) ;				



Antenna Specification:	GSM,WCDMA,LTE: PIFA Antenna BT,WIFI: PIFA Antenna
SIM Card	Support single card
Hotspot Mode:	Support
DTM Mode:	Not Support
Note: 1. Bluetooth SAR was estimated 2. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power	





## 1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required	Actual
Temperature (°C)	18-25	22~23
Humidity (%RH)	30-70	55~65

## 1.3 Test Facility

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F, Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong,  
Baoan District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649;

FCC Registration No.: 842334;

IC Registration No.: 12108A-1





## 2. Test Standards And Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r04	SAR for LTE Devices
9	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
11	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

### (A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body   Partial-Body   Hands, Wrists, Feet and Ankles

0.4                      8.0                      20.0

### (B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body   Partial-Body   Hands, Wrists, Feet and Ankles

0.08                      1.6                      4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

#### **Population/Uncontrolled Environments:**

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

#### **Occupational/Controlled Environments:**

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

#### **NOTE**

#### **GENERAL POPULATION/UNCONTROLLED EXPOSURE**

#### **PARTIAL BODY LIMIT**

**1.6 W/kg**



### 3. SAR Measurement System

#### 3.1 Definition Of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  
 $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

#### 3.2 SAR System

SATIMO SAR System Diagram:

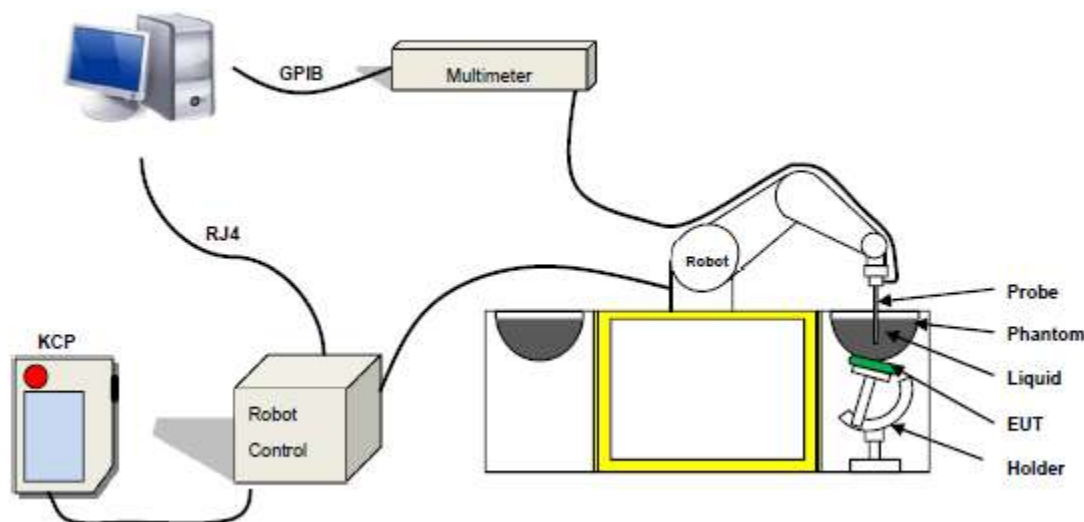

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue



The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

### 3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 17/14 EP221 with following specifications is used

- Dynamic range: 0.01-100 W/kg
  - Tip Diameter :5 mm
  - Distance between probe tip and sensor center: 2.7mm
  - Distance between sensor center and the inner phantom surface: 4 mm (repeatability better than +/- 1mm)
  - Probe linearity: < 0.25 dB
  - Axial Isotropy: < 0.25 dB
  - Spherical Isotropy: < 0.25 dB
  - Calibration range: 450MHz to 2600MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1 – Satimo COMOSAR Dosimetric E field Dipole

### 3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

SN 32/14 SAM115



SN 32/14 SAM116



### 3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



## 4. Tissue Simulating Liquids

### 4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Frequency (MHz)	Bactericide	DGBE	HEC	NaCl	Sucrose	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	$\sigma$	$\epsilon_r$
835	0.10	/	1.00	1.45	57.00	/	40.45	0.90	41.6
900	0.10	/	1.00	1.48	56.50	/	40.92	0.98	41.2
1800	/	44.92	/	0.18	/	/	54.9	1.40	40.4
1900	/	44.92	/	0.18	/	/	54.9	1.42	39.9
2100	/	50.0	/	/	/	/	50.0	1.51	36.8
2450	/	7.99	/	0.16	/	/	50.0	1.88	40.3

Tissue dielectric parameters for head and body phantoms				
Frequency	$\epsilon_r$		$\sigma$ S/m	
	Head	Body	Head	Body
300	45.3	58.2	0.87	0.92
450	43.5	58.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
3000	38.5	52.0	2.40	2.73
5800	35.3	48.2	5.27	6.00

**LIQUID MEASUREMENT RESULTS****Date:** 22 Feb. 2016**Ambient condition:** Temperature 22.7°C Relative humidity: 49%

Head Simulating Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
835 MHz	22.30	Permittivity:	41.5	42.10	1.45	±5
		Conductivity:	0.9	0.94	4.44	± 5
1800 MHz	22.30	Permittivity:	40.1	40.11	0.02	±5
		Conductivity:	1.37	1.34	-2.19	± 5
1900 MHz	22.30	Permittivity:	40	40.31	0.78	± 5
		Conductivity:	1.4	1.44	2.86	± 5
2450 MHz	22.30	Permittivity:	39.2	39.28	0.20	± 5
		Conductivity:	1.8	1.85	2.55	± 5


Body Simulating Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
835 MHz	22.30	Permittivity:	55.2	55.61	0.74	± 5
		Conductivity:	0.97	0.98	1.03	± 5
1800 MHz	22.30	Permittivity:	53.4	54.84	2.70	± 5
		Conductivity:	1.49	1.46	-2.01	± 5
1900 MHz	22.30	Permittivity:	53.3	53.70	0.75	± 5
		Conductivity:	1.52	1.50	-1.32	± 5
2450 MHz	22.30	Permittivity:	52.7	52.69	-0.02	± 5
		Conductivity:	1.95	1.86	-4.37	± 5

## 5. SAR System Validation

### 5.1 Validation System

Each SATIMO system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

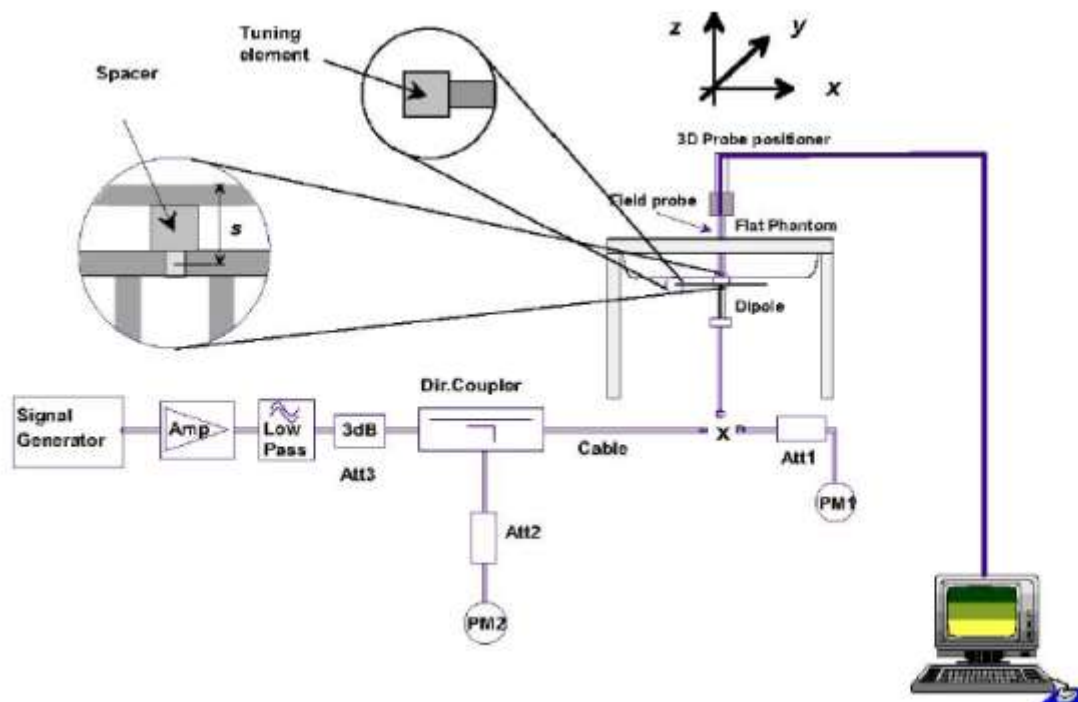

### 5.2 Validation Result

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %.

**Ambient condition:** Temperature 22.7°C Relative humidity: 49%

Freq.(MHz)	Power(mW)	Tested Value (W/Kg)	Normalized SAR (W/kg)	Target(W/Kg)	Tolerance(%)	Date
835 Head	100	0.961	9.61	9.56	0.52	2016-02-22
835 Body	100	0.973	9.73	9.56	1.78	2016-02-22
1800 Head	100	3.964	39.64	38.4	3.23	2016-02-22
1800 Body	100	3.980	39.80	38.4	3.65	2016-02-22
1900 Head	100	4.162	41.62	39.7	4.84	2016-02-22
1900 Body	100	4.148	41.48	39.7	4.48	2016-02-22
2450 Head	100	5.310	53.10	52.4	1.34	2016-02-22
2450 Body	100	5.266	52.66	52.4	0.50	2016-02-22

Note: The tolerance limit of System validation  $\pm 10\%$ .



## 6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:


The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

➤ Area Scan& Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.


When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

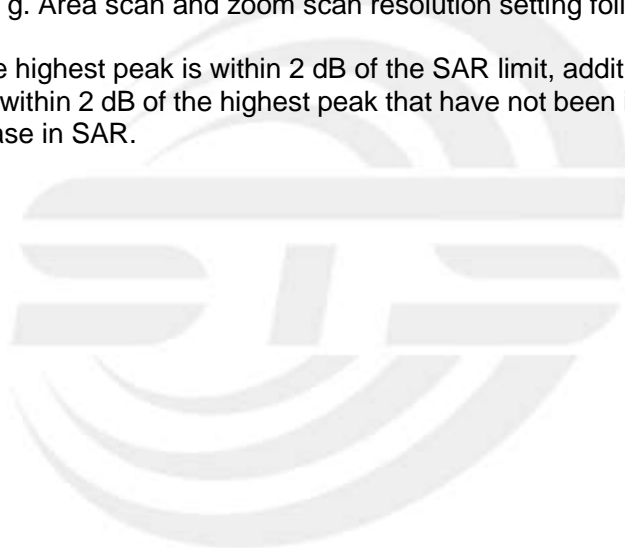



## 7. EUT Antenna Location Sketch

It is a SMART PHONE, support GSM/WCDMA/LTE mode.

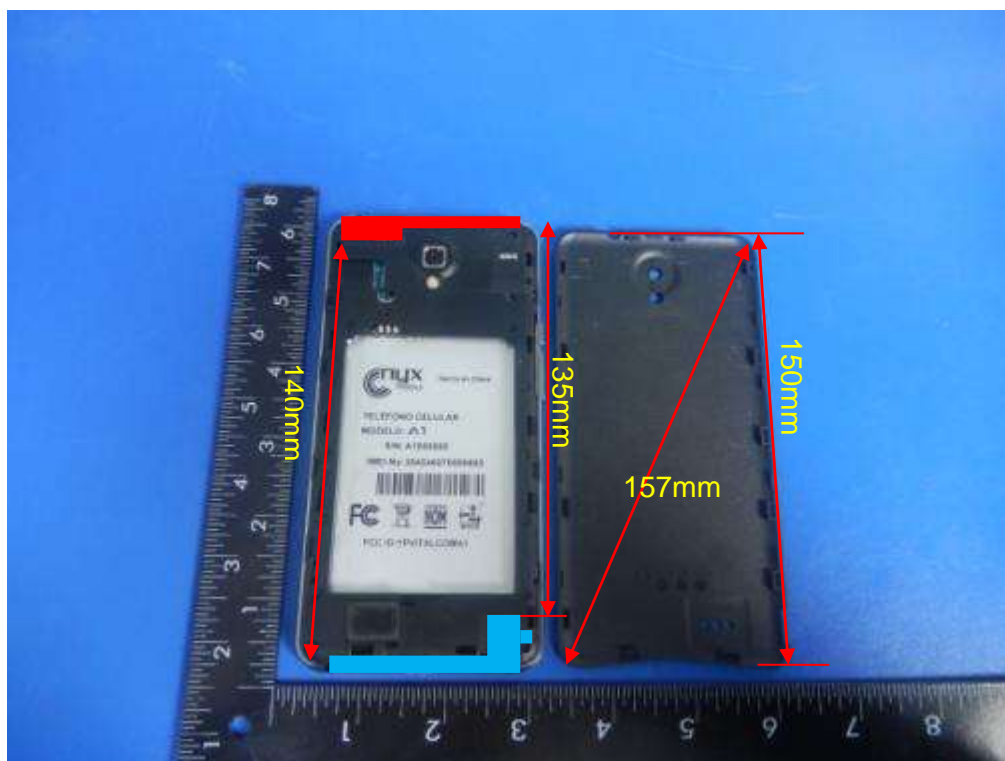

- WWAN Antenna
- WIFI/BT Antenna





## 7.1 SAR TEST EXCLUSION CONSIDER TABLE

According with FCC KDB 447498 D01, appendix A, <SAR test exclusion thresholds for 100MHz~6GHz and≤50mm> table, this device SAR test configurations consider as following:

Band	Test position configurations					
	Front	Back	Right edge	Left edge	Top edge	Bottom edge
GSM850	<5mm	<5mm	<5mm	<5mm	135mm	<5mm
	Yes	Yes	Yes	Yes	No	Yes
GSM1900	<5mm	<5mm	<5mm	<5mm	135mm	<5mm
	Yes	Yes	Yes	Yes	No	Yes
WCDMA Band II	<5mm	<5mm	<5mm	<5mm	135mm	<5mm
	Yes	Yes	Yes	Yes	No	Yes
WCDMA Band V	<5mm	<5mm	<5mm	<5mm	135mm	<5mm
	Yes	Yes	Yes	Yes	No	Yes
LTE Band 4	<5mm	<5mm	<5mm	<5mm	135mm	<5mm
	Yes	Yes	Yes	Yes	No	Yes
WLAN	<5mm	<5mm	<5mm	<5mm	<5mm	140mm
	Yes	Yes	Yes	Yes	Yes	No
Bluetooth	<5mm	<5mm	<5mm	<5mm	<5mm	140mm
	Yes	Yes	Yes	Yes	Yes	No

### Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <5mm, 5mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance ≤50mm are determined by:  

$$[(\text{max.power of channel, including tune-up tolerance, Mw}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

$$f(\text{GHz}) \text{ is the RF channel transmit frequency in GHz}$$

Power and distance are rounded to the nearest mW and mm before calculation  
The result is rounded to one decimal place for comparison  
For <50mm distance, we just calculate mW of the exclusion threshold value(3.0)to do compare
5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following  
a)[threshold at 50mm in step 1]+(test separation distance -50mm)\*(f (MHz)/150)]Mw, at 100 MHz to 1500 MHz



- b) [threshold at 50mm in step1]+( test separation distance -50mm) \*10]mW at > 1500MHz and  $\leq 6$ GHz
6. Per KDB 447498 D02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is <0.25db higher than RMC 12.2Kbps, or reported SAR with RMC 12.2kbps setting is  $\leq 1.2$ W/Kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
7. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band ,testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode ,thus the SAR can be excluded.



## 8. EUT Test Position


This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.

### 8.1 Define Two Imaginary Lines On The Handset

(1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the handset.

(2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.

(3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

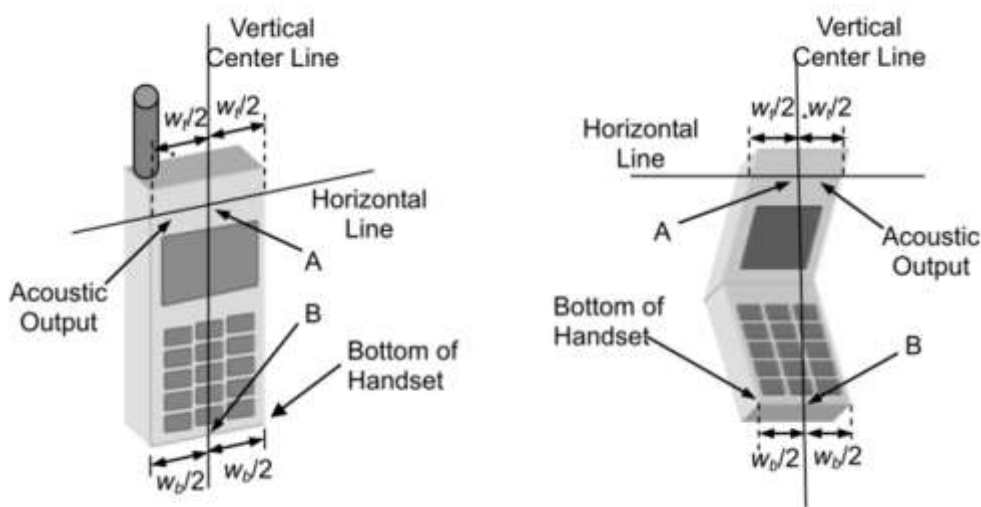

#### Cheek Position

1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

2) To move the device towards the phantom with the ear piece aligned with the the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost



#### Title Position

(1) To position the device in the "cheek" position described above.

(2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.




#### Body-worn Position Conditions

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to 5mm.



## 8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

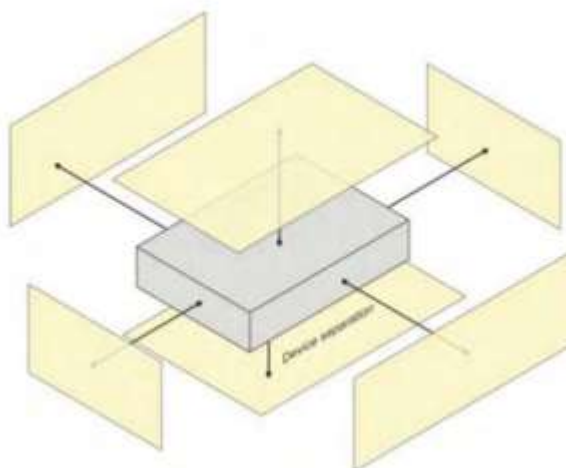



## 9. Uncertainty

### 9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

NO	Source	Tol(%)	Prob. Dist.	Div. k	ci (1g)	ci (10g)	1gUi	10gUi	Veff
<b>Measurement System</b>									
1	Probe calibration	5.8	N	1	1	1	5.8	5.8	$\infty$
2	Axial isotropy	3.5	R	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.43	1.43	$\infty$
3	Hemispherical isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	$\infty$
4	Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
5	Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	$\infty$
6	System Detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
7	Readout electronics	0.5	N	1	1	1	0.50	0.50	$\infty$
8	Response time	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
9	Integration time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	$\infty$
10	Ambient noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
11	Ambient reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
12	Probe positioner mech. restrictions	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	$\infty$
13	Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	$\infty$
14	Max.SAR evaluation	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
<b>Test sample related</b>									



15	Device positioning	2.6	N	1	1	1	2.6	2.6	11
16	Device holder	3	N	1	1	1	3.0	3.0	7
17	Drift of output power	5.0	R	√3	1	1	2.89	2.89	∞
Phantom and set-up									
18	Phantom uncertainty	4.0	R	√3	1	1	2.31	2.31	∞
19	Liquid conductivity (target)	2.5	N	1	0.78	0.71	1.95	1.78	5
20	Liquid conductivity (meas)	4	N	1	0.23	0.26	0.92	1.04	5
21	Liquid Permittivity (target)	2.5	N	1	0.78	0.71	1.95	1.78	∞
22	Liquid Permittivity (meas)	5.0	N	1	0.23	0.26	1.15	1.30	∞
Combined standard			RSS	$U_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$			10.63%	10.54%	
Expanded uncertainty (P=95%)		$U = k U_c, k=2$					21.26%	21.08%	



## 9.2 System validation Uncertainty

NO	Source	Tol(%)	Prob. Dist.	Div. k	ci (1g)	ci (10g)	1gUi	10gUi	Veff
<b>Magnet System</b>									
1	Probe calibration	5.8	N	1	1	1	5.8	5.8	$\infty$
2	Axial isotropy	3.5	R	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.43	1.43	$\infty$
3	Hemispherical isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	$\infty$
4	Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
5	Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	$\infty$
6	System Detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
7	Modulation response	0	N	1	1	1	0	0	$\infty$
8	Readout electronics	0.5	N	1	1	1	0.50	0.50	$\infty$
9	Response time	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
10	Integration time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	$\infty$
11	Ambient noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
12	Ambient reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
13	Probe positioner mech. restrictions	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	$\infty$
14	Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	$\infty$
15	Max.SAR evaluation	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
<b>Dipole</b>									
16	Deviation of experimental source from	4	N	1	1	1	4.00	4.00	$\infty$





17	Input power and SAR drif measurement	5	R	√3	1	1	2.89	2.89	∞
18	Dipole Axis to liquid Distance	2	R	√3	1	1			∞
Phantom and set-up									
19	Phantom uncertainty	4.0	R	√3	1	1	2.31	2.31	∞
20	Uncertainty in SAR correction for deviation(in	2.0	N	1	1	0.84	2	1.68	∞
21	Liquid conductivity (target)	2	N	1	1	0.84	2.00	1.68	∞
22	Liquid conductivity (temperature uncertainty)	2.5	N	1	0.78	0.71	1.95	1.78	5
23	Liquid conductivity (meas)	4	N	1	0.23	0.26	0.92	1.04	5
24	Liquid Permittivity (target)	2.5	N	1	0.78	0.71	1.95	1.78	∞
25	Liquid Permittivity (temperature uncertainty)	2.5	N	1	0.78	0.71	1.95	1.78	5
26	Liquid Permittivity (meas)	5.0	N	1	0.23	0.26	1.15	1.30	∞
Combined standard			RSS	$U_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$			10.15%	10.05%	
Expanded uncertainty (P=95%)		$U = k U_c, k=2$					20.29%	20.10%	



## 10. Conducted Power Measurement

### Test Result:

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	28.80	28.85	28.55	28.59	28.26	27.93
GPRS (GMSK, 1-Slot)	28.66	28.46	28.53	28.67	28.05	27.94
GPRS (GMSK, 2-Slot)	27.76	27.58	27.73	27.78	27.43	27.02
GPRS (GMSK, 3-Slot)	26.20	26.02	26.06	26.06	25.61	25.37
GPRS (GMSK, 4-Slot)	24.69	24.80	24.66	24.79	24.33	23.99
EGPRS(8PSK, 1-Slot)	28.47	28.43	28.33	28.52	27.86	27.74
EGPRS(8PSK, 2-Slot)	27.55	27.42	27.45	27.67	27.33	27.14
EGPRS(8PSK, 3-Slot)	25.83	25.67	25.97	26.05	25.61	25.33
EGPRS(8PSK, 4-Slot)	24.33	24.37	24.58	24.56	24.42	24.06
Remark: GPRS, CS4 coding scheme. EGPRS, MCS9 coding scheme. Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link						

Frame- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	19.77	19.82	19.52	19.56	19.23	18.90
GPRS (GMSK, 1-Slot)	19.63	19.43	19.50	19.64	19.02	18.91
GPRS (GMSK, 2-Slot)	21.74	21.56	21.71	21.76	21.41	21.00
GPRS (GMSK, 3-Slot)	21.94	21.76	21.80	21.80	21.35	21.11
GPRS (GMSK, 4-Slot)	21.68	21.79	21.65	21.78	21.32	20.98
EGPRS(8PSK, 1-Slot)	19.44	19.40	19.30	19.49	18.83	18.71
EGPRS(8PSK, 2-Slot)	21.53	21.40	21.43	21.65	21.31	21.12
EGPRS(8PSK, 3-Slot)	21.57	21.41	21.71	21.79	21.35	21.07
EGPRS(8PSK, 4-Slot)	21.32	21.36	21.57	21.55	21.41	21.05
Remark : 1. SAR testing was performed on the maximum frame-averaged power mode. 2. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below: Frame-averaged power = Burst averaged power (1 Tx Slot) – 9.03 dB Frame-averaged power = Burst averaged power (2 Tx Slots) – 6.02 dB Frame-averaged power = Burst averaged power (3 Tx Slots) - 4.26 dB Frame-averaged power = Burst averaged power (4 Tx Slots) – 3.01 dB						

**WCDMA**

Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency (MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
AMR 12.2Kbps	22.68	22.46	22.31	21.80	22.36	22.08
RMC 12.2Kbps	22.73	22.54	22.40	21.94	22.46	22.11
HSDPA Subtest-1	22.26	22.04	21.95	21.49	22.04	21.70
HSDPA Subtest-2	21.85	21.65	21.58	21.04	21.57	21.16
HSDPA Subtest-3	21.43	21.18	21.14	20.60	21.09	20.69
HSDPA Subtest-4	20.89	20.67	20.51	19.91	20.55	20.05
HSUPA Subtest-1	21.82	21.61	21.45	21.07	21.60	21.26
HSUPA Subtest-2	21.34	21.17	21.14	20.55	21.20	20.70
HSUPA Subtest-3	20.88	20.71	20.68	20.07	20.71	20.21
HSUPA Subtest-4	20.21	20.20	20.06	19.46	20.17	19.71
HSUPA Subtest-5	19.51	19.53	19.45	18.92	19.61	19.12

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta_c/\beta_d=12/15$ , $\beta_{hs}/\beta_c=24/15$ .For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced.

The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

**WIFI**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11b	1	2412	12.8
	6	2437	12.4
	11	2462	12.8
802.11g	1	2412	8.6
	6	2437	9.9
	11	2462	8.0
802.11n(HT 20)	1	2412	8.5
	6	2437	10.0
	11	2462	8.5
802.11n(HT 40)	3	2422	8.0
	6	2437	8.7
	9	2452	7.6

**Bluetooth**

Mode	Channel Number	Frequency (MHz)	Peak Power (dBm)
GFSK(1Mbps)	0	2402	2.435
	39	2441	3.097
	78	2480	5.096
$\pi/4$ -DQPSK(2Mbps)	0	2402	1.484
	39	2441	2.183
	78	2480	4.000
8-DPSK(3Mbps)	0	2402	1.624
	39	2441	2.326
	78	2480	4.186



## LTE Conducted Power

### General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is  $> \text{not } \frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is  $> \text{not } \frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.





# LTE Band 4

BW(MHz)	Modulation	RB Size	RB Offset	Power Low CH./Freq.	Power Middle CH./Freq.	Power High CH./Freq.
Channel				20050	20175	20300
Frequency(MHz)				1720	1732.5	1745
20	QPSK	1	0	22.12	22.14	22.15
20	QPSK	1	49	22.03	22.12	22.16
20	QPSK	1	99	22.16	22.27	22.27
20	QPSK	50	0	22.07	22.07	22.15
20	QPSK	50	24	22.05	22.09	22.16
20	QPSK	50	49	22.08	22.12	22.22
20	QPSK	100	0	22.05	22.07	22.19
20	16QAM	1	0	22.11	22.47	22.59
20	16QAM	1	49	22.06	22.42	22.61
20	16QAM	1	99	22.18	22.51	22.77
20	16QAM	50	0	22.06	22.08	22.06
20	16QAM	50	24	22.06	22.04	22.09
20	16QAM	50	49	22.10	22.03	22.16
20	16QAM	100	0	22.02	22.05	22.18
Channel				20025	20175	20325
Frequency(MHz)				1717.5	1732.5	1747.5
15	QPSK	1	0	22.10	22.08	22.21
15	QPSK	1	37	21.97	22.03	22.14
15	QPSK	1	74	22.03	22.13	22.26
15	QPSK	36	0	22.13	22.08	22.28
15	QPSK	36	18	22.10	22.14	22.26
15	QPSK	36	39	22.05	22.23	22.27
15	QPSK	75	0	22.13	22.17	22.28
15	16QAM	1	0	22.21	22.30	22.05
15	16QAM	1	38	22.14	22.18	22.05
15	16QAM	1	75	22.22	22.25	22.16
15	16QAM	36	0	22.13	22.09	22.24
15	16QAM	36	18	22.13	22.11	22.23
15	16QAM	36	39	22.10	22.15	22.27
15	16QAM	75	0	22.09	22.16	22.18
Channel				20000	20175	20350
Frequency(MHz)				1715	1732.5	1750
10	QPSK	1	0	22.06	22.10	22.21
10	QPSK	1	24	22.08	22.07	22.18
10	QPSK	1	49	22.01	22.08	22.23
10	QPSK	25	0	22.06	22.04	22.15
10	QPSK	25	12	22.05	22.07	22.16
10	QPSK	25	24	22.07	22.07	22.21
10	QPSK	50	0	22.07	22.07	22.18
10	16QAM	1	0	22.18	22.32	22.26
10	16QAM	1	24	22.19	22.23	22.29
10	16QAM	1	49	22.13	22.20	22.35
10	16QAM	25	0	22.06	22.09	22.21
10	16QAM	25	12	22.04	22.07	22.25
10	16QAM	25	24	22.09	22.04	22.28
10	16QAM	50	0	22.01	22.02	22.14





Channel				19975	20175	20375
Frequency(MHz)				1712.5	1732.5	1752.5
5	QPSK	1	0	22.07	22.13	22.25
5	QPSK	1	12	22.05	22.09	22.19
5	QPSK	1	24	22.06	22.11	22.23
5	QPSK	12	0	22.09	22.10	22.22
5	QPSK	12	6	22.08	22.11	22.21
5	QPSK	12	11	22.10	22.09	22.21
5	QPSK	25	0	22.05	22.04	22.20
5	16QAM	1	0	22.16	22.25	22.56
5	16QAM	1	12	22.12	22.19	22.54
5	16QAM	1	24	22.11	22.16	22.59
5	16QAM	12	0	22.11	22.14	22.18
5	16QAM	12	6	22.09	22.11	22.20
5	16QAM	12	11	22.09	22.08	22.19
5	16QAM	25	0	22.08	21.98	22.16
Channel				19965	20175	20385
Frequency(MHz)				1711.5	1732.5	1753.5
3	QPSK	1	0	21.97	21.99	22.14
3	QPSK	1	7	21.95	21.98	22.12
3	QPSK	1	14	21.95	21.98	22.14
3	QPSK	8	0	22.09	22.06	22.19
3	QPSK	8	4	22.09	22.06	22.24
3	QPSK	8	7	22.07	22.08	22.20
3	QPSK	15	0	22.03	22.04	22.19
3	16QAM	1	0	22.10	22.20	22.26
3	16QAM	1	7	22.09	22.14	22.29
3	16QAM	1	14	22.08	22.16	22.30
3	16QAM	8	0	22.16	22.16	22.26
3	16QAM	8	4	22.14	22.16	22.28
3	16QAM	8	7	22.15	22.15	22.29
3	16QAM	15	0	22.00	22.03	22.21
Channel				19957	20175	20393
Frequency(MHz)				1710.7	1732.5	1754.3
1.4	QPSK	1	0	22.01	21.99	22.15
1.4	QPSK	1	2	22.02	22.00	22.15
1.4	QPSK	1	5	22.03	22.01	22.18
1.4	QPSK	3	0	22.10	22.09	22.20
1.4	QPSK	3	1	22.03	22.03	22.13
1.4	QPSK	3	2	22.08	22.07	22.21
1.4	QPSK	6	0	22.00	22.00	22.14
1.4	16QAM	1	0	22.11	21.90	22.33
1.4	16QAM	1	2	22.05	21.90	22.32
1.4	16QAM	1	5	22.11	21.89	22.36
1.4	16QAM	3	0	21.92	22.01	22.16
1.4	16QAM	3	1	21.85	21.94	22.06
1.4	16QAM	3	2	21.93	21.99	22.12
1.4	16QAM	6	0	21.98	22.05	22.18



**Turn Power**

Mode	GSM850(AVG)	GSM1900(AVG)
GSM/PCS	28±1dBm	28±1dBm
GPRS (1 Slot)	28±1dBm	28±1dBm
GPRS (2 Slot)	27±1dBm	27±1dBm
GPRS (3 Slot)	26±1dBm	25.1±1dBm
GPRS (4 Slot)	24±1dBm	24±1dBm
EDGE (1 Slot)	28±1dBm	28±1dBm
EDGE (2 Slot)	27±1dBm	27±1dBm
EDGE (3 Slot)	25±1dBm	26±1dBm
EDGE (4 Slot)	24±1dBm	24±1dBm

Mode	WCDMA Band V(AVG)	WCDMA Band II(AVG)
AMR	22±1dBm	21.5±1dBm
RMC	22±1dBm	21.5±1dBm
HSDPA Subtest-1	22±1dBm	22±1dBm
HSDPA Subtest-2	21±1dBm	21±1dBm
HSDPA Subtest-3	21±1dBm	21±1dBm
HSDPA Subtest-4	20±1dBm	20±1dBm
HSUPA Subtest-1	21±1dBm	21±1dBm
HSUPA Subtest-2	21±1dBm	21±1dBm
HSUPA Subtest-3	20±1dBm	20±1dBm
HSUPA Subtest-4	20±1dBm	20±1dBm
HSUPA Subtest-5	19±1dBm	19±1dBm

Mode	WIFI(AVG)
IEEE 802.11b	12±1dBm
IEEE 802.11g	9±1dBm
IEEE 802.11n(HT 20)	9±1dBm
IEEE 802.11n(HT 40)	8±1dBm

Mode	BT(PEAK)		
	Low	Mid	High
GFSK	2±1dBm	3±1dBm	5±1dBm
$\pi/4$ -DQPSK	1±1dBm	2±1dBm	4±1dBm
8DPSK	1±1dBm	2±1dBm	4±1dBm



LTE

BW[MHz]	RB Size	Mode	Band 4
1.4	1	QPSK	22±1dBm
1.4	3		22±1dBm
1.4	6		22±1dBm
1.4	1	16- QAM	22±1dBm
1.4	3		22±1dBm
1.4	6		22±1dBm
3	1	QPSK	22±1dBm
3	8		22±1dBm
3	15		22±1dBm
3	1	16- QAM	22±1dBm
3	8		22±1dBm
3	15		22±1dBm
5	1	QPSK	22±1dBm
5	12		22±1dBm
5	25		22±1dBm
5	1	16- QAM	22±1dBm
5	12		22±1dBm
5	25		22±1dBm
10	1	QPSK	22±1dBm
10	25		22±1dBm
10	50		22±1dBm
10	1	16- QAM	22±1dBm
10	25		22±1dBm
10	50		22±1dBm
15	1	QPSK	22±1dBm
15	36		22±1dBm
15	75		22±1dBm
15	1	16- QAM	22±1dBm
15	36		22±1dBm
15	75		22±1dBm
20	1	QPSK	22±1dBm
20	50		21.3±1dBm
20	100		22±1dBm
20	1	16- QAM	22±1dBm
20	50		22±1dBm
20	100		22±1dBm

## 11. EUT And Test Setup Photo

### 11.1 EUT Photo

Front side



Back side



Top side



Bottom side



Left side



Right side






## 11.2 Setup Photo


Right Touch




Right Tilt

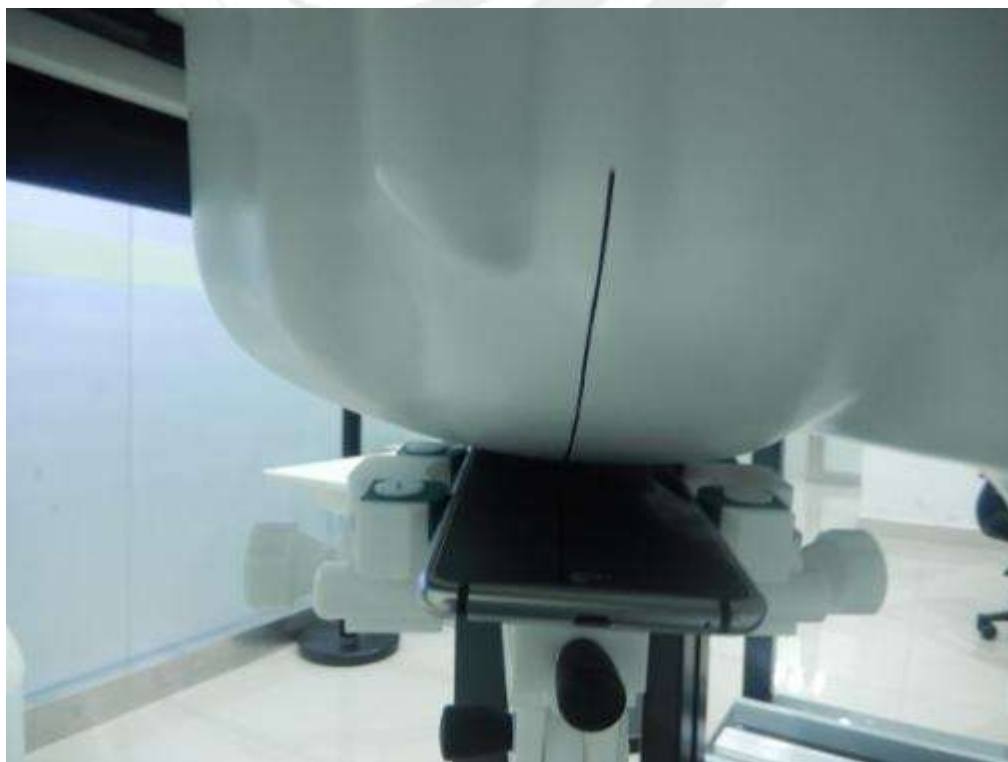

Left Touch

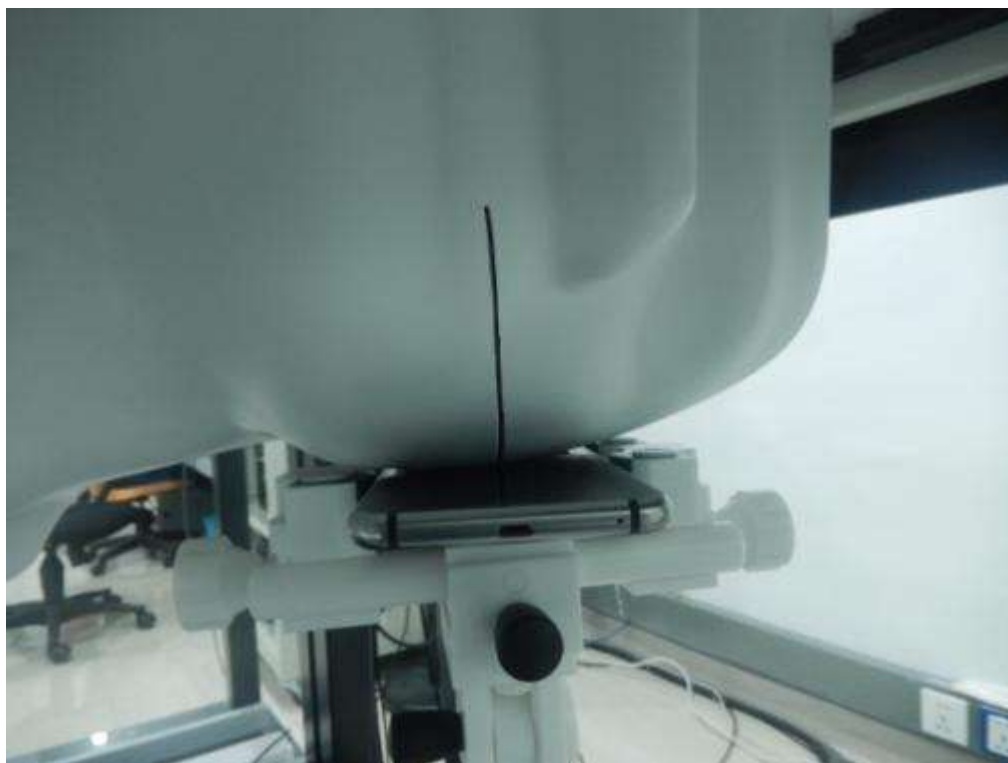

Left Tilt

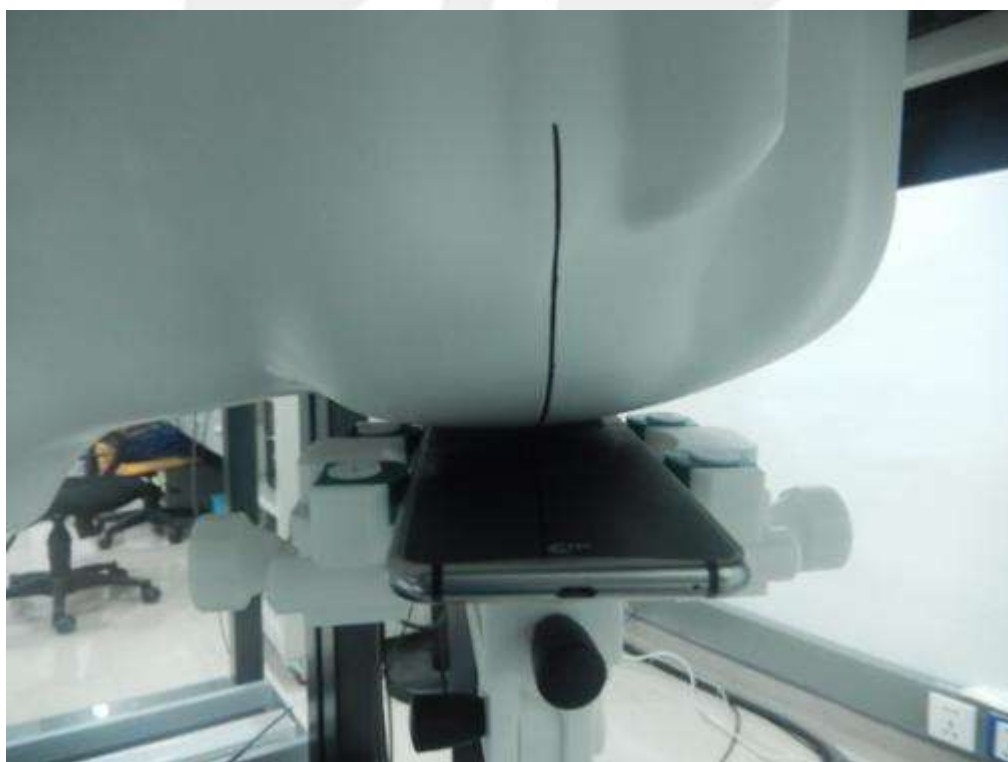




Body Front side(separation distance is 5mm)



Body Back side(separation distance is 5mm)

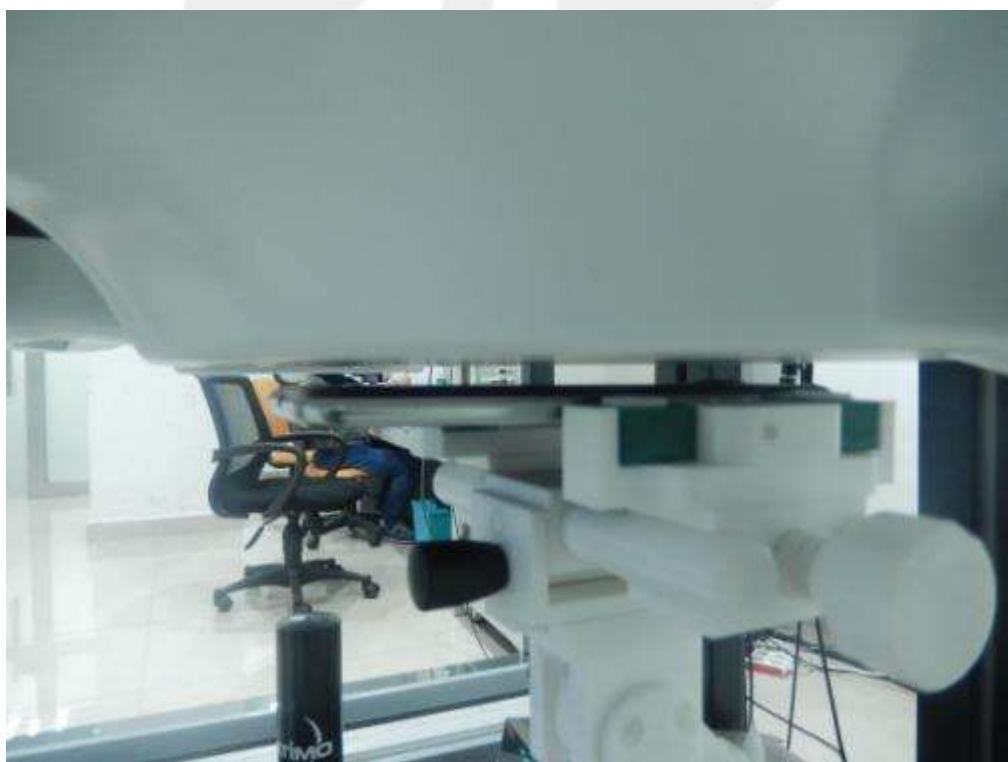


Body Front side(separation distance is 10mm)



Body Back side(separation distance is 10mm)




Body left side(separation distance is 10mm)

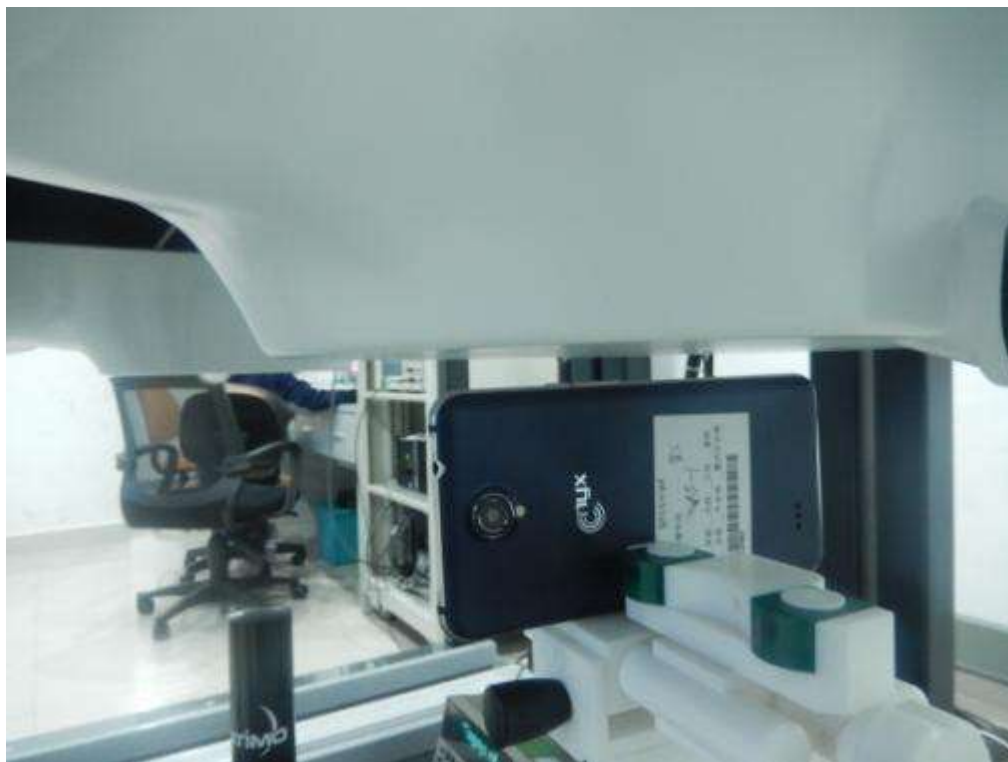


Body right side(separation distance is 10mm)



Body top side(separation distance is 10mm)

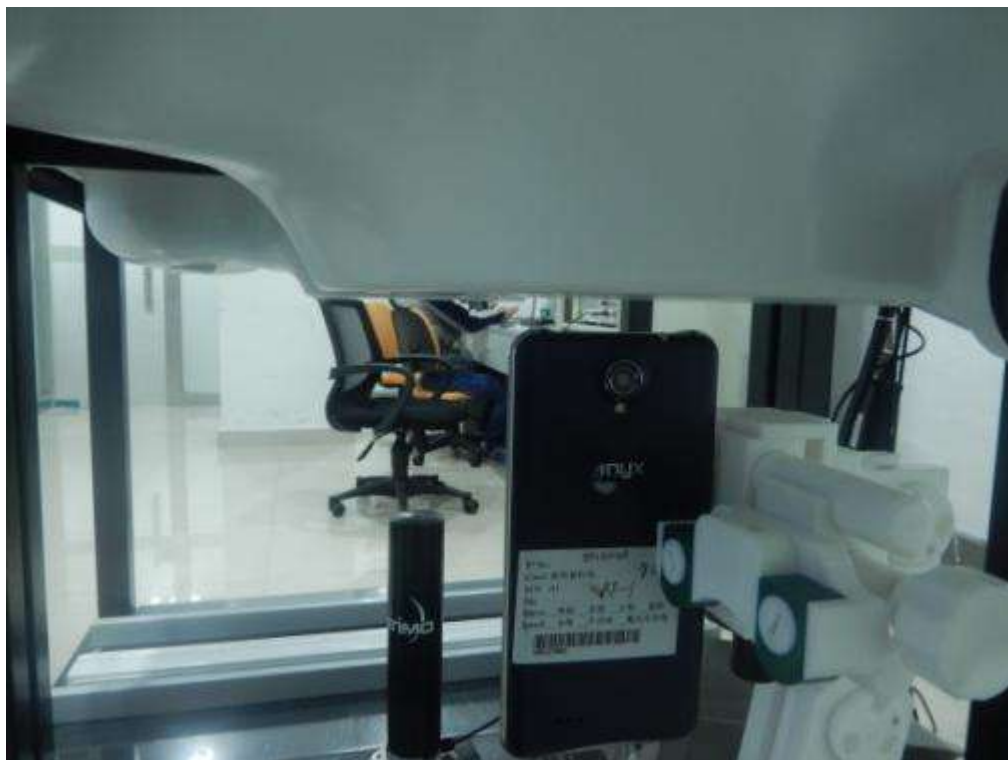


Body Bottom side(separation distance is 10mm)

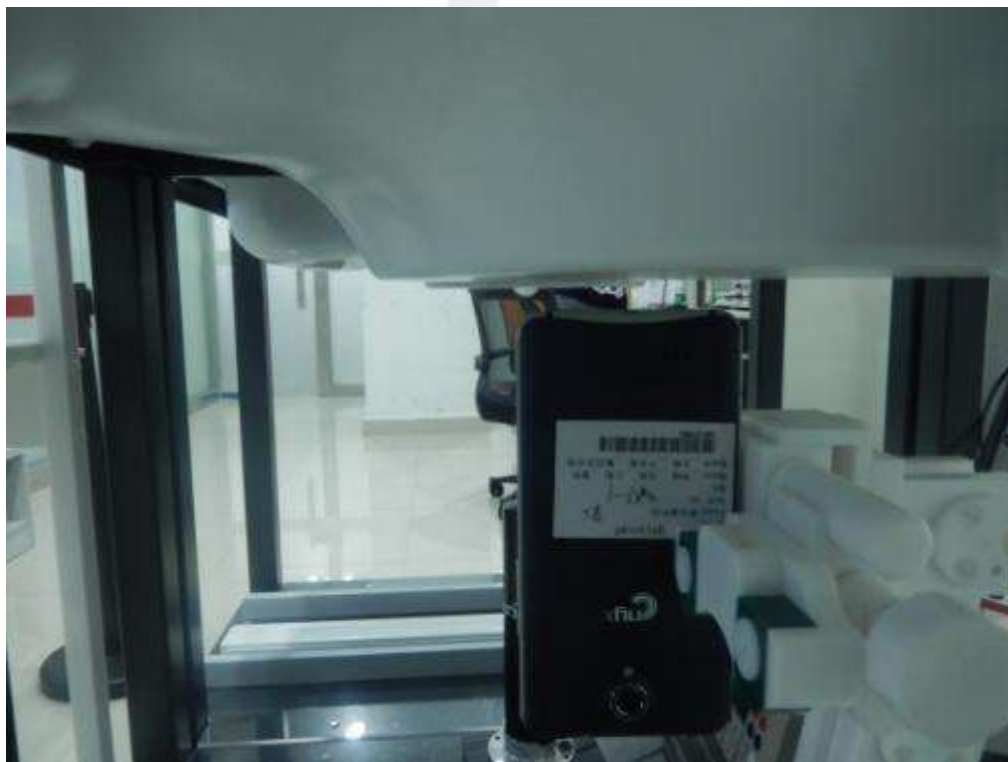



Liquid depth (15 cm)

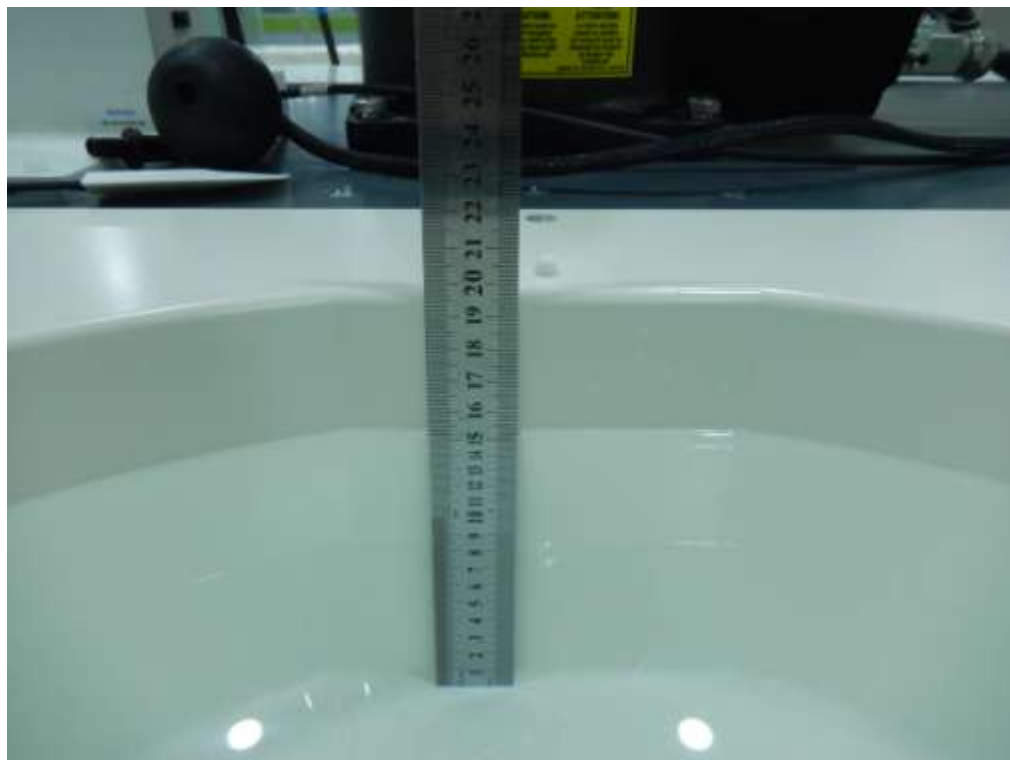





## 12. SAR Result Summary

### 12.1 Head SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	Voice	Right Cheek	190	0.182	-2.06	29	28.85	0.188	/
		Right Tilt	190	0.115	2.46	29	28.85	0.119	/
		Left Cheek	190	0.186	-2.25	29	28.85	<b>0.193</b>	1
		Left Tilt	190	0.114	-0.67	29	28.85	0.118	/
GSM1900	Voice	Right Cheek	512	0.060	-2.35	29	28.59	<b>0.066</b>	3
		Right Tilt	512	0.034	-2.58	29	28.59	0.037	/
		Left Cheek	512	0.031	-2.00	29	28.59	0.034	/
		Left Tilt	512	0.009	-3.23	29	28.59	0.010	/
WCDMA II	RMC	Right Cheek	9400	0.066	-2.54	23	22.46	<b>0.075</b>	5
		Right Tilt	9400	0.038	-2.50	23	22.46	0.043	/
		Left Cheek	9400	0.048	-2.37	23	22.46	0.054	/
		Left Tilt	9400	0.020	-1.34	23	22.46	0.023	/
WCDMA V	RMC	Right Cheek	4132	0.100	2.99	23	22.73	0.106	/
		Right Tilt	4132	0.071	-2.72	23	22.73	0.076	/
		Left Cheek	4132	0.115	-0.66	23	22.73	<b>0.122</b>	7
		Left Tilt	4132	0.056	-2.35	23	22.73	0.060	/

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
WIFI	DATA	Right Cheek	1	0.371	-0.24	13	12.8	100	0.388	/
		Right Tilt	1	0.515	-1.09	13	12.8	100	<b>0.539</b>	9
		Left Cheek	1	0.343	-0.06	13	12.8	100	0.359	/
		Left Tilt	1	0.388	-2.00	13	12.8	100	0.406	/

Note:

1. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.276** W/Kg for Head)
2. Per KDB865664 D01, Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg





Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 4	20M	QPSK	1	99	Right Cheek	20300	0.078	-3.01	23	22.27	0.092	/
			50	55	Right Cheek	20300	0.061	0.46	23	22.22	0.073	/
			1	99	Right Tilt	20300	0.026	-2.90	23	22.27	0.031	/
			50	55	Right Tilt	20300	0.019	0.30	23	22.22	0.023	/
			1	99	Left Cheek	20300	0.175	-2.50	23	22.27	<b>0.207</b>	11
			50	55	Left Cheek	20300	0.094	-3.22	23	22.22	0.112	/
			1	99	Left Tilt	20300	0.041	-2.99	23	22.27	0.049	/
			50	55	Left Tilt	20300	0.037	0.37	23	22.22	0.044	/

## 12.2 Body-worn SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	GPRS Data-3 Slot	Front side	128	0.607	1.34	27	26.20	<b>0.730</b>	2
		Back side	128	0.589	0.84	27	26.20	0.708	/
GSM1900	GPRS Data-3 Slot	Front side	512	0.692	-0.34	26.1	26.06	0.698	/
		Back side	512	0.739	0.61	26.1	26.06	<b>0.746</b>	4
WCDMA II	RMC ( body-worn )	Front side	9263	1.089	-0.40	22.5	21.94	<b>1.239</b>	6
		Front side	9400	1.026	-0.07	23	22.46	1.162	/
		Front side	9537	0.820	-0.34	23	22.11	1.007	/
		Back side	9263	0.787	-0.27	22.5	21.94	0.895	/
		Back side	9400	0.887	-0.30	23	22.46	1.004	/
		Back side	9537	0.916	-0.31	23	22.11	1.124	/
WCDMA V	RMC ( body-worn )	Front side	4132	0.390	-0.61	23	22.73	<b>0.415</b>	8
		Back side	4132	0.364	0.17	23	22.73	0.387	/

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
WIFI	802.11b	Front side	1	0.125	1.52	13	12.8	100	0.131	/
		Back side	1	0.250	0.20	13	12.8	100	<b>0.262</b>	10

Note: 1. The test separation of all above table is 5mm.

2. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.134** W/Kg for Body-worn)



Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 4	20M	QPSK	1	99	Front	20050	0.881	-1.17	23	22.16	1.069	/
			1	99	Front	20175	0.982	-0.78	23	22.27	1.162	/
			1	99	Front	20300	0.839	-0.37	23	22.27	0.993	/
			50	49	Front	20300	0.537	2.61	22.3	22.22	0.547	/
			100	0	Front	20300	0.391	-3.00	23	22.19	0.471	/
			1	99	Back	20050	0.795	-2.34	23	22.16	0.965	/
			1	99	Back	20175	1.017	-0.31	23	22.27	<b>1.203</b>	12
			1	99	Back	20300	0.858	-2.68	23	22.27	1.015	/
			50	49	Back	20300	0.671	0.42	22.3	22.22	0.683	/
			100	0	Back	20300	0.475	-1.02	23	22.19	0.572	/

### 12.3 Body Hotspot SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	GPRS Data-3 Slot	Front side	190	0.229	2.63	27	26.20	<b>0.275</b>	/
		Back side	190	0.220	0.34	27	26.20	0.264	/
		Left side	190	0.132	2.60	27	26.20	0.159	/
		Right side	190	0.097	-1.06	27	26.20	0.117	/
		Bottom side	190	0.127	3.77	27	26.20	0.153	/
GSM1900	GPRS Data-3 Slot	Front side	512	0.277	1.06	26.1	26.06	0.280	/
		Back side	512	0.363	0.82	26.1	26.06	<b>0.366</b>	/
		Left side	512	0.290	0.01	26.1	26.06	0.293	/
		Right side	512	0.136	0.97	26.1	26.06	0.137	/
		Bottom side	512	0.323	0.94	26.1	26.06	0.326	/
WCDMA II	RMC	Front side	9400	0.491	-0.37	23	22.46	<b>0.556</b>	/
		Back side	9400	0.417	-0.12	23	22.46	0.472	/
		Left side	9400	0.410	0.38	23	22.46	0.464	/
		Right side	9400	0.234	-2.61	23	22.46	0.265	/
		Bottom side	9400	0.405	-0.67	23	22.46	0.459	/
WCDMA V	RMC	Front side	4132	0.132	-2.02	23	22.73	<b>0.140</b>	/
		Back side	4132	0.131	1.27	23	22.73	0.139	/
		Left side	4132	0.110	-0.43	23	22.73	0.117	/
		Right side	4132	0.081	0.11	23	22.73	0.086	/
		Bottom side	4132	0.129	3.10	23	22.73	0.137	/

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
WIFI	802.11b	Front side	1	0.113	2.68	13	12.8	100	0.118	/
		Back side	1	0.240	-0.80	13	12.8	100	<b>0.251</b>	/
		Left side	1	0.072	3.04	13	12.8	100	0.075	/
		Right side	1	0.091	3.10	13	12.8	100	0.095	/
		Top side	1	0.116	0.46	13	12.8	100	0.121	/

Note:

1. The test separation of all above table is 10mm.
2. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.129** W/Kg for



Body/Hotspot)

3. When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 4	20M	QPSK	1	99	Front	20300	0.640	0.57	23	22.27	<b>0.757</b>	/
			50	49	Front	20300	0.427	0.42	23	22.22	0.511	/
			1	99	Back	20300	0.478	-0.33	23	22.27	0.565	/
			50	49	Back	20300	0.305	-3.07	23	22.22	0.365	/
			1	99	Left Side	20300	0.463	0.30	23	22.27	0.548	/
			50	49	Left Side	20300	0.297	0.14	23	22.22	0.355	/
			1	99	Bottom Side	20300	0.571	0.64	23	22.27	0.676	/
			50	49	Bottom Side	20300	0.339	0.72	23	22.22	0.406	/



**Repeated SAR**

Band	Mode	Test Position	Channel	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
WCDMA II	RMC body-worn	Front side	CH 9263	1.089	-0.41	22.5	21.94	1.239	-
WCDMA II	RMC body-worn	Back side	CH 9537	0.917	2.22	23	22.11	1.126	-
LTE Band 4	QPSK body-worn	Front side	CH 20175	0.977	-0.40	23	22.27	1.156	-
LTE Band 4	QPSK body-worn	Back side	CH 20175	0.975	-2.70	23	22.27	1.153	-

**12.3 repeated SAR measurement**

Band	Mode	Test Position	Channel	Original Measured SAR 1g(mW/g)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(mW/g)	2nd Repeated SAR 1g	Ratio
WCDMA II	RMC body-worn	Front side	CH 9263	1.089	1.089	1.00	-	-	-
WCDMA II	RMC body-worn	Back side	CH 9537	0.916	0.917	1.00	-	-	-
LTE Band 4	QPSK body-worn	Front side	CH 20175	0.982	0.977	0.99	-	-	-
LTE Band 4	QPSK body-worn	Back side	CH 20175	1.017	0.975	0.96	-	-	-

**Note:**

1. Per KDB 865664 D01V01,for each frequency band ,repeated SAR measurement is required only when the measured SAR is  $\geq 0.8\text{W/Kg}$ .
2. Per KDB 865664 D01V01,if the ratio of largest to smallest SAR for the original and first repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45\text{W/Kg}$ , only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45\text{W/Kg}$
4. The ratio is the difference in percentage between original and repeated measured SAR.



### Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

Position	Simultaneous state
Head	1. GSM + WIFI
	2. GSM + Bluetooth
	3. WCDMA + WIFI
	4. WCDMA + Bluetooth
	5. LTE + WIFI
	6. LTE + Bluetooth
Body	1. GSM + WIFI
	2. GSM + Bluetooth
	3. WCDMA + WIFI
	4. WCDMA + Bluetooth
	5. LTE + WIFI
	6. LTE + Bluetooth

#### NOTE:

1. Bluetooth and WIFI can't simultaneous transmission at the same time.
2. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
3. Based upon KDB 447498 D01 v05, BT SAR is excluded as below table.
4. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
5. For minimum test separation distance  $\leq 50\text{mm}$ , Bluetooth standalone SAR is excluded according to  $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} (\text{GHz}) / x] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR
6. The reported SAR summation is calculated based on the same configuration and test position.
7. KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
  - a)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f} (\text{GHz}) / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; Where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - b)  $0.4\text{W/Kg}$  for 1-g SAR and  $1.0\text{W/Kg}$  for 10-g SAR, when the separation distance is  $>50\text{mm}$ .

Estimated SAR		Maximum Power		Antenna to user(mm)	Frequency(GHz)	Stand alone SAR(1g) [W/kg]
		dBm	mW			
BT	Head	6	1.26	5	2.48	0.167
	Body			5	2.48	0.167
				10	2.48	0.084



Simultaneous Mode	Position	Mode	Max. 1-g SAR (W/kg)	1-g Sum SAR (W/kg)
GSM + WIFI	Head	GSM Voice	0.193	0.732
		WIFI	0.539	
	Body-worn	GSM Data	0.746	1.008
		WIFI	0.262	
	Body-Hotspot	GSM Data	0.366	0.617
		WIFI	0.251	
GSM + Bluetooth	Head	GSM Voice	0.193	0.360
		Bluetooth	0.167	
	Body-worn	GSM Data	0.746	0.913
		Bluetooth	0.167	
	Body-Hotspot	GSM Data	0.366	0.450
		Bluetooth	0.084	
WCDMA + WIFI	Head	WCDMA RMC	0.122	0.661
		WIFI	0.539	
	Body-worn	WCDMA RMC	1.239	<b>1.501</b>
		WIFI	0.262	
	Body-Hotspot	WCDMA RMC	0.556	0.807
		WIFI	0.251	
WCDMA + Bluetooth	Head	WCDMA RMC	0.122	0.289
		Bluetooth	0.167	
	Body-worn	WCDMA RMC	1.239	1.406
		WIFI	0.167	
	Body-Hotspot	WCDMA RMC	0.556	0.640
		Bluetooth	0.084	
LTE + WIFI	Head	LTE RMC	0.207	<b>0.746</b>
		WIFI	0.539	
	Body-worn	LTE RMC	1.203	1.465
		WIFI	0.262	
	Body-Hotspot	LTE RMC	0.757	<b>1.008</b>
		WIFI	0.251	
LTE + Bluetooth	Head	LTE RMC	0.207	0.374
		Bluetooth	0.167	
	Body-worn	LTE RMC	1.203	1.370
		Bluetooth	0.167	
	Body-Hotspot	LTE RMC	0.757	0.841
		Bluetooth	0.084	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.





### 13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
835MHz Dipole	SATIMO	SID835	SN 30/14 DIP0G835-332	2014.09.01	2017.08.31
1800MHz Dipole	SATIMO	SID1800	SN 30/14 DIP1G800-329	2014.09.01	2017.08.31
1900MHz Dipole	SATIMO	SID1900	SN 30/14 DIP1G900-333	2014.09.01	2017.08.31
2450MHzDipole	SATIMO	SID2450	SN 30/14 DIP2G450-335	2014.09.01	2017.08.31
E-Field Probe	SATIMO	SSE5	SN 17/14 EP221	2015.09.01	2016.08.31
Antenna	SATIMO	ANTA3	SN 07/13 ZNTA52	2014.09.01	2017.08.31
Waveguide	SATIMO	SWG5500	SN 13/14 WGA32	2014.09.01	2017.08.31
Phantom1	SATIMO	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	SATIMO	SAM	SN 32/14 SAM116	N/A	N/A
SAR TEST BENCH	SATIMO	GSM and WCDMA mobile phone POSITIONNIN G SYSTEM	SN 32/14 MSH97	N/A	N/A
SAR TEST BENCH	SATIMO	LAPTOP POSITIONNIN G SYSTEM	SN 32/14 LSH29	N/A	N/A
Dielectric Probe Kit	SATIMO	SCLMP	SN 32/14 OCPG52	2015.09.01	2016.08.31
Multi Meter	Keithley	Multi Meter 2000	4050073	2015.11.20	2016.11.19
Signal Generator	Agilent	N5182A	MY50140530	2015.11.18	2016.11.17
Power Meter	R&S	NRP	100510	2015.10.25	2016.10.24
Power Meter	HP	EPM-442A	GB37170267	2015.10.24	2016.10.23
Power Sensor	R&S	NRP-Z11	101919	2015.10.24	2016.10.23
Power Sensor	HP	8481A	2702A65976	2015.10.24	2016.10.23
Network Analyzer	Agilent	5071C	EMY46103472	2015.12.12	2016.12.11
Attenuator 1	PE	PE7005-10	N/A	2015.10.25	2016.10.24
Attenuator 2	PE	PE7005-3	N/A	2015.10.24	2016.10.23
Attenuator 3	Woken	WK0602-XX	N/A	2015.12.12	2016.12.11
Dual Directional Coupler	Agilent	778D	50422	2015.11.18	2016.11.17



## Appendix A. System Validation Plots

### System Performance Check Data (835MHz Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-02-22

Measurement duration: 13 minutes 27 seconds

### Experimental conditions

Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity (real part)	41.00
Relative permittivity	18.72
Conductivity (S/m)	0.86
Power drift (%)	0.45
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	4.83
Crest factor:	1:1

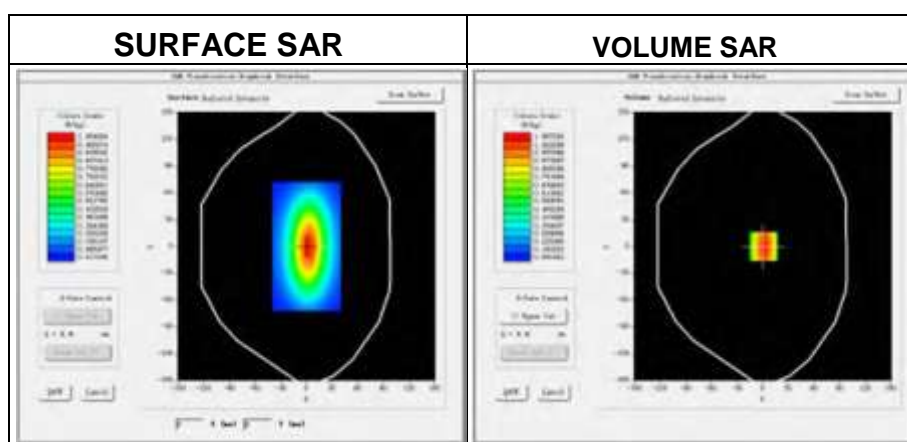






Maximum location: X=1.00, Y=0.00

SAR Peak: 1.39 W/kg

SAR 10g (W/Kg)	0.616293
SAR 1g (W/Kg)	0.960584

**Z Axis Scan**

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	1.3473	0.97291	0.61265	0.5442	0.3812	0.2605	0.12794

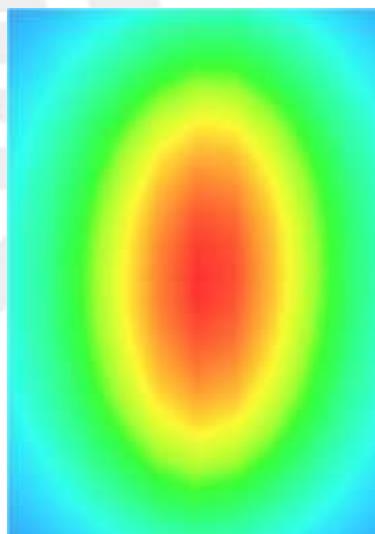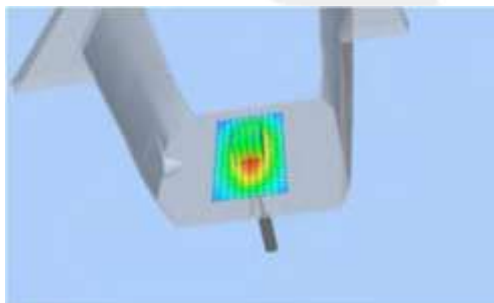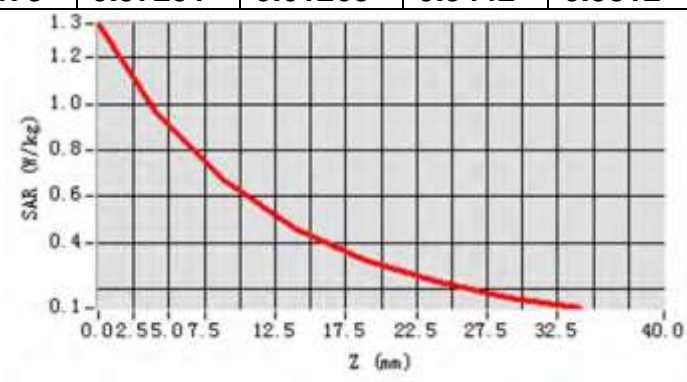

**System Performance Check Data (835MHz Body)**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-02-22

Measurement duration: 14 minutes 13 seconds

**Experimental conditions.**

Probe	
Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity (real part)	54.70
Relative permittivity	21.408187
Conductivity (S/m)	0.98
Power drift (%)	0.090000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	5.02
Crest factor:	1:1

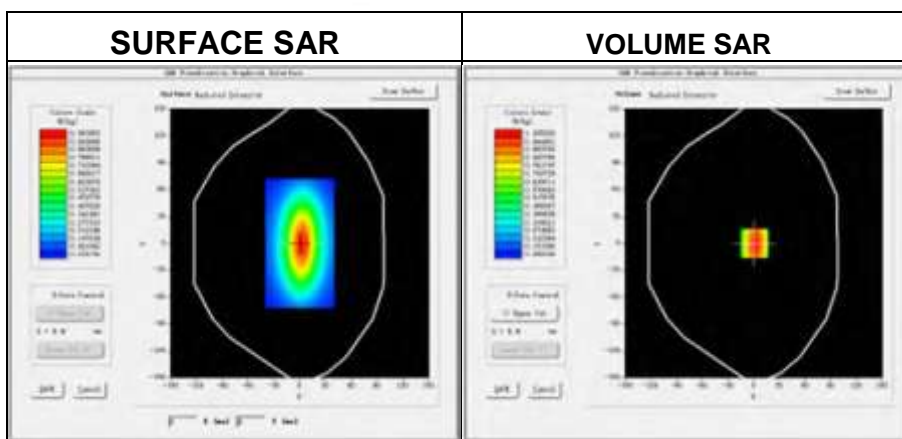






Maximum location: X=1.00, Y=0.00

SAR Peak: 1.50 W/kg

SAR 10g (W/Kg)	0.636100
SAR 1g (W/Kg)	0.972885

### Z Axis Scan

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	1.3725	1.0058	0.6838	0.4755	0.3314	0.2365	0.1688

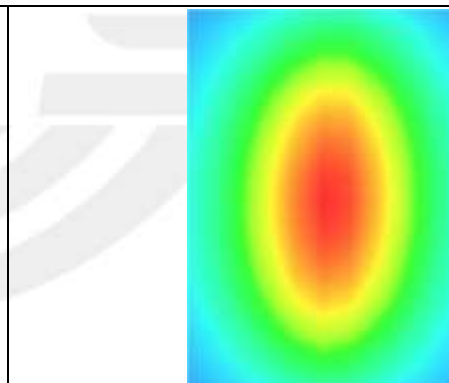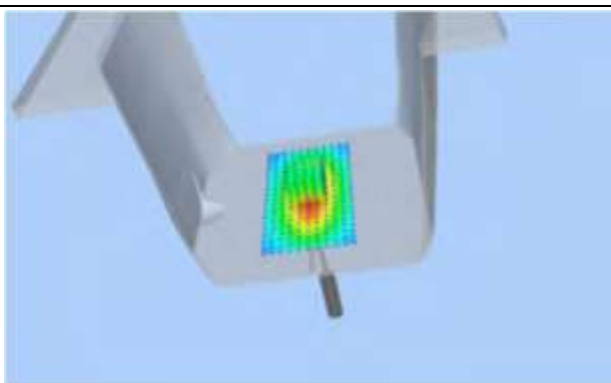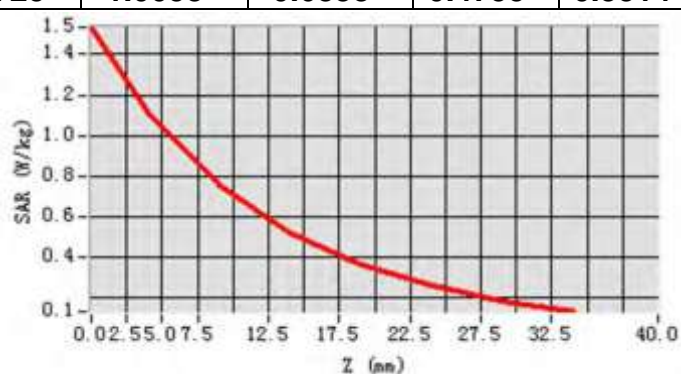

**System Performance Check Data(1800MHz Head)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-02-22

**Experimental conditions.**

Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity (real part)	40.20
Relative permittivity	14.096855
Conductivity (S/m)	1.308491
Power drift (%)	-1.390000
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 17/14 EP221
ConvF	4.25
Crest factor:	1:1

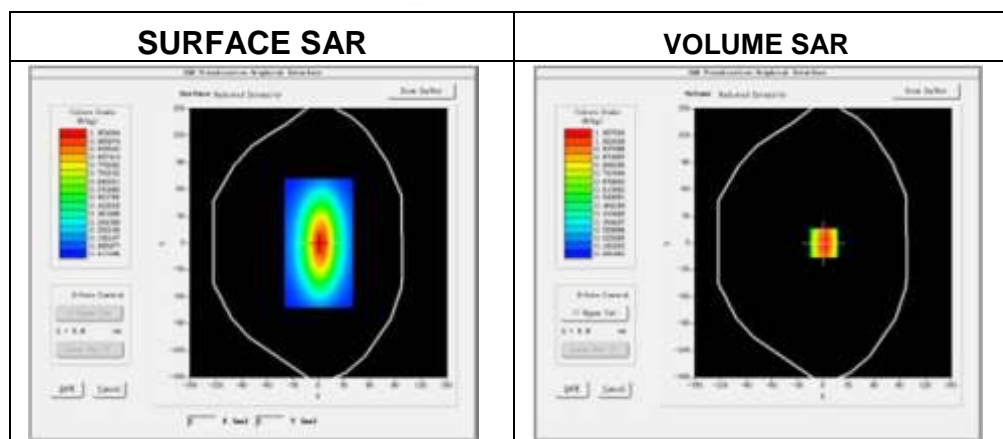








Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.996040
SAR 1g (W/Kg)	3.964357

**Z Axis Scan**

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	7.1146	4.0782	1.9352	1.0130	0.5642	0.3334	0.2079

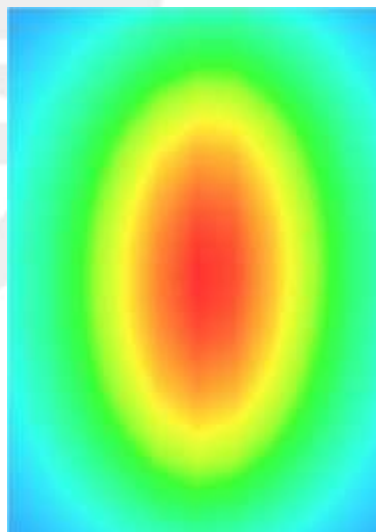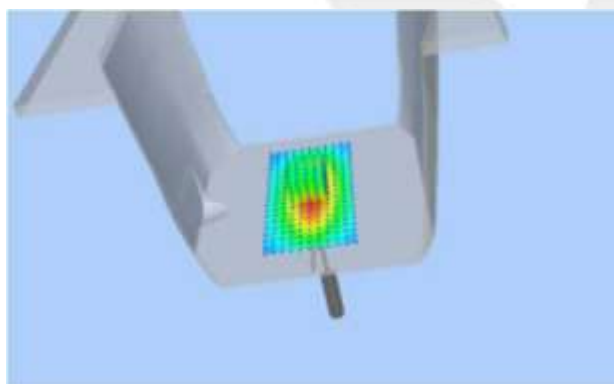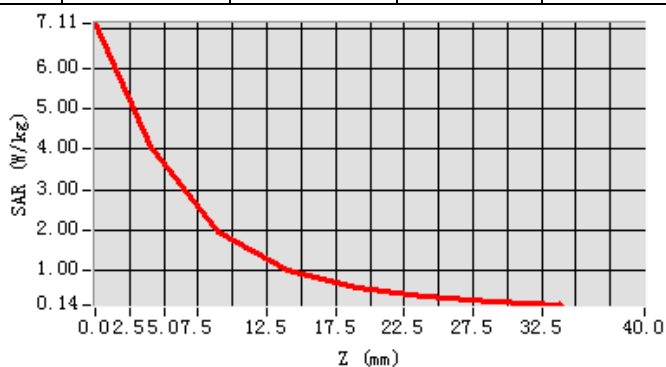

**System Performance Check Data(1800MHz Body)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-02-22

**Experimental conditions.**

Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity (real part)	52.6
Relative permittivity	15.08356
Conductivity (S/m)	1.376582
Power drift (%)	2.351
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 17/14 EP221
ConvF	4.34
Crest factor:	1:1

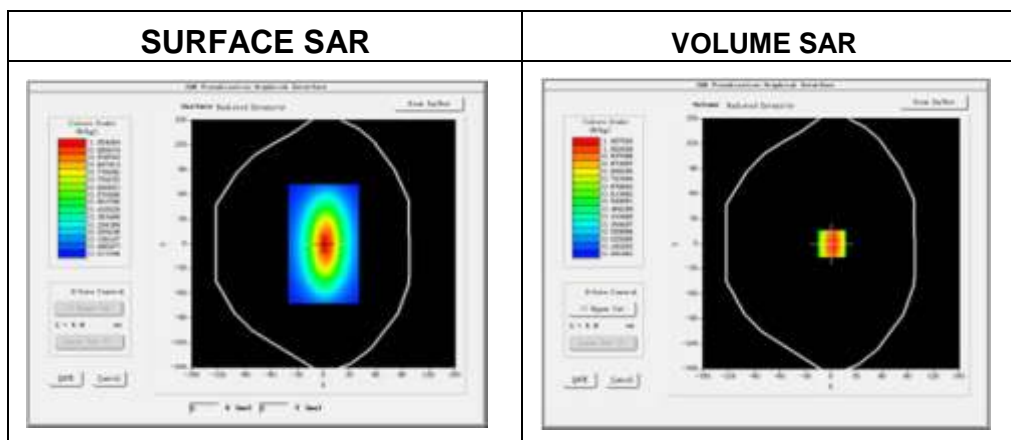






Maximum location: X=6.00, Y=2.00

SAR 10g (W/Kg)	1.99821
SAR 1g (W/Kg)	3.98325

### Z Axis Scan

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	7.2356	4.1258	1.9683	1.1253	0.6535	0.3652	0.2658

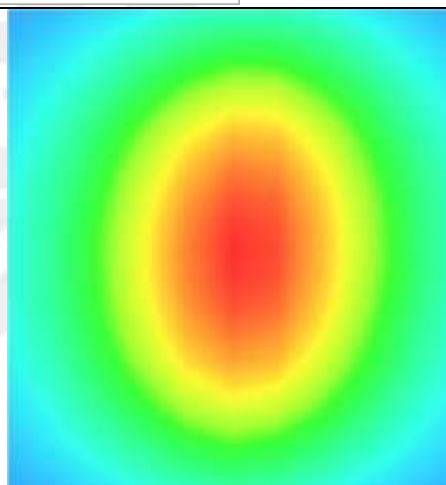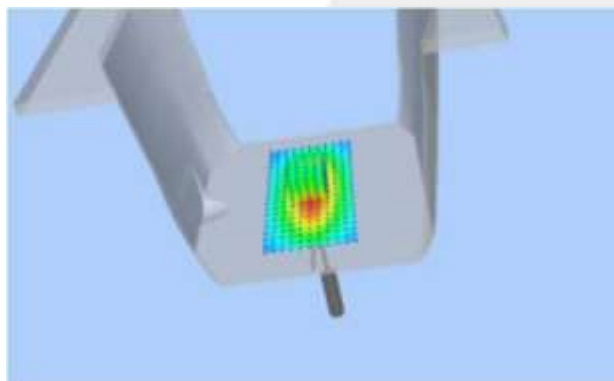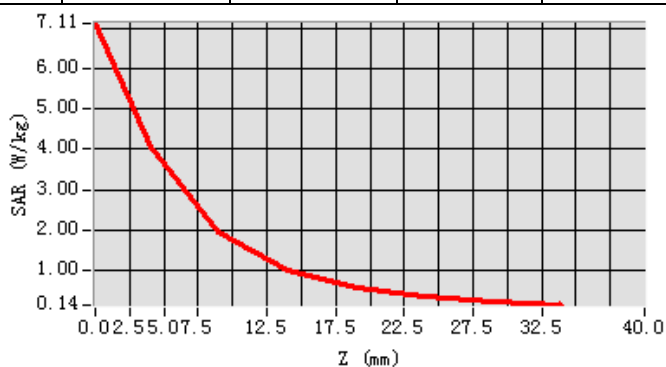

**System Performance Check Data (1900MHz Head)**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-02-22

Measurement duration: 14 minutes 12 seconds

**Experimental conditions.**

Phantom	Validation plane
Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900MHz
Relative permittivity (real part)	39.50
Relative permittivity	13.26
Conductivity (S/m)	1.43
Power drift (%)	0.47
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
Probe	SN 17/14 EP221
ConvF:	4.71
Crest factor:	1:1

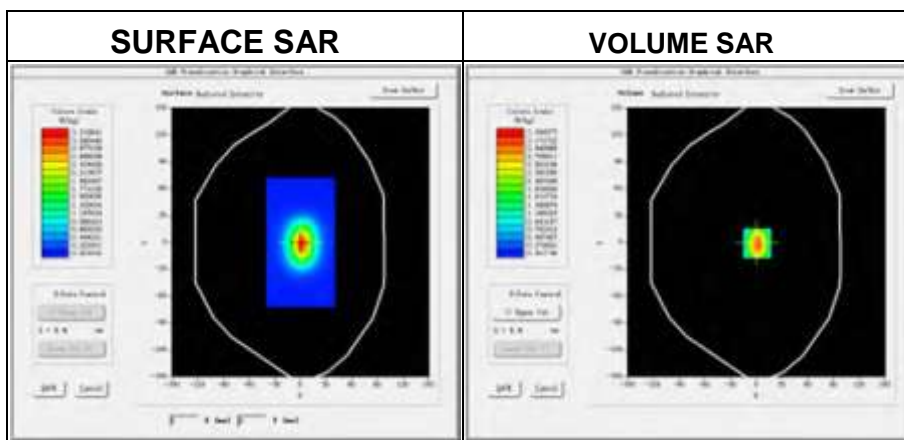






Maximum location: X=1.00, Y=0.00

SAR Peak: 5.41 W/kg

SAR 10g (W/Kg)	2.017525
SAR 1g (W/Kg)	4.162056

### Z Axis Scan

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	6.5296	4.1946	2.3311	1.3187	0.5733	0.3288	0.1617

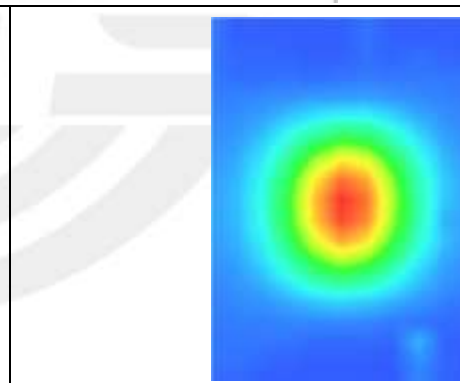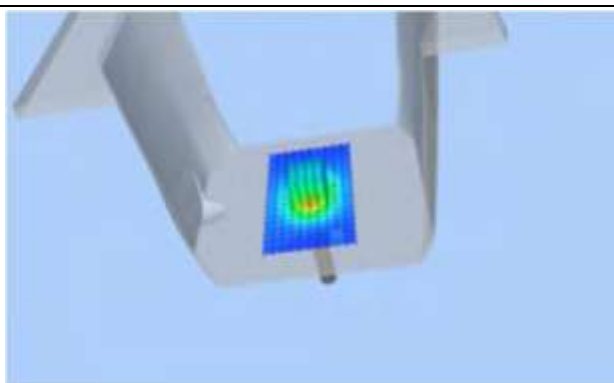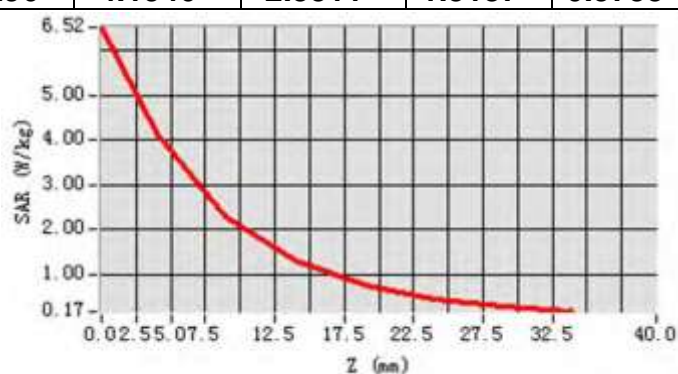

**System Performance Check Data (1900MHz Body)**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-02-22

Measurement duration: 14 minutes 46 seconds

**Experimental conditions.**

Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900
Relative permittivity (real part)	52.31
Relative permittivity	12.87531
Conductivity (S/m)	1.5
Power drift (%)	0.37
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
Probe	SN 17/14 EP221
ConvF:	4.85
Crest factor:	1:1

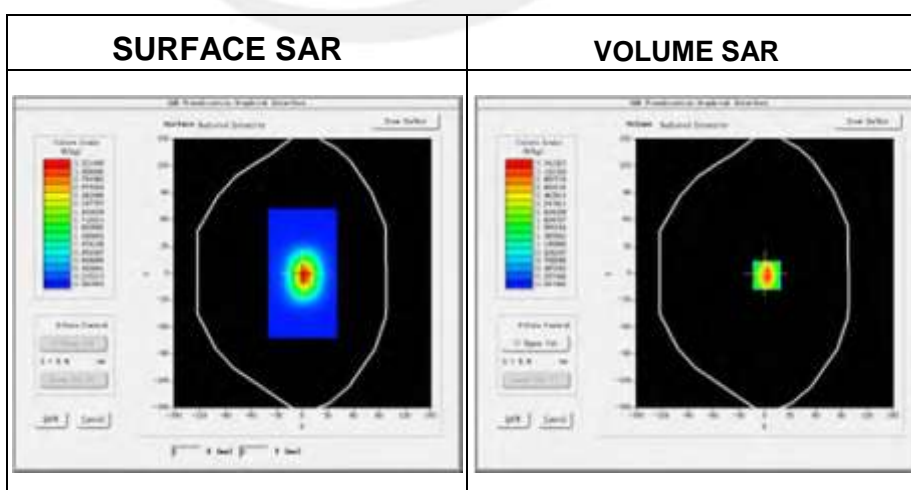






Maximum location: X=2.00, Y=2.00

SAR Peak: 5.27 W/kg

SAR 10g (W/Kg)	2.353112
SAR 1g (W/Kg)	4.147516

### Z Axis Scan

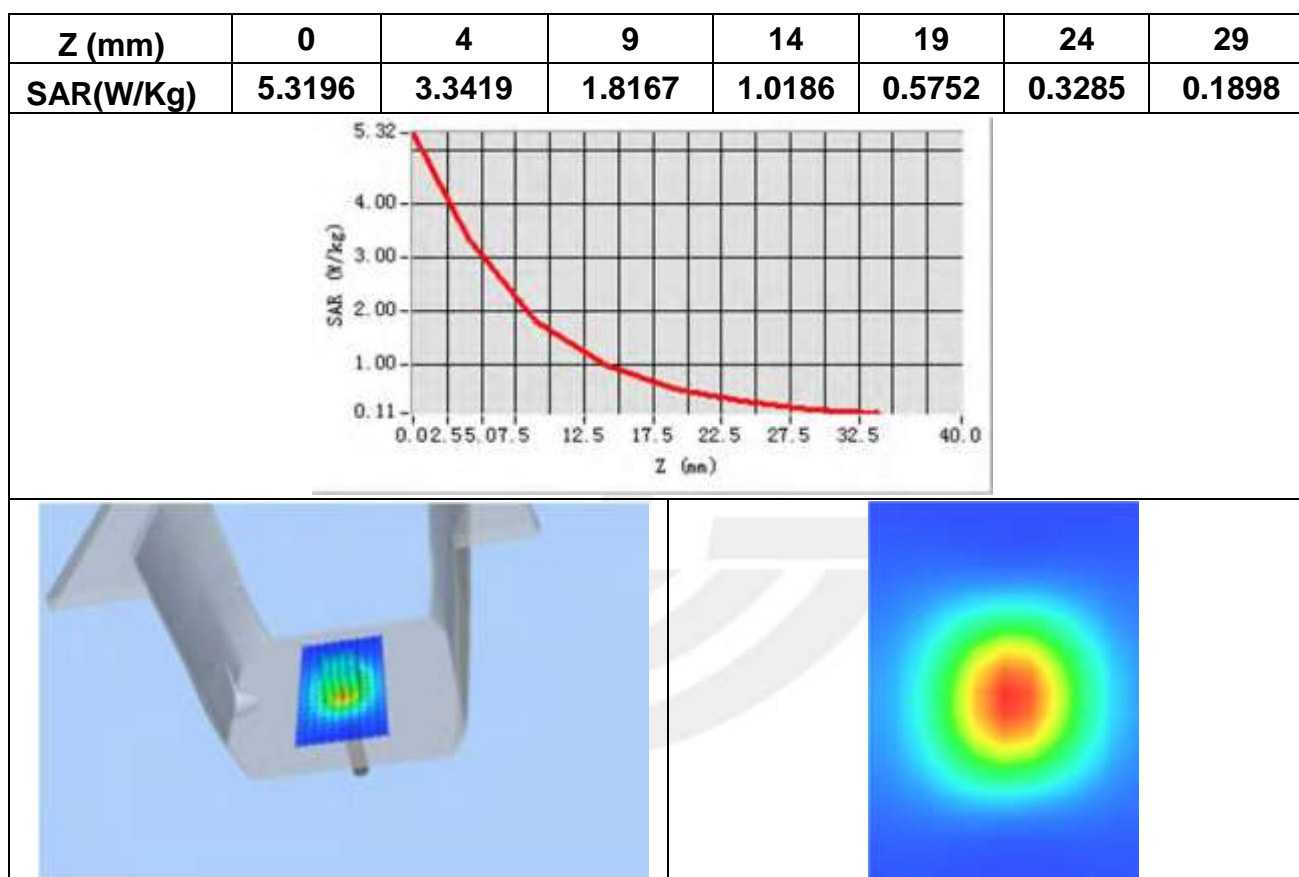

**System Performance Check Data (2450MHz Head)**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm



Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-02-22

Measurement duration: 13 minutes 51seconds

**Experimental conditions.**

Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity (real part)	39.176002
Relative permittivity	12.930000
Conductivity (S/m)	1.88
Power drift (%)	-1.200000
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 17/14 EP221
ConvF	4.11
Crest factor:	1:1

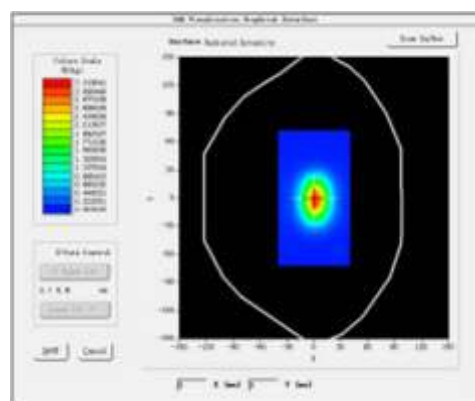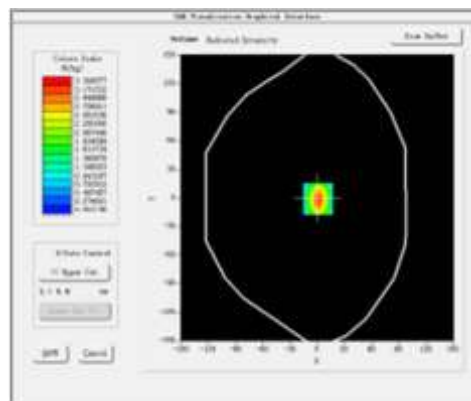
**SURFACE SAR****VOLUME SAR**



Maximum location: X=7.00, Y=6.00

SAR 10g (W/Kg)	2.524335
SAR 1g (W/Kg)	5.311435

### Z Axis Scan

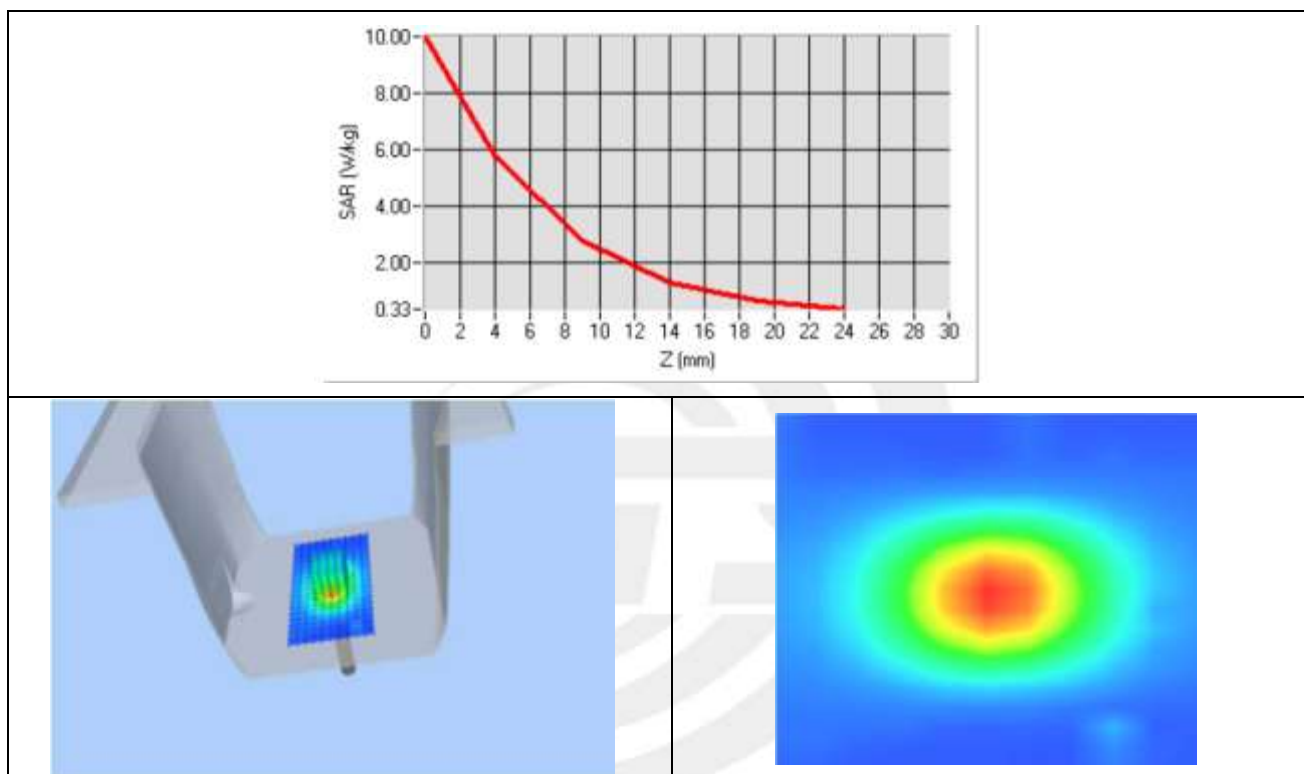

**System Performance Check Data (2450MHz Body)**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-02-22

Measurement duration: 14 minutes 23 seconds

**Experimental conditions.**

Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity (real part)	52.316002
Relative permittivity	12.930000
Conductivity (S/m)	1.92
Power drift (%)	-1.200000
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 17/14 EP221
ConvF	4.25
Crest factor:	1:1

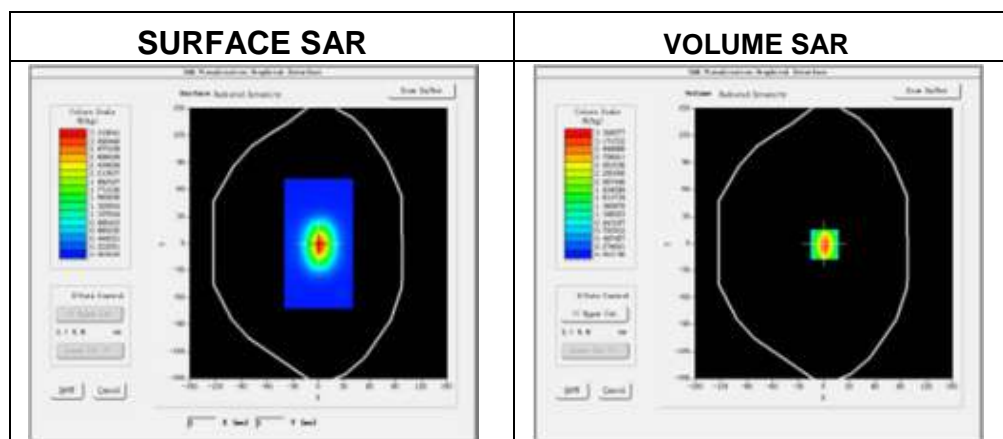




Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	2.362758
SAR 1g (W/Kg)	5.265828

### Z Axis Scan

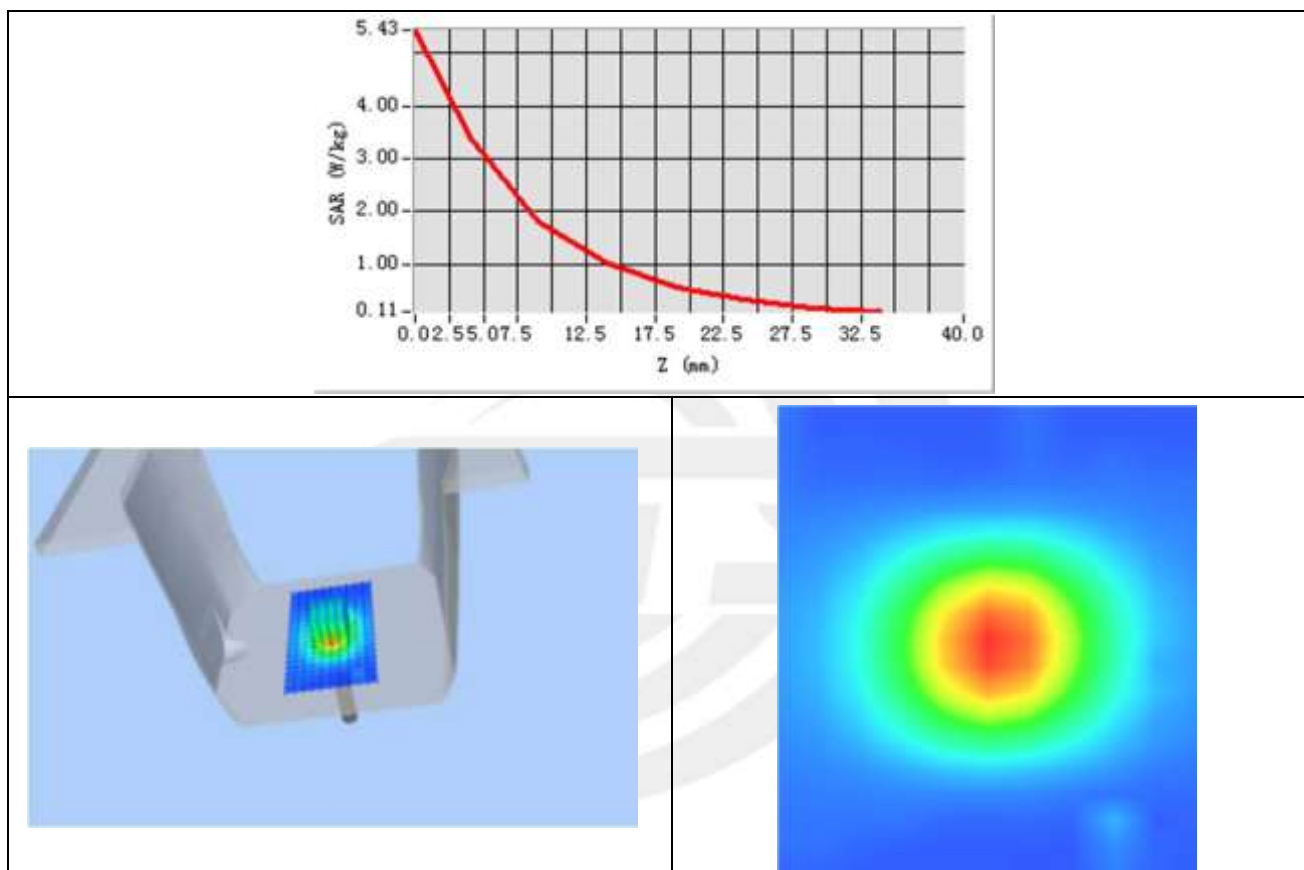

## Appendix B. SAR Test Plots


### Plot 1: DUT: SMART PHONE; EUT Model: A1

Test Data	2016-02-22
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 17/14 EP221
ConvF	4.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	836.6
Relative permittivity (real part)	41.5
Conductivity (S/m)	0.90
Variation (%)	-3.25

Maximum location: X=-49.00, Y=-55.00

SAR Peak: 0.26 W/kg

SAR 10g (W/Kg)	0.132173
SAR 1g (W/Kg)	0.186114

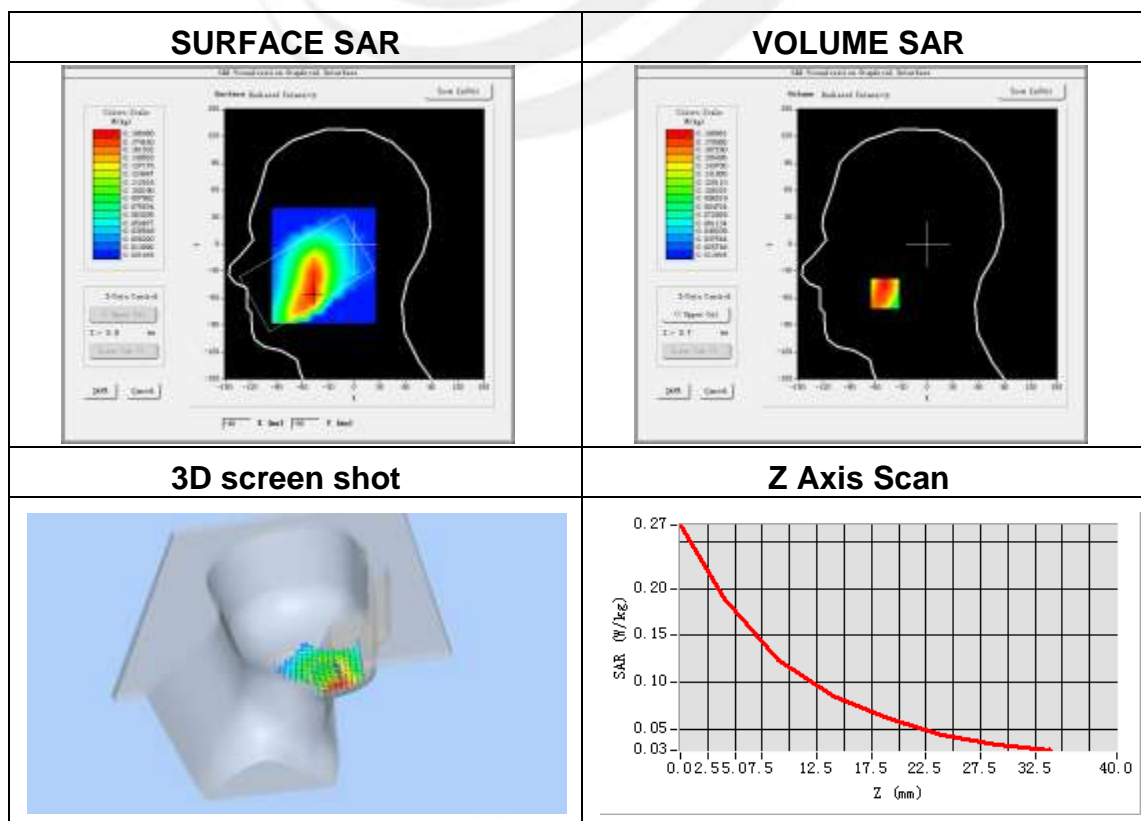




**Plot 2: DUT: SMART PHONE; EUT Model: A1**

Test Data	2016-02-22
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 17/14 EP221
ConvF	5.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body Back
Band	GPRS 850
Channels	Low
Signal	Duty Cycle: 2.67 (Crest factor: 2.67)
Frequency (MHz)	824.2
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	1.34

Maximum location: X=16.00, Y=23.00

SAR Peak: 1.01 W/kg

SAR 10g (W/Kg)	0.344370
SAR 1g (W/Kg)	0.607069

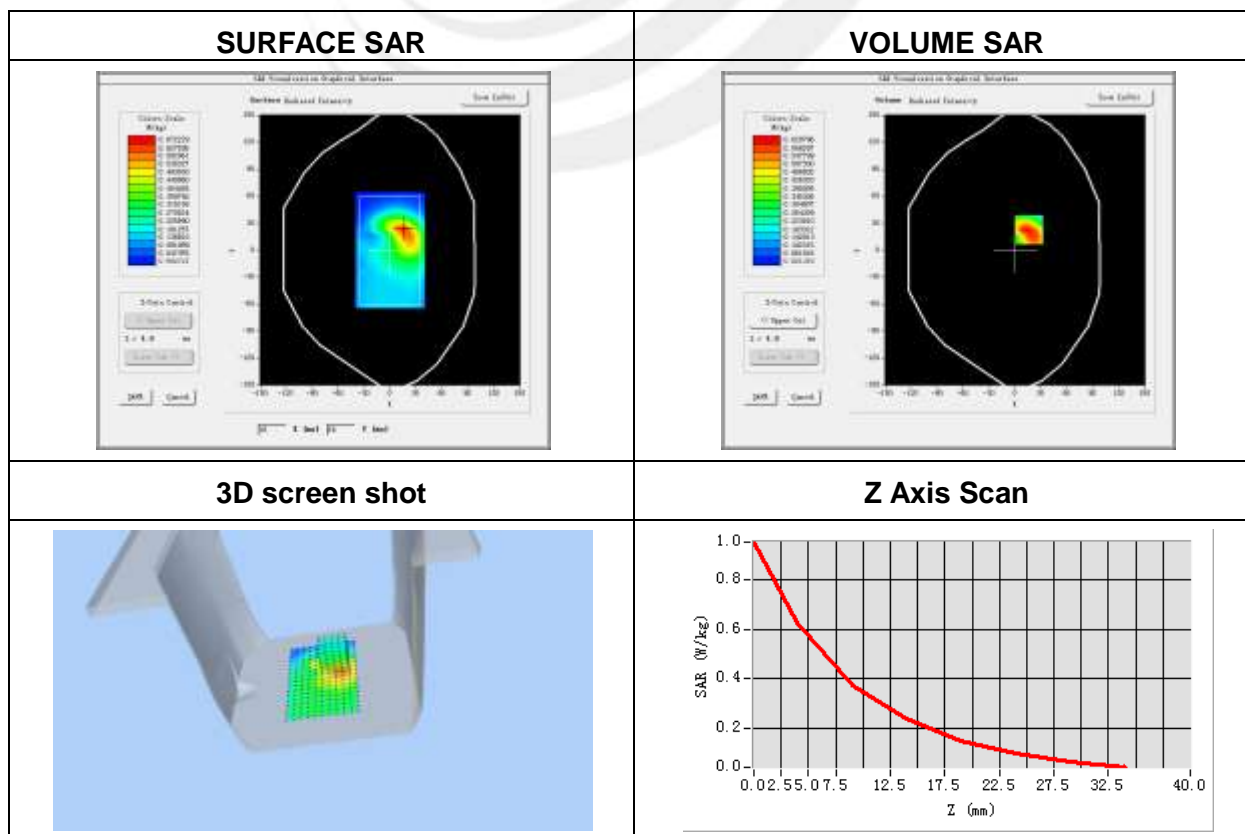





**Plot 3: DUT: SMART PHONE; EUT Model: A1**

Test Data	2016-02-22
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 4.0)
Frequency (MHz)	1850.2
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-2.35

Maximum location: X=-45.00, Y=-80.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.033298
SAR 1g (W/Kg)	0.059727

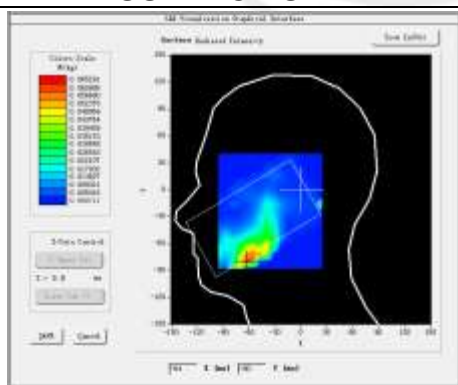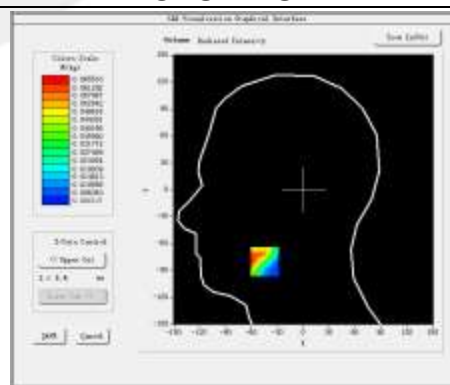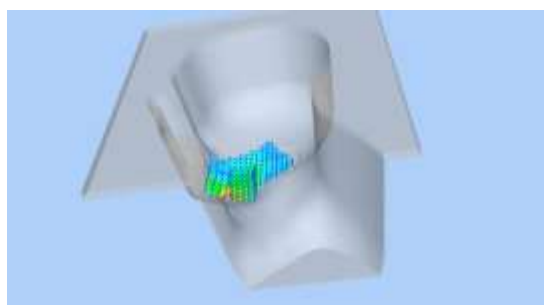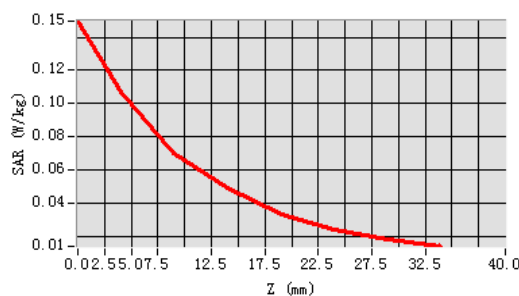**SURFACE SAR**

**VOLUME SAR**

**3D screen shot**

**Z Axis Scan**


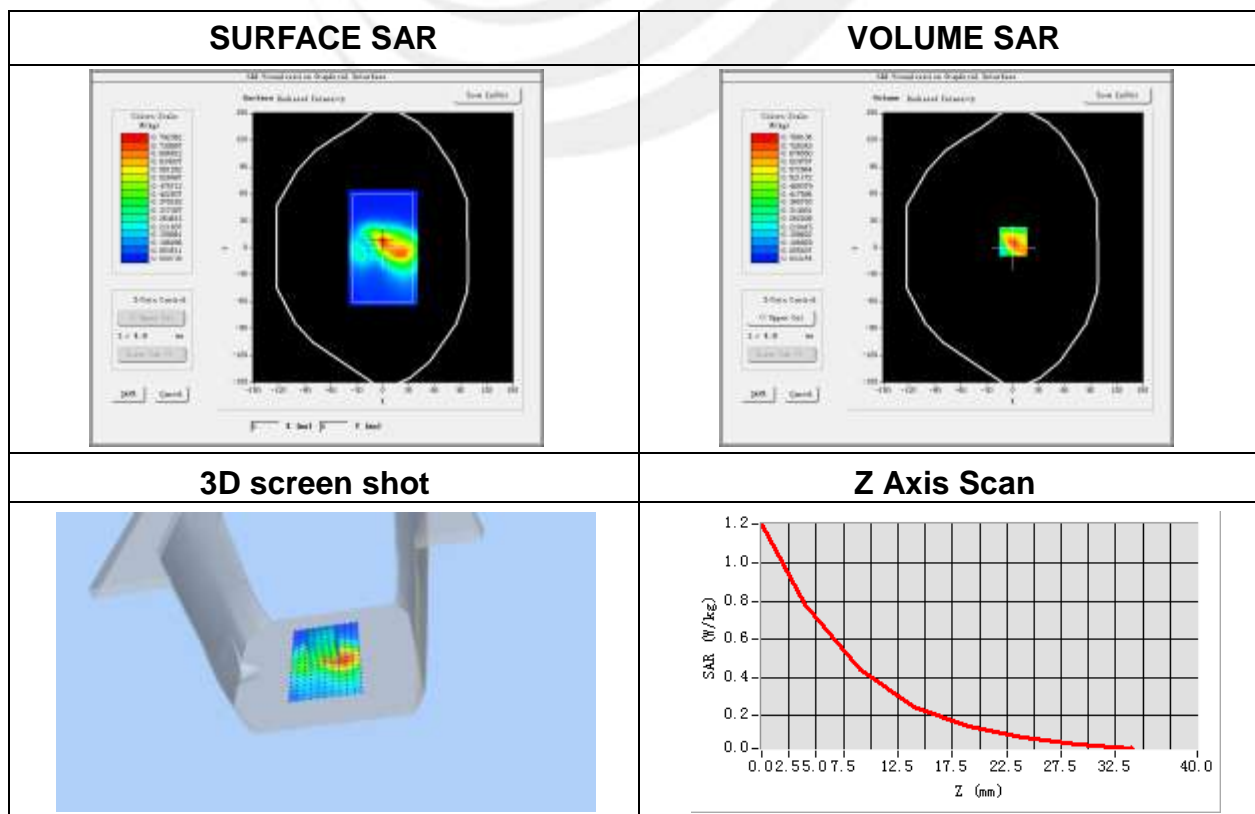
**Plot 4: DUT: SMART PHONE; EUT Model: A1**

Test Data	2016-02-22
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 17/14 EP221
ConvF	4.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body Behind
Band	GPRS 1900
Channels	Low
Signal	Duty Cycle: 2.67 (Crest factor: 2.67)
Frequency (MHz)	1850.2
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	0.61

Maximum location: X=0.00, Y=7.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.381494
SAR 1g (W/Kg)	0.739058




**Plot 5: DUT: SMART PHONE; EUT Model: A1**

Test Data	2016-02-22
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 17/14 EP221
ConvF	4.71
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA II
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1880.0
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-2.54

Maximum location: X=-64.00, Y=-71.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.037688
SAR 1g (W/Kg)	0.066391

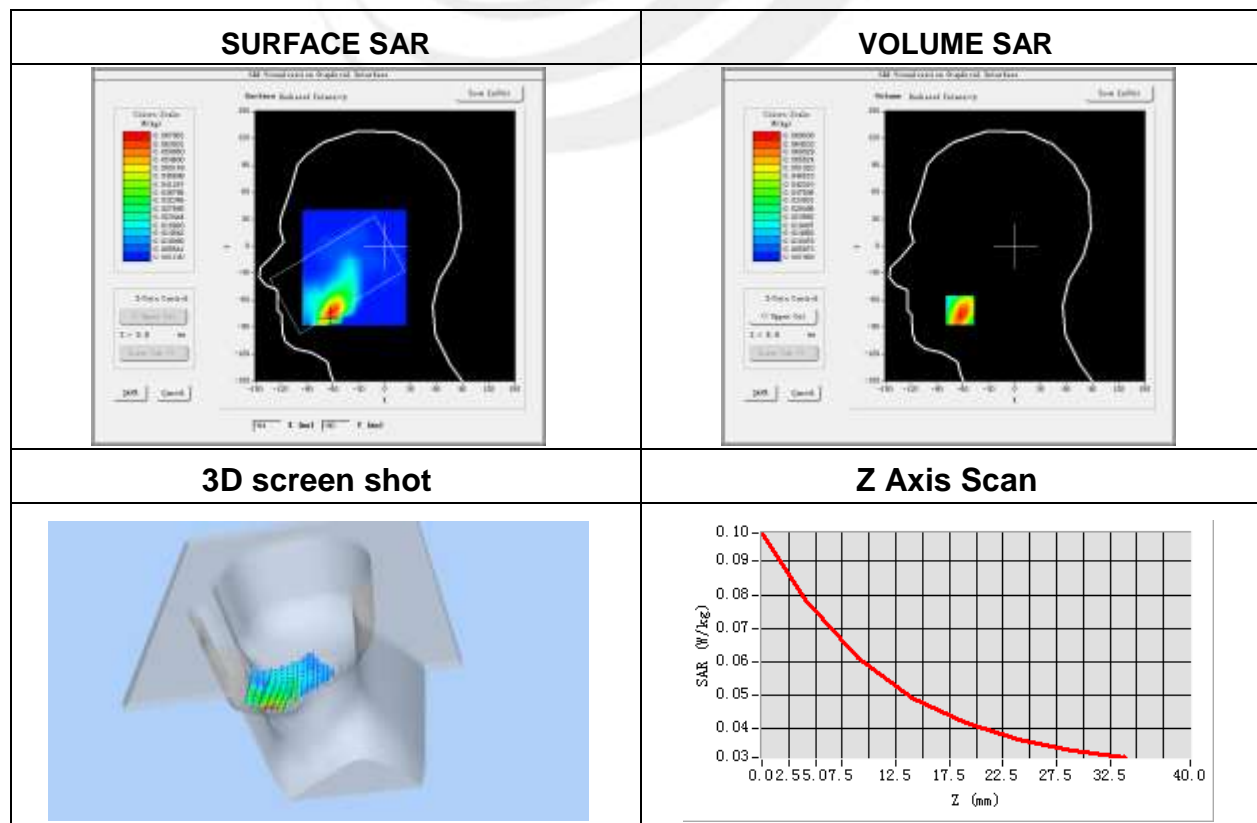


**Plot 6: DUT: SMART PHONE; EUT Model: A1**

Test Data	2016-02-22
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 17/14 EP221
ConvF	4.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back side
Band	WCDMA II
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1880.0
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	-0.40

Maximum location: X=-5.00, Y=17.00

SAR Peak: 2.34 W/kg

SAR 10g (W/Kg)	0.581861
SAR 1g (W/Kg)	1.088604

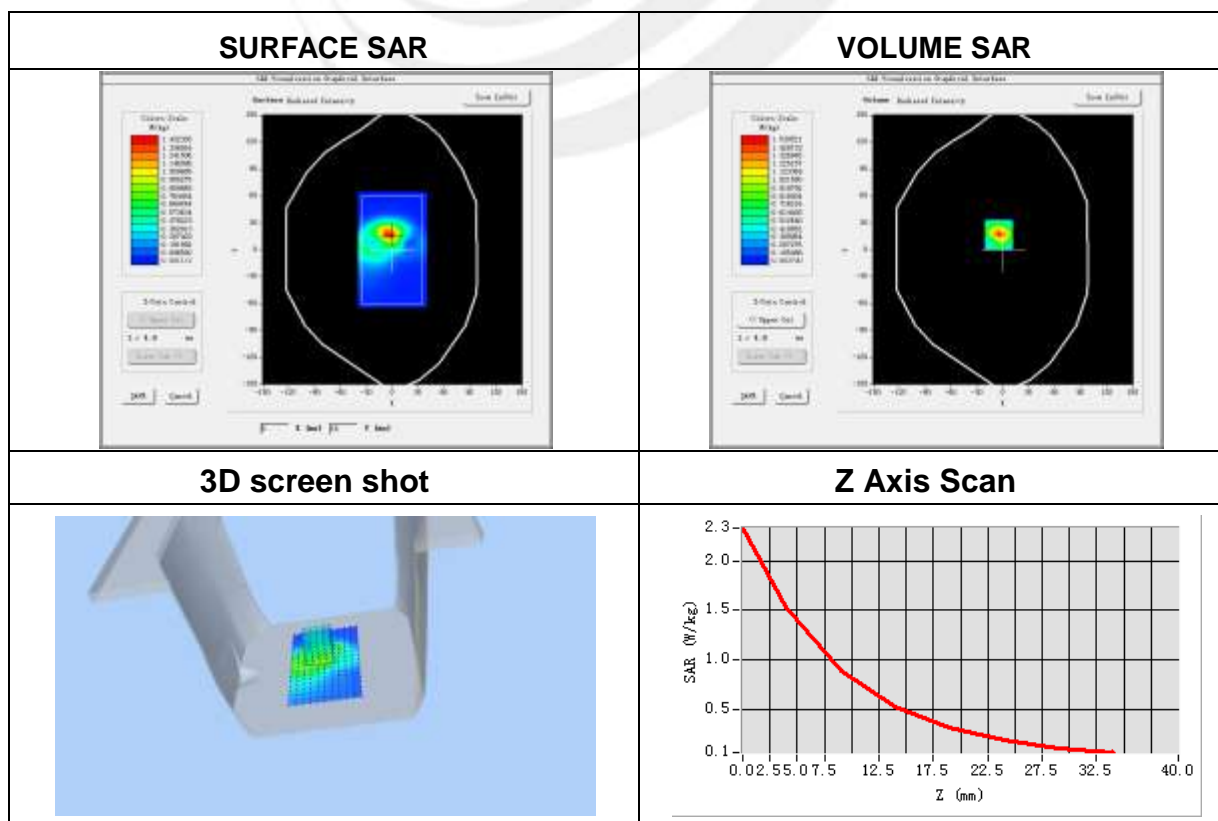


**Plot 7: DUT: SMART PHONE; EUT Model: A1**

Test Data	2016-02-22
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 17/14 EP221
ConvF	4.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	42.27
Conductivity (S/m)	0.91
Variation (%)	-0.66

Maximum location: X=-49.00, Y=-47.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.081544
SAR 1g (W/Kg)	0.114909

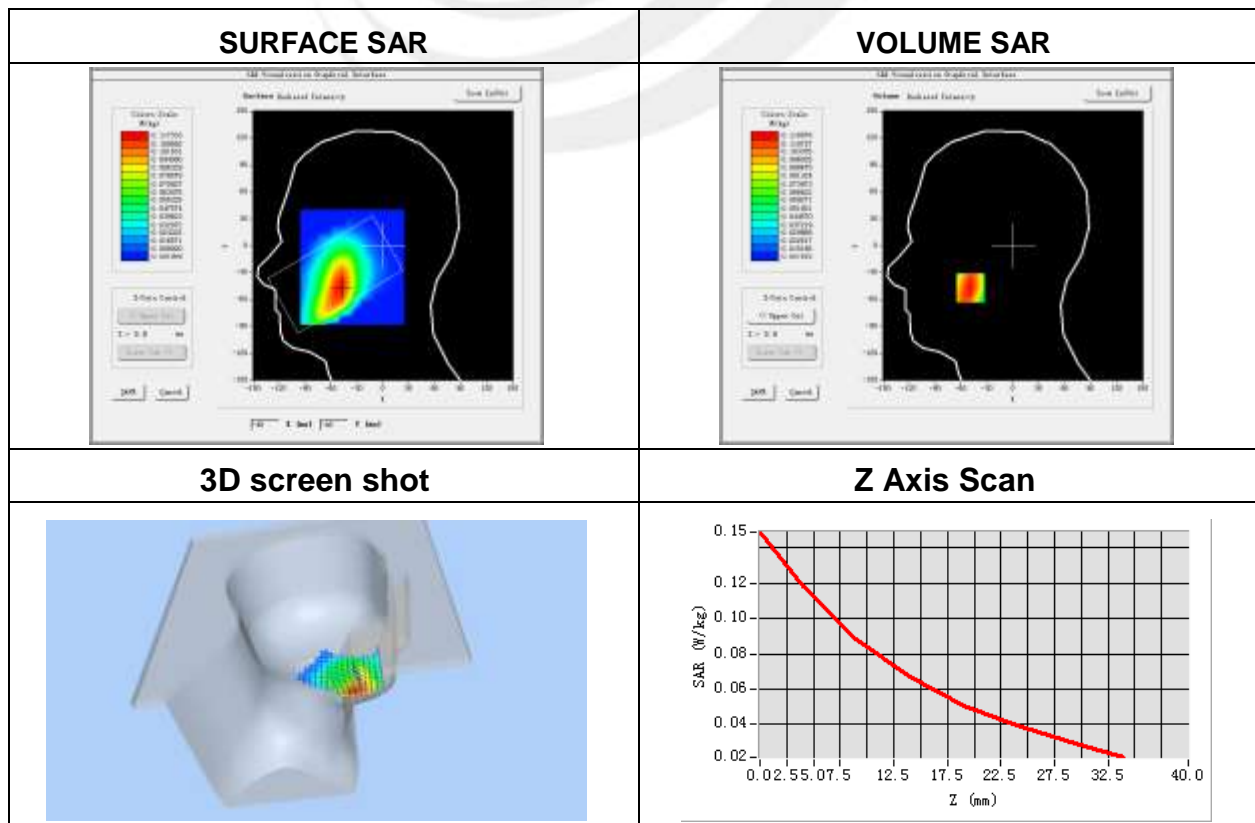




**Plot 8: DUT: SMART PHONE; EUT Model: A1**

Test Data	2016-02-22
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 17/14 EP221
ConvF	5.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back side
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	55.5
Conductivity (S/m)	0.96
Variation (%)	-0.61

Maximum location: X=15.00, Y=15.00

SAR Peak: 0.63 W/kg

SAR 10g (W/Kg)	0.217090
SAR 1g (W/Kg)	0.390062

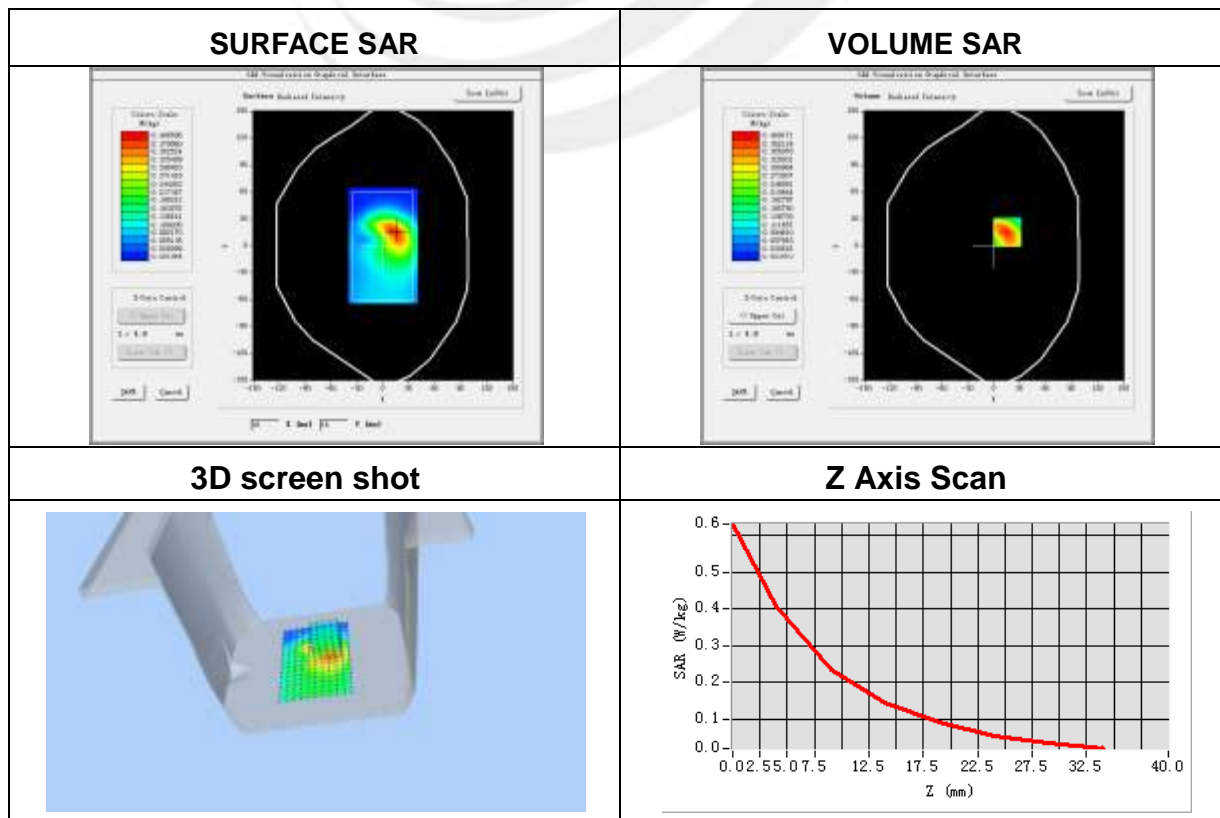


**Plot 9: DUT:SMART PHONE; EUT Model: A1**

Test Data	2016-02-22
Probe	SN 17/14 EP221
ConvF	4.11
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11b ISM
Channels	Low
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	39.23
Conductivity (S/m)	1.79
Variation (%)	-1.09

Maximum location: X=-7.00, Y=8.00

SAR Peak: 1.02 W/kg

SAR 10g (W/Kg)	0.208021
SAR 1g (W/Kg)	0.515098

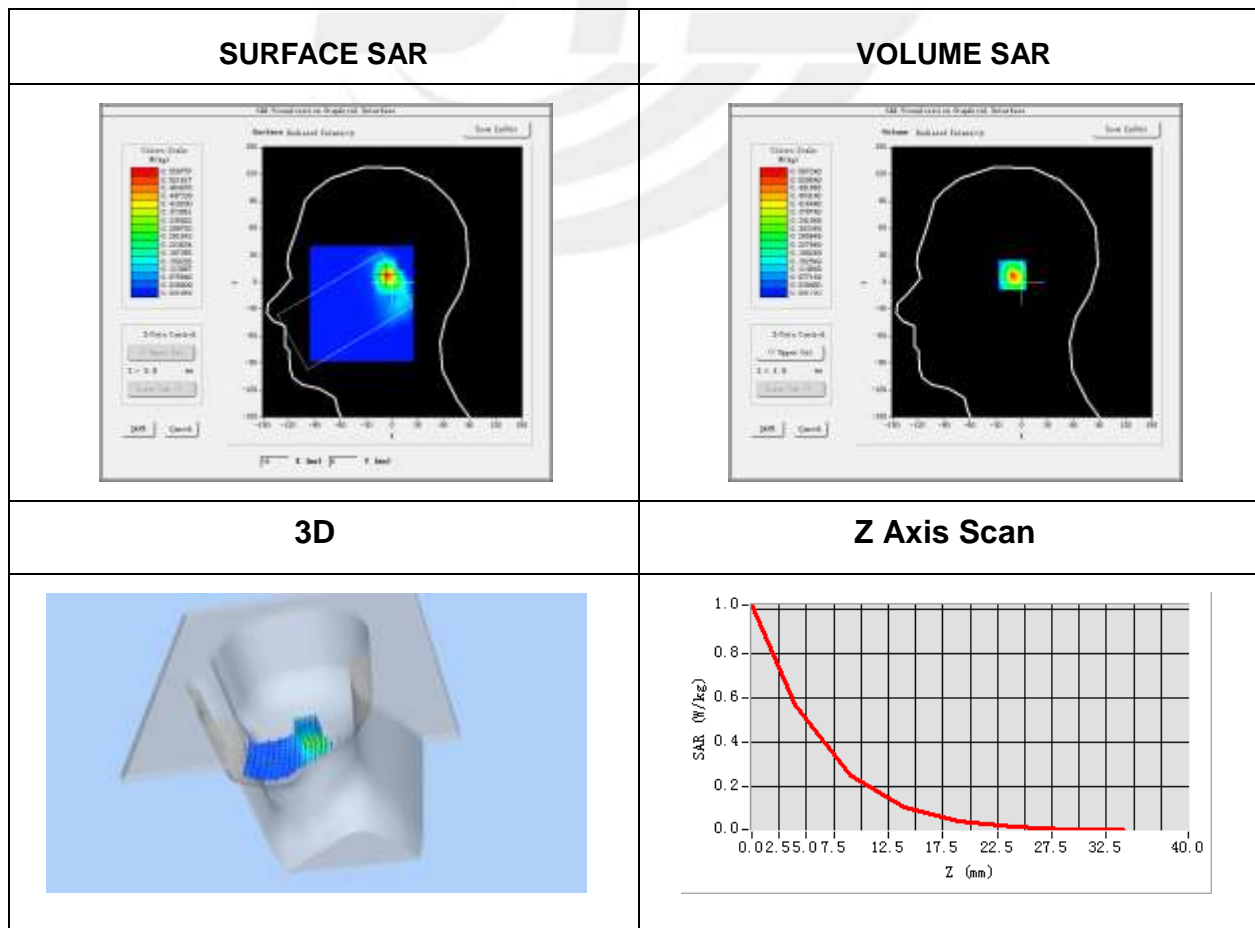


**Plot 10: DUT: SMART PHONE; EUT Model: A1**

Test Data	2016-02-22
Probe	SN 17/14 EP221
ConvF	4.25
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back side
Band	IEEE 802.11b ISM
Channels	Low
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	51.2
Conductivity (S/m)	1.95
Variation (%)	0.20

Maximum location: X=31.00, Y=-16.00

SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.150820
SAR 1g (W/Kg)	0.254665

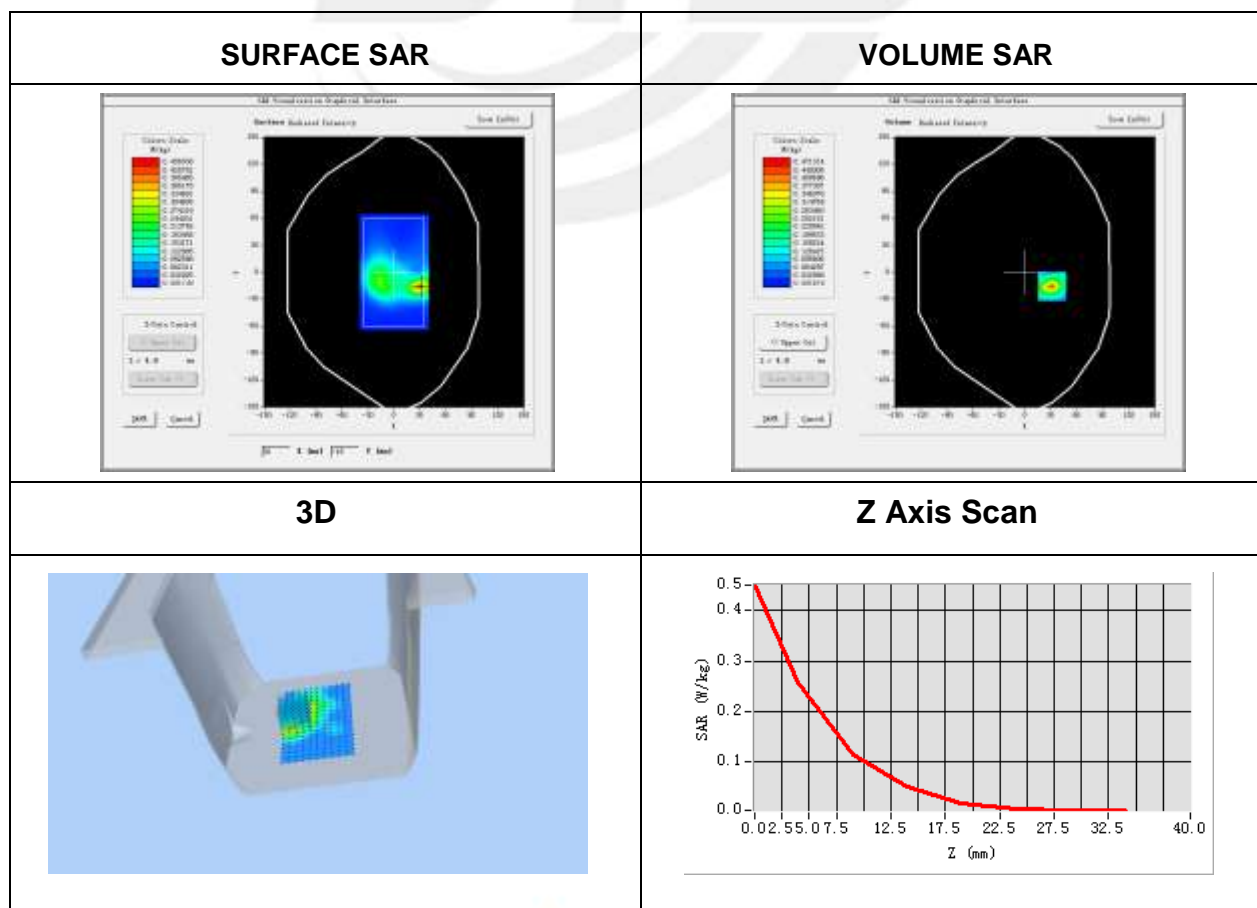


**Plot 11: DUT: SMART PHONE; EUT Model: A1**

Test Data	2016-02-22
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 17/14 EP221
ConvF	4.25
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 4 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1745
Relative permittivity (real part)	40.2
Conductivity (S/m)	1.31
Variation (%)	-2.50

Maximum location: X=-58.00, Y=-54.00

SAR Peak: 0.25 W/kg

SAR 10g (W/Kg)	0.107148
SAR 1g (W/Kg)	0.174650

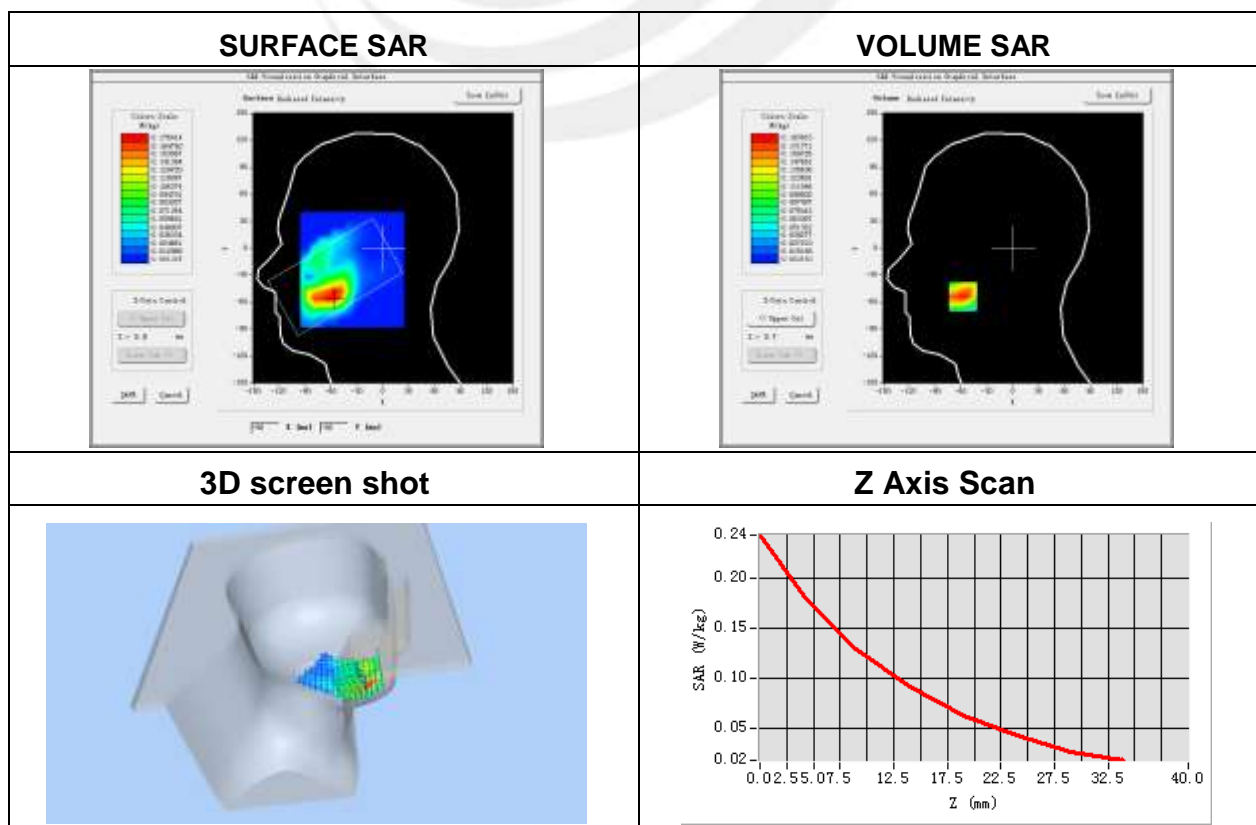


**Plot 12: DUT: SMART PHONE; EUT Model: A1**

Test Data	2016-02-22
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 17/14 EP221
ConvF	4.34
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	LTE Band 4 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1745
Relative permittivity (real part)	52.6
Conductivity (S/m)	1.38
Variation (%)	-0.31

Maximum location: X=7.00, Y=22.00

SAR Peak:1.64 W/kg

SAR 10g (W/Kg)	0.534067
SAR 1g (W/Kg)	1.017454

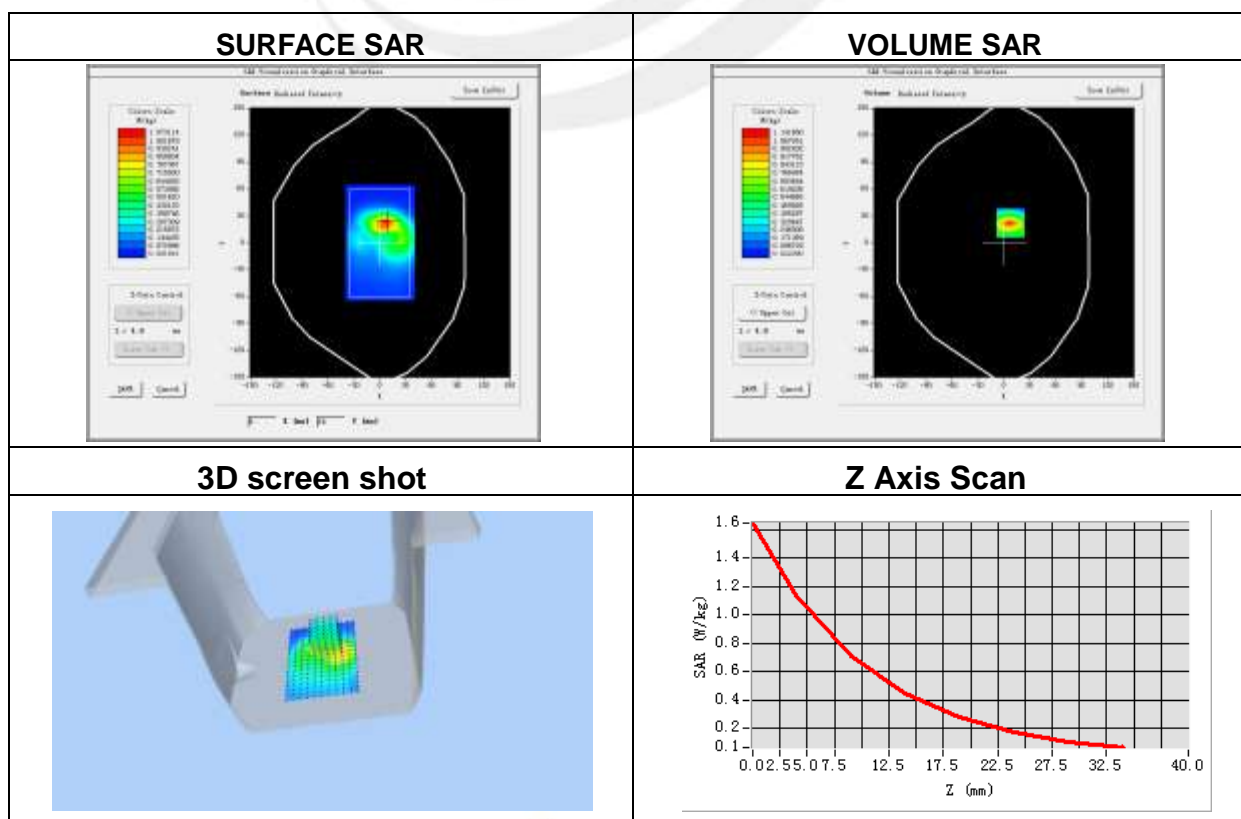



## Appendix C. Probe Calibration And Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※

