



FCC PART 15.247 TEST REPORT

For

ITALCOM GROUP

1728 Coral Way, Coral Gables, Miami, Florida, 33145, United States

FCC ID: YPVITALCOMLOV-TV

Report Type: **Product Type:** Mobile Phone Original Report Gardon Zhang **Test Engineer:** Gardon Zhang **Report Number:** RSZ120925002-00B **Report Date:** 2012-11-26 Alvin Huang **Reviewed By:** RF Leader **Test Laboratory:** Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

^{*} This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★"

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
Objective	4
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	
EUT Exercise Software	6
SUPPORT EQUIPMENT LIST AND DETAILS	
External I/O Cable	
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §2.1093 – RF EXPOSURE	8
APPLICABLE STANDARD	
RESULT:	
FCC §15.203 – ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	
ANTENNA CONNECTOR CONSTRUCTION	
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTY	
EUT SETUP	
EMI TEST RECEIVER SETUP	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
CORRECTED FACTOR & MARGIN CALCULATION	
TEST DATA	
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS	
APPLICABLE STANDARD	
EUT SETUP	
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST EQUIPMENT LIST AND DETAILS.	
TEST RESULTS SUMMARY	
TEST DATA	
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	20
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST ROCEDURE TEST EQUIPMENT LIST AND DETAILS	

TEST DATA	20
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING	27
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	33
APPLICABLE STANDARD	33
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	33
TEST DATA	
FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)	36
APPLICABLE STANDARD	36
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	36
TEST DATA	36
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST EQUIPMENT LIST AND DETAILS	52
TEST DATA	52
FCC §15.247(d) - BAND EDGES TESTING	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST EQUIPMENT LIST AND DETAILS	58
TEST DATA	59

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *ITALCOM GROUP*'s product, model number: *lov-tv* (*FCC ID: YPVITALCOMLOV-TV*) or the "EUT" in this report was a *Mobile Phone*, which was measured approximately: 9.0 cm (L) x 5.1 cm (W) x 1.4 cm (H), rated input voltage: DC 3.7 V Li-ion battery or DC 5V charging from adapter.

Report No.: RSZ120925002-00B

Adapter Information:

Model: lov-tv

Input: 100-240Vca 50/60Hz 0.15A

Output: 5Vcc 500mA

* All measurement and test data in this report was gathered from production sample serial number: 1209118 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2012-09-25.

Objective

This test report is prepared on behalf of *ITALCOM GROUP* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 22H&24E PCE and Part 15B JBP submissions with FCC ID: YPVITALCOMLOV-TV.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part15.247 Page 4 of 62

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Report No.: RSZ120925002-00B

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at http://ts.nist.gov/Standards/scopes/2007070.htm

FCC Part15.247 Page 5 of 62

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a testing mode which was controlled by software.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The test software was provided by client, which was embedded in the product.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
-	-	-	-

Report No.: RSZ120925002-00B

External I/O Cable

Cable Description	Length (m)	From Port	То
Shielded Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

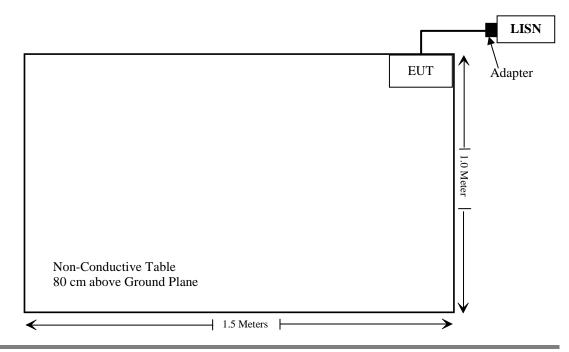

FCC Part15.247 Page 6 of 62

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

Report No.: RSZ120925002-00B

Page 7 of 62 FCC Part15.247

FCC §15.247 (i) & §2.1093 – RF EXPOSURE

Applicable Standard

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Report No.: RSZ120925002-00B

Table 2 - Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	Routine evaluation required	SAR not required: Unlicensed only
Unlicensed Transmitters	When there is no simultaneous transmission — o output ≤ 60/f: SAR not required o output > 60/f: stand-alone SAR required When there is simultaneous transmission — Stand-alone SAR not required when o output ≤ 2·P _{Ref} and antenna is ≥ 5.0 cm from other antennas o output ≤ P _{Ref} and antenna is ≥ 2.5 cm from other antennas o output ≤ P _{Ref} and antenna is < 2.5 cm from other antennas, each with either output power ≤ P _{Ref} or 1-g SAR < 1.2 W/kg Otherwise stand-alone SAR is required When stand-alone SAR is required o test SAR on highest output channel for each wireless mode and exposure condition o if SAR for highest output channel is > 50% of SAR limit, evaluate all channels according to normal procedures	o when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas Licensed & Unlicensed o when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas o when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 SAR required: Licensed & Unlicensed antenna pairs with SAR to peak location separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply
Jaw, Mouth and Nose	Flat phantom SAR required o when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues o position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

FCC Part15.247 Page 8 of 62

- 1) GSM can transmit simultaneously with Bluetooth.
- 2) The distance between BT and GSM antenna is 2.1~cm < 2.5~cm. The max output power of Bluetooth antenna is $(7.31dBm)~5.383mW < P_{Ref}(12mW)$. According to KDB648474, the standalone SAR is not required for BT antenna.

Report No.: RSZ120925002-00B

- 3) When the sum of the 1-g SAR is 0.784 W/kg <1.2W/kg, the simultaneous SAR is not required.
- 4) P_{Ref} is defined as the maximum conducted power available at the antenna according to source-based time-averaging requirements of Section 2.1093(d) (5).

Result:

The stand-alone SAR measurement of the BT antenna is exempt.

FCC Part15.247 Page 9 of 62

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: RSZ120925002-00B

Antenna Connector Construction

The EUT has a monopole antenna arranement for bluetooth, which was permanently attached, the antenna gain is -1.5dBi, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC Part15.247 Page 10 of 62

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for all the test data recorded in the report.

Report No.: RSZ120925002-00B

EUT Setup

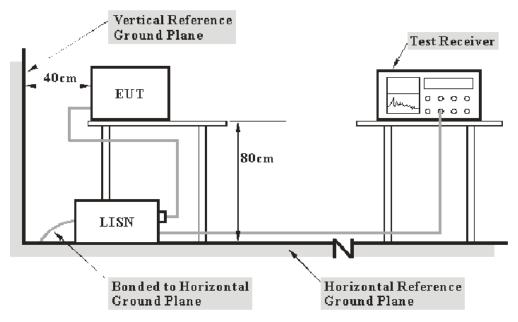

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2009. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm

The adapter was connected to a 120 VAC/60 Hz power source.

FCC Part15.247 Page 11 of 62

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Report No.: RSZ120925002-00B

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2011-11-24	2012-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-11-17	2012-11-16
Rohde & Schwarz	Pulse limiter	ESH3Z2	DE25985	2012-07-08	2013-07-07
BACL	CE Test software	BACL-CE	V1.0	-	-

^{*} Statement of Traceability: Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Pulse Limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Pulse Limiter Attenuation

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

13.10 dB at 0.515 MHz in the Neutral conducted mode

FCC Part15.247 Page 12 of 62

Test Data


Environmental Conditions

Temperature:	25 °C	
Relative Humidity:	56 %	
ATM Pressure:	100.0 kPa	

The testing was performed by Gardon Zhang on 2012-10-15.

EUT operation mode: Charging & Transmitting

AC 120 V, 60 Hz, Line:

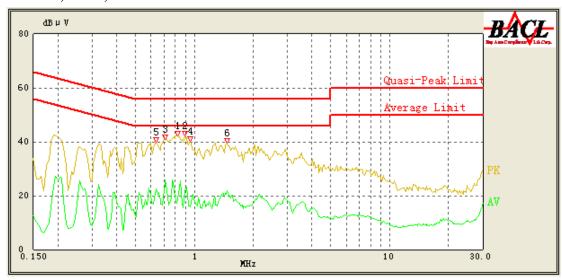


Report No.: RSZ120925002-00B

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.635	37.15	10.23	56.00	18.85	QP
0.705	35.65	10.22	56.00	20.35	QP
0.705	24.20	10.22	46.00	21.80	Ave.
0.895	33.13	10.19	56.00	22.87	QP
0.635	22.41	10.23	46.00	23.59	Ave.
0.895	21.85	10.19	46.00	24.15	Ave.
0.820	31.83	10.20	56.00	24.17	QP
1.475	21.81	10.19	46.00	24.19	Ave.
1.465	30.06	10.19	56.00	25.94	QP
0.825	18.78	10.20	46.00	27.22	Ave.
0.955	15.85	10.18	46.00	30.15	Ave.
0.955	25.67	10.18	56.00	30.33	QP

FCC Part15.247 Page 13 of 62

AC 120V, 60 Hz, Neutral:

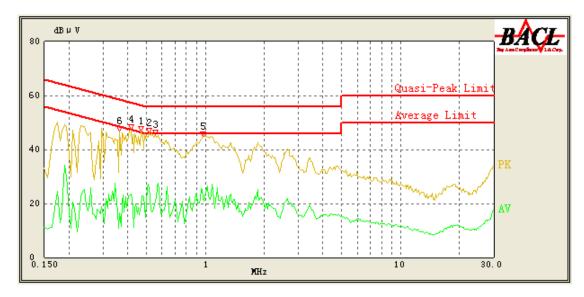

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.515	42.90	10.24	56.00	13.10	QP
0.470	42.79	10.25	56.86	14.07	QP
0.555	41.06	10.23	56.00	14.94	QP
0.975	40.94	10.17	56.00	15.06	QP
0.415	41.94	10.25	58.43	16.49	QP
0.365	42.69	10.25	59.86	17.17	QP
0.515	25.85	10.24	46.00	20.15	Ave.
0.975	22.16	10.17	46.00	23.84	Ave.
0.555	21.20	10.23	46.00	24.80	Ave.
0.415	23.36	10.25	48.43	25.07	Ave.
0.470	18.76	10.25	46.86	28.10	Ave.
0.365	16.47	10.25	49.86	33.39	Ave.

- 1) Correction Factor =LISN/ISN VDF (Voltage Division Factor) + Cable Loss + Pulse Limiter Attenuation The corrected factor has been input into the transducer of the test software.

 2) Corrected Amplitude = Reading + Correction Factor

 3) Margin = Limit - Corrected Amplitude

FCC Part15.247 Page 14 of 62

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

FCC §15.205; §15.209; §15.247(d)

Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Report No.: RSZ120925002-00B


Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB(k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for all the test data recorded in the report.

EUT Setup

Below 1 GHz:

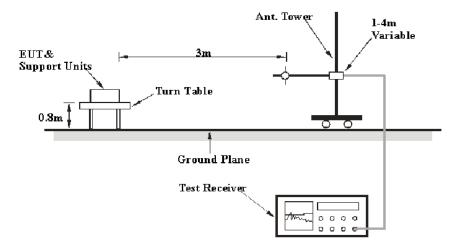

Above 1 GHz:

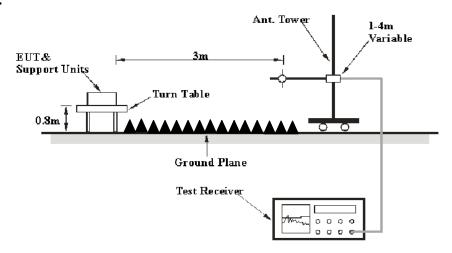

FCC Part15.247 Page 15 of 62

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

Report No.: RSZ120925002-00B

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to an AC 120V/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

Test Procedure

For radiated emissions, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Factor = Antenna Factor + Cable Loss- Amplifier Gain Corrected Amplitude = Meter Reading + Corrected Factor

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

Margin = Limit - Corrected Amplitude

FCC Part15.247 Page 16 of 62

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
НР	Amplifier	8447E	1937A01046	2011-11-24	2012-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2011-11-24	2012-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2012-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
Agilent	Spectrum Analyzer	8564E	3943A01781	2012-04-12	2013-04-11
the electro- Mechanics Co.	Horn Antenna	3116	9510-2270	2012-10-14	2013-10-13

Report No.: RSZ120925002-00B

Test Results Summary

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.</u>

6.56 dB at 7206.0 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	25 °C		
Relative Humidity:	56 %		
ATM Pressure:	100.0 kPa		

The testing was performed by Gardon Zhang on 2012-10-15.

EUT operation mode: Transmitting

FCC Part15.247 Page 17 of 62

^{*} **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Report No.: RSZ120925002-00B

30 MHz ~25 GHz: (Scan with GFSK, π /4-DQPSK, 8-DPSK, the worst case is BDR Mode (GFSK))

Frequency	Re	Receiver	Turntable	Rx An	tenna		Corrected	15.247	C Part /205/209
(MHz)	Reading (dBµV)	Detector (PK/QP/Ave.)	Degree		Height Polar (dB)	Amplitude (dBuV/m)		Margin (dB)	
			Low Ch	annel (2	402 M	Hz)			
2402.0	83.16	PK	69	1.2	Н	6.13	89.29	/	/
2402.0	70.69	Ave.	69	1.2	Н	6.13	76.82	/	/
2402.0	86.76	PK	35	1.3	V	6.13	92.89	/	/
2402.0	71.91	Ave.	35	1.3	V	6.13	78.04	/	/
7206.0	30.38	Ave.	164	1.2	V	17.06	47.44	54	6.56
7206.0	45.73	PK	164	1.2	V	17.06	62.79	74	11.21
9608.0	18.22	Ave.	15	1.3	Н	19.28	37.50	54	16.50
368.6	37.84	QP	114	1.1	V	-10.72	27.12	46	18.88
4804.0	20.39	Ave.	22	1.2	V	12.40	32.79	54	21.21
9608.0	33.25	PK	15	1.3	Н	19.28	52.53	74	21.47
4804.0	36.93	PK	22	1.2	V	12.40	49.33	74	24.67
2486.1	20.96	Ave.	158	1.2	V	6.81	27.77	54	26.23
2331.1	21.29	Ave.	22	1.1	Н	5.48	26.77	54	27.23
2362.7	20.83	Ave.	335	1.2	V	5.48	26.31	54	27.69
2486.1	35.22	PK	158	1.2	V	6.81	42.03	74	31.97
2331.1	35.69	PK	22	1.1	Н	5.48	41.17	74	32.83
2362.7	35.37	PK	335	1.2	V	5.48	40.85	74	33.15
			Middle C	Channel ((2441 M	(Hz)			
2441.0	82.69	PK	28	1.3	Н	7.21	89.90	/	/
2441.0	69.95	Ave.	28	1.3	Н	7.21	77.16	/	/
2441.0	86.22	PK	61	1.3	V	6.81	93.03	/	/
2441.0	70.14	Ave.	61	1.3	V	6.81	76.95	/	/
7323.0	29.91	Ave.	32	1.2	V	16.49	46.40	54	7.60
7323.0	44.71	PK	32	1.2	V	16.49	61.20	74	12.80
712.8	32.78	QP	79	1.2	V	-2.93	29.85	46	16.15
9764.0	18.05	Ave.	51	1.3	Н	19.40	37.45	54	16.55
9764.0	33.26	PK	51	1.3	Н	19.40	52.66	74	21.34
4882.0	20.01	Ave.	336	1.1	V	12.46	32.47	54	21.53
4882.0	35.69	PK	336	1.1	V	12.46	48.15	74	25.85
2482.4	20.55	Ave.	9	1.3	V	6.81	27.36	54	26.64
2337.9	20.51	Ave.	117	1.2	Н	5.48	25.99	54	28.01
2362.3	19.98	Ave.	46	1.2	V	5.48	25.46	54	28.54
2482.4	35.66	PK	9	1.3	V	6.81	42.47	74	31.53
2362.3	34.75	PK	46	1.2	V	5.48	40.23	74	33.77
2337.9	34.15	PK	117	1.2	Н	5.48	39.63	74	34.37

FCC Part15.247 Page 18 of 62

Frequency	Re	eceiver	Turntable	Rx An	tenna	Collected		_	C Part 7/205/209
(MHz)	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)	(dB)	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
			High Ch	nannel (2	2480 M	Hz)			
2480.0	82.66	PK	91	1.1	Н	7.21	89.87	/	/
2480.0	69.34	Ave.	91	1.1	Н	7.21	76.55	/	/
2480.0	85.97	PK	58	1.3	V	6.81	92.78	/	/
2480.0	70.25	Ave.	58	1.3	V	6.81	77.06	/	/
7440.0	28.87	Ave.	26	1.2	V	15.90	44.77	54	9.23
7440.0	42.69	PK	26	1.2	V	15.90	58.59	74	15.41
9920.0	17.98	Ave.	23	1.3	Н	19.38	37.36	54	16.64
794.2	31.06	QP	210	1.2	V	-1.92	29.14	46	16.86
9920.0	33.26	PK	23	1.3	Н	19.38	52.64	74	21.36
4960.0	19.18	Ave.	55	1.3	V	12.50	31.68	54	22.32
2486.2	21.93	Ave.	136	1.2	V	6.81	28.74	54	25.26
4960.0	35.76	PK	55	1.3	V	12.50	48.26	74	25.74
2363.4	21.81	Ave.	85	1.3	V	5.48	27.29	54	26.71
2338.1	20.93	Ave.	55	1.2	Н	5.48	26.41	54	27.59
2486.2	37.69	PK	136	1.2	V	6.81	44.50	74	29.50
2363.4	36.41	PK	85	1.3	V	5.48	41.89	74	32.11
2338.1	35.66	PK	55	1.2	Н	5.48	41.14	74	32.86

Note:

- Corrected Factor=Antenna factor (RX) +cable loss amplifier factor
 Corrected Amplitude = Corrected Factor + Receiver Reading
 Margin = Limit- Corrected Amplitude

FCC Part15.247 Page 19 of 62

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ120925002-00B

Test Procedure

- 1. Set the EUT in transmitting mode, maxhold the channel.
- 2. Set the adjacent channel of the EUT and maxhold another trace
- 3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

^{*} Statement of Traceability: Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions

Temperature:	25 °C	
Relative Humidity:	56 %	
ATM Pressure:	100.0 kPa	

^{*} The testing was performed by Gardon Zhang on 2012-10-10 and 2012-10-11.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

FCC Part15.247 Page 20 of 62


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
	Low	2402	1.000	0.613	Pass
	Adjacent	2403	1.000	0.013	1 455
BDR	Middle	2441	1.000	0.613	Pass
(GFSK)	Adjacent	2442	1.000	0.013	rass
	High	2480	1.000	0.613	Pass
	Adjacent	2479	1.000	0.013	rass
	Low	2402	1.002	0.840	Pass
	Adjacent	2403	1.002	0.840	Pass
EDR	Middle	2441	1.002	0.840	Pass
$(\pi/4\text{-DQPSK})$	Adjacent	2442	1.002	0.840	
	High	2480	1.002	0.840	Pass
	Adjacent	2479	1.002	0.840	
	Low	2402	1.002	0.845	Dogg
EDR (8DPSK)	Adjacent	2403	1.002	0.845	Pass
	Middle	2441	1.002	0.945	Dana
	Adjacent	2442	1.002	0.845	Pass
	High	2480	1.002	0.845	Dana
	Adjacent	2479	1.002	0.845	Pass

Note: Limit = 20 dB bandwidth *2/3

FCC Part15.247 Page 21 of 62


BDR (GFSK): Low Channel

Report No.: RSZ120925002-00B

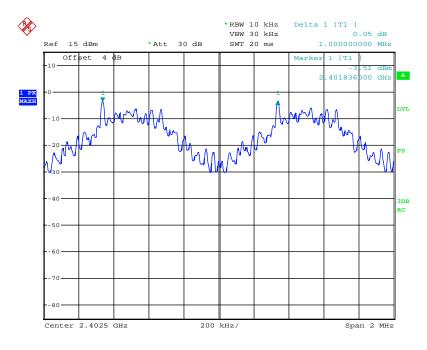

Date: 10.0CT.2012 16:12:50

BDR (GFSK): Middle Channel

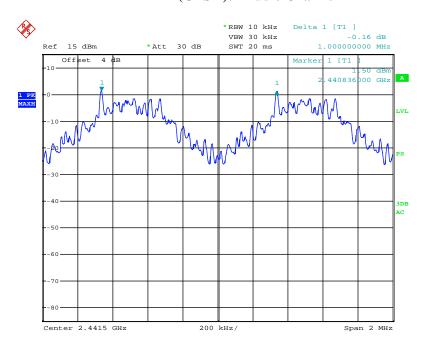


Date: 10.OCT.2012 15:36:24

FCC Part15.247 Page 22 of 62

BDR (GFSK): High Channel

Report No.: RSZ120925002-00B

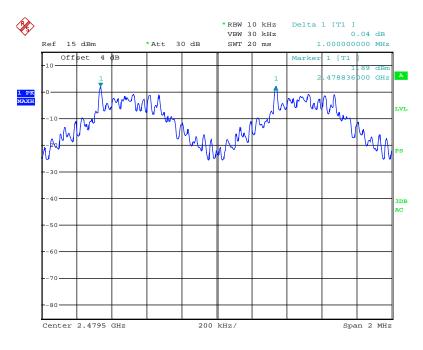

Date: 10.OCT.2012 15:27:54

EDR ($\pi/4$ -DQPSK): Low Channel




Date: 10.OCT.2012 16:47:51

FCC Part15.247 Page 23 of 62

EDR ($\pi/4$ -DQPSK): Middle Channel

Report No.: RSZ120925002-00B

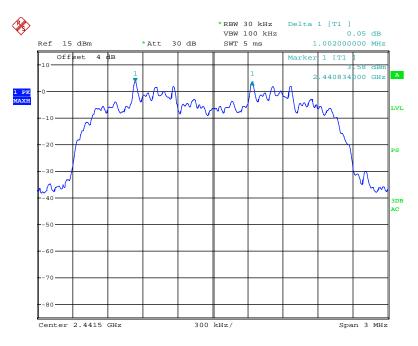

Date: 10.OCT.2012 16:49:12

EDR (π /4-DQPSK): High Channel




Date: 10.OCT.2012 16:50:30

FCC Part15.247 Page 24 of 62


EDR (8DPSK): Low Channel

Report No.: RSZ120925002-00B

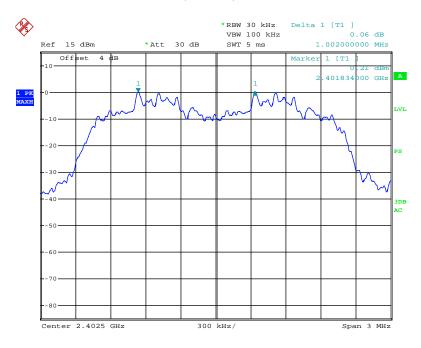

Date: 11.0CT.2012 09:30:35

EDR (8DPSK): Middle Channel

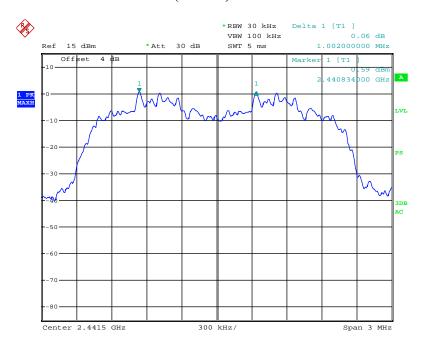


Date: 11.0CT.2012 09:32:45

FCC Part15.247 Page 25 of 62

EDR (8DPSK): High Channel

Report No.: RSZ120925002-00B

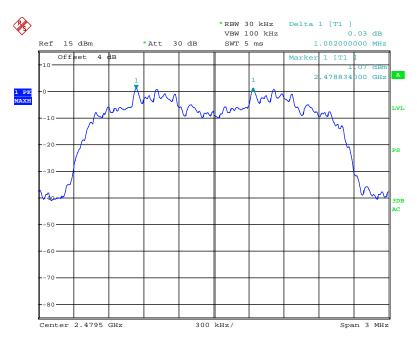

Date: 11.0CT.2012 09:43:51

FCC Part15.247 Page 26 of 62

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ120925002-00B

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions

Temperature:	25 °C	
Relative Humidity:	56 %	
ATM Pressure:	100.0 kPa	

^{*} The testing was performed by Gardon Zhang on 2012-10-10 and 2012-10-11.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

FCC Part15.247 Page 27 of 62

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	
	Low	2402	0.920	
BDR (GFSK)	Middle	2441	0.920	
(01 211)	High	2480	0.920	
	Low	2402	1.260	
EDR (π/4-DQPSK)	Middle	2441	1.260	
	High	2480	1.260	
EDR (8DPSK)	Low	2402	1.268	
	Middle	2441	1.268	
(= 2-1)	High	2480	1.268	

Report No.: RSZ120925002-00B

BDR (GFSK): Low Channel

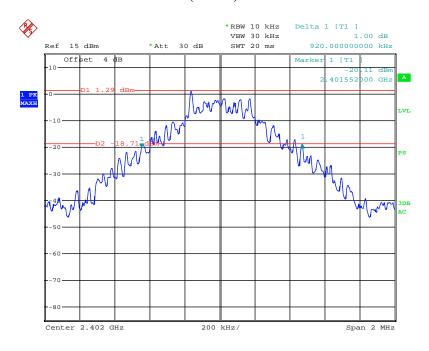


Date: 10.OCT.2012 15:40:50

FCC Part15.247 Page 28 of 62


BDR (GFSK): Middle Channel

Report No.: RSZ120925002-00B

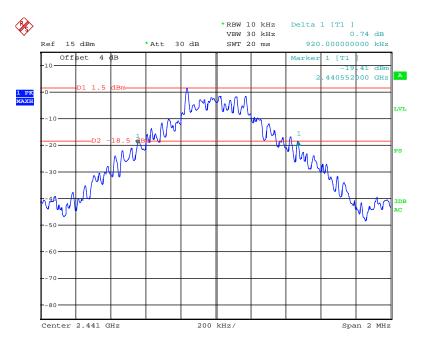

Date: 10.OCT.2012 15:34:32

BDR (GFSK): High Channel

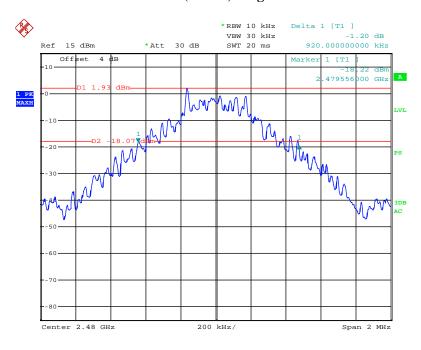


Date: 10.0CT.2012 15:25:57

FCC Part15.247 Page 29 of 62


EDR ($\pi/4$ -DQPSK): Low Channel

Report No.: RSZ120925002-00B

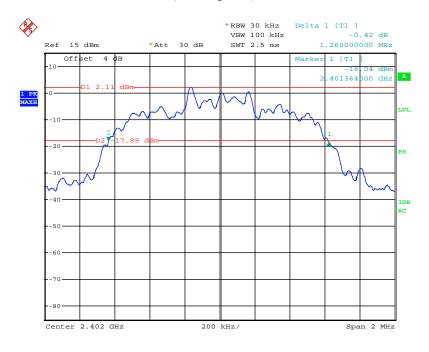

Date: 10.OCT.2012 16:46:42

EDR ($\pi/4$ -DQPSK): Middle Channel

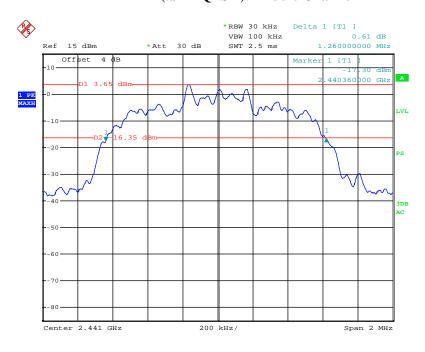


Date: 10.0CT.2012 16:45:26

FCC Part15.247 Page 30 of 62


EDR ($\pi/4$ -DQPSK): High Channel

Report No.: RSZ120925002-00B

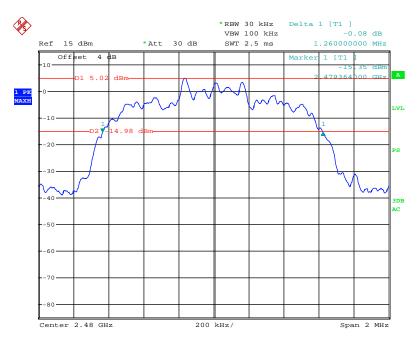

Date: 10.0CT.2012 16:43:46

EDR (8DPSK): Low Channel

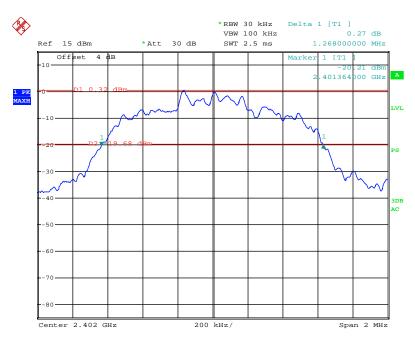


Date: 11.0CT.2012 09:05:29

FCC Part15.247 Page 31 of 62


EDR (8DPSK): Middle Channel

Report No.: RSZ120925002-00B

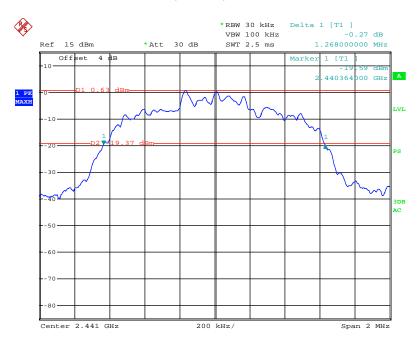

Date: 11.0CT.2012 09:08:13

EDR (8DPSK): High Channel

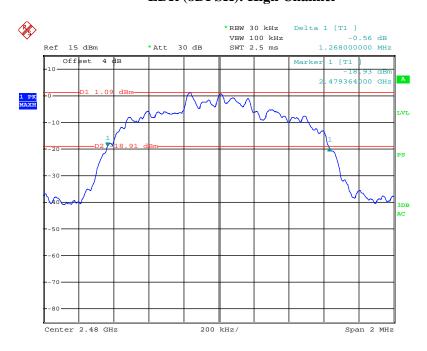

Date: 11.OCT.2012 09:10:00

FCC Part15.247

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ120925002-00B

Test Procedure

- 1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 2. Set the EUT in hopping mode from first channel to last.
- 3. By using the Max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions

Temperature:	25 °C	
Relative Humidity:	56 %	
ATM Pressure:	100.0 kPa	

The testing was performed by Gardon Zhang on 2012-10-10 and 2012-10-11.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

FCC Part15.247 Page 33 of 62

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2402-2480	79	≥15
EDR (π/4-DQPSK)	2402-2480	79	≥15
EDR (8DPSK)	2402-2480	79	≥15

BDR (GFSK): Number of Hopping Channels

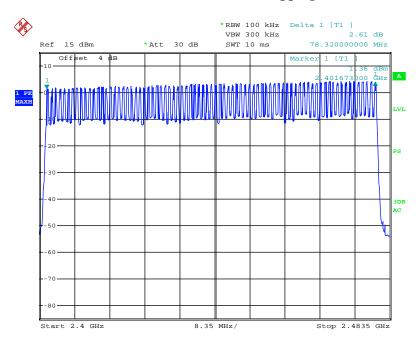


Date: 10.OCT.2012 16:21:26

FCC Part15.247 Page 34 of 62


EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

Report No.: RSZ120925002-00B

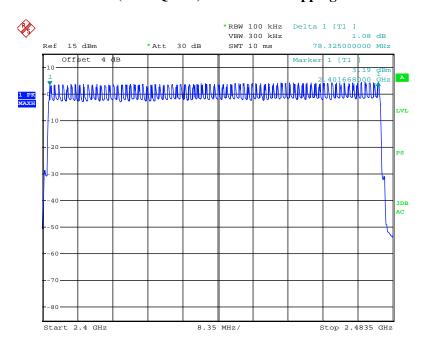

Date: 11.0CT.2012 08:58:43

(8DPSK): Number of Hopping Channels

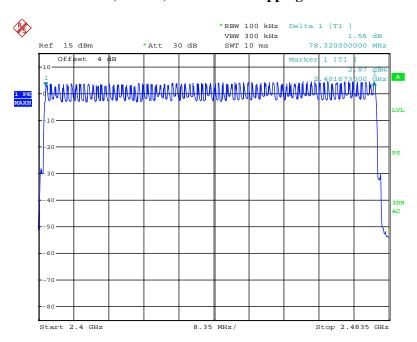

Date: 11.0CT.2012 10:00:37

FCC Part15.247 Page 35 of 62

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ120925002-00B

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hope rate/number of hopping channels*31.6S Hop rate=1600/S

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

^{*} **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions

Temperature:	25 °C	
Relative Humidity:	56 %	
ATM Pressure:	100.0 kPa	

The testing was performed by Gardon Zhang on 2012-10-10 and 2012-10-11.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

FCC Part15.247 Page 36 of 62


Report No.: RSZ120925002-00B

FCC Part15.247 Page 37 of 62

BDR (GFSK):


Pulse time, Low Channel, DH1

Report No.: RSZ120925002-00B

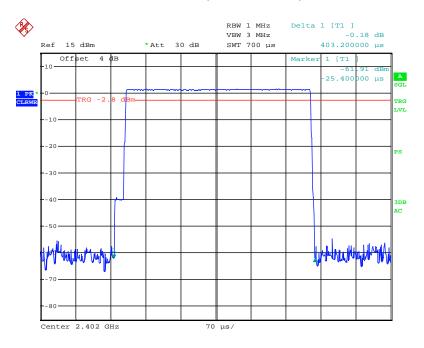

Date: 10.OCT.2012 16:23:20

Pulse time, Middle Channel, DH1

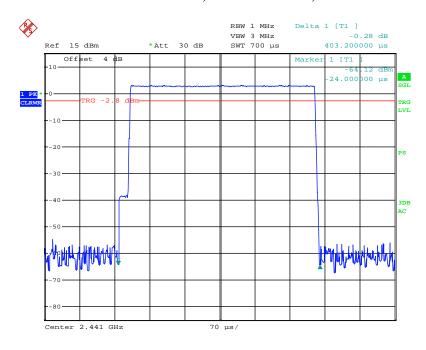


Date: 10.OCT.2012 16:24:10

FCC Part15.247 Page 38 of 62


Pulse time, High Channel, DH1

Report No.: RSZ120925002-00B

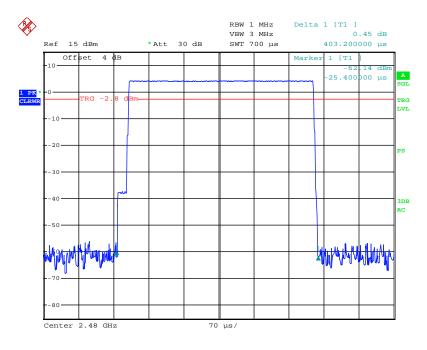

Date: 10.OCT.2012 16:24:44

Pulse time, Low Channel, DH3

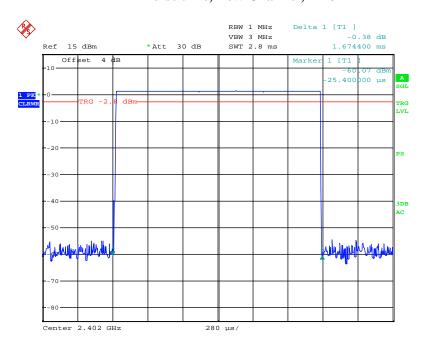


Date: 10.OCT.2012 16:27:01

FCC Part15.247 Page 39 of 62


Pulse time, Middle Channel, DH3

Report No.: RSZ120925002-00B

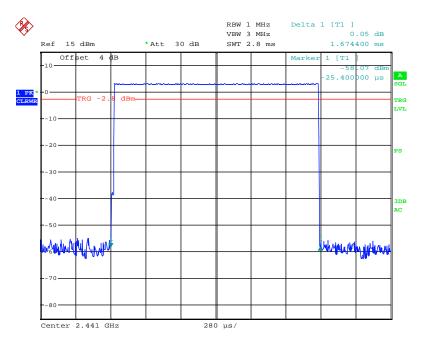

Date: 10.OCT.2012 16:26:30

Pulse time, High Channel, DH3

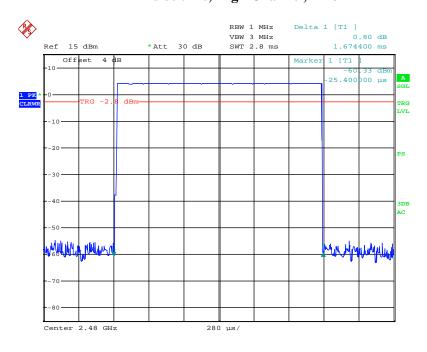


Date: 10.OCT.2012 16:26:09

FCC Part15.247 Page 40 of 62


Pulse time, Low Channel, DH5

Report No.: RSZ120925002-00B

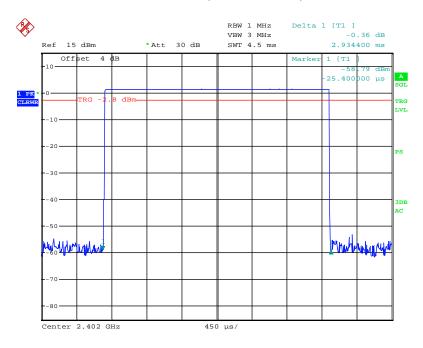

Date: 10.OCT.2012 16:29:06

Pulse time, Middle Channel, DH5

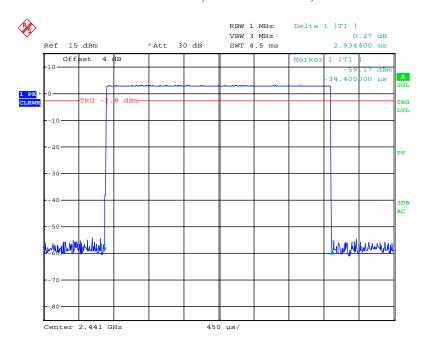


Date: 10.OCT.2012 16:29:38

FCC Part15.247 Page 41 of 62

Pulse time, High Channel, DH5


Report No.: RSZ120925002-00B

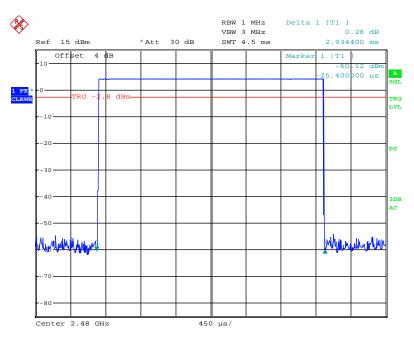

Date: 10.OCT.2012 16:30:10

EDR ($\pi/4$ -DQPSK):

Pulse time, Low Channel, DH1

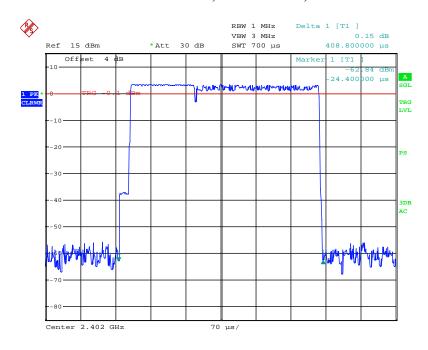


Date: 11.0CT.2012 08:34:12

FCC Part15.247 Page 42 of 62


Pulse time, Middle Channel, DH1

Report No.: RSZ120925002-00B

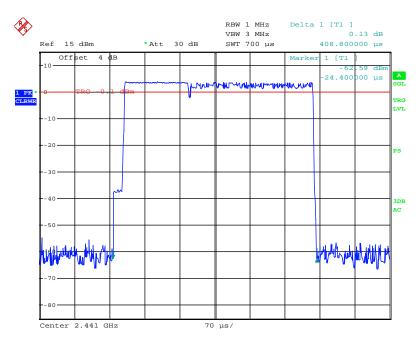

Date: 11.0CT.2012 08:37:21

Pulse time, High Channel, DH1

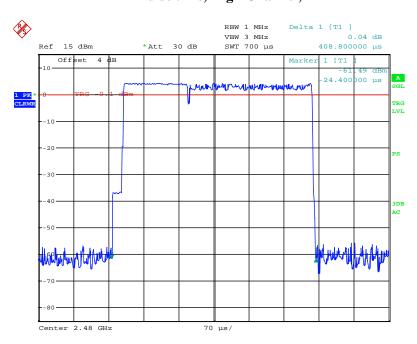


Date: 11.OCT.2012 08:38:09

FCC Part15.247 Page 43 of 62


Pulse time, Low Channel, DH3

Report No.: RSZ120925002-00B

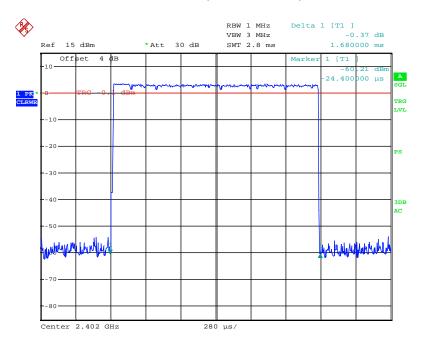

Date: 11.0CT.2012 08:40:24

Pulse time, Middle Channel, DH3

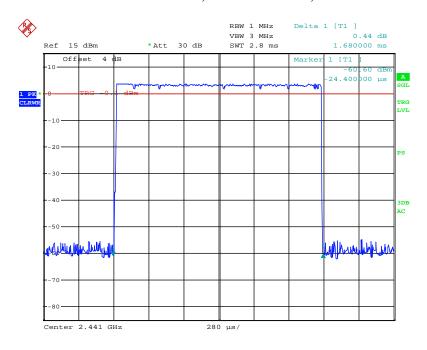


Date: 11.OCT.2012 08:40:04

FCC Part15.247 Page 44 of 62


Pulse time, High Channel, DH3

Report No.: RSZ120925002-00B

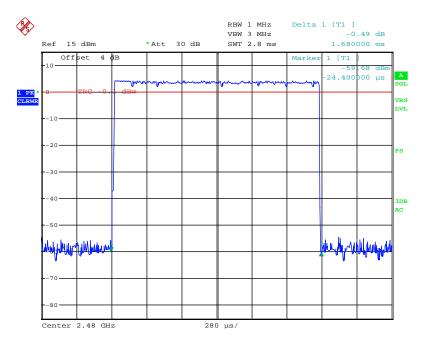

Date: 11.OCT.2012 08:39:40

Pulse time, Low Channel, DH5

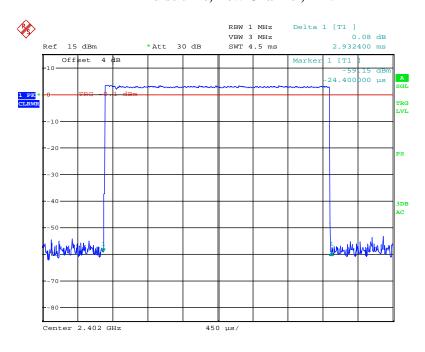


Date: 11.0CT.2012 08:42:50

FCC Part15.247 Page 45 of 62


Pulse time, Middle Channel, DH5

Report No.: RSZ120925002-00B

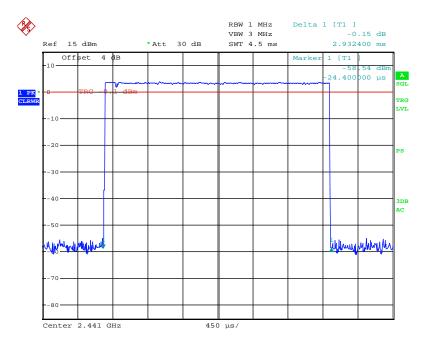

Date: 11.0CT.2012 08:43:30

Pulse time, High Channel, DH5

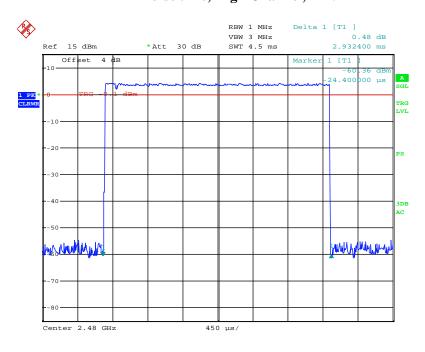


Date: 11.OCT.2012 08:45:03

FCC Part15.247 Page 46 of 62

EDR (8DPSK):


Pulse time, Low Channel, DH1

Report No.: RSZ120925002-00B

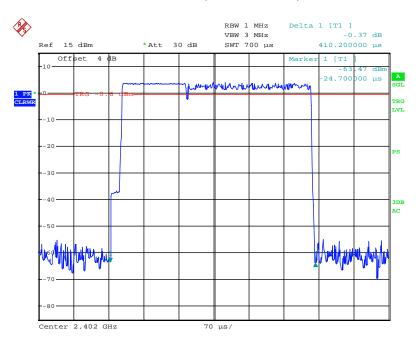

Date: 11.0CT.2012 10:05:27

Pulse time, Middle Channel, DH1

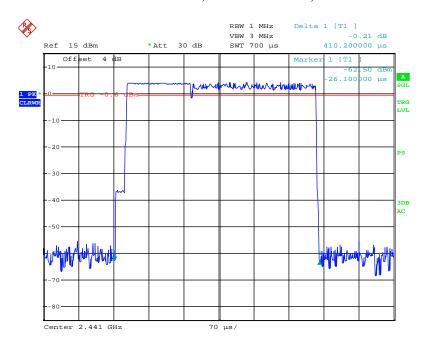


Date: 11.OCT.2012 10:06:16

FCC Part15.247 Page 47 of 62


Pulse time, High Channel, DH1

Report No.: RSZ120925002-00B

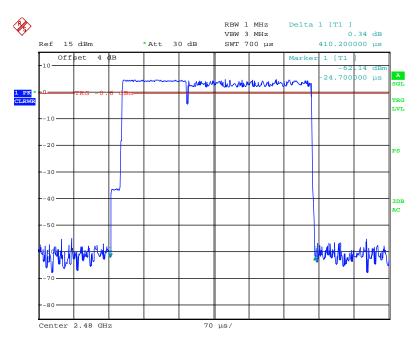

Date: 11.0CT.2012 10:06:56

Pulse time, Low Channel, DH3

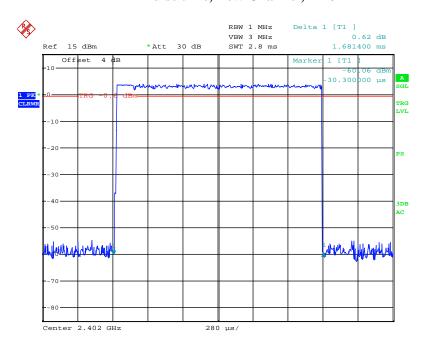


Date: 11.OCT.2012 10:09:32

FCC Part15.247 Page 48 of 62


Pulse time, Middle Channel, DH3

Report No.: RSZ120925002-00B

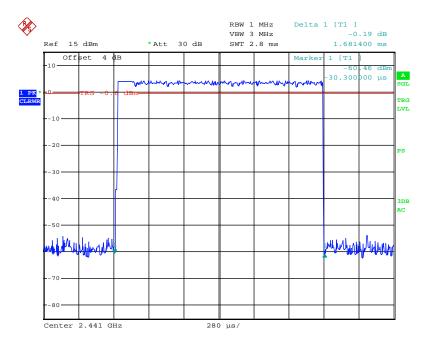

Date: 11.0CT.2012 10:08:58

Pulse time, High Channel, DH3

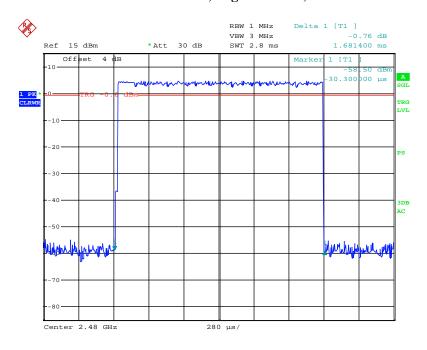


Date: 11.OCT.2012 10:08:37

FCC Part15.247 Page 49 of 62


Pulse time, Low Channel, DH5

Report No.: RSZ120925002-00B

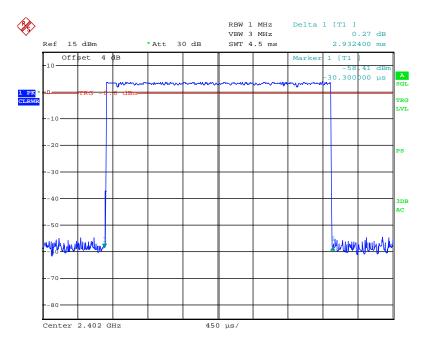

Date: 11.0CT.2012 10:11:41

Pulse time, Middle Channel, DH5

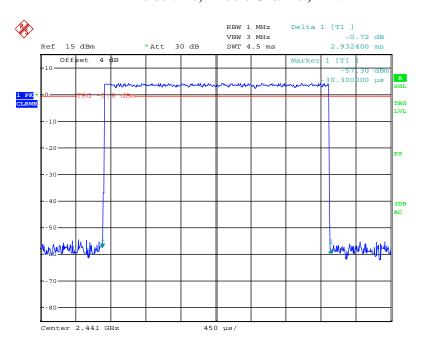


Date: 11.OCT.2012 10:12:02

FCC Part15.247 Page 50 of 62

Pulse time, High Channel, DH5

Report No.: RSZ120925002-00B

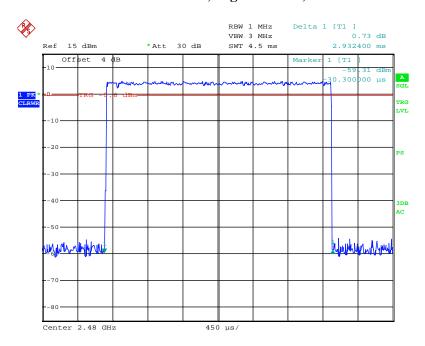

Date: 11.OCT.2012 10:12:30

FCC Part15.247 Page 51 of 62

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT


Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Report No.: RSZ120925002-00B

Test Procedure

- 1. Place the EUT on a bench and set in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
- 3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

Test Data

Environmental Conditions

Temperature:	25 °C	
Relative Humidity:	56 %	
ATM Pressure:	100.0 kPa	

The testing was performed by Gardon Zhang on 2012-10-10 and 2012-10-11.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

FCC Part15.247 Page 52 of 62

Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit
			(dBm)	(mW)	(mW)
BDR (GFSK)	Low	2402	6.04	4.018	1000
	Middle	2441	6.50	4.467	1000
	High	2480	6.95	4.955	1000
EDR (π/4-DQPSK)	Low	2402	4.34	2.716	1000
	Middle	2441	5.80	3.802	1000
	High	2480	7.31	5.383	1000
EDR (8DPSK)	Low	2402	4.19	2.624	1000
	Middle	2441	4.70	2.952	1000
	High	2480	5.25	3.350	1000

BDR (GFSK): Low Channel

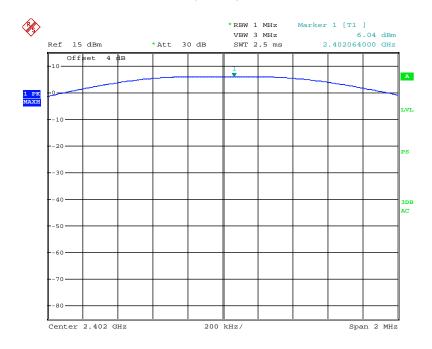


Date: 10.OCT.2012 15:19:13

FCC Part15.247 Page 53 of 62


BDR (GFSK): Middle Channel

Report No.: RSZ120925002-00B

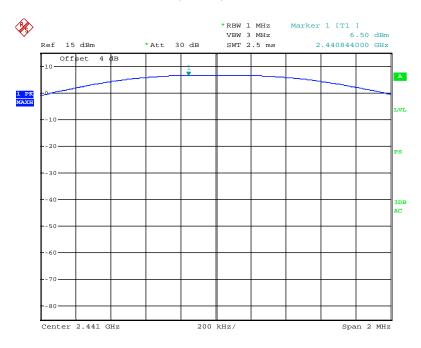

Date: 10.OCT.2012 15:20:58

BDR (GFSK): High Chanel

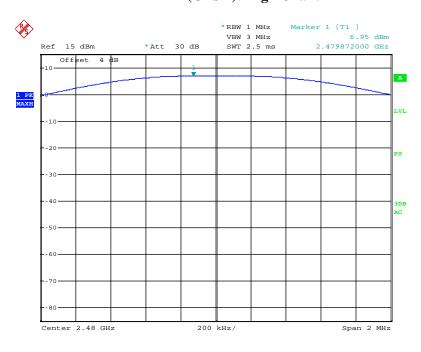


Date: 10.OCT.2012 15:24:46

FCC Part15.247 Page 54 of 62


$EDR(\pi/4-DQPSK)$: Low Channel

Report No.: RSZ120925002-00B

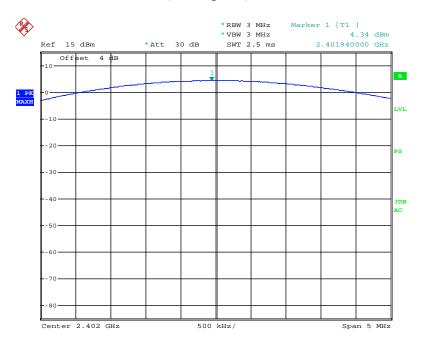

Date: 10.OCT.2012 16:39:48

$EDR(\pi/4-DQPSK)$: Middle Channel

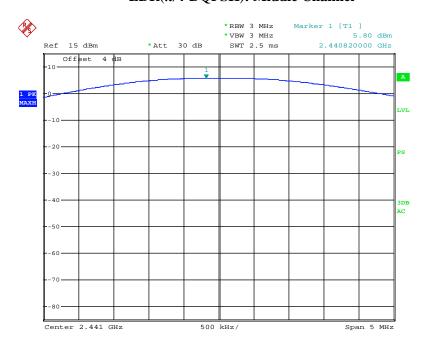


Date: 10.OCT.2012 16:41:09

FCC Part15.247


$EDR(\pi/4-DQPSK)$: High Chanel

Report No.: RSZ120925002-00B

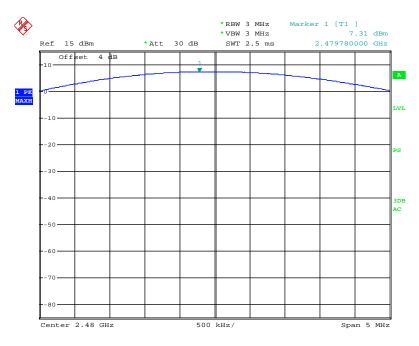

Date: 10.OCT.2012 16:42:04

EDR(8DPSK): Low Channel

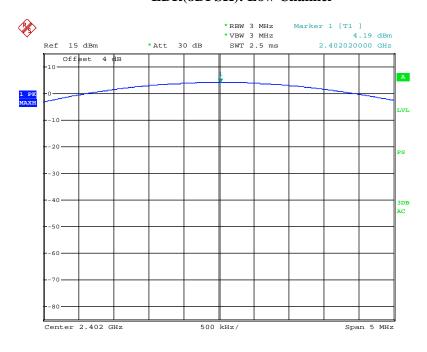


Date: 11.0CT.2012 09:28:13

FCC Part15.247


EDR(8DPSK): Middle Channel

Report No.: RSZ120925002-00B

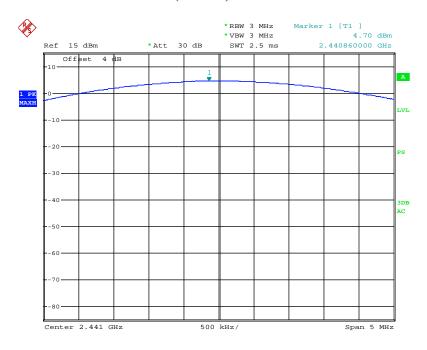

Date: 11.0CT.2012 09:16:14

EDR(8DPSK): High Chanel

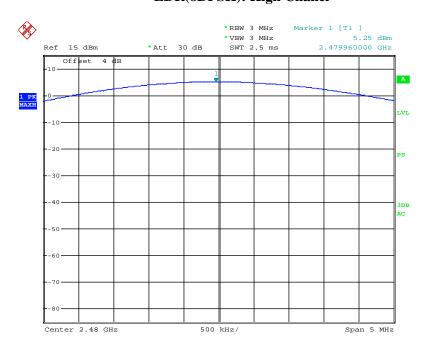

Date: 11.OCT.2012 09:12:50

FCC Part15.247 Page 57 of 62

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Report No.: RSZ120925002-00B

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

FCC Part15.247 Page 58 of 62

Test Data

Environmental Conditions

Temperature:	24-25 °C	
Relative Humidity:	55-56 %	
ATM Pressure:	100.0-100.1 kPa	

The testing was performed by Gardon Zhang from 2012-10-10 to 2012-11-22.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Frequency Band	Delta Peak to Band Emission (dBc)	Limit (dBc)
BDR (GFSK)	Left Side	52.45	>20
	Right Side	58.29	>20
EDR (π/4-DQPSK)	Left Side	51.89	>20
	Right Side	58.75	>20
EDR (8DPSK)	Left Side	51.23	>20
	Right Side	57.04	>20

Report No.: RSZ120925002-00B

FCC Part15.247 Page 59 of 62


BDR (GFSK): Band Edge-Left Side

Report No.: RSZ120925002-00B

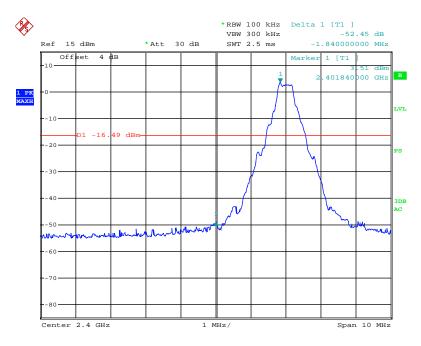

Date: 22.NOV.2012 08:39:42

BDR (GFSK): Band Edge-Right Side

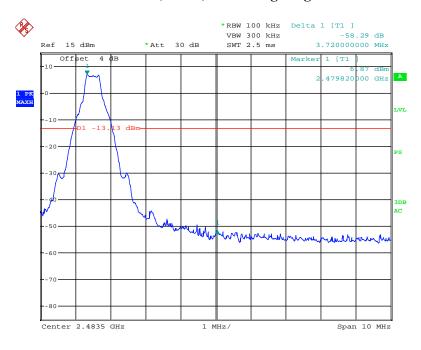


Date: 10.OCT.2012 15:30:42

FCC Part15.247 Page 60 of 62


EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

Report No.: RSZ120925002-00B

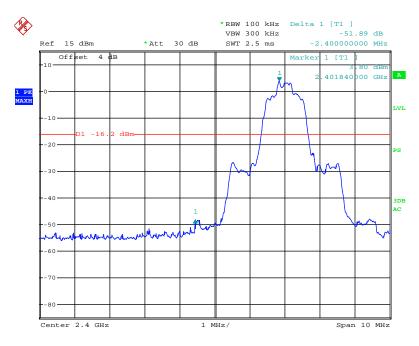

Date: 10.OCT.2012 16:54:19

EDR (π /4-DQPSK): Band Edge-Right Side

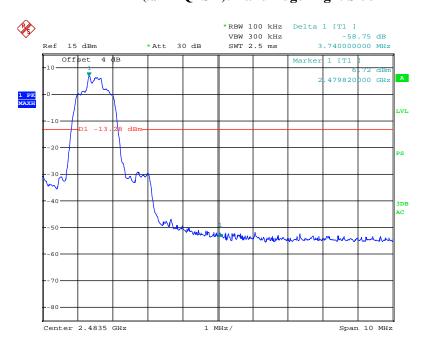


Date: 10.OCT.2012 16:52:49

FCC Part15.247 Page 61 of 62


EDR (8DPSK): Band Edge-Left Side

Report No.: RSZ120925002-00B

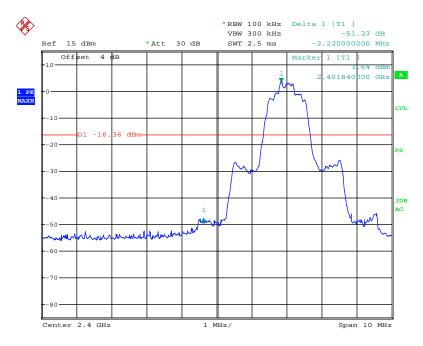

Date: 11.0CT.2012 09:50:37

BDR (8DPSK): Band Edge-Right Side

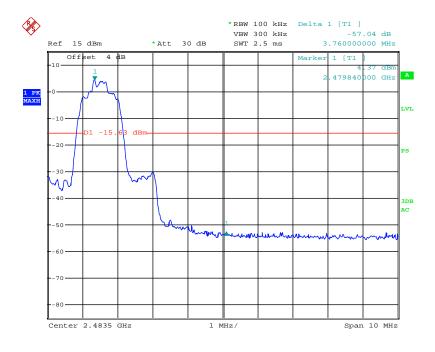

Date: 11.OCT.2012 09:48:44

***** END OF REPORT *****

FCC Part15.247 Page 62 of 62