



FCC Test Report

(Part 22 Subpart H & Part 24 Subpart E)

FCC ID : YPVITALCOMSUN

Applicant : ITALCOM GROUP

1728 Coral Way, Coral Gables, Miami, Florida, United States 33145

Sample Description

Product Name : 3G Mobile

Model No. : SUN

Serial No. : N/A

Trademark : NYX Mobile

Receipt Date : 2013-09-26

Test Date : 2013-09-27 to 2013-10-28

Issue Date : 2013-11-05

Test Standard(s) : FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E

Conclusions : PASSED*

*In the configuration tested, the EUT complied with the standards specified above.

Test/Witness Engineer

: *Jason Deng*

Approved & Authorized

: *Wimkey Wang*

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



Content

CONTENT	2
1. GENERAL INFORMATION	3
1.1. Client Information	3
1.2. General Description of EUT (Equipment Under Test)	3
1.3. Description of Test Mode	4
1.4. Laboratory Location	5
2. TEST RESULTS SUMMARY	6
3. TEST INSTRUMENTS LIST	7
4. CONDUCTED OUTPUT POWER	8
4.1. Test Standard and Limit	8
4.2. Test Setup	8
4.3. Test Procedure	8
4.4. Test Data	8
5. OCCUPIED BANDWIDTH TEST	12
5.1. Test Standard and Limit	12
5.2. Test Setup	12
5.3. Test Procedure	12
5.4. Test Data	12
6. OUT OF BAND EMISSION AT ANTENNA TERMINALS	30
6.1. Test Standard and Limit	30
6.2. Test Setup	30
6.3. Test Procedure	30
6.4. Test Data	30
7. ERP, EIRP MEASUREMENT	48
7.1. Test Standard and Limit	48
7.2. Test Setup	48
7.3. Test Procedure	48
7.4. Test Data	49
8. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	51
8.1. Test Standard and Limit	51
8.2. Test Setup	51
8.3. Test Procedure	51
8.4. Test Data	52
9. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	60
9.1. Test Standard and Limit	60
9.2. Test Setup	60
9.3. Test Procedure	60
9.4. Test Data	60
10. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	65
10.1. Test Standard and Limit	65
10.2. Test Setup	65
10.3. Test Procedure	65
10.4. Test Data	65



1. General Information

1.1. Client Information

Applicant	:	ITALCOM GROUP
Address	:	1728 Coral Way, Coral Gables, Miami, Florida, United States 33145
Manufacturer	:	Sunry Technology LTD
Address	:	18F, Dawning Building #12 Keji South Road, Hi-Tech Park, Nanshan District, Shenzhen, China

1.2. General Description of EUT (Equipment Under Test)

Product Name	:	3G Mobile
Model No.	:	SUN
Serial No.	:	N/A
Trademark	:	NYX Mobile
Power Supply	:	Travel charger: Input 100-240V~ 50/60Hz, 0.15A, Output DC 5V, 500mA Rechargeable Li-ion Battery DC 3.7V
Operation Frequency range:	:	GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz WCDMA Band V:826.4MHz-846.6MHz WCDMA Band II:1852.4 MHz -1907.6 MHz
Modulation type	:	GSM/GPRS:GMSK, EGPRS: 8PSK, UMTS:QPSK
Antenna type	:	Integral Antenna
Antenna gain	:	GSM 850: 0.3 dBi PCS 1900:0.9 dBi WCDMA 850 : 0.3 dBi WCDMA1900 : 0.9 dBi
Remark:		

Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) Operation Frequency List:

GSM 850		PCS1900	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
....
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
...



250	848.60	809	1909.60
251	848.80	810	1909.80
WCDMA Band V		WCDMA Band II	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
4132	826.40	9262	1852.40
4133	826.60	9263	1852.60
....
4182	836.40	9399	1879.80
4183	836.60	9400	1880.00
4184	836.80	9401	1880.20
...
4232	846.40	9537	1907.40
4233	846.60	9538	1907.60

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

GSM850			PCS1900		
	Channel	Frequency(MHz)		Channel	Frequency(MHz)
Lowest channel	128	824.20	Lowest channel	512	1850.20
Middle channel	190	836.60	Middle channel	661	1880.00
Highest channel	251	848.80	Highest channel	810	1909.80
WCDMA Band V			WCDMA Band II		
	Channel	Frequency(MHz)		Channel	Frequency(MHz)
Lowest channel	4132	826.40	Lowest channel	9262	1852.40
Middle channel	4183	836.60	Middle channel	9400	1880.00
Highest channel	4233	846.60	Highest channel	9538	1907.60

1.3. Description of Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.



Test Mode	Description
Communicate mode (GSM850)	Keep the EUT in communicating mode on GSM 850 band.
Data mode (GPRS850)	Keep the EUT in data communicating mode on GPRS 850 band.
Data mode (EGPRS850)	Keep the EUT in data communicating mode on EGPRS 850 band.
Communicate mode (PCS1900)	Keep the EUT in communicating mode on PCS1900 band.
Data mode (GPRS1900)	Keep the EUT in data communicating mode on GPRS1900 band.
Data mode (EGPRS1900)	Keep the EUT in data communicating mode on EGPRS1900 band.
Communicate mode (UMTS 850)	Keep the EUT in communicating mode on UMTS 850 band.
Communicate mode (UMTS 1900)	Keep the EUT in communicating mode on UMTS 1900 band.
Data mode (RMC UMTS 850)	Keep the EUT in data communicating mode on RMC in UMTS 850 (12.2 kbps, 64 kbps, 144 kbps & 384 kbps).
Data mode (HSDPA UMTS 850)	Keep the EUT in data communicating mode on HSDPA in UMTS 850(Sub-test 1~Sub-test 4).
Data mode (RMC UMTS 1900)	Keep the EUT in data communicating mode on RMC in UMTS 850 (12.2 kbps, 64 kbps, 144 kbps & 384 kbps).
Data mode (HSDPA UMTS 1900)	Keep the EUT in data communicating mode on HSDPA in UMTS 1900. (Sub-test 1~Sub-test 4).
Remark :	Pre-test output power of all modes, and found GSM 850, PCS 1900, UMTS 850 12.2 kbps RMC & UMTS 1900 12.2 kbps RMC were the worst case.

1.4. Laboratory Location

Shenzhen Certification Technology Service Co., Ltd.

Address: 2F, Building B, East Area of Nanchang Second Industrial Zone, Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China

At the time of testing, the Laboratory is accredited. It is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 197647.

Tel:86-755-86375552 Fax: 86-755-26736857



2. Test Results Summary

FCC Part15, Subpart B		
Section	Test Item	Judgment
Part 1.1307 Part 2.1093	RF Exposure (SAR)	PASSED (refer to SAR report)
Part 2.1046 Part 22.913(a)(2) Part 24.232 (c)	RF Output Power	PASSED
Part 2.1047	Modulation Characteristics	PASSED
Part 2.1049 Part 22.917 Part 24.238	99% & -26 dB Occupied Bandwidth	PASSED
Part 2.1051 Part 22.917 (a) Part 24.238 (a)	Spurious Emissions at Antenna Terminal	PASSED
Part 2.1053 Part 22.917 (a) Part 24.238 (a)	Field Strength of Spurious Radiation	PASSED
Part 22.917 (a) Part 24.238 (a)	Out of band emission Band Edge	PASSED
Part 2.1055(a)(1)(b)	Frequency stability vs. temperature	PASSED
Part 2.1055(d)(1)(2)	Frequency stability vs. voltage	PASSED
Note: "PASSED" - The EUT complies with the essential requirements in the standard.		



3. Test Instruments List

Item	Test Equipment	Manufacturer	Model No.	Cal. Date	Cal. Due date
1	Bilog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	May 25, 2013	May 24, 2014
2	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	May 30, 2013	May 29, 2014
3	Coaxial Cable	N/A	N/A	Apr. 01, 2013	Mar. 31, 2014
4	Coaxial Cable	N/A	N/A	Apr. 01, 2013	Mar. 31, 2014
5	Coaxial cable	N/A	N/A	Apr. 01, 2013	Mar. 31, 2014
6	Coaxial Cable	N/A	N/A	Apr. 01, 2013	Mar. 31, 2014
7	Coaxial Cable	N/A	N/A	Apr. 01, 2013	Mar. 31, 2014
8	Amplifier (10kHz-1.3GHz)	HP	8447D	Apr. 01, 2013	Mar. 31, 2014
9	Amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	Jun. 09, 2013	Jun. 08, 2014
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	Apr. 01, 2013	Mar. 31, 2014
11	Horn Antenna	ETS-LINDGREN	3160	Mar. 30, 2013	Mar. 29, 2014
12	Positioning Controller	UC	UC3000	N/A	N/A
13	Spectrum analyzer 9kHz-30GHz	Rohde & Schwarz	FSP	May 29, 2013	May 28, 2014
14	EMI Test Receiver	Rohde & Schwarz	ESPI	Apr. 01, 2013	Mar. 31, 2014
15	Loop antenna	Laplace instrument	RF300	May 25, 2013	May 24, 2014
16	Universal radio communication tester	Rhode & Schwarz	CMU200	May 29, 2013	May 28, 2014
17	Signal Analyzer	Rohde & Schwarz	FSIQ3	May 29, 2013	May 28, 2014



4. Conducted Output Power

4.1. Test Standard and Limit

4.1.1. Test Standard

FCC part 22.913(a) and FCC part 24.232(b)


4.1.2. Test Method

FCC part 2.1046

4.1.3. Test Limit

Frequency Band	Limit
GSM 850MHz	38.5 dBm (ERP)
PCS 1900 MHz	33 dBm (EIRP)
WCDMA Band V	38.5 dBm (ERP)
WCDMA Band II	33 dBm (EIRP)

4.2. Test Setup

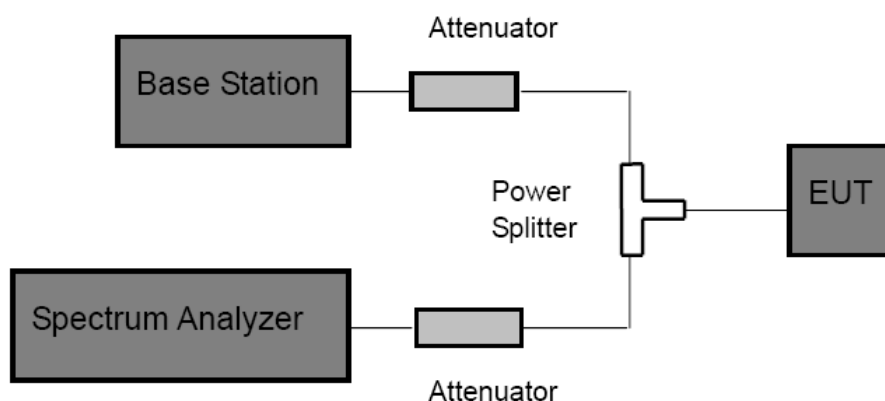

4.3. Test Procedure

- (1) The EUT is coupled to the Spectrum Analyzer and the Base Station with the suitable Attenuators through the Power Splitter, the path loss is calibrated to correct the reading.
- (2) A call is set up by the Base Station to the generic call set up procedure.
- (3) Set EUT at maximum power level through base station by power level command.
- (4) Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak and mark it; finally record the peak and the plot.

4.4. Test Data



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 9 of 67

Mode	Channel	Frequency (MHz)	Burst Average power (dBm)	Limit (dBm)	Result
GSM 850	128	824.20	30.93	38.45	PASSED
	190	836.60	31.02		PASSED
	251	848.80	31.05		PASSED
GPRS 850 (1 Uplink slot)	128	824.20	30.91		PASSED
	190	836.60	30.97		PASSED
	251	848.80	31.03		PASSED
GPRS 850 (2 Uplink slots)	128	824.20	29.80		PASSED
	190	836.60	29.88		PASSED
	251	848.80	29.92		PASSED
GPRS 850 (3 Uplink slots)	128	824.20	28.02		PASSED
	190	836.60	28.11		PASSED
	251	848.80	28.13		PASSED
GPRS 850 (4 Uplink slots)	128	824.20	26.14		PASSED
	190	836.60	26.19		PASSED
	251	848.80	26.24		PASSED
PCS 1900	512	1850.20	28.63	33.00	PASSED
	661	1880.00	28.88		PASSED
	810	1909.80	28.61		PASSED
GPRS 1900 (1 Uplink slot)	512	1850.20	28.28		PASSED
	661	1880.00	28.25		PASSED
	810	1909.80	28.75		PASSED
GPRS 1900 (2 Uplink slots)	512	1850.20	26.67		PASSED
	661	1880.00	26.65		PASSED
	810	1909.80	26.61		PASSED
GPRS 1900 (3 Uplink slots)	512	1850.20	26.26		PASSED
	661	1880.00	26.22		PASSED
	810	1909.80	25.19		PASSED
GPRS 1900 (4 Uplink slots)	512	1850.20	23.35		PASSED
	661	1880.00	23.32		PASSED
	810	1909.80	23.28		PASSED



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 10 of 67

Mode		Channel	Frequency (MHz)	Burst Average power (dBm)	Limit (dBm)	Result
UMTS 850 HSDPA	Subtest 1	4132	826.40	19.38	38.45	PASSED
		4183	836.00	19.46		PASSED
		4233	846.60	20.16		PASSED
	Subtest 2	4132	826.40	18.65		PASSED
		4183	836.00	18.71		PASSED
		4233	846.60.	19.56		PASSED
	Subtest 3	4132	826.40	19.18		PASSED
		4183	836.00	19.21		PASSED
		4233	846.60	19.10		PASSED
	Subtest 4	4132	826.40	19.16		PASSED
		4183	836.00	19.19		PASSED
		4233	846.60	19.09		PASSED
UMTS 850 RMC	12.2kbps	4132	826.40	21.15	38.45	PASSED
		4183	836.00	21.84		PASSED
		4233	846.60	21.26		PASSED
UMTS 850 AMR	12.2kbps	4132	826.40	21.10		PASSED
		4183	836.00	21.76		PASSED
		4233	846.60	21.15		PASSED



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 11 of 67

Mode		Channel	Frequency (MHz)	Burst Average power (dBm)	Limit (dBm)	Result
UMTS 1900 HSDPA	Subtest 1	9262	1852.40	22.29	33.00	PASSED
		9400	1880.00	22.41		PASSED
		9538	1907.60	22.65		PASSED
	Subtest 2	9262	1825.40	22.53		PASSED
		9400	1880.00	22.62		PASSED
		9538	1907.60	22.91		PASSED
	Subtest 3	9262	1852.40	22.09		PASSED
		9400	1880.00	22.16		PASSED
		9538	1907.60	22.41		PASSED
	Subtest 4	9262	1852.40	22.08		PASSED
		9400	1880.00	22.18		PASSED
		9538	1907.60	22.40		PASSED
UMTS 1900 RMC	12.2 kbps	9262	1852.40	23.45	33.00	PASSED
		9400	1880.00	23.34		PASSED
		9538	1907.60	23.17		PASSED
UMTS1900 AMR	12.2kbps	9262	1852.40	23.22		PASSED
		9400	1880.00	23.16		PASSED
		9538	1907.60	23.08		PASSED



5. Occupied Bandwidth Test

5.1. Test Standard and Limit

6.1.1. Test Standard

FCC part 22.913(a) and FCC part 24.232(b)

5.1.2 Test Method


FCC part 2.1049

5.1.3 Test Limit

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as 99% power and -26dBc occupied bandwidths.

5.2. Test Setup

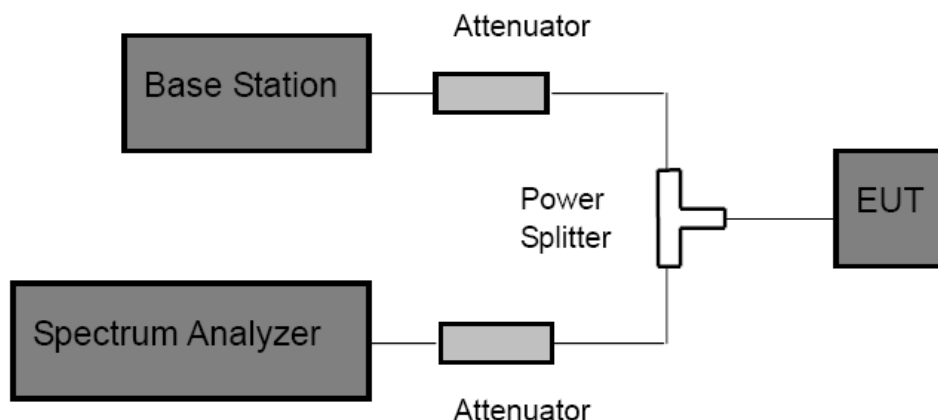

5.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and Base station via power splitter as show in the block diagram above.
- (2) RBW was set to about 1% of emission BW, VBW= 3 times RBW.
- (3) -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

5.4. Test Data



ATA Testing Technology Service Co., Ltd.




Report No.: ATA131028008E

Page: 13 of 67




Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
GSM 850	128	824.2	240.00	316.00
	190	836.6	244.00	314.00
	251	848.8	244.00	320.00
EGPRS850	128	824.2	242.00	312.00
	190	836.6	244.00	310.00
	251	848.8	240.00	316.00
PCS 1900	512	1850.2	236.00	310.00
	661	1880.0	238.00	308.00
	810	1909.8	236.00	304.00
EGPRS1900	512	1850.2	242.00	312.00
	661	1880.0	240.00	308.00
	810	1909.8	244.00	314.00
UMTS850 12.2k RMC	4132	824.40	4188.38	4689.38
	4183	836.00	4168.34	4689.38
	4233	846.60	4188.38	4709.42
UMTS1900 12.2k RMC	9262	1852.40	4180.00	4720.00
	9400	1880.00	4200.00	4700.00
	9538	1907.60	4200.00	4720.00
UMTS850 HSDPA	4132	824.40	4168.34	4689.38
	4183	836.00	4208.42	4729.46
	4233	846.60	4188.38	4709.42
UMTS1900 HSDPA	9262	1852.40	4180.00	4720.00
	9400	1880.00	4200.00	4720.00
	9538	1907.60	4200.00	4720.00
Note: GSM & GPRS use the same modulation technical (GMSK), and with the same channels, so the 99% OBW and the -26dB of GPRS not performed.				

Test plot as follows:

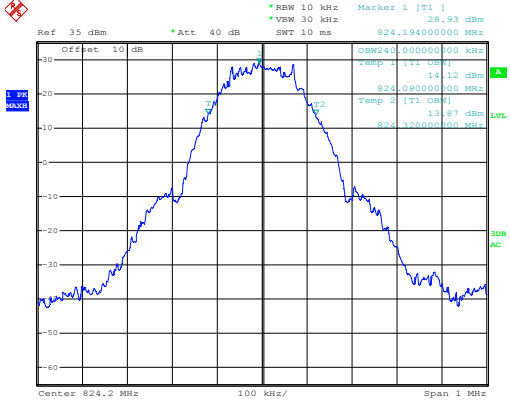
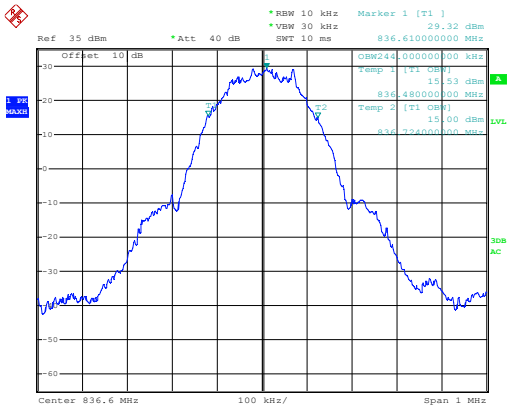
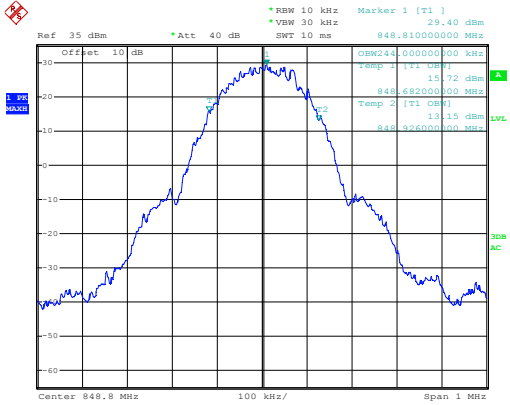


Test Item	99% Occupy bandwidth	Test Mode	GSM850
Lowest	 <p>Date: 12.OCT.2013 11:35:28</p>		
Middle	 <p>Date: 12.OCT.2013 11:34:20</p>		
Highest	 <p>Date: 12.OCT.2013 11:33:10</p>		

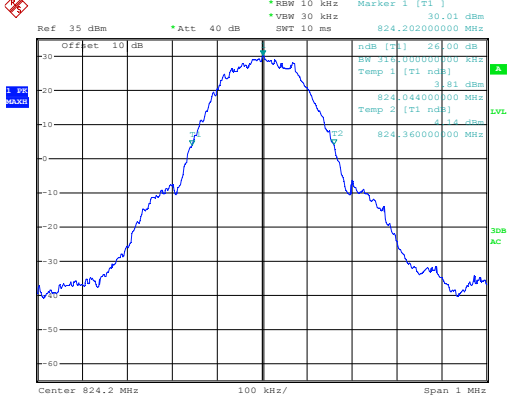
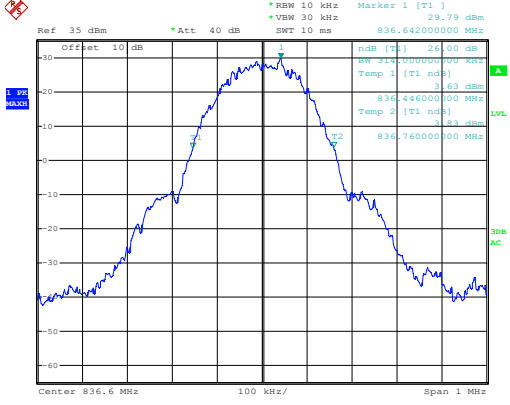
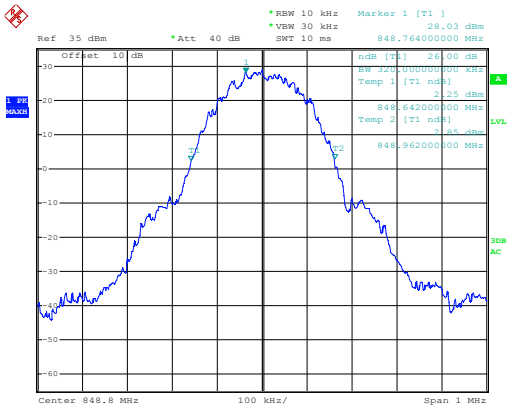


Test Item	-26dB bandwidth	Test Mode	GSM850
Lowest	 <p>Date: 12.OCT.2013 11:29:46</p>		
Middle	 <p>Date: 12.OCT.2013 11:30:54</p>		
Highest	 <p>Date: 12.OCT.2013 11:31:50</p>		

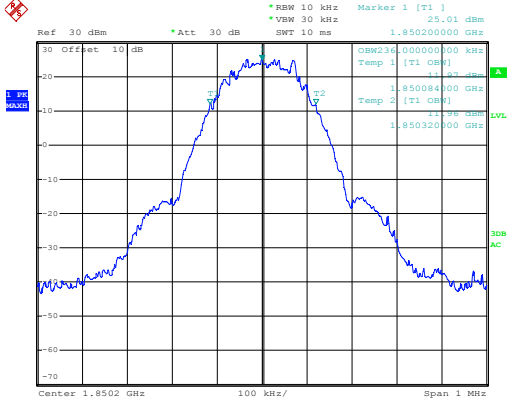
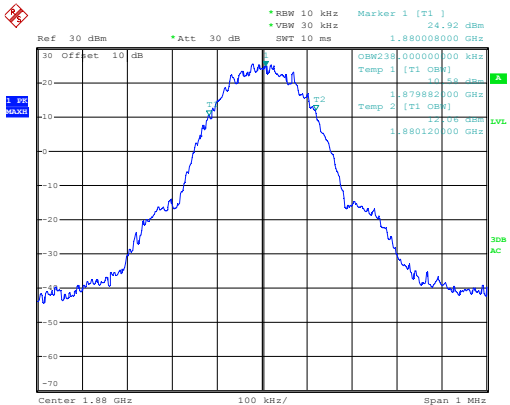
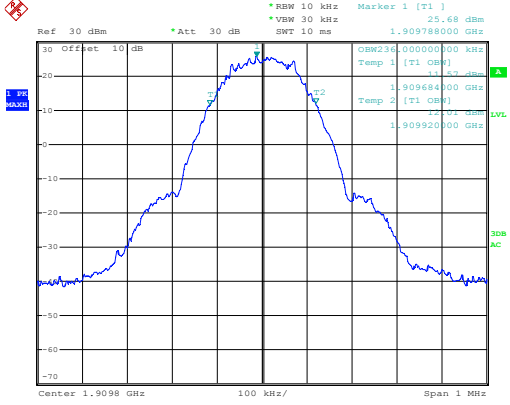


Test Item	99% Occupy bandwidth	Test Mode	PCS1900
Lowest	 <p>Date: 12.OCT.2013 12:12:04</p>		
Middle	 <p>Date: 12.OCT.2013 12:10:57</p>		
Highest	 <p>Date: 12.OCT.2013 12:09:21</p>		

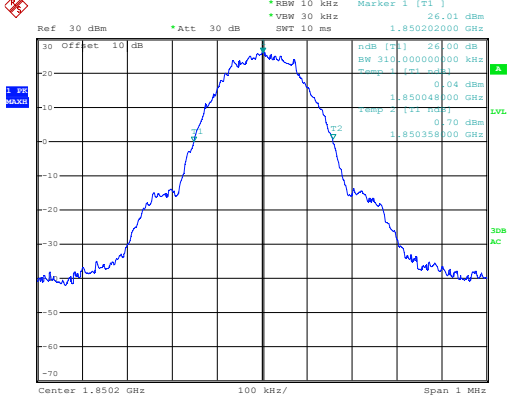
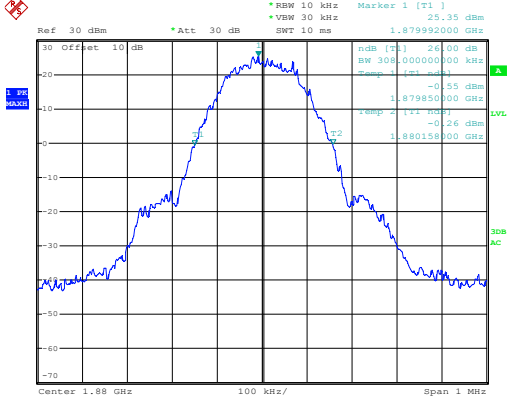
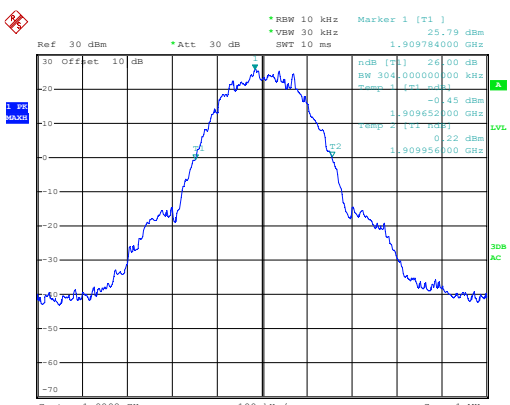


Test Item	-26dB bandwidth	Test Mode	PCS 1900
Lowest	 <p>Date: 12.OCT.2013 12:02:35</p>		
Middle	 <p>Date: 12.OCT.2013 12:03:34</p>		
Highest	 <p>Date: 12.OCT.2013 12:07:05</p>		

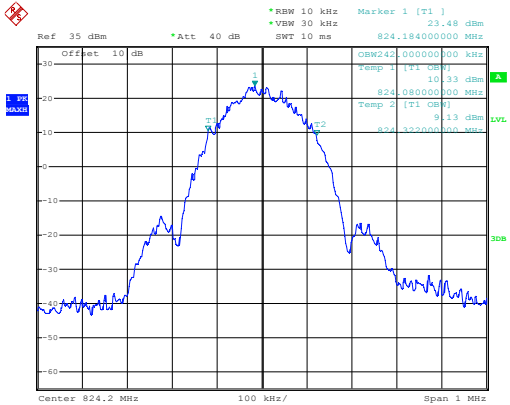
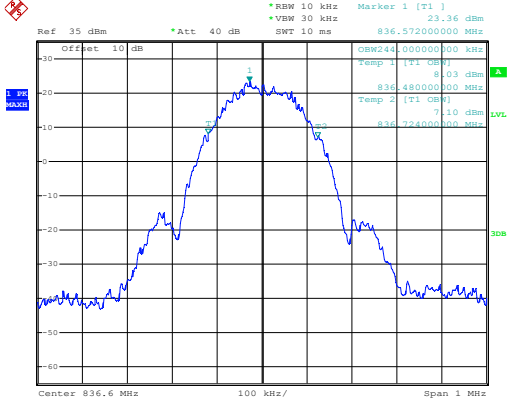
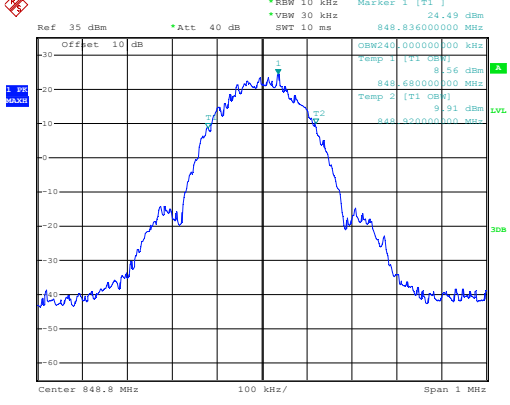


Test Item	99% Occupy bandwidth	Test Mode	EGPRS850
Lowest	 <p>REMOTE HIGH Date: 4.OCT.2013 15:08:11</p>		
Middle	 <p>REMOTE HIGH Date: 4.OCT.2013 15:12:19</p>		
Highest	 <p>REMOTE HIGH Date: 4.OCT.2013 15:11:45</p>		

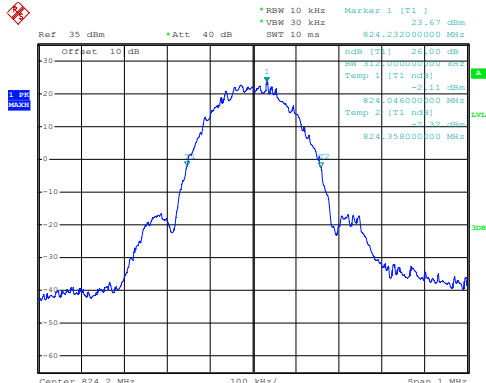
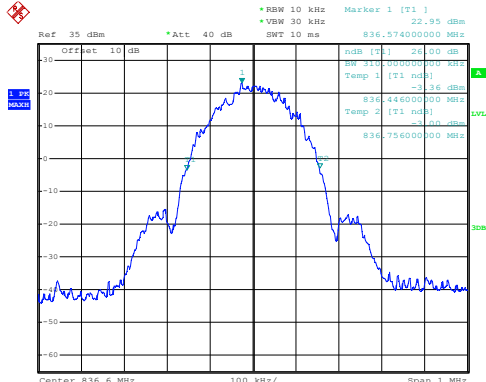
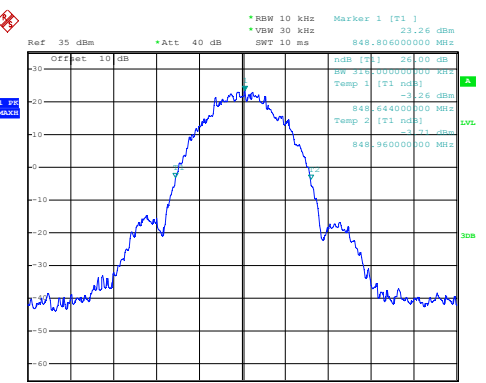


Test Item	-26dB bandwidth	Test Mode	EGPRS850
Lowest	 <p>REMOTE HIGH Date: 4.OCT.2013 15:07:33</p>		
Middle	 <p>REMOTE HIGH Date: 4.OCT.2013 15:12:56</p>		
Highest	 <p>REMOTE HIGH Date: 4.OCT.2013 15:11:21</p>		

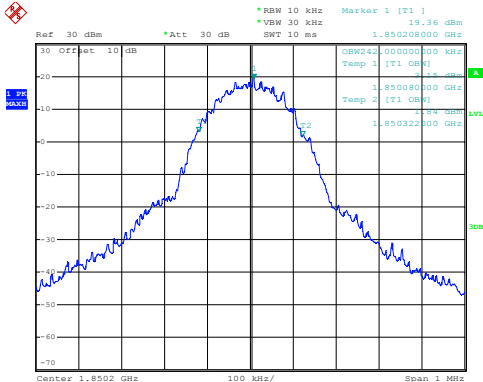
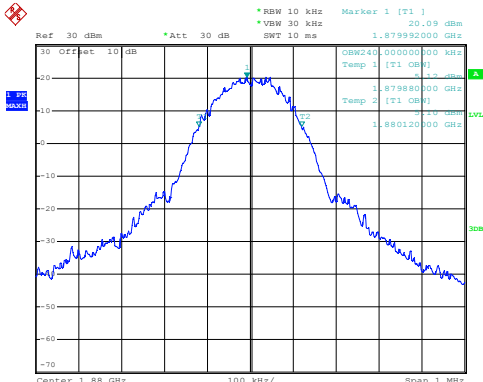
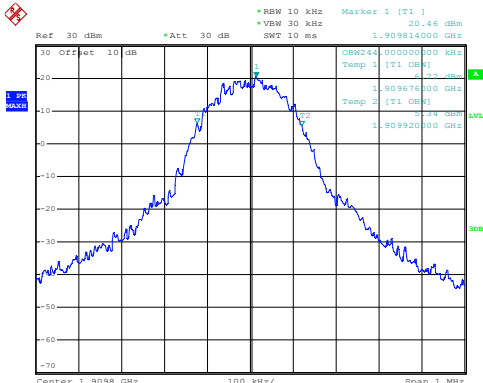


Test Item	99% Occupy bandwidth	Test Mode	EGPRS1900
Lowest	 <p>REMOTE HIGH Date: 4.OCT.2013 15:31:17</p>		
Middle	 <p>REMOTE HIGH Date: 4.OCT.2013 15:31:57</p>		
Highest	 <p>REMOTE HIGH Date: 4.OCT.2013 15:33:21</p>		

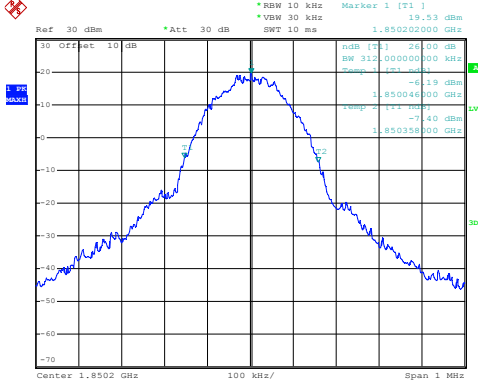
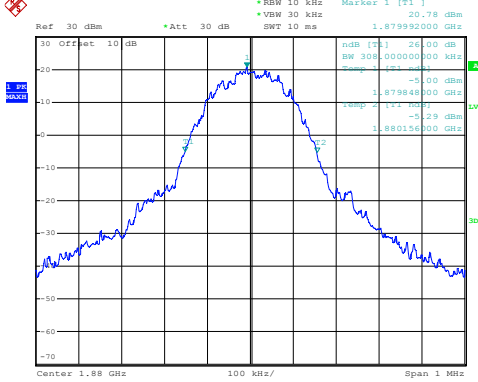
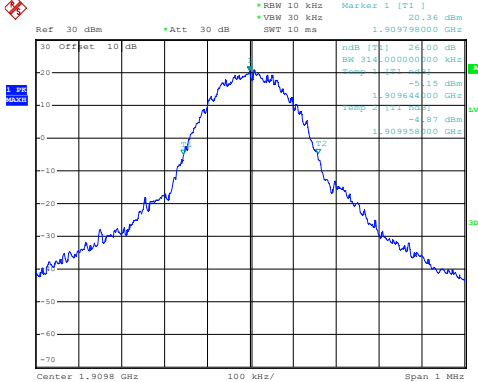


Test Item	-26dB bandwidth	Test Mode	EGPRS1900
Lowest	 <p>REMOTE HIGH Date: 4.OCT.2013 15:30:54</p>		
Middle	 <p>REMOTE HIGH Date: 4.OCT.2013 15:32:22</p>		
Highest	 <p>REMOTE HIGH Date: 4.OCT.2013 15:33:01</p>		

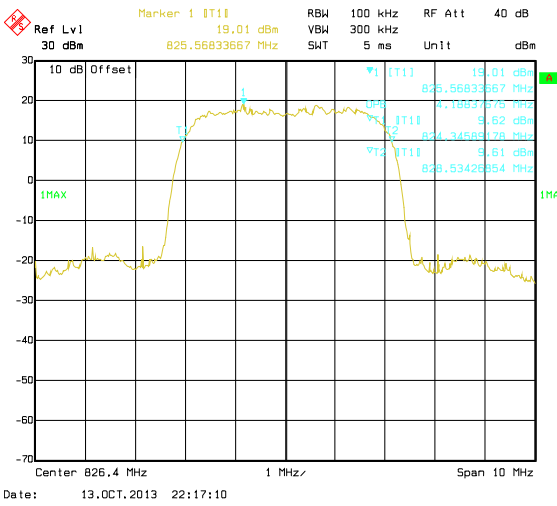
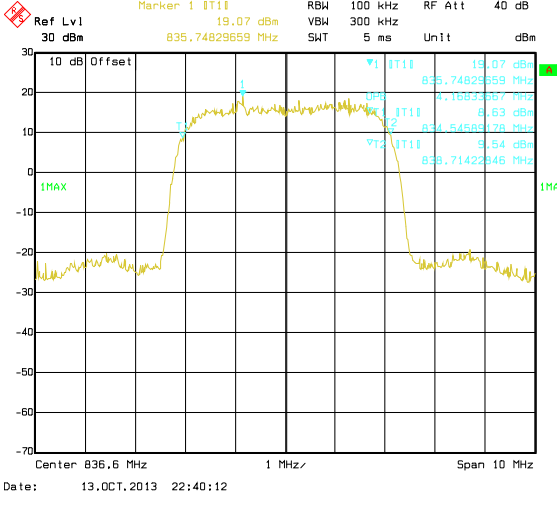
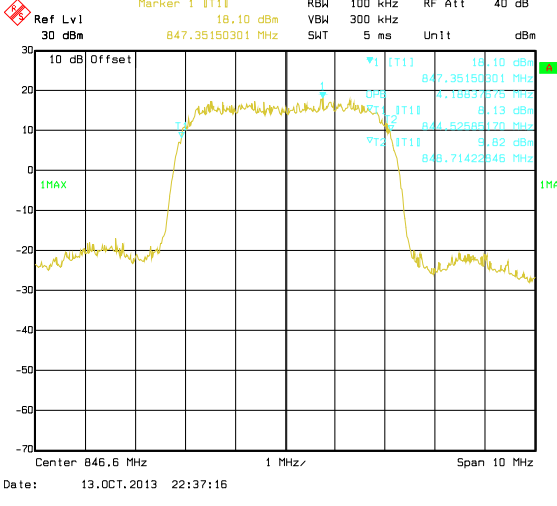


Test Item	99% Occupy bandwidth	Test Mode	UMTS850 12.2k RMC
Lowest	 <p>Ref. Lvl 30 dBm Marker 1 19.01 dBm RBW 100 kHz VBW 300 kHz SWT 5 ms RF Att 40 dB Unit dBm Center 826.4 MHz Span 10 MHz Date: 13.OCT.2013 22:17:10</p>		
Middle	 <p>Ref. Lvl 30 dBm Marker 1 19.07 dBm RBW 100 kHz VBW 300 kHz SWT 5 ms RF Att 40 dB Unit dBm Center 836.6 MHz Span 10 MHz Date: 13.OCT.2013 22:40:12</p>		
Highest	 <p>Ref. Lvl 30 dBm Marker 1 18.10 dBm RBW 100 kHz VBW 300 kHz SWT 5 ms RF Att 40 dB Unit dBm Center 846.6 MHz Span 10 MHz Date: 13.OCT.2013 22:37:16</p>		

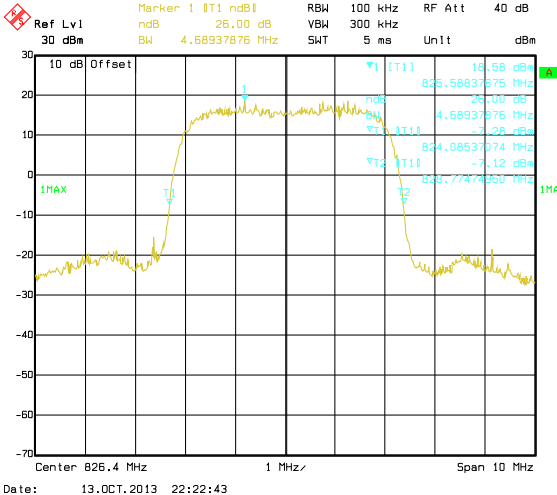
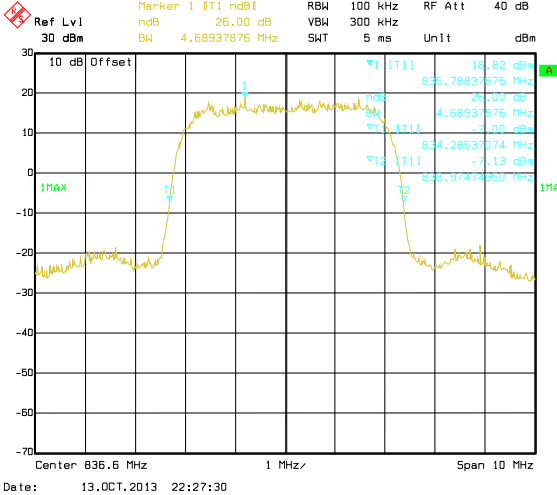
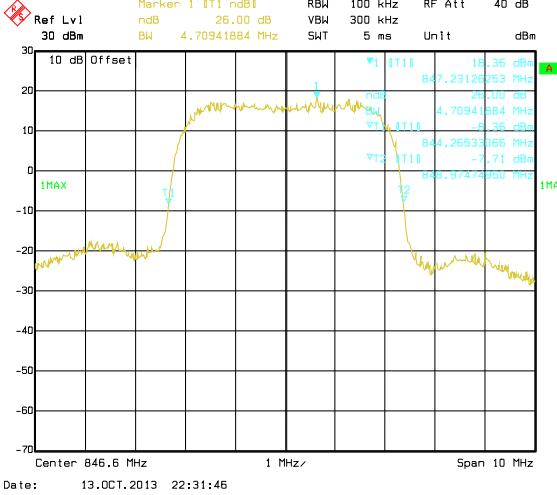



Test Item	-26dB bandwidth	Test Mode	UMTS850 12.2k RMC
Lowest			
Middle			
Highest			

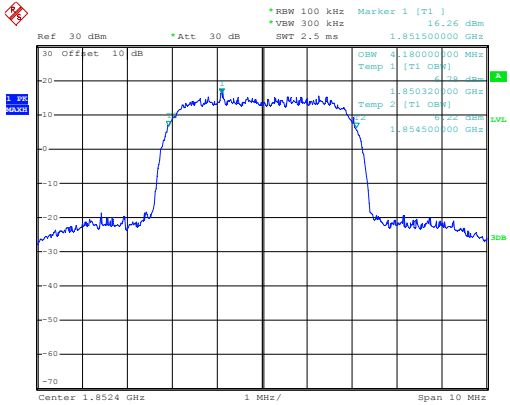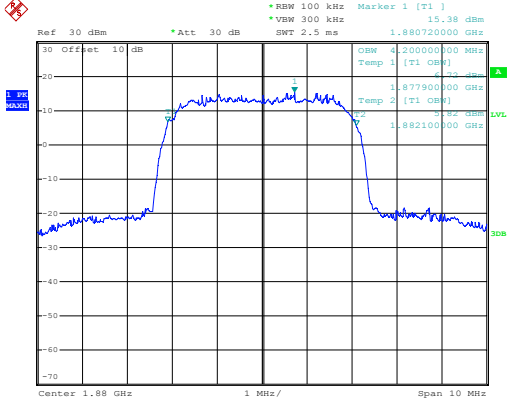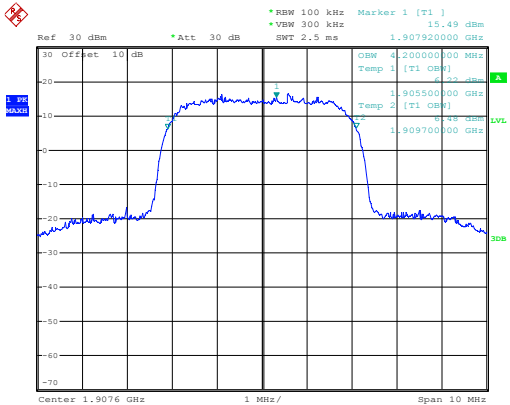




Test Item	99% Occupy bandwidth	Test Mode	UMTS1900 12.2k RMC
Lowest	 <p>Date: 21.OCT.2013 20:55:51</p>		
Middle	 <p>Date: 21.OCT.2013 20:54:03</p>		
Highest	 <p>Date: 21.OCT.2013 20:51:51</p>		

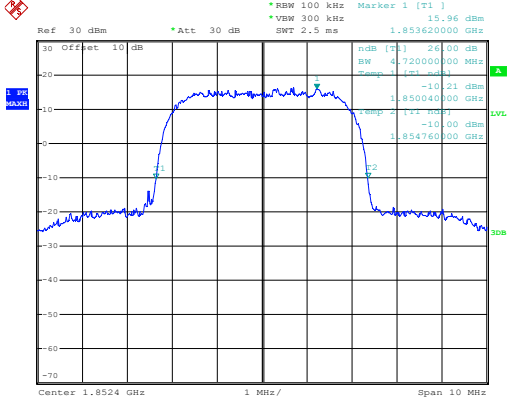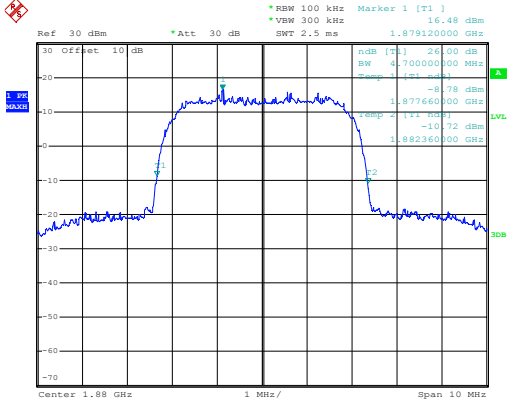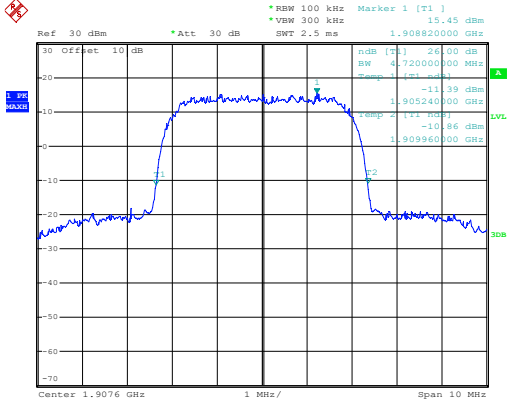




Test Item	-26dB bandwidth	Test Mode	UMTS1900 12.2k RMC
Lowest	 <p>Date: 21.OCT.2013 20:45:23</p>		
Middle	 <p>Date: 21.OCT.2013 20:47:13</p>		
Highest	 <p>Date: 21.OCT.2013 20:49:00</p>		

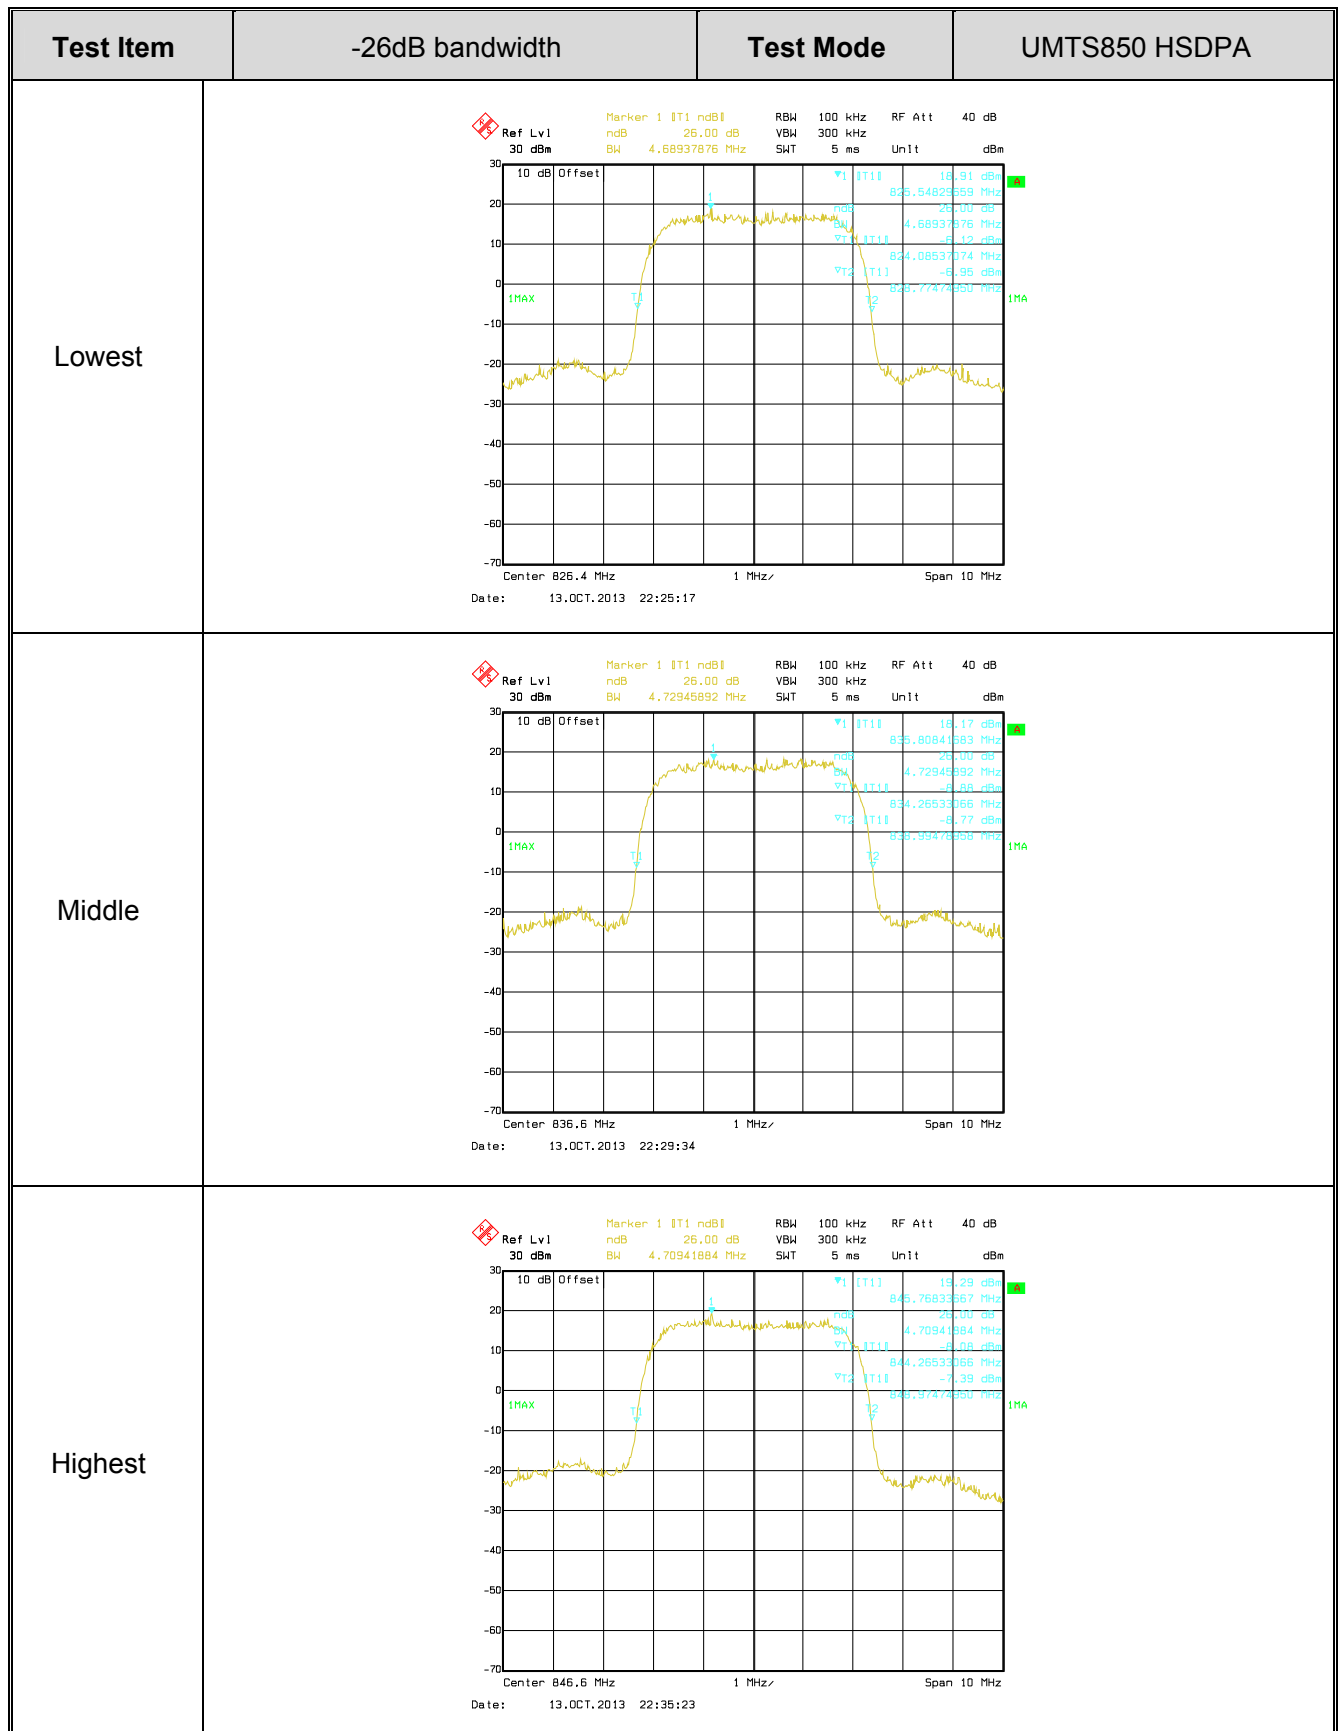

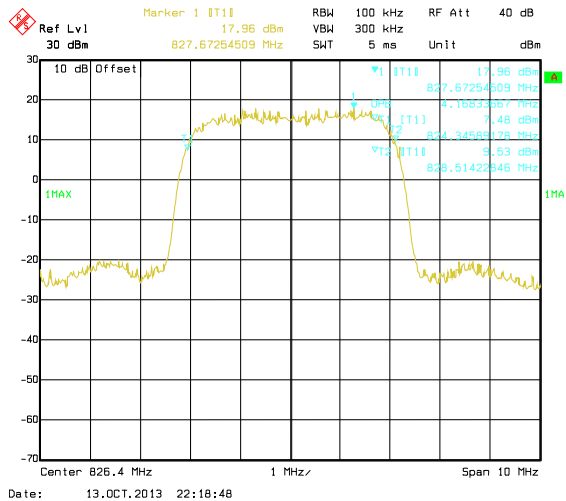
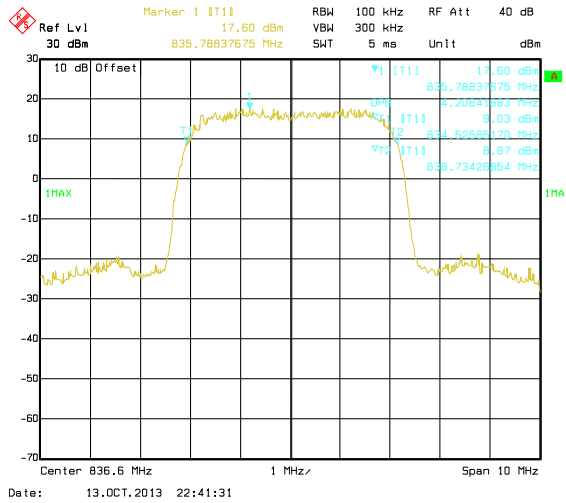
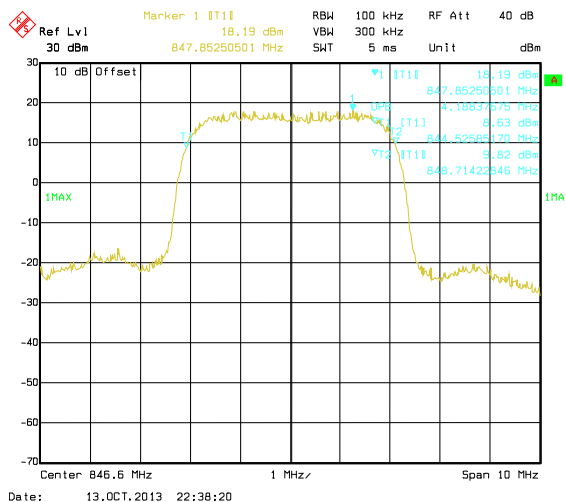


Test Item	99% Occupy bandwidth	Test Mode	UMTS850 HSDPA
Lowest	 <p>Ref Lvl 30 dBm Marker 1 0T11 17.96 dBm 827.67254509 MHz RBW 100 kHz RF Att 40 dB VBW 300 kHz SWT 5 ms Unit dBm Center 826.4 MHz 1 MHz Span 10 MHz Date: 13.OCT.2013 22:18:48</p>		
Middle	 <p>Ref Lvl 30 dBm Marker 1 0T11 17.60 dBm 835.78837675 MHz RBW 100 kHz RF Att 40 dB VBW 300 kHz SWT 5 ms Unit dBm Center 836.6 MHz 1 MHz Span 10 MHz Date: 13.OCT.2013 22:41:31</p>		
Highest	 <p>Ref Lvl 30 dBm Marker 1 0T11 18.19 dBm 847.85250501 MHz RBW 100 kHz RF Att 40 dB VBW 300 kHz SWT 5 ms Unit dBm Center 846.6 MHz 1 MHz Span 10 MHz Date: 13.OCT.2013 22:38:20</p>		

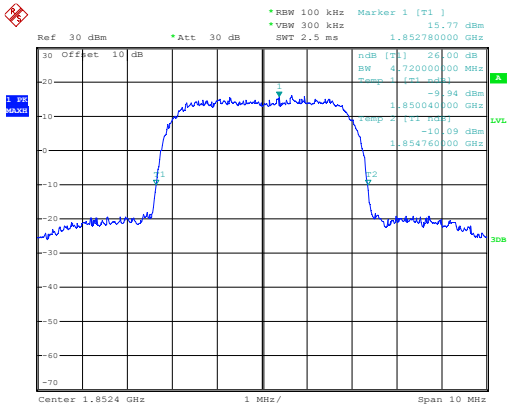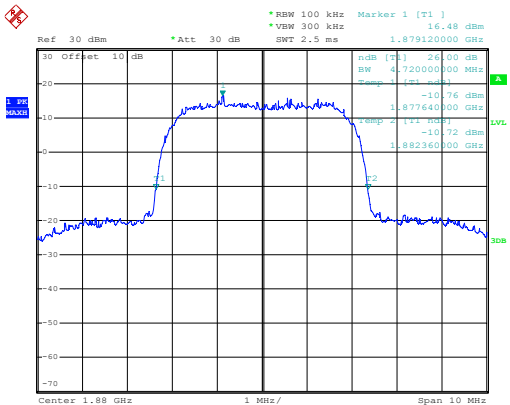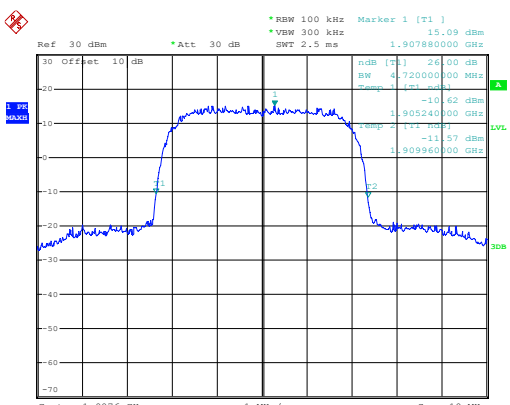

Test Item	-26dB bandwidth	Test Mode	UMTS1900 HSDPA
Lowest	 <p>Date: 21.OCT.2013 20:45:40</p>		
Middle	 <p>Date: 21.OCT.2013 20:47:20</p>		
Highest	 <p>Date: 21.OCT.2013 20:49:15</p>		

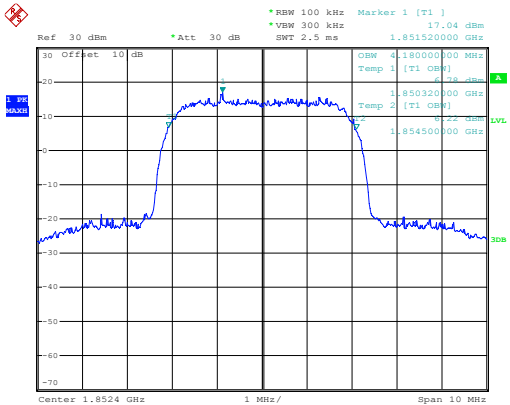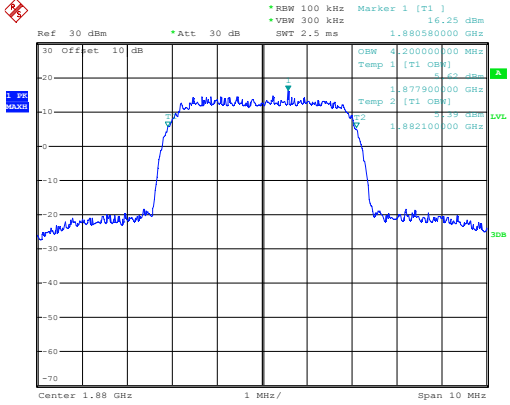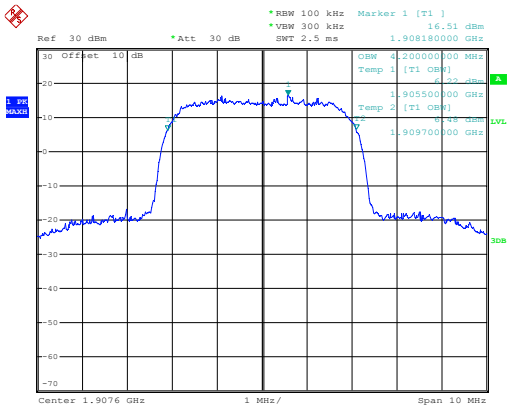

Test Item	99% Occupy bandwidth	Test Mode	UMTS1900 HSDPA
Lowest	 <p>Date: 21.OCT.2013 20:55:56</p>		
Middle	 <p>Date: 21.OCT.2013 20:54:15</p>		
Highest	 <p>Date: 21.OCT.2013 20:51:57</p>		



6. Out of Band Emission at Antenna Terminals

6.1. Test Standard and Limit

6.1.1. Test Standard

FCC part 22.917(a) and FCC part 24.238(a)


6.1.2. Test Method

FCC part 2.1051

6.1.3. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power(P) by a factor of at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

6.2. Test Setup


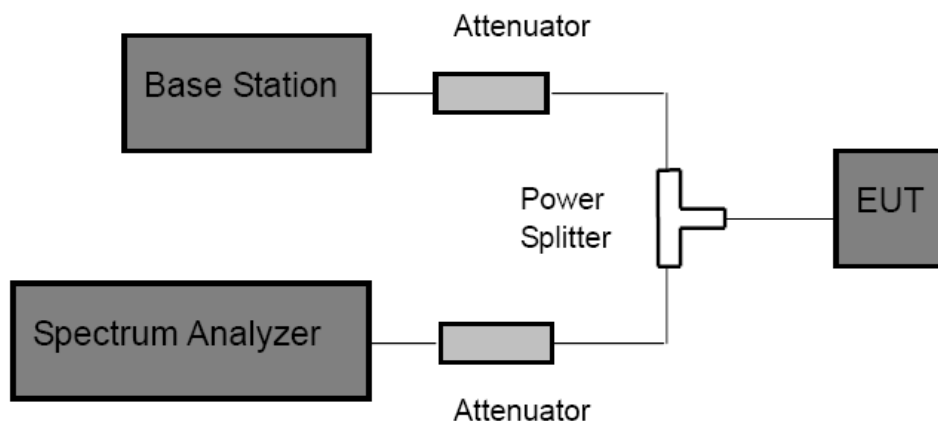




6.3. Test Procedure

- (1) The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
- (2) The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.
- (3) For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic.
- (4) Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

6.4. Test Data

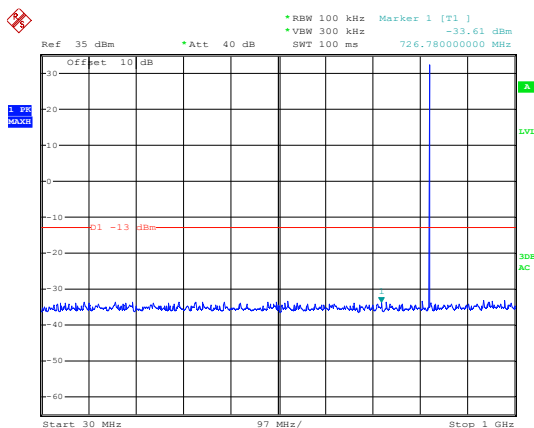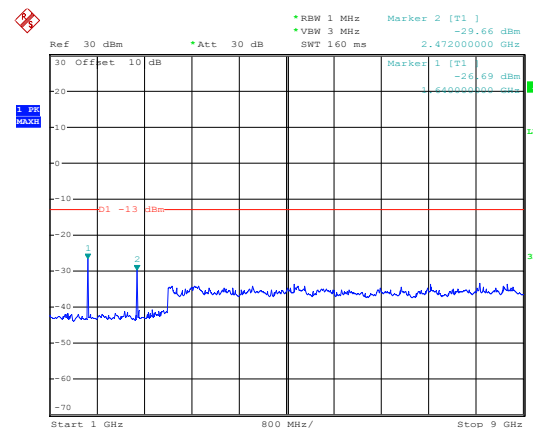

Test Mode	GSM850	Test Channel	Lowest channel
 <p>Date: 12.OCT.2013 11:47:24</p>		 <p>Date: 14.OCT.2013 23:57:34</p>	
30MHz~1GHz		1GHz~9GHz	

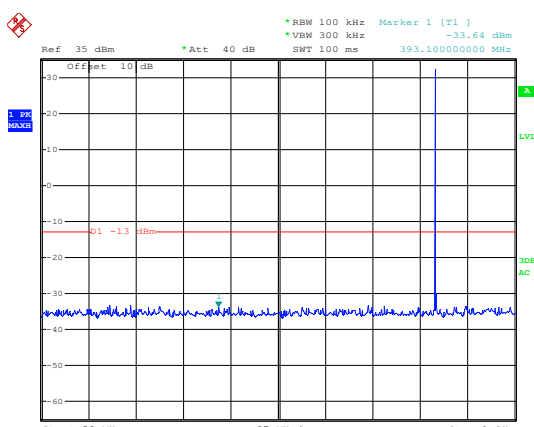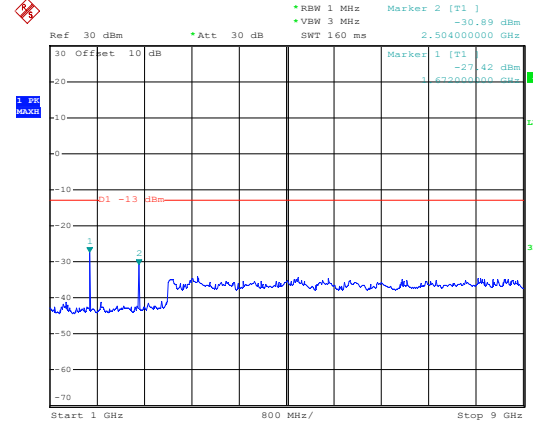Test Mode	GSM850	Test Channel	Middle channel
 <p>Date: 12.OCT.2013 11:46:32</p>		 <p>Date: 14.OCT.2013 23:58:53</p>	
30MHz~1GHz		1GHz~9GHz	



Test Mode	GSM850	Test Channel	Highest channel
<p>Date: 12.OCT.2013 11:46:32</p>	<p>Date: 14.OCT.2013 23:58:53</p>		
	30MHz~1GHz		1GHz~9GHz

Test Mode	PCS1900	Test Channel	Lowest channel
<p>Date: 12.OCT.2013 11:53:16</p>	<p>Date: 14.OCT.2013 23:47:59</p>		
	30MHz~1GHz		1GHz~20GHz



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 33 of 67

Test Mode	PCS1900	Test Channel	Middle channel
<p>Ref: 35 dBm *Att: 40 dB *RBW 100 kHz Marker 1 [T1] -33.31 dBm *VBW 300 kHz 416.06000000 MHz SWT 100 ms</p> <p>Offset 10 dB</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 12.OCT.2013 11:54:19</p>		<p>Ref: 30 dBm *Att: 30 dB *RBW 1 MHz Marker 1 [T1] -21.99 dBm *VBW 3 MHz 14.94600000 GHz SWT 380 ms</p> <p>Offset 10 dB</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 14.OCT.2013 23:50:15</p>	
30MHz~1GHz		1GHz~20GHz	



Test Mode	PCS1900	Test Channel	Highest channel
<p>Ref: 35 dBm *Att: 40 dB *RBW 100 kHz Marker 1 [T1] -33.52 dBm *VBW 300 kHz 338.46000000 MHz SWT 100 ms</p> <p>Offset 10 dB</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>Date: 12.OCT.2013 11:54:52</p>		<p>Ref: 30 dBm *Att: 30 dB *RBW 1 MHz Marker 1 [T1] -21.54 dBm *VBW 3 MHz 13.65400000 GHz SWT 380 ms</p> <p>Offset 10 dB</p> <p>Start 1 GHz 1.9 GHz/ Stop 20 GHz</p> <p>Date: 14.OCT.2013 23:53:38</p>	
30MHz~1GHz		1GHz~20GHz	



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 34 of 67

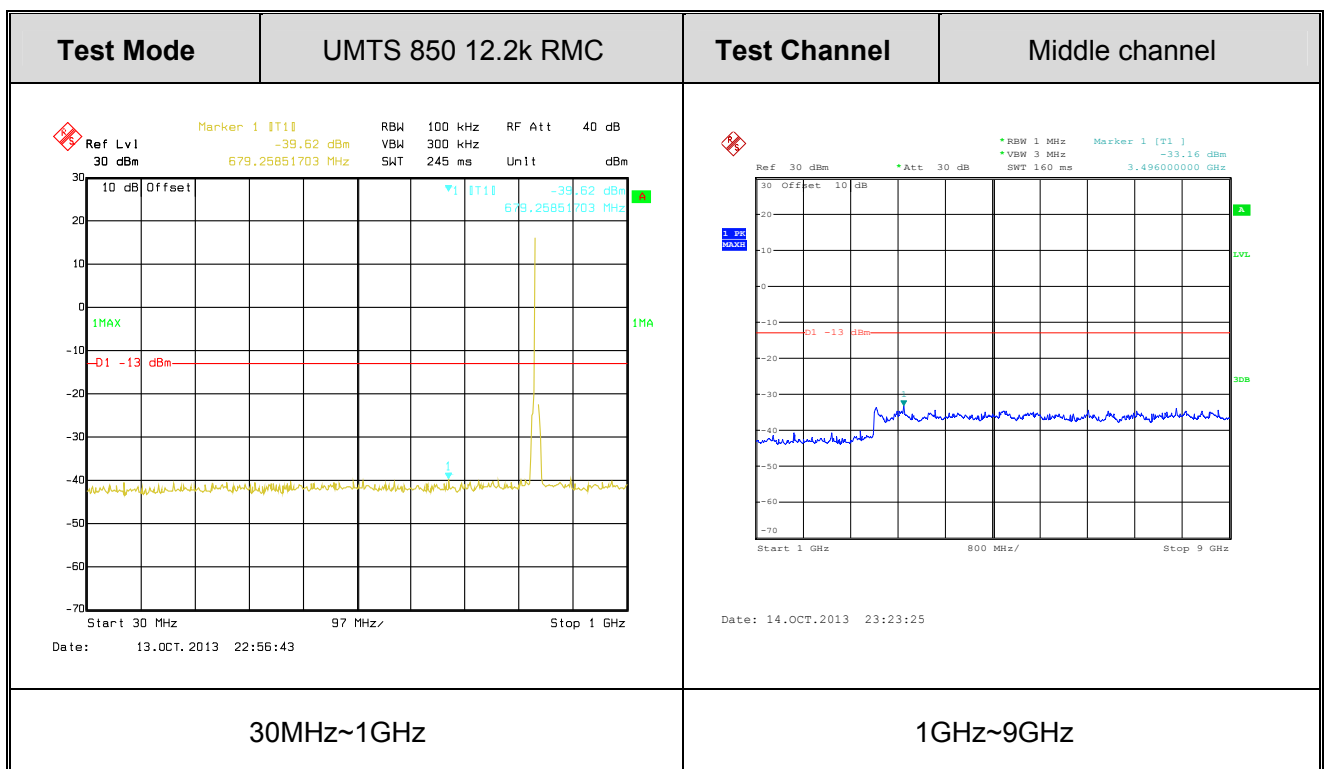
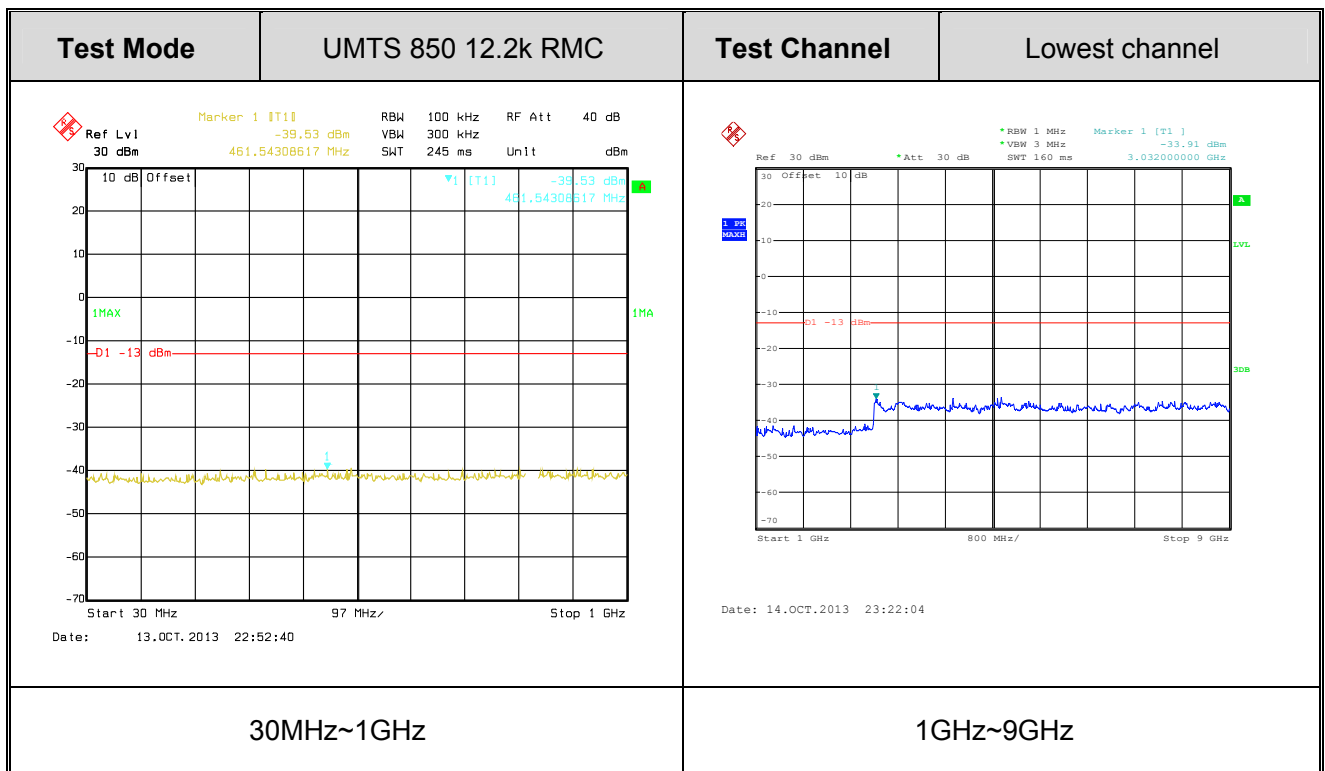




ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 35 of 67

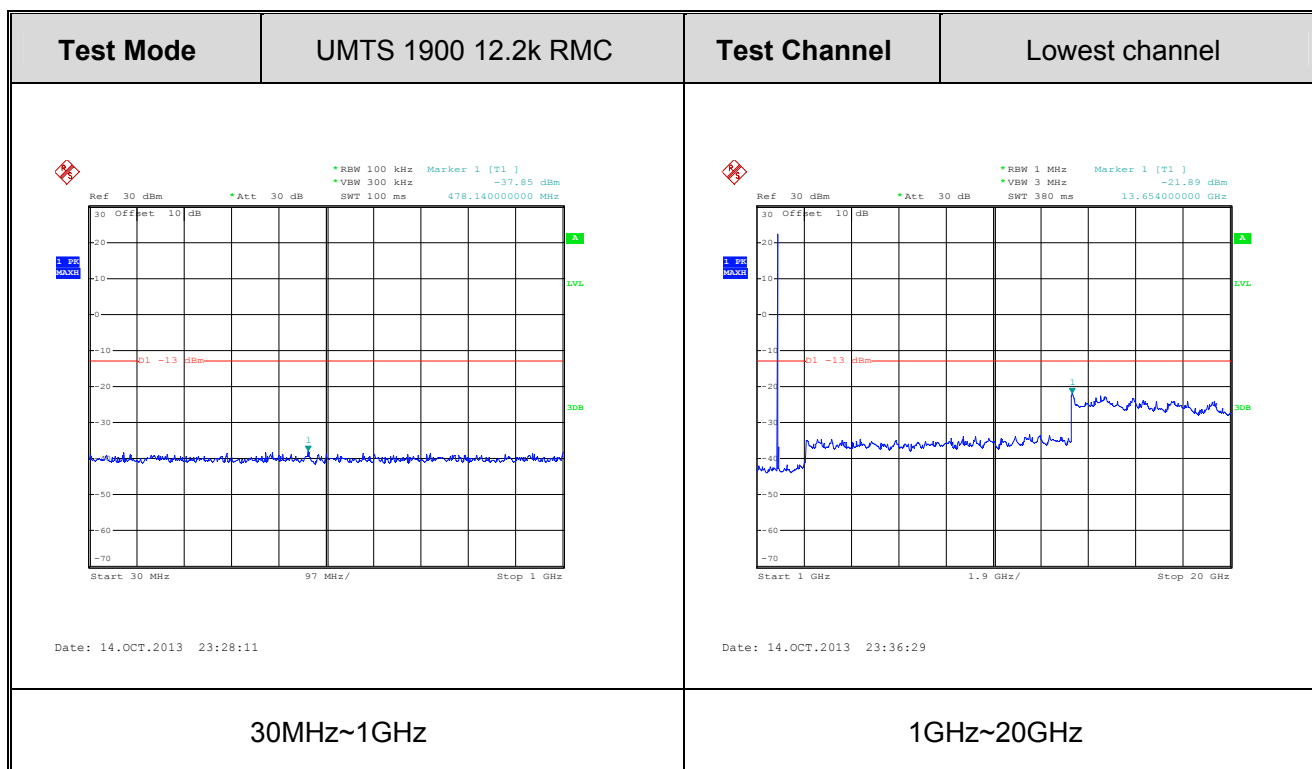
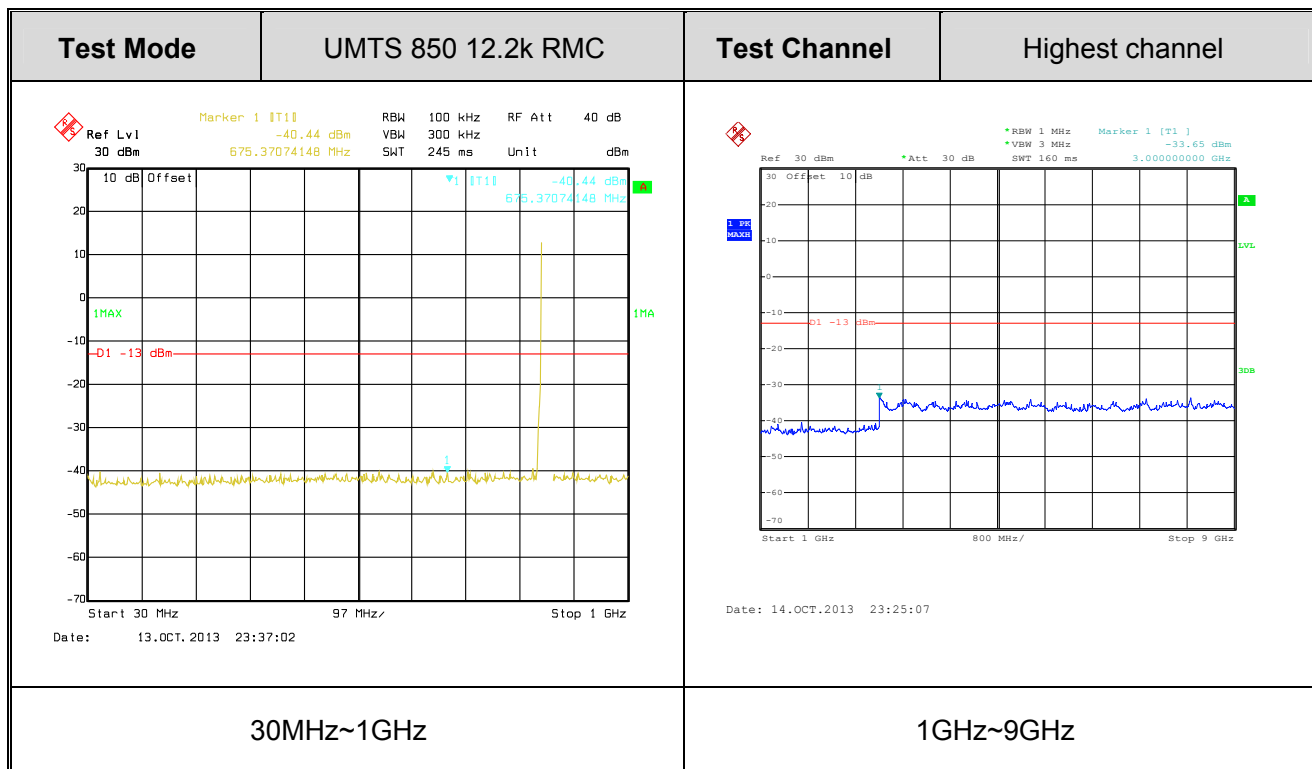






ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 36 of 67

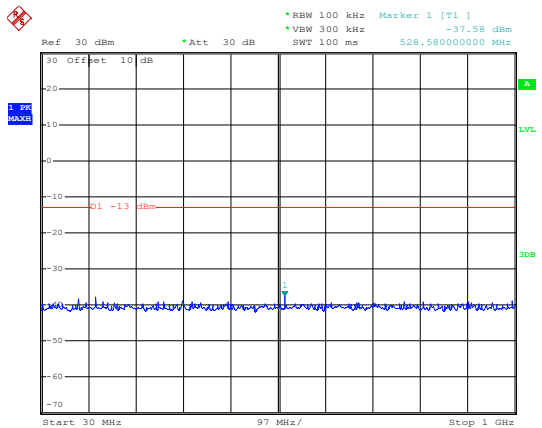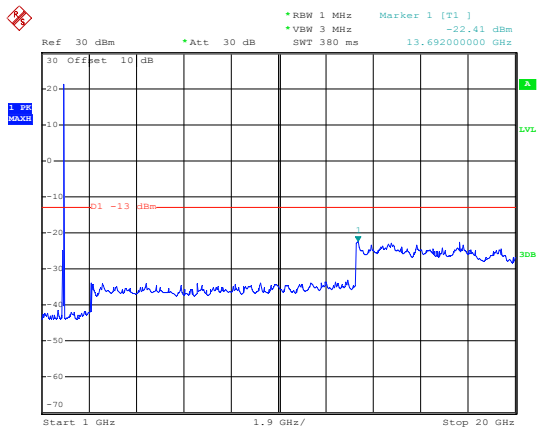Test Mode	UMTS 1900 12.2k RMC	Test Channel	Middle channel
 <p>Date: 14.OCT.2013 23:29:19</p>		 <p>Date: 14.OCT.2013 23:35:16</p>	
30MHz~1GHz		1GHz~20GHz	

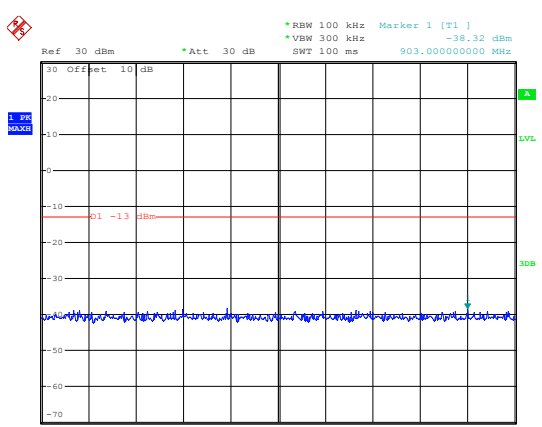
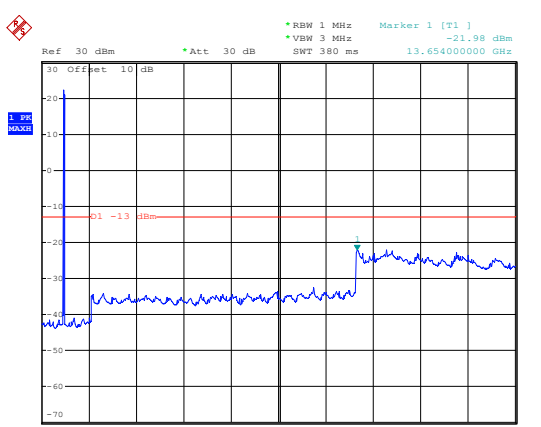
Test Mode	UMTS 1900 12.2k RMC	Test Channel	Highest channel
 <p>Date: 14.OCT.2013 23:30:39</p>		 <p>Date: 14.OCT.2013 23:32:12</p>	
30MHz~1GHz		1GHz~20GHz	



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 37 of 67

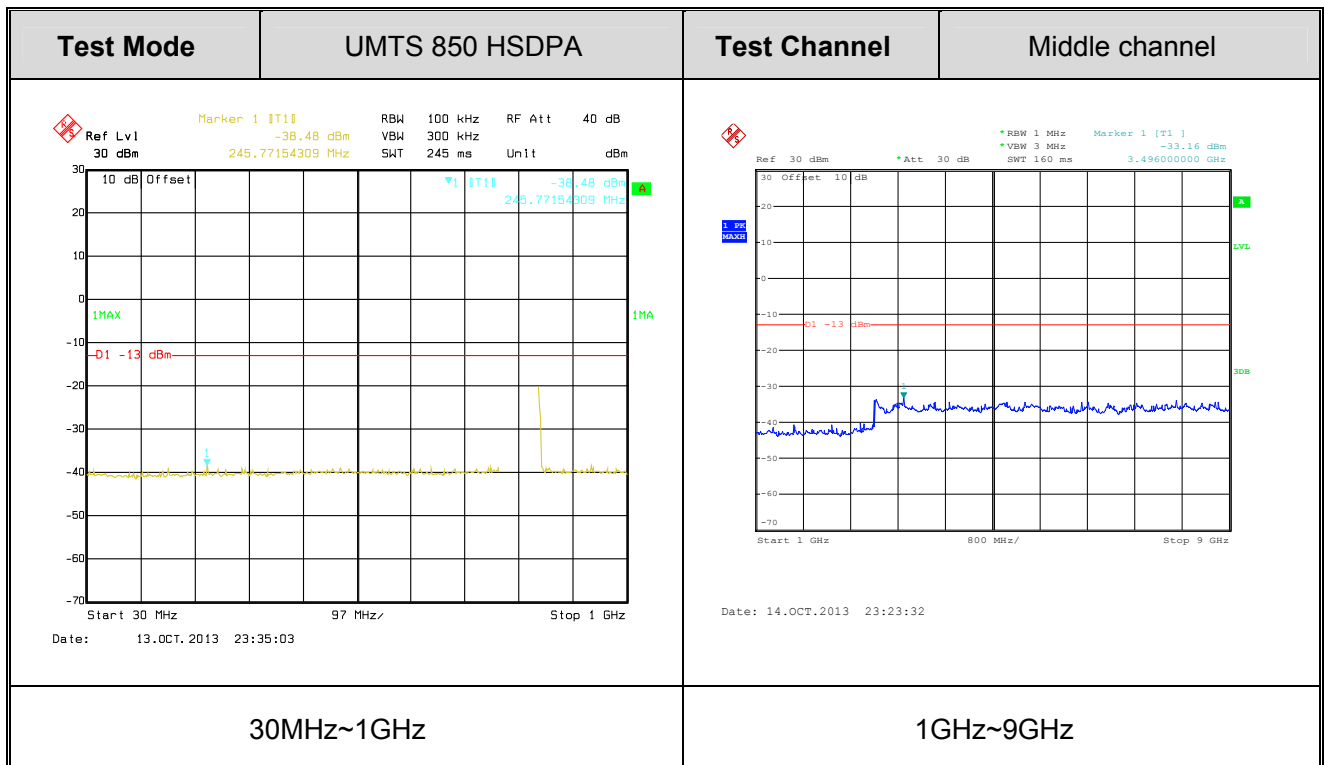
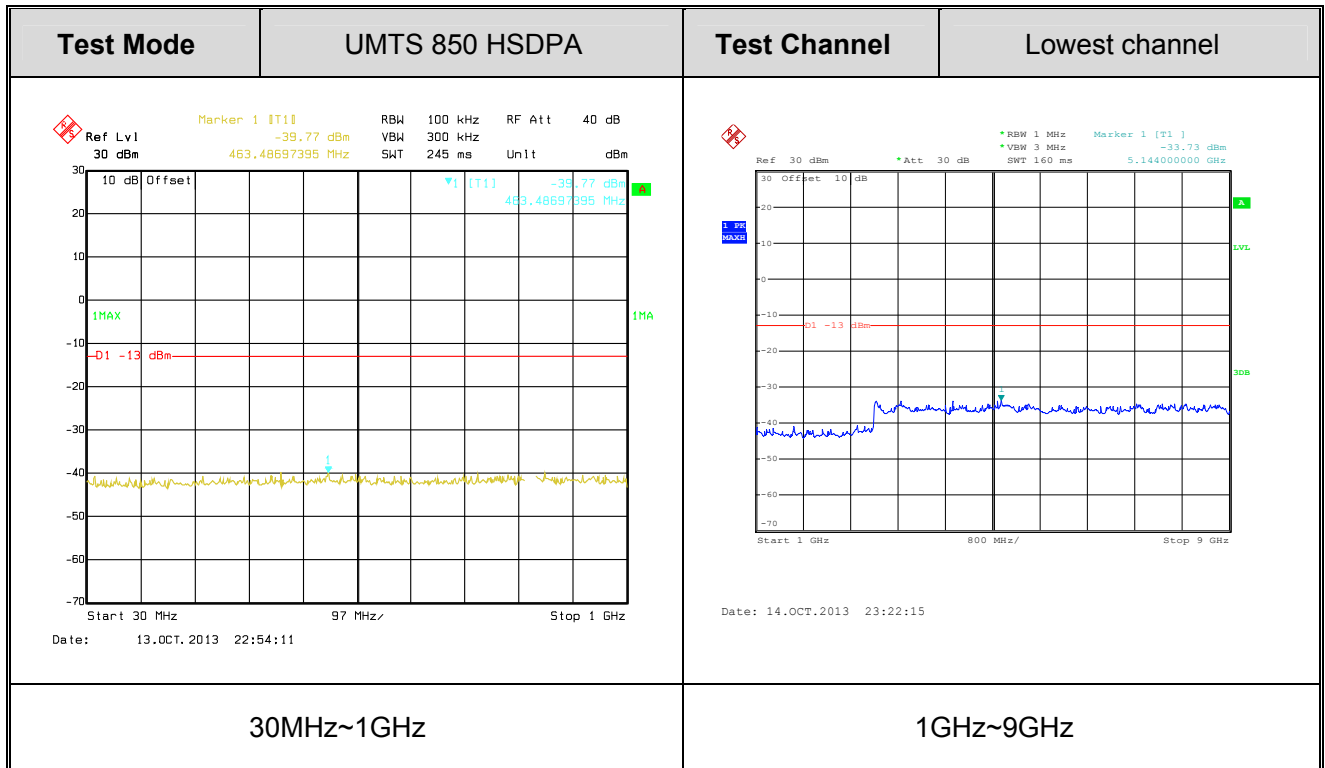






ATA Testing Technology Service Co., Ltd.



Report No.: ATA131028008E

Page: 38 of 67

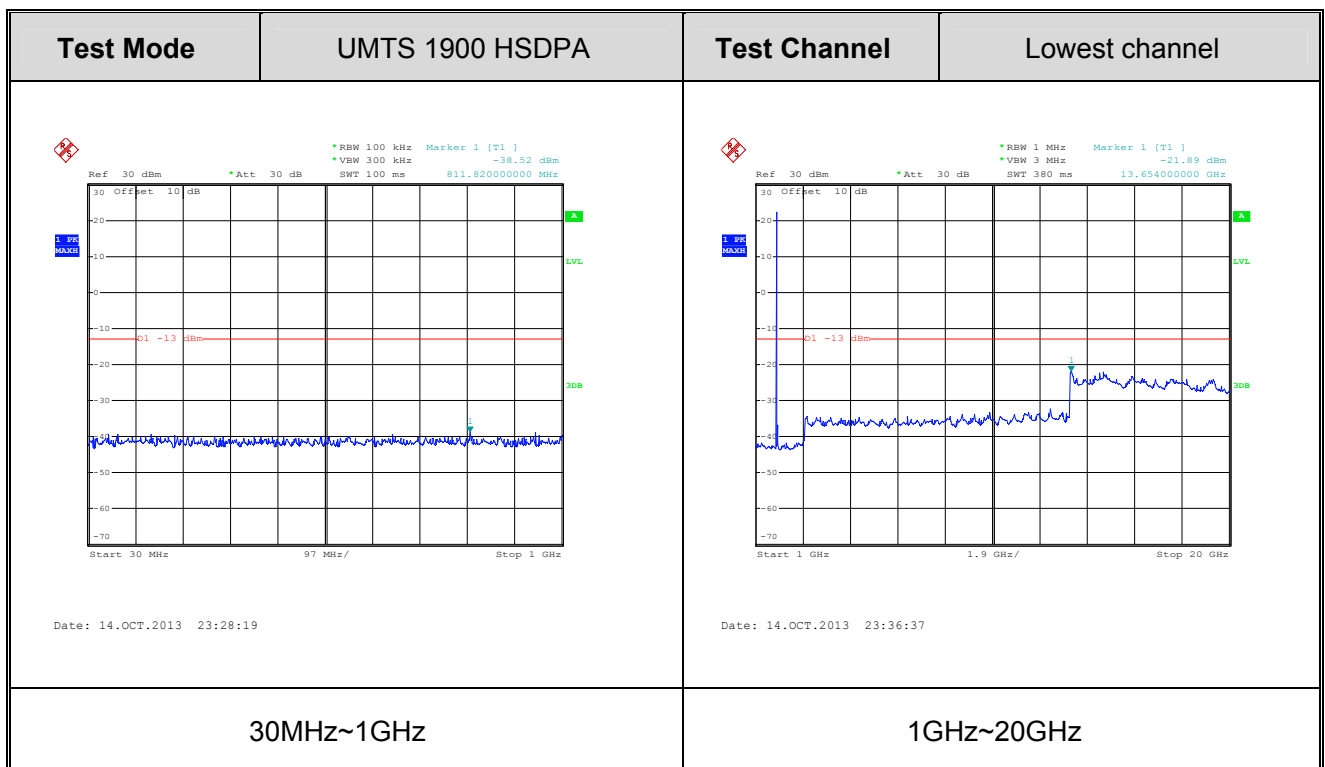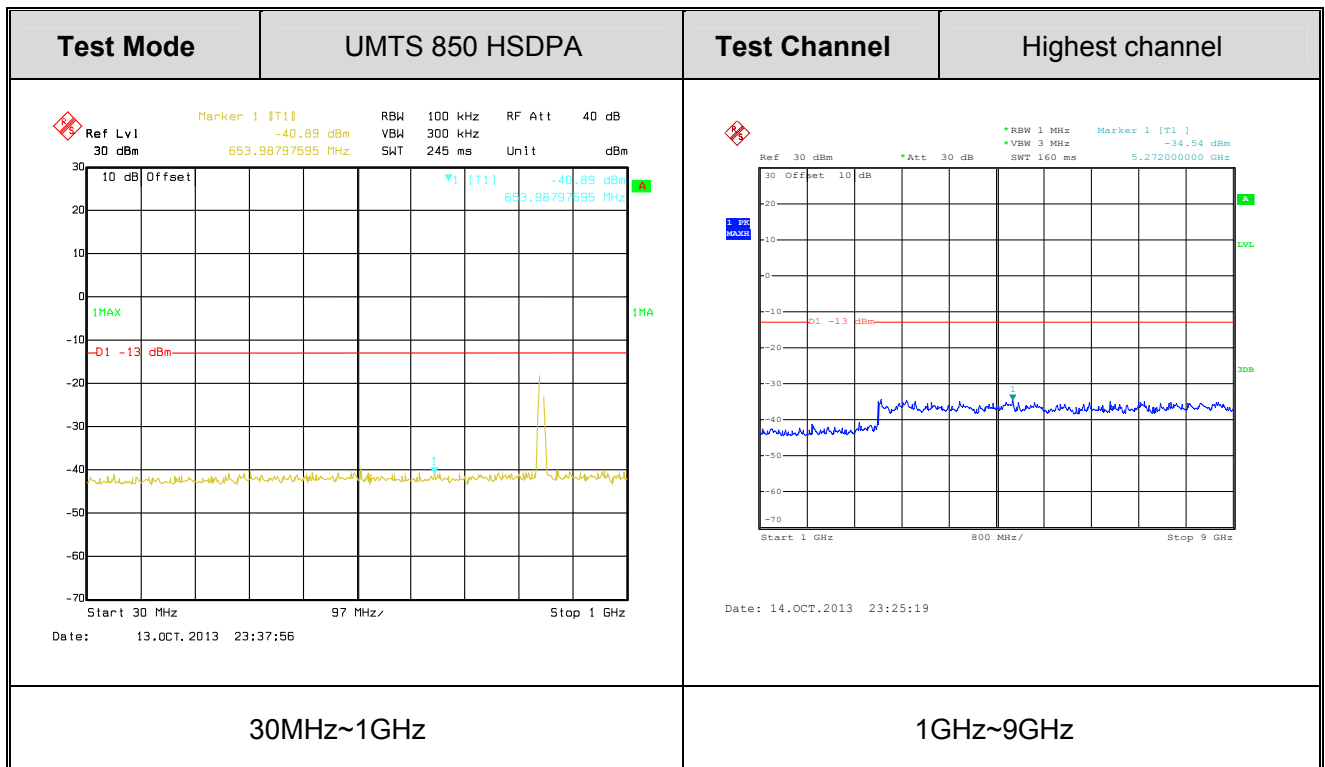

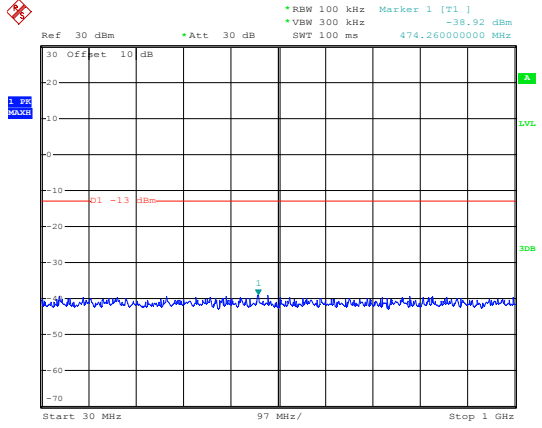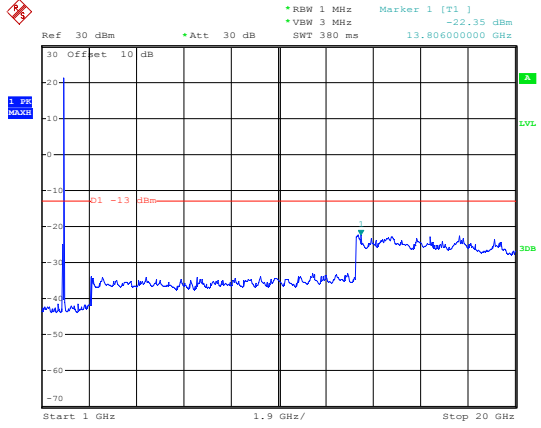

Test Mode	UMTS 1900 HSDPA	Test Channel	Middle channel
 <p>Date: 14.OCT.2013 23:29:28</p>		 <p>Date: 14.OCT.2013 23:35:24</p>	
30MHz~1GHz		1GHz~20GHz	

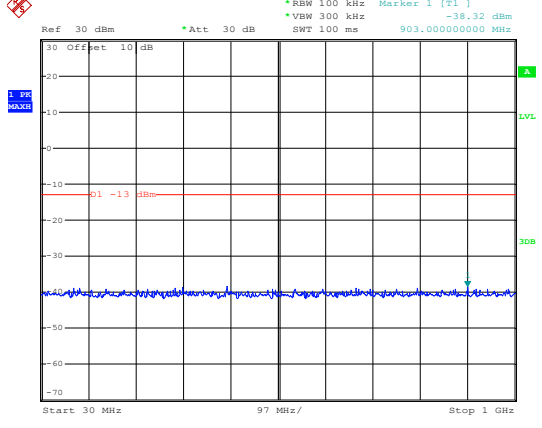
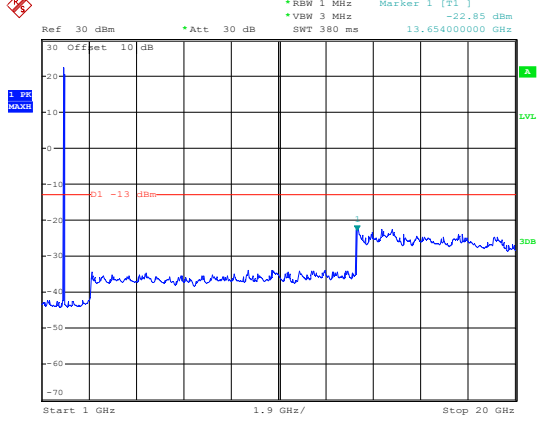
Test Mode	UMTS 1900 HSDPA	Test Channel	Highest channel
 <p>Date: 14.OCT.2013 23:30:45</p>		 <p>Date: 14.OCT.2013 23:32:21</p>	
30MHz~1GHz		1GHz~20GHz	





Band edge emission

Test Mode	GSM850
Lowest	<div data-bbox="614 488 1220 974"></div>
Highest	<div data-bbox="614 1294 1220 1780"></div>

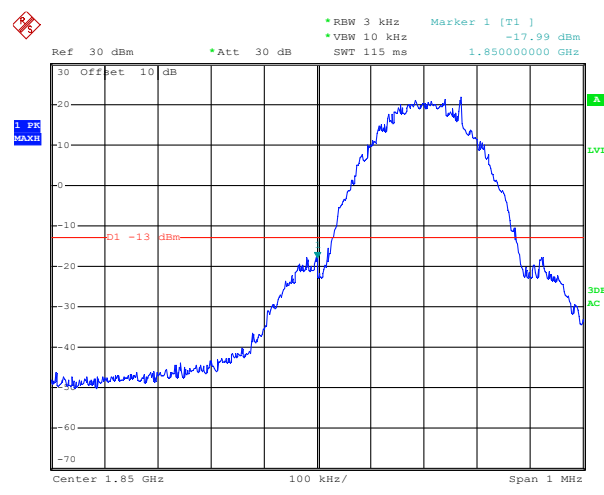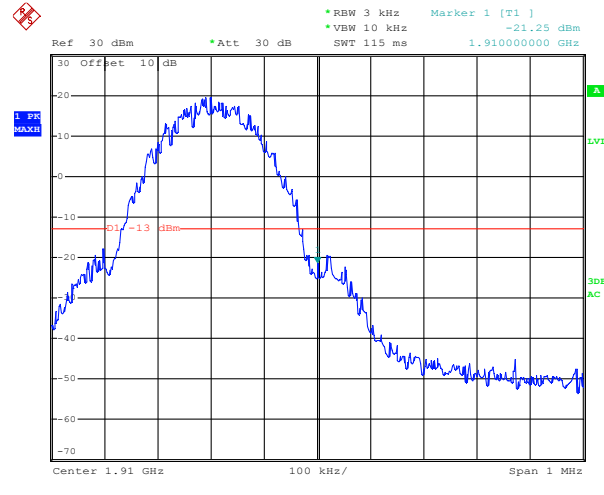


Test Mode	PCS1900
Lowest	<div data-bbox="606 481 1212 974"><p>Ref 30 dBm *Att 30 dB RBW 3 kHz Marker 1 [T1] -17.99 dBm VBW 10 kHz SWT 115 ms 1.850000000 GHz</p><p>Center 1.85 GHz 100 kHz/ Span 1 MHz</p></div> <p>Date: 12.OCT.2013 11:59:37</p>
Highest	<div data-bbox="606 1288 1212 1780"><p>Ref 30 dBm *Att 30 dB RBW 3 kHz Marker 1 [T1] -21.25 dBm VBW 10 kHz SWT 115 ms 1.910000000 GHz</p><p>Center 1.91 GHz 100 kHz/ Span 1 MHz</p></div> <p>Date: 12.OCT.2013 11:57:14</p>

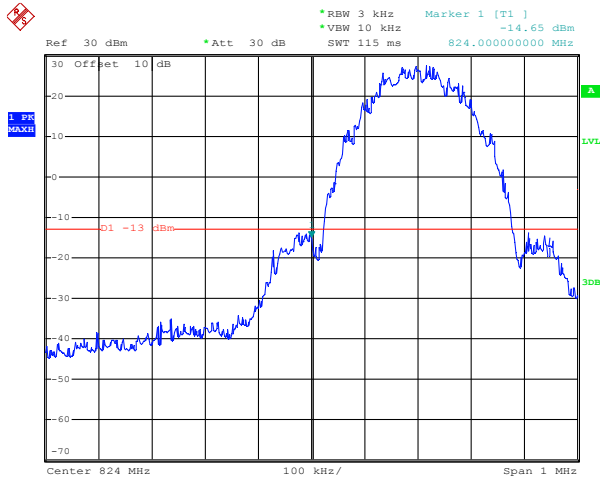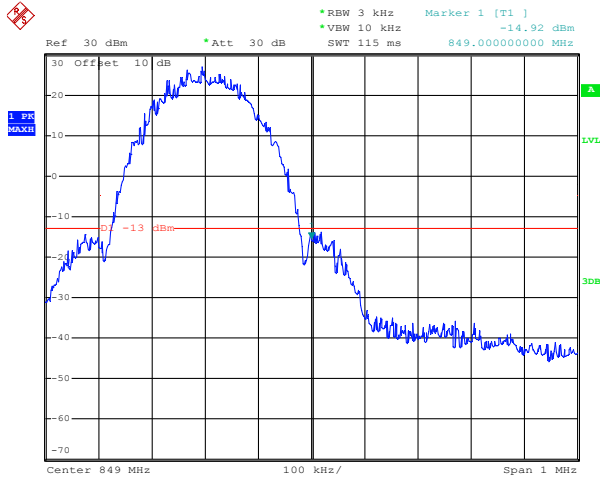

Test Mode	EGPRS850
Lowest	<div data-bbox="612 450 1214 927"></div> <p data-bbox="612 987 847 1008">Date: 12.OCT.2013 14:11:25</p>
Highest	<div data-bbox="612 1249 1214 1727"></div> <p data-bbox="612 1787 847 1807">Date: 12.OCT.2013 14:14:11</p>




Test Mode	EGPRS1900
Lowest	<div data-bbox="614 448 1220 929"></div>
Highest	<div data-bbox="614 1243 1220 1724"></div>

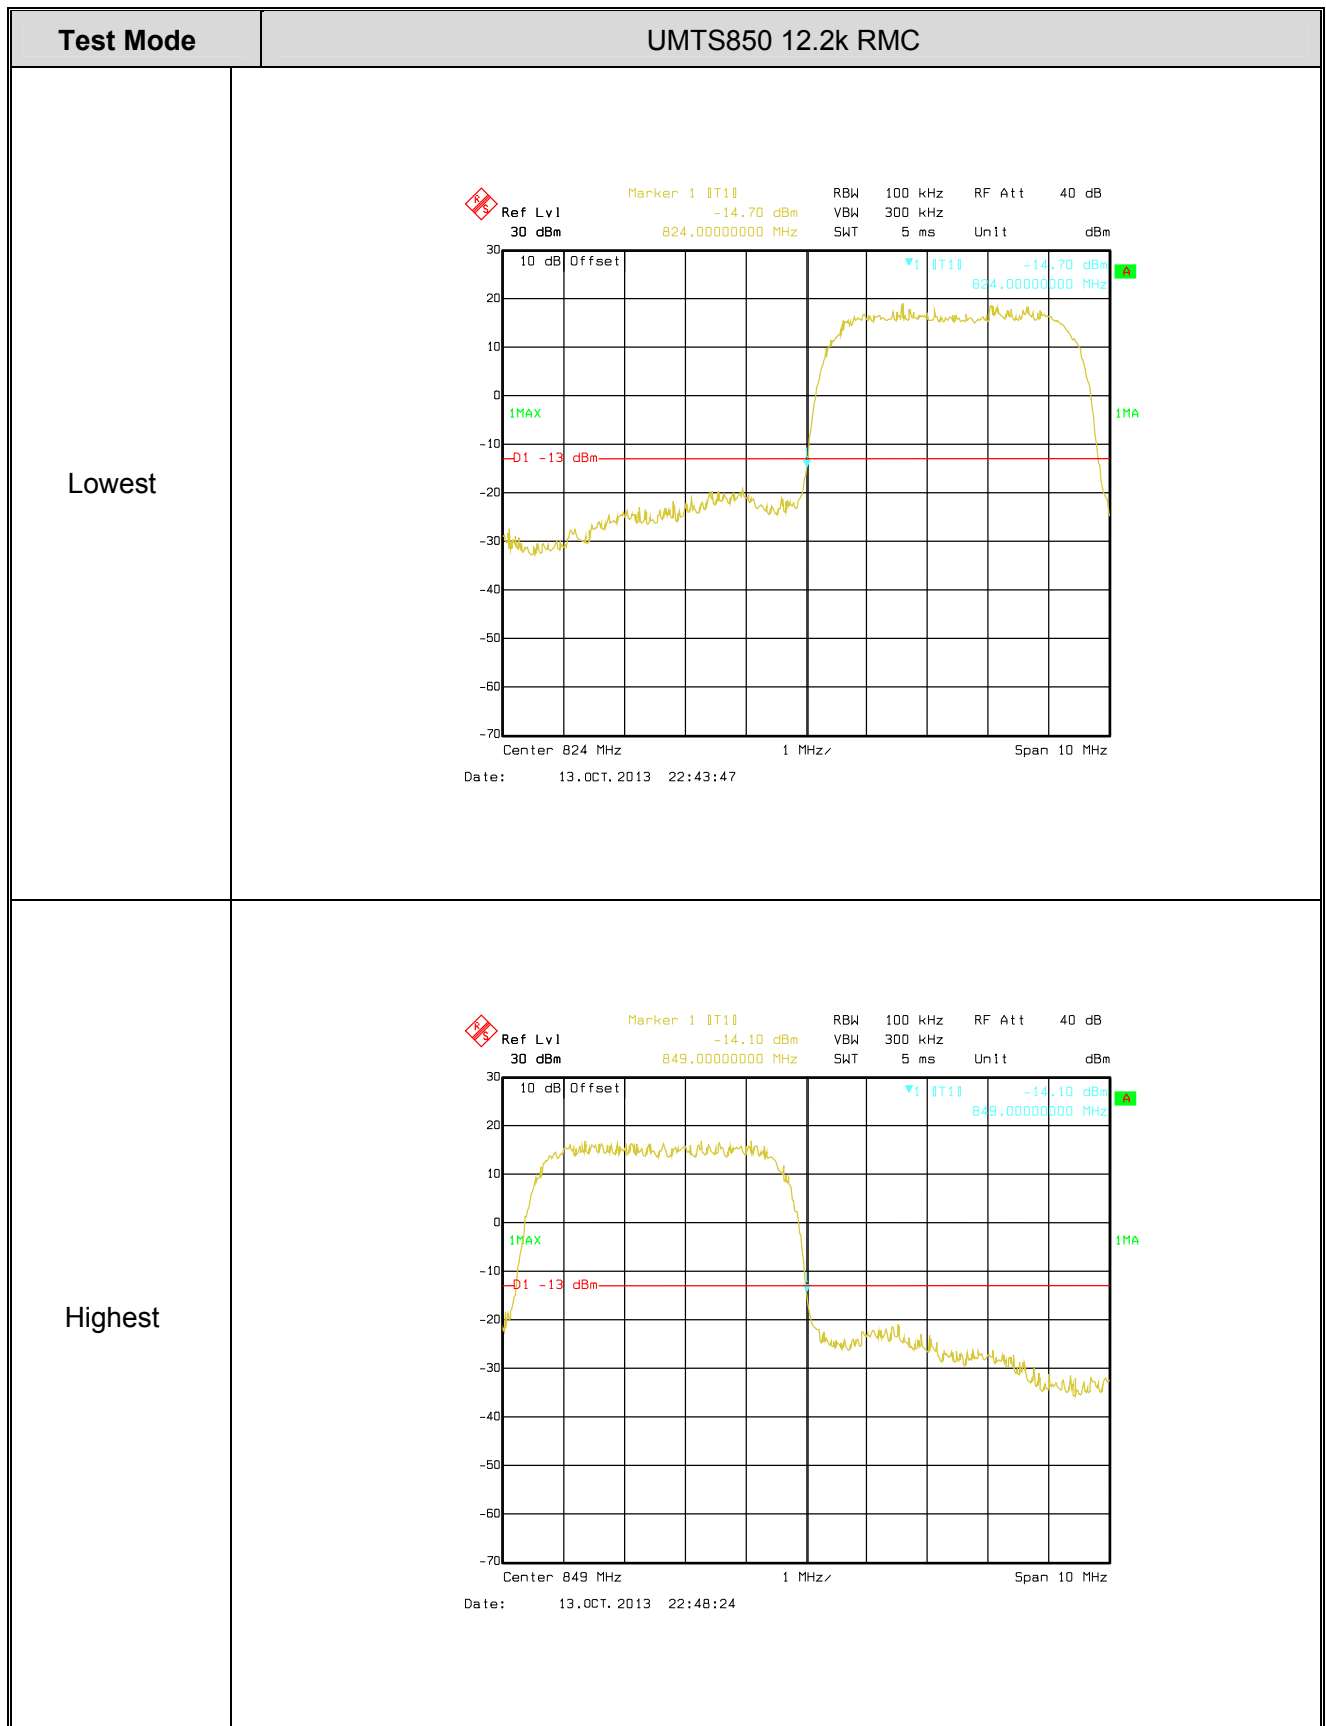



Test Mode	UMTS1900 12.2k RMC
Lowest	<div data-bbox="614 481 1212 952"></div> <p data-bbox="614 1019 845 1041">Date: 21.OCT.2013 20:57:42</p>
Highest	<div data-bbox="614 1288 1212 1758"></div> <p data-bbox="614 1825 845 1848">Date: 21.OCT.2013 20:59:19</p>

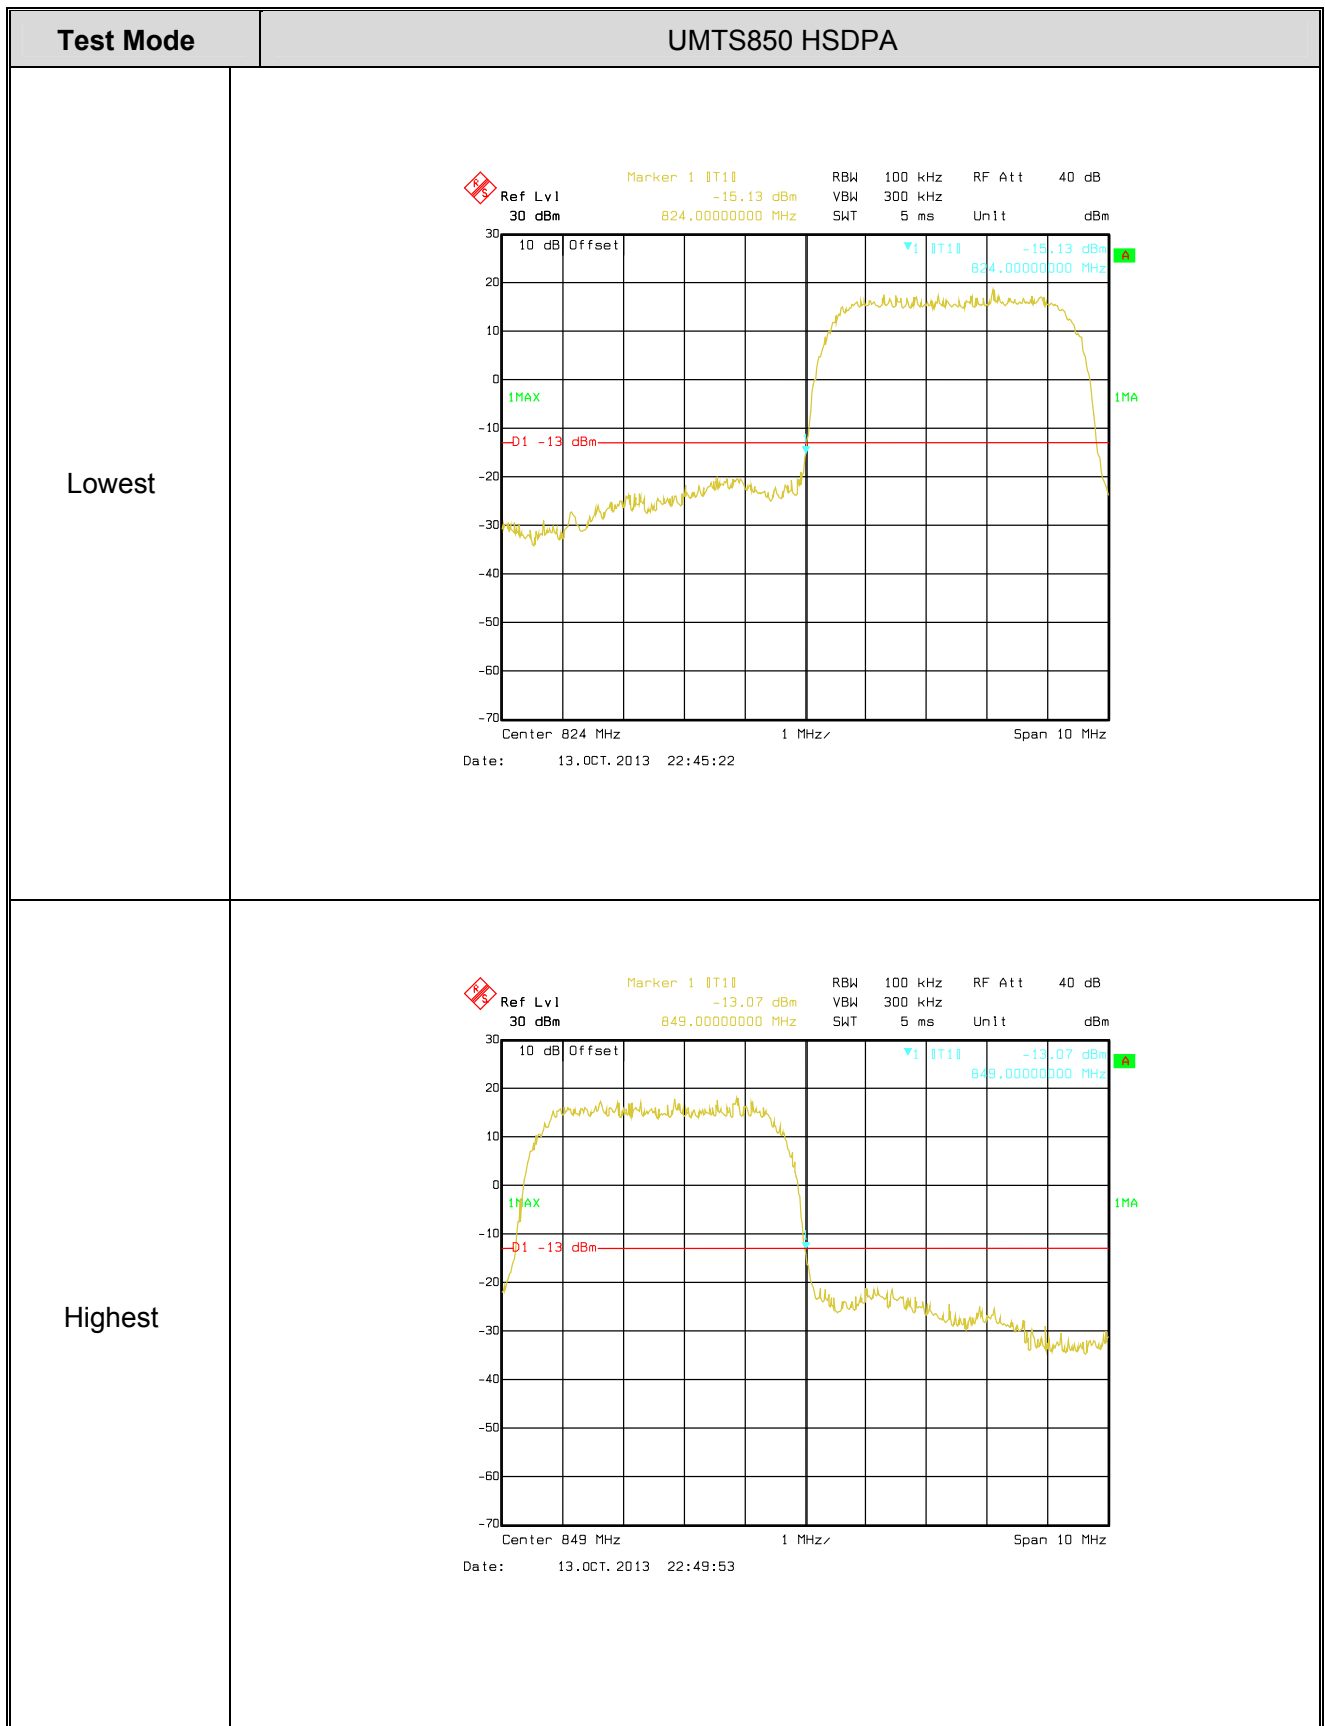

Highest



7. ERP, EIRP Measurement

7.1. Test Standard and Limit

7.1.1. Test Standard

FCC part 22.913(a) and FCC part 24.232(b)

7.1.2. Test Method


FCC part 2.1046

7.1.3. Test Limit


Frequency Band	Limit
GSM 850MHz	38.45 dBm (ERP)
PCS 1900 MHz	33 dBm (EIRP)
WCDMA Band V	38.5 dBm (ERP)
WCDMA Band II	33 dBm (EIRP)

7.2. Test Setup

Below 1GHz

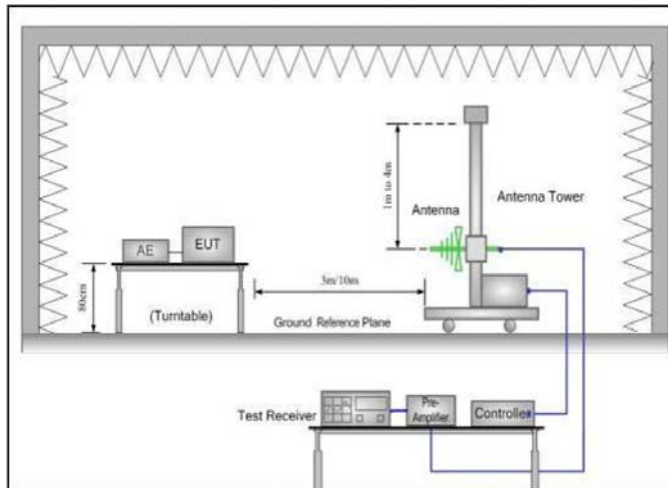

Above 1GHz

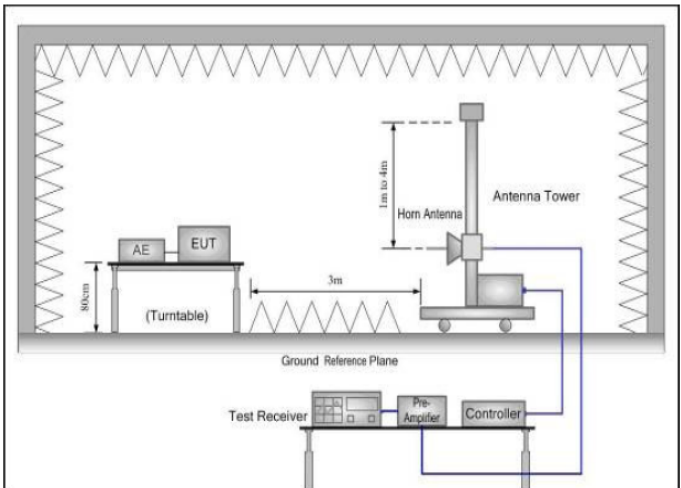

7.3. Test Procedure

- (1) The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.
- (2) During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.
- (3) ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was



calculated as follows:

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$$

- (4) EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$$

- (5) The worse case was relating to the conducted output power.

7.4. Test Data

Measurement Data (worst case)

Mode	Channel	EUT Pol.	Antenna Pol.	ERP (dBm)	Limit (dBm)	Result
GSM850	251	H	V	27.81	38.45	PASSED
			H	23.25		PASSED
		E1	V	27.63		PASSED
			H	23.12		PASSED
		E2	V	26.58		PASSED
			H	22.60		PASSED
EGPRS 850	251	H	V	27.16	38.45	PASSED
			H	20.18		PASSED

Mode	Channel	EUT Pol.	Antenna Pol.	ERP (dBm)	Limit (dBm)	Result
PCS1900	661	H	V	23.33	33.00	PASSED
			H	21.65		PASSED
		E1	V	23.78		PASSED
			H	21.25		PASSED
		E2	V	23.28		PASSED
			H	21.31		PASSED
EGPRS 1900	810	H	V	22.50	33.00	PASSED
			H	19.64		PASSED



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 50 of 67

Mode	Channel	EUT Pol.	Antenna Pol.	ERP (dBm)	Limit (dBm)	Result
UMTS 850 12.2k RMC	4183	H	V	19.32	38.45	PASSED
			H	16.78		PASSED
		E1	V	19.11		PASSED
			H	16.32		PASSED
		E2	V	18.67		PASSED
			H	15.34		PASSED
HSDPA 850 Sub-test 3	4233	H	V	19.26		PASSED
			H	16.18		PASSED

Mode	Channel	EUT Pol.	Antenna Pol.	ERP (dBm)	Limit (dBm)	Result
UMTS 1900 12.2k RMC	9262	H	V	17.38	33.00	PASSED
			H	13.34		PASSED
		E1	V	17.21		PASSED
			H	13.26		PASSED
		E2	V	17.16		PASSED
			H	13.35		PASSED
HSDPA 1900 Sub-test 4	9538	H	V	17.26		PASSED
			H	13.21		PASSED

8. Field Strength of Spurious Radiation Measurement

8.1. Test Standard and Limit

8.1.1. Test Standard

FCC part 22.917(a) and FCC part 24.238(a)


8.1.2. Test Method

FCC part 2.1053

8.1.3. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power(P) by a factor of at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

8.2. Test Setup

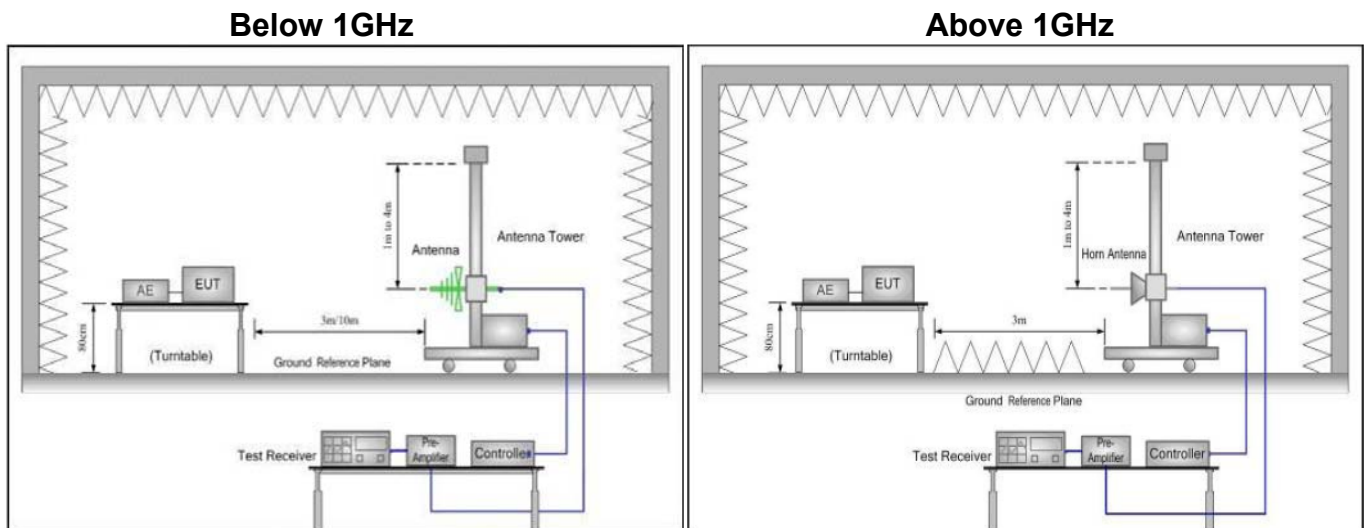

8.3. Test Procedure

- (1) The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.
- (2) During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.
- (3) The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.
- (4) The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.
$$ERP / EIRP = S.G. \text{ output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$$



8.4. Test Data

Measurement Data (worst case)

Test mode	GSM850		Test channel	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1648.40	Vertical	-38.47	-13.00	Passed
2472.60	V	-50.01		Passed
3296.80	V	-37.88		Passed
4121.00	V	-47.53		Passed
4945.20	V	---		Passed
5769.40	V	---		Passed
1648.40	Horizontal	-43.29	-13.00	Passed
2472.60	H	-50.52		Passed
3296.80	H	-44.98		Passed
4121.00	H	-46.88		Passed
4945.20	H	---		Passed
5769.40	H	---		Passed

Test mode	GSM850		Test channel	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-39.33	-13.00	Passed
2509.80	V	-39.11		Passed
3346.40	V	-42.58		Passed
4183.00	V	-44.65		Passed
5019.60	V	---		Passed
5856.2	V	---		Passed
1673.20	Horizontal	-46.72	-13.00	Passed
2509.80	H	-49.31		Passed
3346.40	H	-40.21		Passed
4183.00	H	-49.68		Passed
5019.60	H	---		Passed
5856.20	H	---		Passed



Test mode	GSM850		Test channel	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1697.60	Vertical	-39.49	-13.00	Passed
2546.40	V	-43.74		Passed
3395.20	V	-35.34		Passed
4244.00	V	-48.89		Passed
5092.80	V	---		Passed
5941.60	V	---		Passed
1697.60	Horizontal	-49.73	-13.00	Passed
2546.40	H	-45.69		Passed
3395.20	H	-41.10		Passed
4244.00	H	-44.18		Passed
5092.80	H	---		Passed
5941.60	H	---		Passed

Remark :

1. The emission behavior belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 54 of 67

Test mode	PCS1900		Test channel	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3700.40	Vertical	-21.95	-13.00	Passed
5550.60	V	-41.73		Passed
7400.80	V	-37.04		Passed
9251.00	V	-33.26		Passed
11101.20	V	---		Passed
12951.40	V	---		Passed
3700.40	Horizontal	-23.10	-13.00	Passed
5550.60	H	-42.89		Passed
7400.80	H	-38.66		Passed
9251.00	H	-34.52		Passed
11101.20	H	---		Passed
12951.40	H	---		Passed

Test mode	PCS1900		Test channel	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-18.42	-13.00	Passed
5640.00	V	-39.75		Passed
7520.00	V	-38.96		Passed
9400.00	V	-31.89		Passed
11280.00	V	---		Passed
13160.00	V	---		Passed
3760.00	Horizontal	-16.61	-13.00	Passed
5640.00	H	-39.59		Passed
7520.00	H	-37.24		Passed
9400.00	H	-35.39		Passed
11280.00	H	---		Passed
13160.00	H	---		Passed



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 55 of 67

Test mode	PCS1900		Test channel	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3819.60	Vertical	-16.82	-13.00	Passed
5729.40	V	-34.49		Passed
7639.20	V	-38.13		Passed
9549.00	V	-33.59		Passed
11458.80	V	---		Passed
13368.60	V	---		Passed
3819.60	Horizontal	-19.55	-13.00	Passed
5729.40	H	-41.75		Passed
7639.20	H	-35.64		Passed
9549.00	H	-34.58		Passed
11458.80	H	---		Passed
13368.60	H	---		Passed

Remark :

1. The emission behavior belongs to narrowband spurious emission.
2. Remark "---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 56 of 67

Test mode	UMTS850 12.2k RMC		Test channel	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1652.80	Vertical	-36.82	-13.00	Passed
2479.20	V	-42.78		Passed
3305.60	V	-48.17		Passed
4132.00	V	-42.18		Passed
4958.40	V	---		Passed
5784.80	V	---		Passed
1652.80	Horizontal	-52.37	-13.00	Passed
2479.20	H	-48.72		Passed
3305.60	H	-48.97		Passed
4132.00	H	-46.38		Passed
4958.40	H	---		Passed
5784.80	H	---		Passed

Test mode	UMTS850 12.2k RMC		Test channel	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1672.00	Vertical	-37.14	-13.00	Passed
2508.00	V	-49.42		Passed
3344.00	V	-49.66		Passed
4180.00	V	-44.50		Passed
5016.00	V	---		Passed
5852.00	V	---		Passed
1672.00	Horizontal	-49.98	-13.00	Passed
2508.00	H	-48.03		Passed
3344.00	H	-48.83		Passed
4180.00	H	-47.04		Passed
5016.00	H	---		Passed
5852.00	H	---		Passed



Test mode	UMTS850 12.2k RMC		Test channel	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1693.20	Vertical	-39.22	-13.00	Passed
2539.80	V	-46.79		Passed
3386.40	V	-49.12		Passed
4233.00	V	-43.52		Passed
5079.60	V	---		Passed
5926.20	V	---		Passed
1693.20	Horizontal	-45.37	-13.00	Passed
2539.80	H	-47.14		Passed
3386.40	H	-48.69		Passed
4233.00	H	-44.65		Passed
5079.60	H	---		Passed
5926.20	H	---		Passed

Remark :

1. The emission behavior belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 58 of 67

Test mode	UMTS1900 12.2k RMC		Test channel	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3704.80	Vertical	-28.93	-13.00	Passed
5557.20	V	-43.90		Passed
7409.60	V	-42.78		Passed
9262.00	V	-32.58		Passed
11114.40	V	---		Passed
12966.80	V	---		Passed
3704.80	Horizontal	-34.25	-13.00	Passed
5557.20	H	-42.44		Passed
7409.60	H	-39.39		Passed
9262.00	H	-35.74		Passed
11114.40	H	---		Passed
12966.80	H	---		Passed

Test mode	UMTS1900 12.2k RMC		Test channel	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-27.80	-13.00	Passed
5640.00	V	-42.97		Passed
7520.00	V	-40.10		Passed
9400.00	V	-34.23		Passed
11280.00	V	---		Passed
13160.00	V	---		Passed
3760.00	Horizontal	-31.17	-13.00	Passed
5640.00	H	-42.97		Passed
7520.00	H	-34.72		Passed
9400.00	H	-33.26		Passed
11280.00	H	---		Passed
13160.00	H	---		Passed



Test mode	UMTS1900 12.2k RMC		Test channel	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3815.20	Vertical	-28.55	-13.00	Passed
5722.80	V	-42.26		Passed
7630.40	V	-38.74		Passed
9538.00	V	-33.57		Passed
11445.60	V	---		Passed
13353.20	V	---		Passed
3815.20	Horizontal	-28.65	-13.00	Passed
5722.80	H	-42.47		Passed
7630.40	H	-39.86		Passed
9538.00	H	-34.23		Passed
11445.60	H	---		Passed
13353.20	H	---		Passed

Remark :

1. The emission behavior belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.



9. Frequency stability V.S. Temperature Measurement

9.1. Test Standard and Limit

9.1.1. Test Standard

FCC part 2.1055(a)(1)(b)

9.1.2. Test Method

FCC part 2.1055(a)(1)(b)

9.1.3. Test Limit


According to FCC section 22.355 the carrier frequency of each transmitter in the Public Mobile Services must be maintained within tolerances given in the table below:

Frequency Range (MHz)	Base, fixed (ppm)	Mobile≤3 watts (ppm)	Mobile≤3 watts (ppm)
25 ~ 50	20.0	20.0	50.0
50 ~ 450	5.0	5.0	50.0
450~ 512	2.5	5.0	5.0
812 ~896	1.5	2.5	2.5
928 ~929	5.0	N/A	N/A
929~ 960	1.5	N/A	N/A
2110 ~ 2220	10.0	N/A	N/A

According to FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

9.2. Test Setup

For Temperature Test:

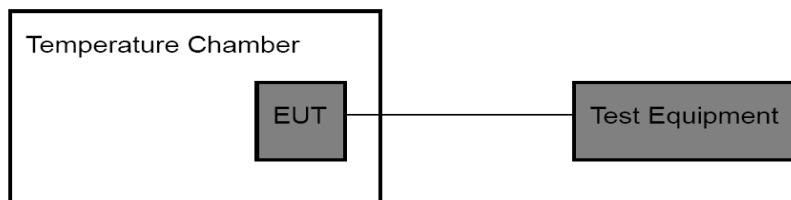

9.3. Test Procedure

- (1) The equipment under test was connected to an external DC power supply and input rated voltage.
- (2) RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
- (3) The EUT was placed inside the temperature chamber.
- (4) Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
- (5) Turn EUT off and set the chamber temperature to - 30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- (6) Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached

9.4. Test Data



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 61 of 67

Measurement Data:

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	42	0.050203	2.5	Passed
	-20	55	0.065742		
	-10	45	0.053789		
	0	32	0.038250		
	10	38	0.045422		
	20	36	0.043031		
	30	32	0.038250		
	40	44	0.052594		
	50	43	0.051399		

Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	45	0.023936	2.5	Passed
	-20	52	0.027660		
	-10	40	0.021277		
	0	40	0.021277		
	10	33	0.017553		
	20	38	0.020213		
	30	32	0.017021		
	40	38	0.020213		
	50	39	0.020745		



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 62 of 67

Reference Frequency: EGPRS 850 Middle channel=190 channel=836.6MHz

Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	67	0.080086	2.5	Passed
	-20	62	0.074109		
	-10	54	0.064547		
	0	51	0.060961		
	10	46	0.054984		
	20	44	0.052594		
	30	48	0.057375		
	40	51	0.060961		
	50	56	0.066938		

Reference Frequency: EGPRS 1900 Middle channel=661 channel=1880MHz

Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	55	0.029255	2.5	Passed
	-20	51	0.027128		
	-10	48	0.025532		
	0	43	0.022872		
	10	45	0.023936		
	20	47	0.025000		
	30	44	0.023404		
	40	50	0.026596		
	50	52	0.027660		



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 63 of 67

Reference Frequency: UMTS850 12.2k RMC Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	48	0.057375	2.5	Passed
	-20	46	0.054984		
	-10	32	0.038250		
	0	35	0.041836		
	10	43	0.051399		
	20	44	0.052594		
	30	38	0.045422		
	40	43	0.051399		
	50	39	0.046617		

Reference Frequency: UMTS1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	46	0.024468	2.5	Passed
	-20	42	0.022340		
	-10	40	0.021277		
	0	36	0.019149		
	10	33	0.017553		
	20	30	0.015957		
	30	45	0.023936		
	40	47	0.025000		
	50	35	0.018617		



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 64 of 67

Reference Frequency: UMTS850 HSDPA Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	39	0.046617	2.5	Passed
	-20	33	0.039445		
	-10	45	0.053789		
	0	40	0.047813		
	10	32	0.038250		
	20	38	0.045422		
	30	46	0.054984		
	40	30	0.035859		
	50	48	0.057375		

Reference Frequency: UMTS1900 HSDPA Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	46	0.024468	2.5	Passed
	-20	36	0.019149		
	-10	40	0.021277		
	0	35	0.018617		
	10	49	0.026064		
	20	42	0.022340		
	30	35	0.018617		
	40	35	0.018617		
	50	49	0.026064		



10. Frequency stability V.S. Voltage Measurement

10.1. Test Standard and Limit

9.1.4. Test Standard

FCC part 2.1055(d)(1)(2)

9.1.5. Test Method

FCC part 2.1055(d)(1)(2)


9.1.6. Test Limit

According to FCC section 22.355 the carrier frequency of each transmitter in the Public Mobile Services must be maintained within tolerances given in the table below:

Frequency Range (MHz)	Base, fixed (ppm)	Mobile≤3 watts (ppm)	Mobile≤3 watts (ppm)
25 ~ 50	20.0	20.0	50.0
50 ~ 450	5.0	5.0	50.0
450~ 512	2.5	5.0	5.0
812 ~896	1.5	2.5	2.5
928 ~929	5.0	N/A	N/A
929~ 960	1.5	N/A	N/A
2110 ~ 2220	10.0	N/A	N/A

According to FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

10.2. Test Setup



10.3. Test Procedure

- (1) Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage.
- (2) Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.
- (3) Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

10.4. Test Data



Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	36	0.043031	2.5	Passed
	3.70	50	0.059766		
	3.40	45	0.053789		

Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	44	0.023404	2.5	Passed
	3.70	52	0.027660		
	3.40	33	0.017553		

Reference Frequency: EGPRS 850 Middle channel= 190 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	45	0.053789	2.5	Passed
	3.70	60	0.071719		
	3.40	52	0.062156		

Reference Frequency: EGPRS 1900 Middle channel= 661 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	51	0.027128	2.5	Passed
	3.70	66	0.035106		
	3.40	47	0.025000		



ATA Testing Technology Service Co., Ltd.

Report No.: ATA131028008E

Page: 67 of 67

Reference Frequency: UMTS 850 12.2k RMC Middle channel=4183 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	36	0.043031	2.5	Passed
	3.70	40	0.047813		
	3.40	46	0.054984		

Reference Frequency: UMTS 1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	40	0.021277	2.5	Passed
	3.70	36	0.019149		
	3.40	30	0.015957		

Reference Frequency: UMTS 850 HSDPA Middle channel=4183 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	36	0.043031	2.5	Passed
	3.70	48	0.057375		
	3.40	40	0.047813		

Reference Frequency: UMTS 1900 HSDPA Middle channel=9400 channel=1880MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	38	0.020213	2.5	Passed
	3.70	36	0.019149		
	3.40	30	0.015957		