

**FCC PART 15.247  
TEST REPORT**

For

**ITALCOM GROUP**

1728 Coral Way, Coral Gables, Miami, Florida, United States

**FCC ID: YPVITALCOMICONX2**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Mobile Phone
<b>Test Engineer:</b> Gardon Zhang	<i>Gardon Zhang</i>
<b>Report Number:</b> RSZ120709001-00C	
<b>Report Date:</b> 2012-08-06	
<b>Reviewed By:</b> RF Leader	<i>Alvin Huang</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>FCC §15.247 (i) &amp; §2.1093 – RF EXPOSURE .....</b>	<b>8</b>
APPLICABLE STANDARD .....	8
RESULT: .....	9
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
ANTENNA CONNECTOR CONSTRUCTION .....	10
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP .....	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE .....	12
TEST RESULTS SUMMARY .....	12
TEST DATA .....	12
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP .....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	16
TEST PROCEDURE .....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	16
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY .....	17
TEST DATA .....	17
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>20</b>
APPLICABLE STANDARD .....	20
TEST PROCEDURE .....	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA .....	20
<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING .....</b>	<b>27</b>

APPLICABLE STANDARD .....	27
TEST PROCEDURE .....	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA .....	27
<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>33</b>
APPLICABLE STANDARD .....	33
TEST PROCEDURE .....	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA .....	33
<b>FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>36</b>
APPLICABLE STANDARD .....	36
TEST PROCEDURE .....	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA .....	36
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>52</b>
APPLICABLE STANDARD .....	52
TEST PROCEDURE .....	52
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	52
TEST EQUIPMENT LIST AND DETAILS.....	52
TEST DATA .....	53
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>54</b>
APPLICABLE STANDARD .....	54
TEST PROCEDURE .....	54
TEST EQUIPMENT LIST AND DETAILS.....	54
TEST DATA .....	55

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *ITALCOM GROUP*'s product, model number: *iconx2* (FCC ID: *YPVITALCOMICONX2*) or the "EUT" in this report was a *Mobile Phone*, which was measured approximately: 12.0 cm (L) x 6.0 cm (W) x 1.4 cm (H), rated input voltage: DC 3.7 V from battery or DC 5 V charging from adapter.

#### Adapter information

Model: *iconx2*

Input: AC 100-240V 50/60 Hz, 0.15A

Output: DC 5.0 V, 500 mA

*\* All measurement and test data in this report was gathered from production sample serial number: 1207031 (Assigned by Shenzhen BACL). The EUT was received on 2012-07-09.*

### Objective

This test report is prepared on behalf of *ITALCOM GROUP* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 22H/24E PCE, part 15.247 DTS and part 15B JBP submissions with FCC ID: *YPVITALCOMICONX2*

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3<sup>rd</sup> Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a testing mode.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
TESCOM	Bluetooth Tester	TC-3000B	3000B650083

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable DC Power Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

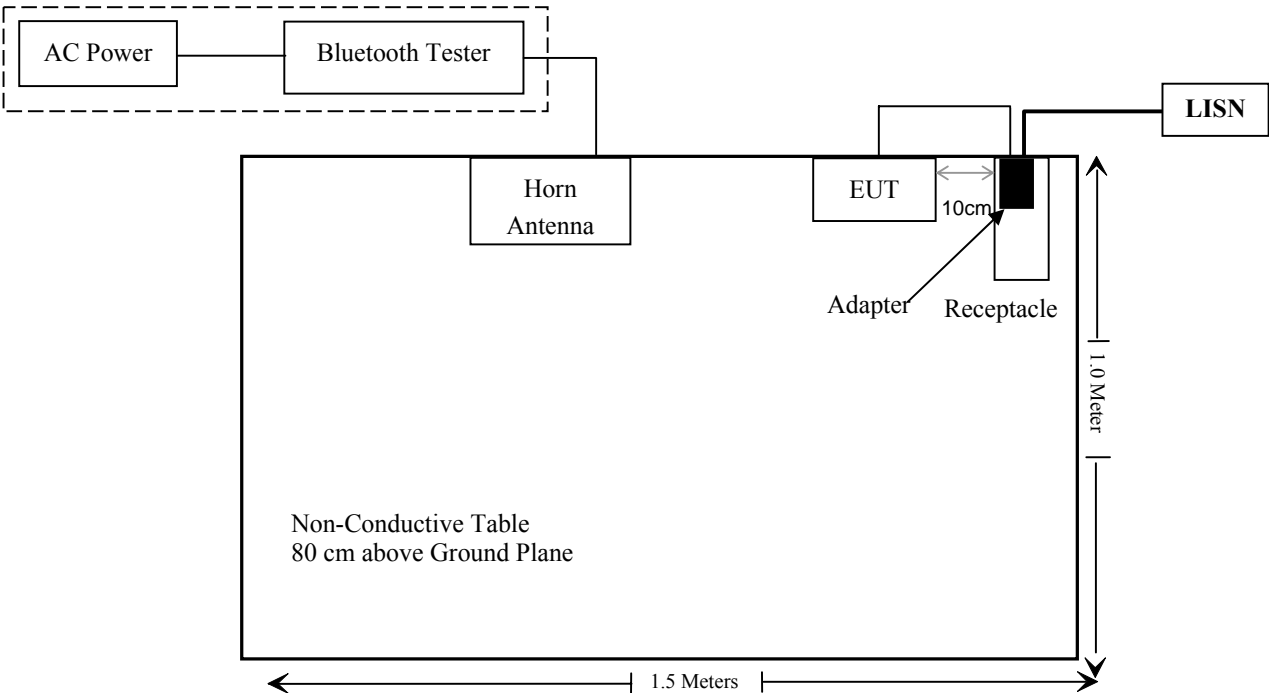

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

## FCC §15.247 (i) & §2.1093 – RF EXPOSURE

### Applicable Standard

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

**Table 2 – Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters**

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	<b>SAR not required:</b> <u>Unlicensed only</u> <ul style="list-style-type: none"> <li>when stand-alone 1-g SAR is not required and antenna is <math>\geq 5</math> cm from other antennas</li> </ul> <b>Licensed &amp; Unlicensed</b> <ul style="list-style-type: none"> <li>when the sum of the 1-g SAR is <math>&lt; 1.6</math> W/kg for all simultaneous transmitting antennas</li> <li>when SAR to peak location separation ratio of simultaneous transmitting antenna pair is <math>&lt; 0.3</math></li> </ul> <b>SAR required:</b> <u>Licensed &amp; Unlicensed</u> antenna pairs with SAR to peak location separation ratio $\geq 0.3$ ; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition <b>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</b>
Unlicensed Transmitters	<p><b>When there is no simultaneous transmission –</b></p> <ul style="list-style-type: none"> <li>output <math>\leq 60</math> f: SAR not required</li> <li>output <math>&gt; 60</math> f: stand-alone SAR required</li> </ul> <p><b>When there is simultaneous transmission –</b> <u>Stand-alone SAR not required when</u></p> <ul style="list-style-type: none"> <li>output <math>\leq 2 \cdot P_{Ref}</math> and antenna is <math>\geq 5.0</math> cm from other antennas</li> <li>output <math>\leq P_{Ref}</math> and antenna is <math>\geq 2.5</math> cm from other antennas</li> <li>output <math>\leq P_{Ref}</math> and antenna is <math>&lt; 2.5</math> cm from other antennas, each with either output power <math>\leq P_{Ref}</math> or 1-g SAR <math>&lt; 1.2</math> W/kg</li> </ul> <p><u>Otherwise stand-alone SAR is required</u></p> <p><b>When stand-alone SAR is required</b></p> <ul style="list-style-type: none"> <li>test SAR on highest output channel for each wireless mode and exposure condition</li> <li>if SAR for highest output channel is <math>&gt; 50\%</math> of SAR limit, evaluate all channels according to normal procedures</li> </ul>	
Jaw, Mouth and Nose	<p><u>Flat phantom SAR required</u></p> <ul style="list-style-type: none"> <li>when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues</li> <li>position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations</li> </ul>	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.



- 1) GSM/WCDMA/Wi-Fi can transmit simultaneously with Bluetooth.
- 2) The distance between BT and GSM/WCDMA antenna is 7.5 cm  $>$  5 cm. The max output power of Bluetooth antenna is (9.5 dBm) 8.91 mW  $<$  2\*P<sub>Ref</sub>(24 mW) . According to KDB648474, stand-alone SAR is not required for BT antenna.
- 3) When the sum of the 1-g SAR is  $<$ 1.6W/kg for GSM and Bluetooth, the simultaneous SAR is not required.
- 4) The max output power of BT antenna is(9.5dBm) 8.91mW  $<$  P<sub>Ref</sub> (12mW), and distance between BT and WiFi antenna is 0.4mm  $<$  25mm, The maximum SAR of WiFi is 0.193W/Kg  $<$  1.2W/Kg. According to KDB648474, stand-alone and simultaneous SAR is not required.
- 5) P<sub>Ref</sub> is defined as the maximum conducted power available at the antenna according to source-based time-averaging requirements of Section 2.1093(d) (5).

**Result:**

The SAR measurement is exempt.

---

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Connector Construction**

The EUT has 3 antennas, one is for WiFi, the gain is -1.0dBi; one is for GSM/WCDMA, the gain is 0dBi, and one is for Bluetooth, the gain is -1.0dBi; All antennas are permanently attached.

**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard


FCC §15.207

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence).

### EUT Setup

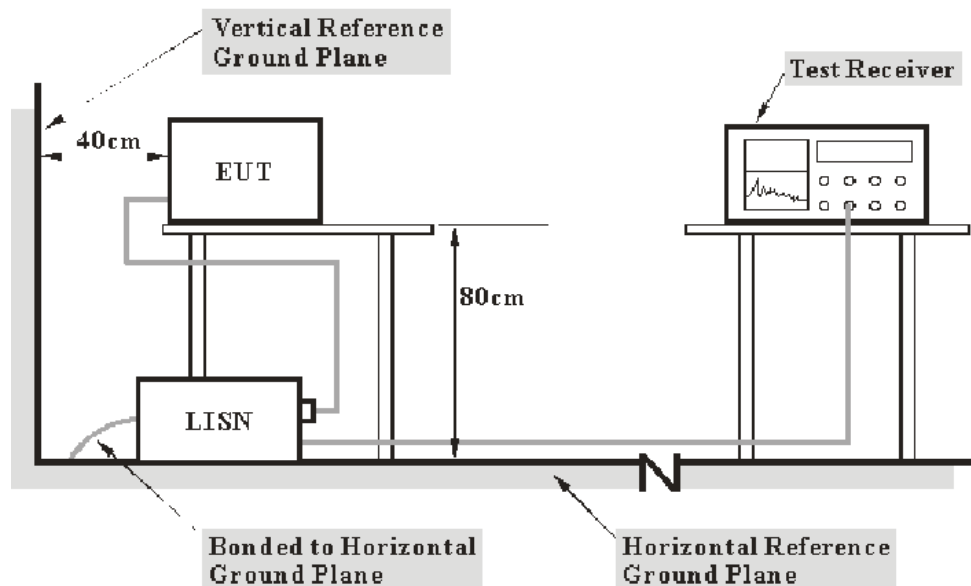

- Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2011-11-24	2012-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-11-17	2012-11-16
Rohde & Schwarz	Pulse limiter	ESH3Z2	DE25985	2012-07-08	2013-07-07
BACL	CE Test software	BACL-CE	V1.0	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

**20.12 dB at 0.905 MHz** in the **Line** conducted mode

## Test Data


### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


*The testing was performed by Gardon Zhang on 2012-08-03*

Test Mode: Charging & Transmitting

AC 120 V, 60 Hz, Line:

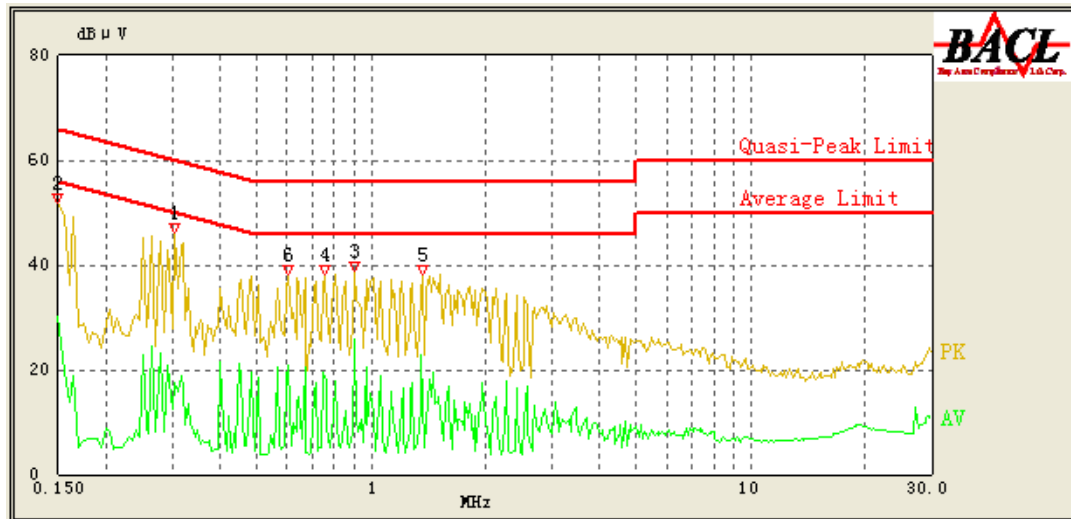

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.905	25.88	10.19	46.00	20.12	Ave.
1.355	22.81	10.18	46.00	23.19	Ave.
0.605	20.91	10.23	46.00	25.09	Ave.
0.150	30.06	10.27	56.00	25.94	Ave.
0.760	18.12	10.21	46.00	27.88	Ave.
0.605	28.00	10.23	56.00	28.00	QP
0.905	27.33	10.19	56.00	28.67	QP
1.360	24.33	10.18	56.00	31.67	QP
0.150	32.05	10.27	66.00	33.95	QP
0.305	17.42	10.26	51.57	34.15	Ave.
0.755	21.22	10.21	56.00	34.78	QP
0.305	20.02	10.26	61.57	41.55	QP

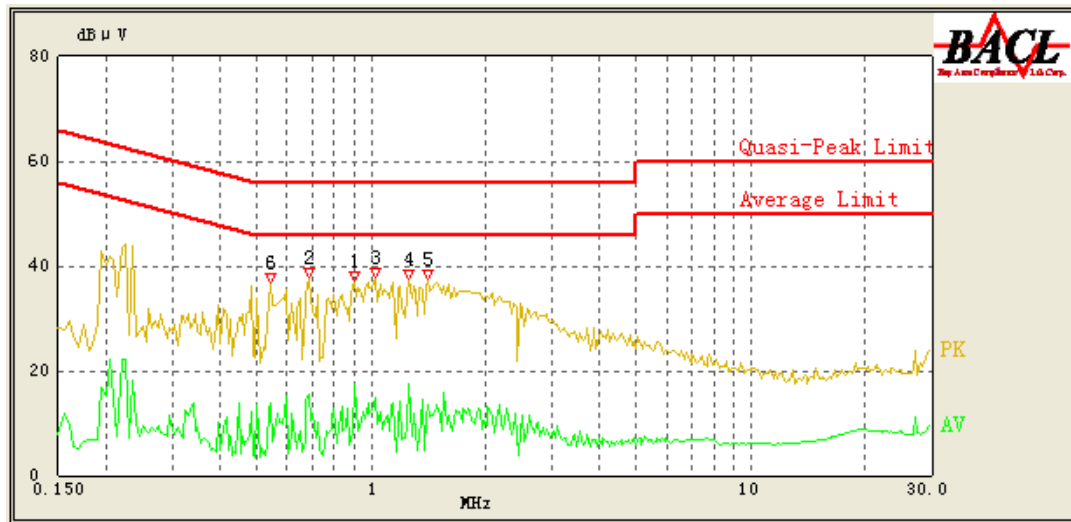**AC 120V, 60 Hz, Neutral:**

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.905	34.19	10.18	56.00	21.81	QP
1.415	29.87	10.18	56.00	26.13	QP
1.260	17.56	10.18	46.00	28.44	Ave.
0.905	17.36	10.18	46.00	28.64	Ave.
0.685	15.49	10.22	46.00	30.51	Ave.
1.025	14.84	10.17	46.00	31.16	Ave.
0.545	13.97	10.24	46.00	32.03	Ave.
1.260	23.92	10.18	56.00	32.08	QP
1.415	13.46	10.18	46.00	32.54	Ave.
0.545	20.01	10.24	56.00	35.99	QP
0.685	15.92	10.22	56.00	40.08	QP
1.025	15.92	10.17	56.00	40.08	QP

## FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

### Applicable Standard

FCC §15.205; §15.209; §15.247(d)


### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB. ( $k=2$ , 95% level of confidence).

### EUT Setup

Below 1 GHz:

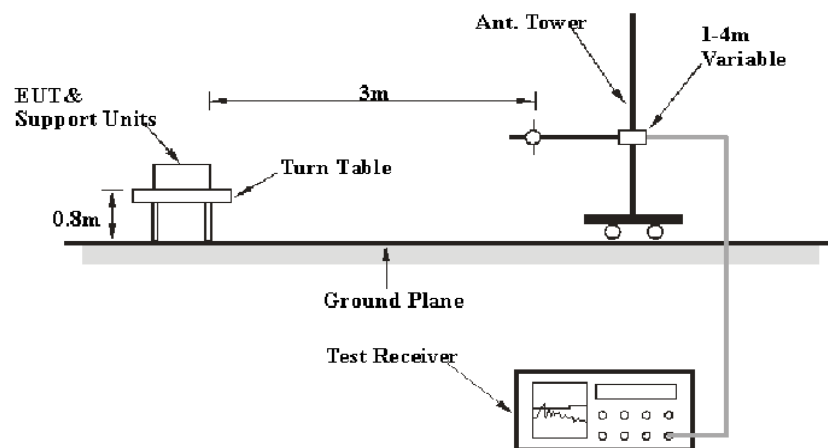

Above 1 GHz:

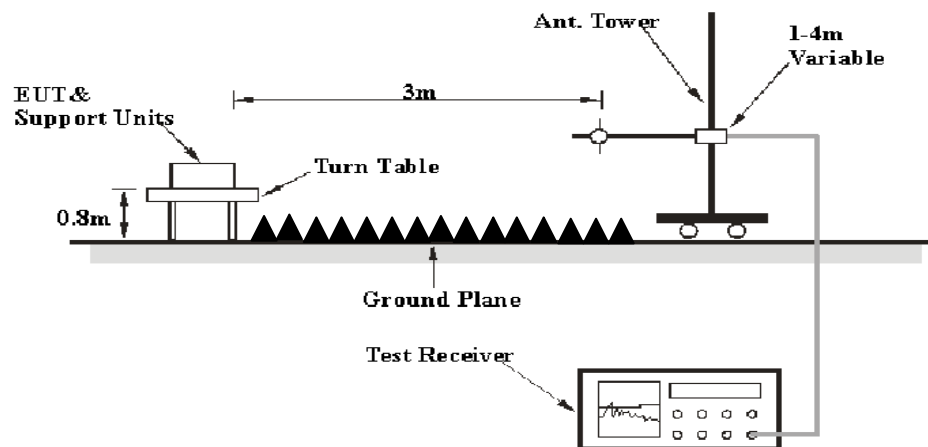

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i><b>Frequency Range</b></i>	<i><b>RBW</b></i>	<i><b>Video B/W</b></i>	<i><b>Detector</b></i>
30 MHz – 1000 MHz	120 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

### Test Procedure

For radiated emissions, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$



**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01057	2011-11-24	2012-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27
Mini-Circuits	Amplifier	ZVA-213+	N/A	2011-11-24	2012-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2012-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
Agilent	Spectrum Analyzer	8564E	3943A01781	2012-05-17	2013-05-16
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2011-10-14	2012-10-13
R&S	Auto test Software	EMC32	V6.30	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

**Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

**13.91 dB at 2483.5 MHz in the Vertical polarization**

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100 kPa

*The testing was performed by Gardon Zhang on 2012-07-30.*

Test mode: Transmitting (Scan with GFSK,  $\pi/4$ -DQPSK, 8-DPSK, the worst case is BDR Mode (GFSK))

**30 MHz ~25 GHz:**

Frequency (MHz)	Receiver		Turn table Degree	Rx Antenna			Cable Loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)	Factor (dB)				Limit (dBuV/m)	Margin (dB)
Low Channel(2402 MHz)											
2402.0	97.53	PK	212	1.3	H	29.60	3.03	26.50	103.66	/	/
2402.0	67.66	Ave.	212	1.3	H	29.60	3.03	26.50	73.79	/	/
2402.0	94.74	PK	63	1.3	V	29.60	3.03	26.50	100.87	/	/
2402.0	64.81	Ave.	63	1.3	V	29.60	3.03	26.50	70.94	/	/
9608.0	17.14	Ave.	113	1.3	V	39.80	5.98	26.50	36.42	54.00	17.58
4804.0	22.06	Ave.	96	1.2	V	34.60	4.30	26.50	34.46	54.00	19.54
7206.0	17.69	Ave.	214	1.2	H	37.90	5.22	26.50	34.31	54.00	19.69
9608.0	33.56	PK	113	1.3	V	39.80	5.98	26.50	52.84	74.00	21.16
2366.7	26.88	Ave.	41	1.2	H	29.00	2.98	26.50	32.36	54.00	21.64
4804.0	39.32	PK	96	1.2	V	34.60	4.30	26.50	51.72	74.00	22.28
7206.0	34.25	PK	214	1.2	H	37.90	5.22	26.50	50.87	74.00	23.13
2366.7	42.36	PK	41	1.2	H	29.00	2.98	26.50	47.84	74.00	26.16
2333.3	20.98	Ave.	5	1.1	V	29.00	2.98	26.50	26.46	54.00	27.54
2485.6	19.69	Ave.	32	1.2	V	29.60	3.03	26.50	25.82	54.00	28.18
2333.3	37.83	PK	5	1.1	V	29.00	2.98	26.50	43.31	74.00	30.69
2485.6	36.87	PK	32	1.2	V	29.60	3.03	26.50	43.00	74.00	31.00
Middle Channel (2441 MHz)											
2441.0	96.83	PK	62	1.1	H	30.60	3.11	26.50	104.04	/	/
2441.0	66.57	Ave.	62	1.1	H	30.60	3.11	26.50	73.78	/	/
2441.0	93.18	PK	34	1.2	V	30.20	3.11	26.50	99.99	/	/
2441.0	63.87	Ave.	34	1.2	V	30.20	3.11	26.50	70.68	/	/
9764.0	17.27	Ave.	164	1.3	V	39.80	6.10	26.50	36.67	54.00	17.33
7323.0	19.02	Ave.	63	1.2	H	37.90	5.09	26.50	35.51	54.00	18.49
9764.0	33.22	PK	164	1.3	V	39.80	6.10	26.50	52.62	74.00	21.38
4882.0	19.82	Ave.	82	1.1	V	34.60	4.36	26.50	32.28	54.00	21.72
7323.0	33.68	PK	63	1.2	H	37.90	5.09	26.50	50.17	74.00	23.83
4882.0	36.68	PK	82	1.1	V	34.60	4.36	26.50	49.14	74.00	24.86
2365.2	20.55	Ave.	61	1.1	H	29.00	2.98	26.50	26.03	54.00	27.97
2486.3	19.67	Ave.	44	1.2	V	29.60	3.03	26.50	25.80	54.00	28.20
2337.1	19.62	Ave.	85	1.2	V	29.00	2.98	26.50	25.10	54.00	28.90
2365.2	37.95	PK	61	1.1	H	29.00	2.98	26.50	43.43	74.00	30.57
2486.3	36.97	PK	44	1.2	V	29.60	3.03	26.50	43.10	74.00	30.90
2337.1	36.67	PK	85	1.2	V	29.00	2.98	26.50	42.15	74.00	31.85

Frequency (MHz)	Receiver		Turn table Degree	Rx Antenna			Cable Loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)	Factor (dB)				Limit (dBuV/m)	Margin (dB)
High Channel (2480 MHz)											
2480.0	97.55	PK	64	1.3	H	30.60	3.11	26.50	104.76	/	/
2480.0	67.83	Ave.	64	1.3	H	30.60	3.11	26.50	75.04	/	/
2480.0	93.62	PK	97	1.2	V	30.20	3.11	26.50	100.43	/	/
2480.0	63.27	AV	97	1.2	V	30.20	3.11	26.50	70.08	/	/
2483.5	33.96	Ave.	63	1.2	V	29.60	3.03	26.50	40.09	54.00	13.91
2483.5	51.62	PK	63	1.2	V	29.60	3.03	26.50	57.75	74.00	16.25
9920.0	17.34	Ave.	63	1.1	V	39.80	6.08	26.50	36.72	54.00	17.28
7440.0	18.57	Ave.	6	1.2	H	37.20	5.20	26.50	34.47	54.00	19.53
9920.0	33.29	PK	63	1.1	V	39.80	6.08	26.50	52.67	74.00	21.33
4960.0	19.67	Ave.	5	1.1	V	34.60	4.40	26.50	32.17	54.00	21.83
7440.0	33.96	PK	6	1.2	H	37.20	5.20	26.50	49.86	74.00	24.14
4960.0	36.19	PK	5	1.1	V	34.60	4.40	26.50	48.69	74.00	25.31
2331.4	20.69	Ave.	77	1.3	V	29.00	2.98	26.50	26.17	54.00	27.83
2362.5	19.76	Ave.	95	1.2	H	29.00	2.98	26.50	25.24	54.00	28.76
2331.4	37.81	PK	77	1.3	V	29.00	2.98	26.50	43.29	74.00	30.71
2362.5	36.68	PK	95	1.2	H	29.00	2.98	26.50	42.16	74.00	31.84

**FCC §15.247(a) (1)-CHANNEL SEPARATION TEST****Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

**Test Procedure**

1. Set the EUT in transmitting mode, RBW of spectrum was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100 kPa

\* The testing was performed by Gardon Zhang on 2012-07-30.


Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	$\geq$ Limit (MHz)	Result
<b>BDR (GFSK)</b>	Low	2402	1.002	0.631	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.631	Pass
	Adjacent	2440			
	High	2480	1.002	0.631	Pass
	Adjacent	2479			
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Low	2402	1.004	0.855	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.855	Pass
	Adjacent	2440			
	High	2480	1.004	0.855	Pass
	Adjacent	2479			
<b>EDR (8DPSK)</b>	Low	2402	1.004	0.85	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.85	Pass
	Adjacent	2440			
	High	2480	1.004	0.85	Pass
	Adjacent	2479			



Note: Limit = 20 dB bandwidth \*2/3

### BDR (GFSK): Low Channel

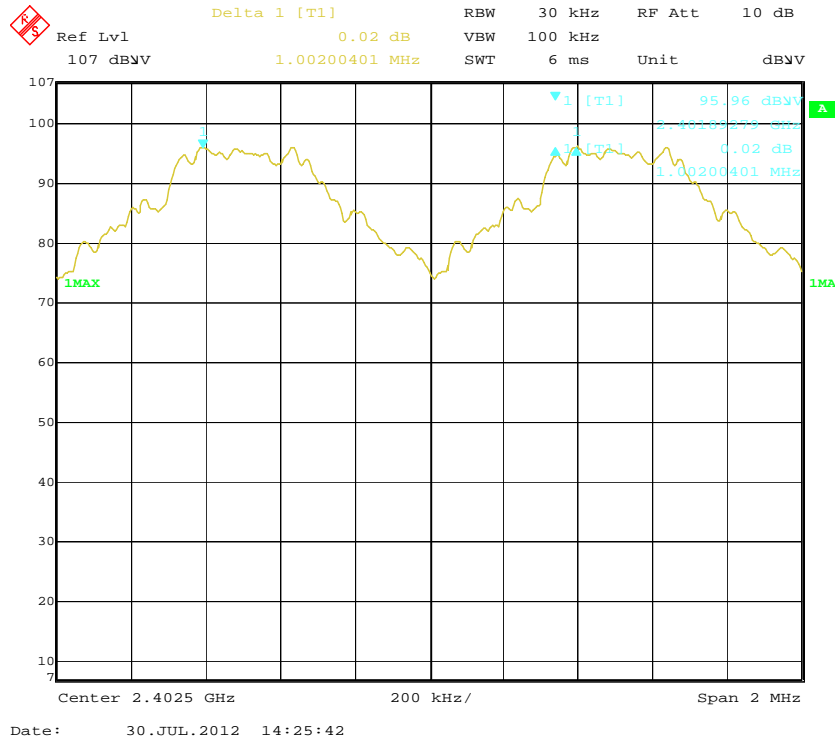


### BDR (GFSK): Middle Channel

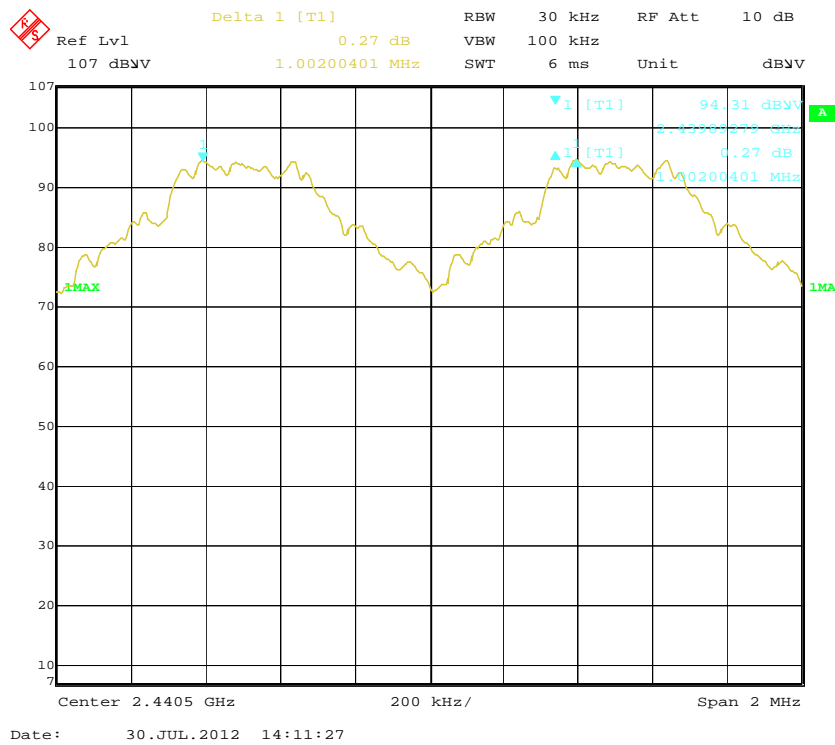


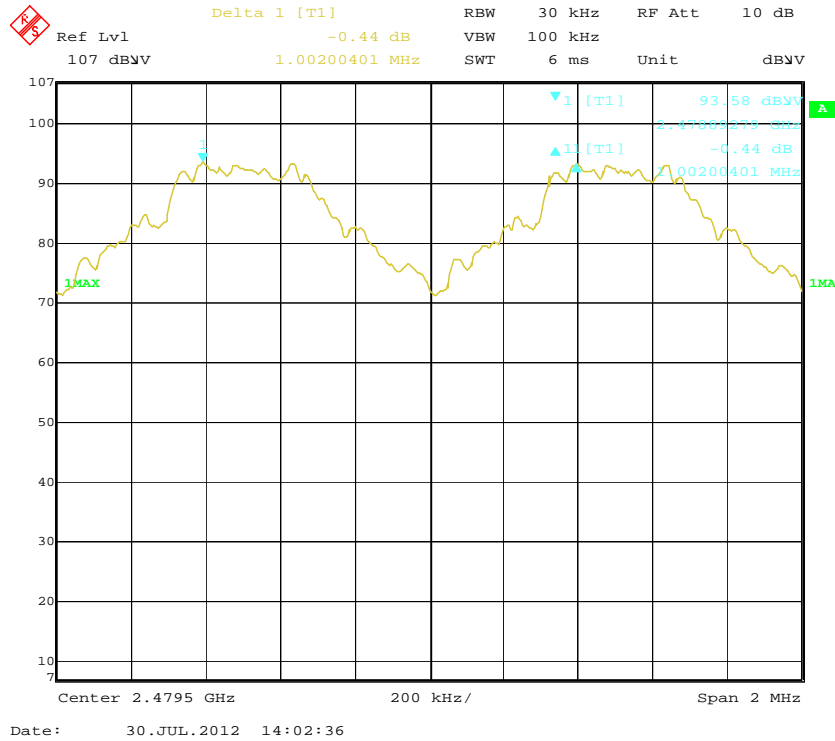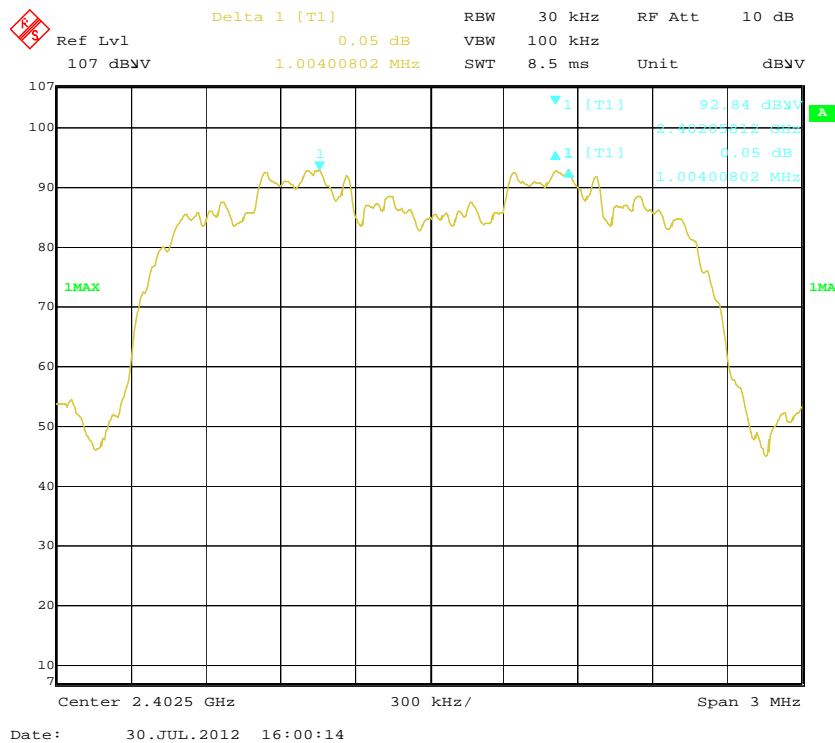**BDR (GFSK): High Channel****EDR ( $\pi/4$ -DQPSK): Low Channel**

### EDR ( $\pi/4$ -DQPSK): Middle Channel

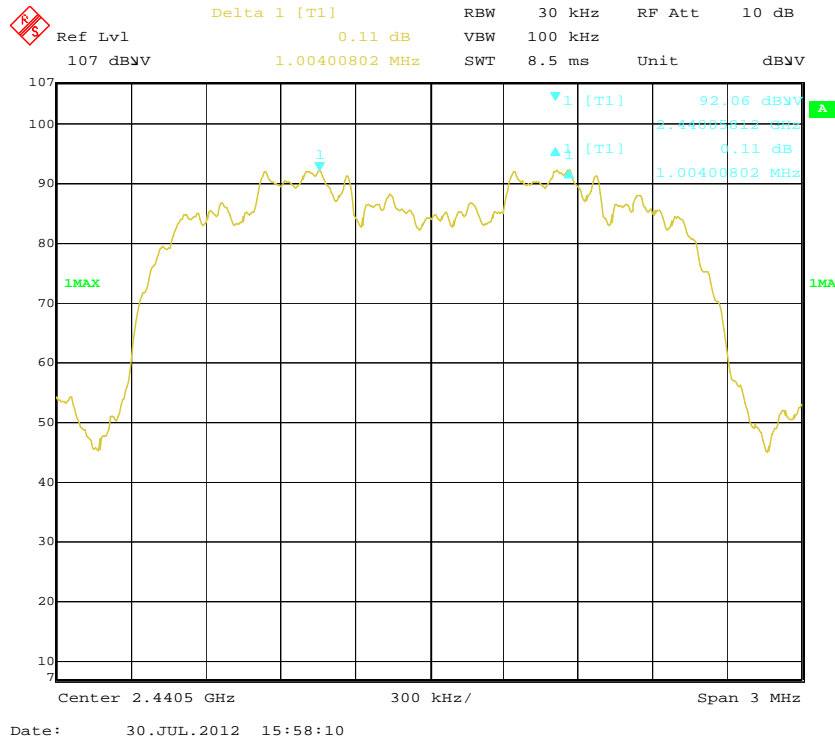


### EDR ( $\pi/4$ -DQPSK): High Channel

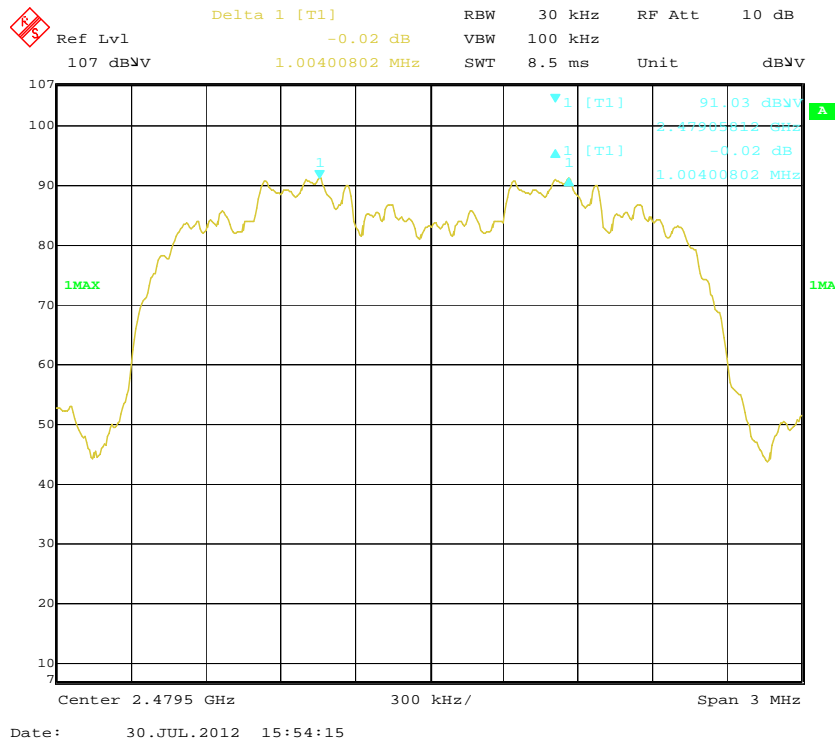





### EDR (8DPSK): Low Channel

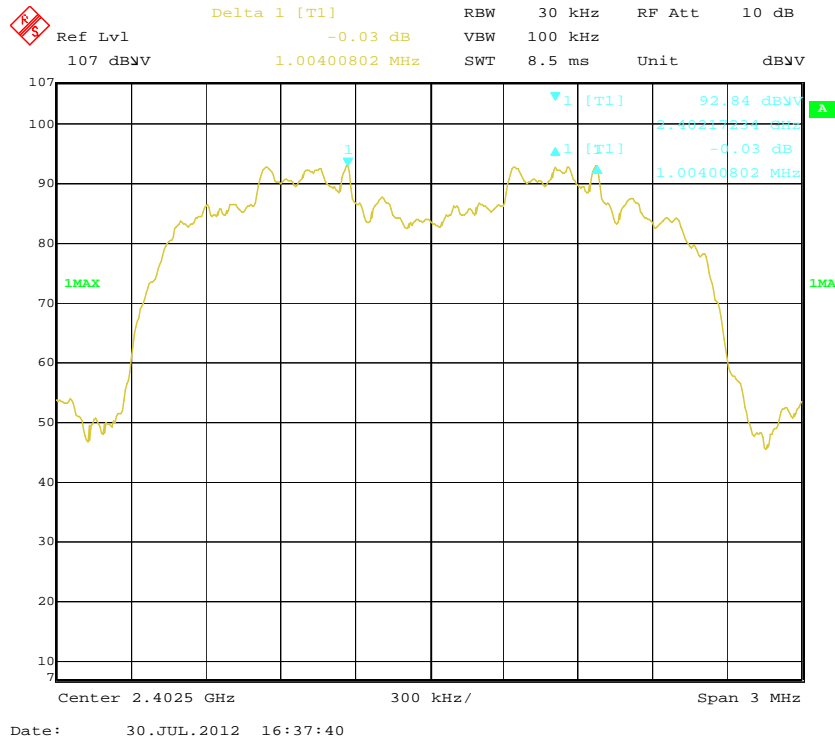

### EDR (8DPSK): Middle Channel

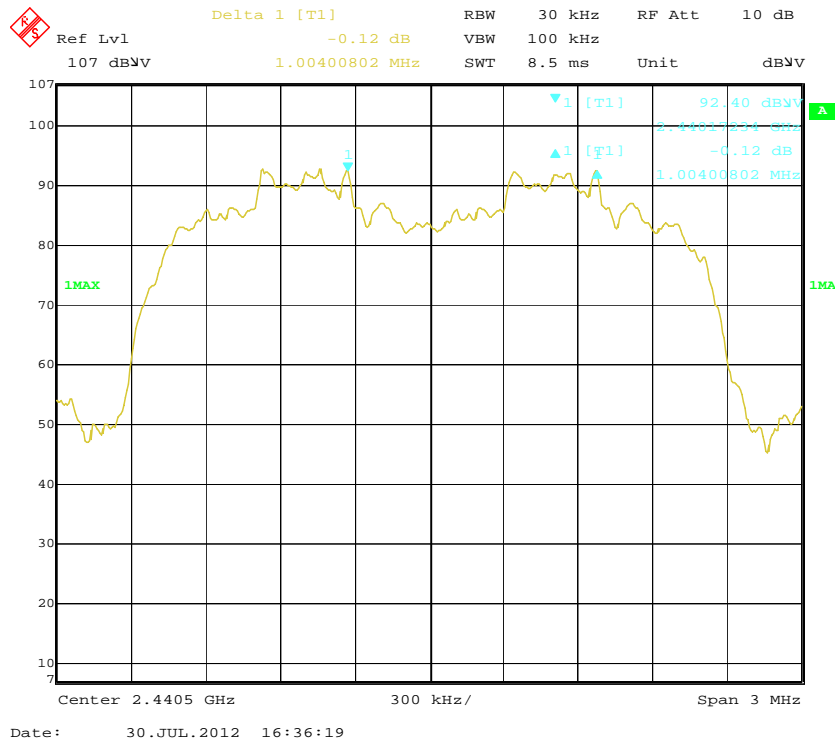

### EDR (8DPSK): High Channel

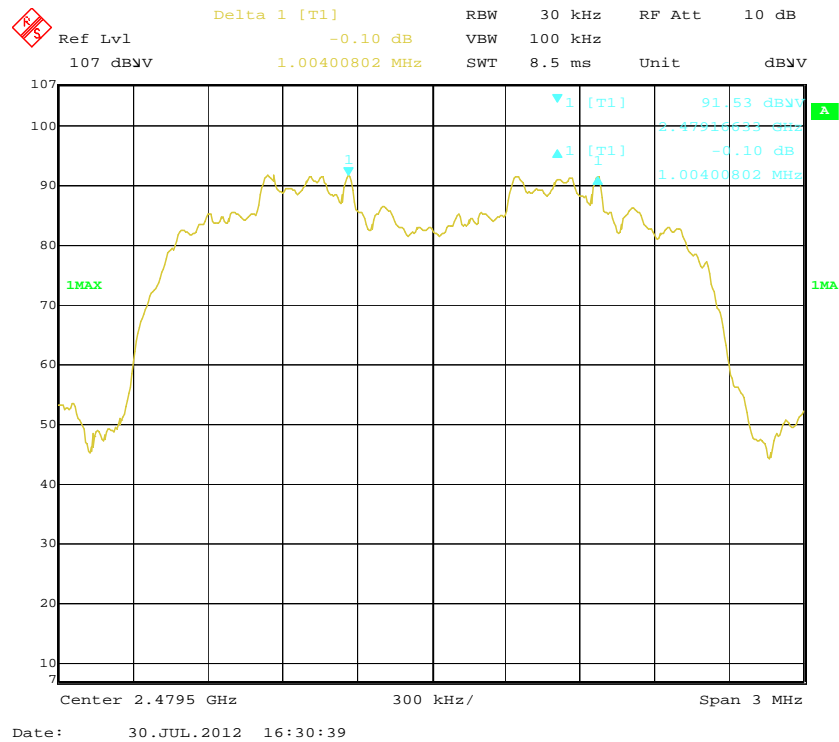

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Data

#### Environmental Conditions

Temperature:	25°C
Relative Humidity:	56 %
ATM Pressure:	100 kPa

\* The testing was performed by Gardon Zhang on 2012-07-30.

Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.946
	Middle	2441	0.946
	High	2480	0.946
EDR ( $\pi/4$ -DQPSK)	Low	2402	1.283
	Middle	2441	1.283
	High	2480	1.283
EDR (8DPSK)	Low	2402	1.275
	Middle	2441	1.275
	High	2480	1.275

Ref Lvl 107 dBV Delta 1 [T1] -0.20 dB RBW 30 kHz RF Att 10 dB  
 107 dBV 945.89178357 kHz SWT 6 ms Unit dBV

Center 2.402 GHz 200 kHz/ Span 2 MHz

76.11 dBV  
 2.4025318 GHz  
 4.28 dB  
 945.89178357 kHz

D1 95.96 dBV  
 D2 75.96 dBV  
 1MAX

Ref Lvl 107 dBV  
 Delta 1 [T1] -0.17 dB  
 RBW 30 kHz  
 VBW 100 kHz  
 RF Att 10 dB  
 107 dBV 945.89178357 kHz SWT 6 ms Unit dBV

D1 95.02 dBV  
 D2 75.02 dBV  
 1MAX  
 1 [T1] 75.17 dBV  
 2.44854318 GHz  
 -0.17 dB  
 945.89178357 kHz  
 1 [T1]

Center 2.441 GHz  
 200 kHz/  
 Span 2 MHz

Ref Lvl 0.00 dB VBW 100 kHz RBW 30 kHz RF Att 10 dB  
 107 dBV 945.89178357 kHz SWT 6 ms Unit dBV

Delta 1 [T1]

D1 93.13 dBV

D2 73.13 dBV



Center 2.48 GHz 200 kHz/ Span 2 MHz

7 10 20 30 40 50 60 70 80 90 100 107

1 [T1] 73.21 dBV 2.47954318 GHz  
 1 [T1] 0.00 dB 945.89178357 kHz

IMA

Date: 30.JUL.2012 13:59:03

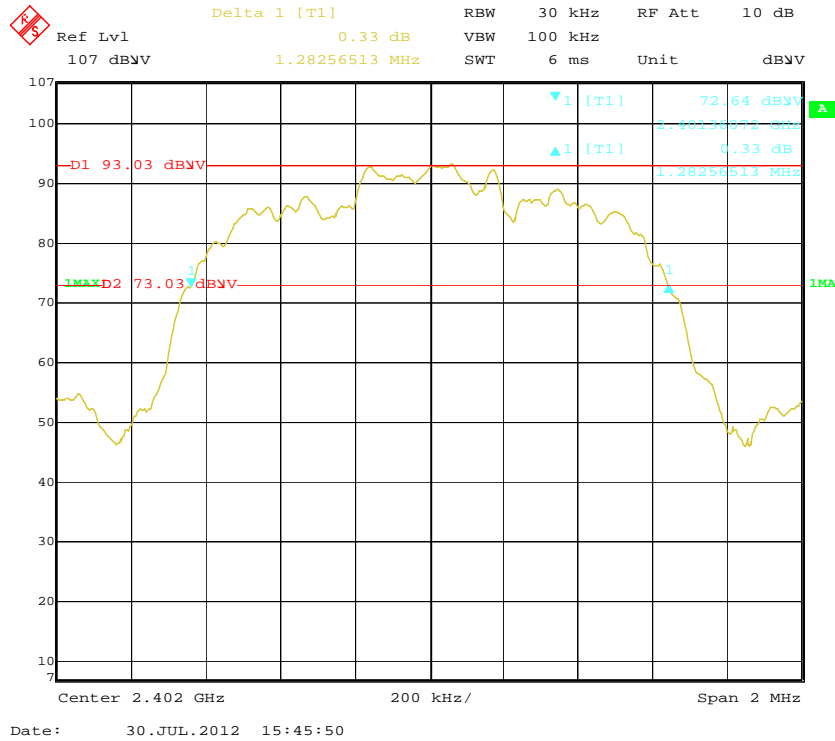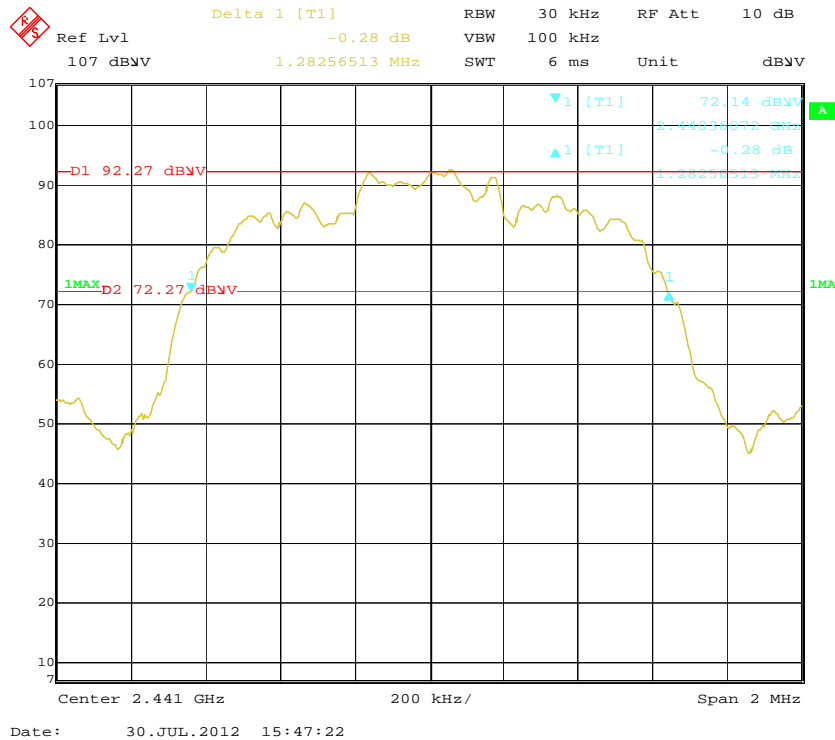EDR ( $\pi/4$ -DQPSK): Low ChannelEDR ( $\pi/4$ -DQPSK): Middle Channel

Ref Lvl 107 dBV Delta 1 [T1] 0.07 dB RBW 30 kHz RF Att 10 dB VBW 100 kHz SWT 6 ms Unit dBV

107 dBV 1.28256513 MHz

Center 2.48 GHz 200 kHz/ Span 2 MHz

Date: 30.JUL.2012 15:48:46

Ref Lvl 107 dBV Delta 1 [T1] -0.74 dB RBW 30 kHz RF Att 10 dB VBW 100 kHz SWT 6 ms Unit dBV

1.27454910 MHz

7 10 20 30 40 50 60 70 80 90 100 107

D1 93.15 dBV

D2 73.15 dBV

1 [T1] 73.07 dBV

2.4023275 GHz

-0.74 dB

1.27454910 MHz

Center 2.402 GHz 200 kHz/ Span 2 MHz

Date: 30.JUL.2012 16:23:58

Ref Lvl 107 dBmV Delta 1 [T1] -0.77 dB RBW 30 kHz RF Att 10 dB  
 107 dBmV 1.27454910 MHz SWT 6 ms Unit dBmV

Center 2.441 GHz 200 kHz/ Span 2 MHz

Date: 30.JUL.2012 16:25:41

[illegible]



**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100 kPa


*The testing was performed by Gardon Zhang on 2012-07-30.*



*Test Mode: Transmitting*

*Test Result: Compliance. Please refer to following tables and plots*

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2402-2480	79	$\geq 15$
EDR ( $\pi/4$ -DQPSK)	2402-2480	79	$\geq 15$
EDR (8DPSK)	2402-2480	79	$\geq 15$

### BDR (GFSK): Number of Hopping Channels

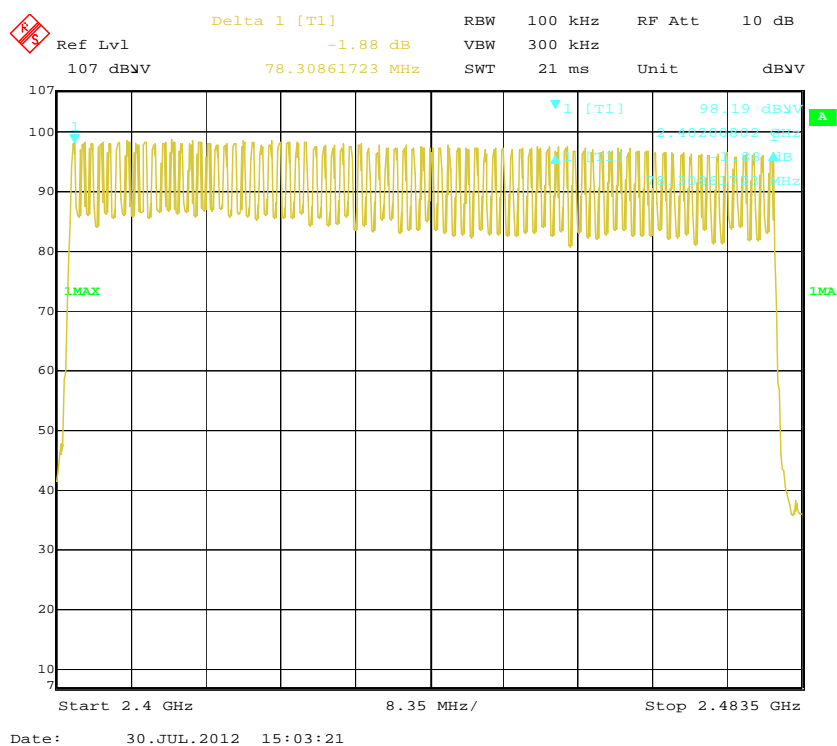

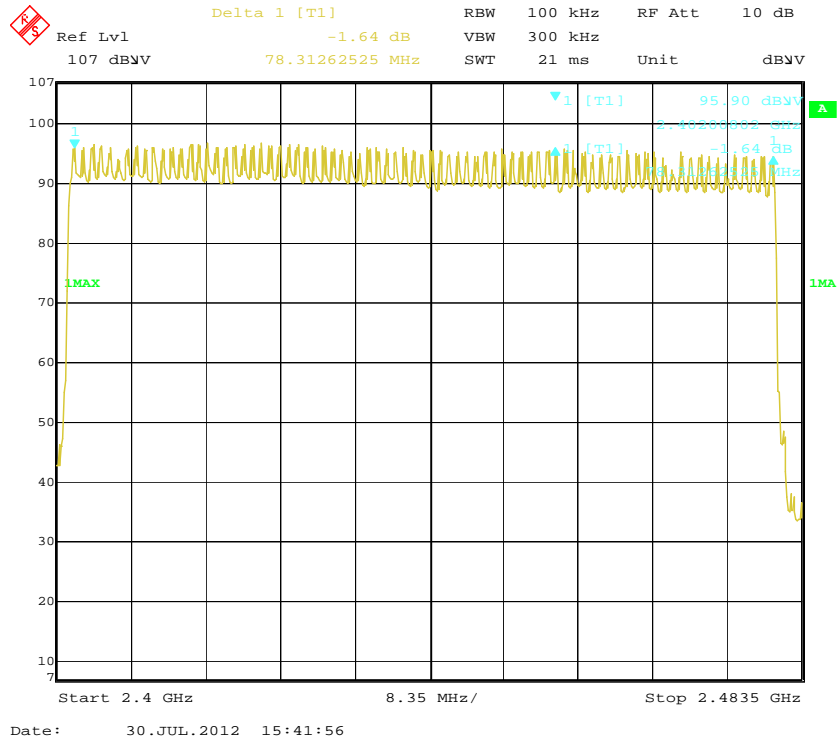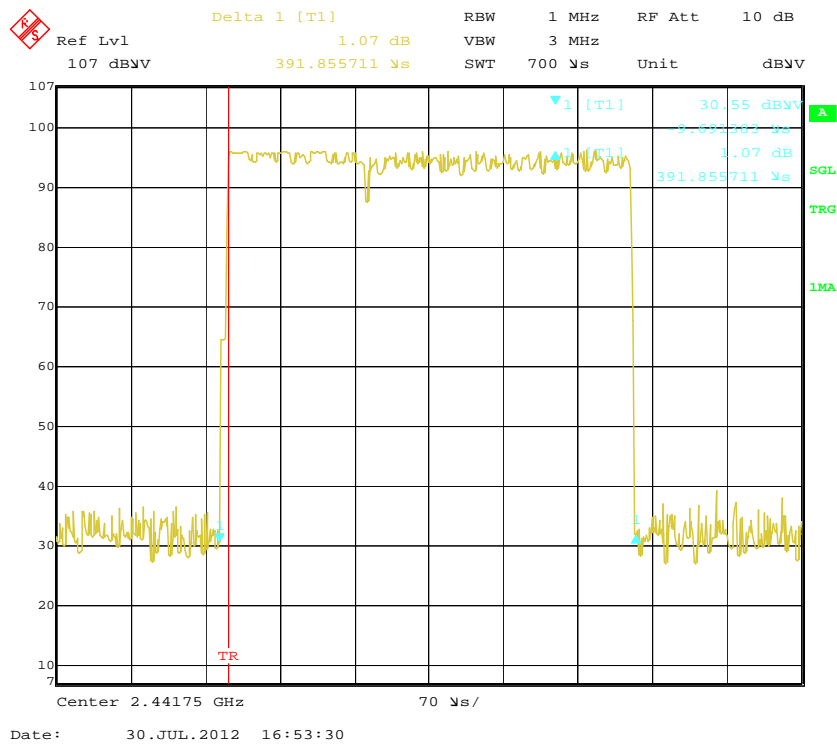**EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels****(8DPSK): Number of Hopping Channels**

**FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time\*hop rate/number of hopping channels\*31.6S

Hop rate=1600/S

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

**Test Data****Environmental Conditions**

Temperature:	25°C
Relative Humidity:	56 %
ATM Pressure:	100 kPa

*The testing was performed by Gardon Zhang on 2012-07-30*


*Test Mode: Transmitting*

*Test Result: Compliance. Please refer to following tables and plots*


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.386	0.124	0.4	Pass
		Middle	0.386	0.124	0.4	Pass
		High	0.386	0.124	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.652	0.264	0.4	Pass
		Middle	1.652	0.264	0.4	Pass
		High	1.652	0.264	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.904	0.310	0.4	Pass
		Middle	2.904	0.310	0.4	Pass
		High	2.904	0.310	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ( $\pi/4$ -DQPSK)	DH 1	Low	0.391	0.125	0.4	Pass
		Middle	0.391	0.125	0.4	Pass
		High	0.391	0.125	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.654	0.265	0.4	Pass
		Middle	1.654	0.265	0.4	Pass
		High	1.654	0.265	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.917	0.311	0.4	Pass
		Middle	2.917	0.311	0.4	Pass
		High	2.917	0.311	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	DH 1	Low	0.393	0.126	0.4	Pass
		Middle	0.393	0.126	0.4	Pass
		High	0.393	0.126	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.656	0.265	0.4	Pass
		Middle	1.656	0.265	0.4	Pass
		High	1.656	0.265	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.909	0.310	0.4	Pass
		Middle	2.909	0.310	0.4	Pass
		High	2.909	0.310	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

**BDR (GFSK):**


**Pulse time, Low Channel, DH1**

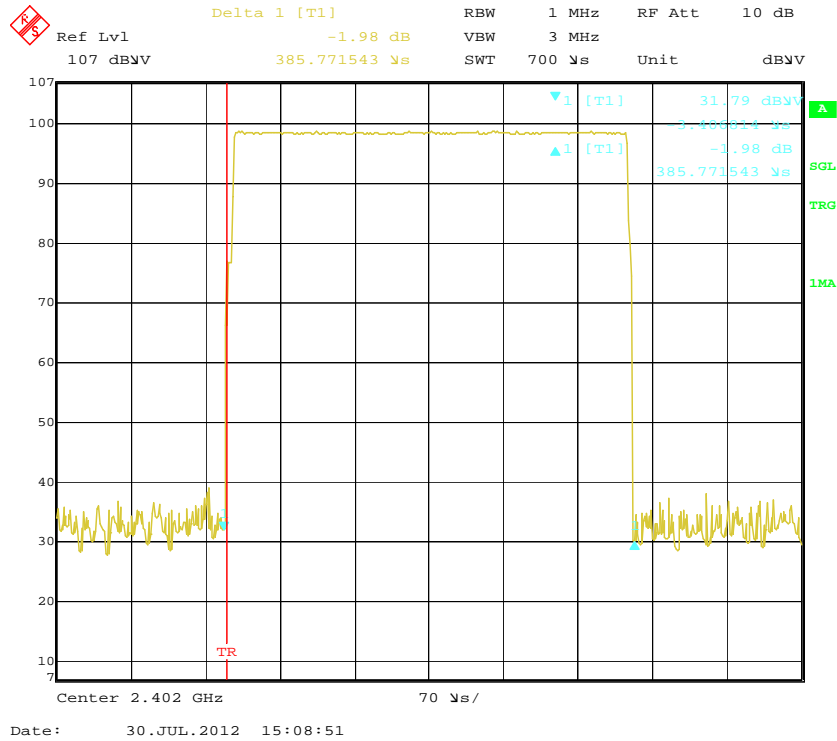


**Pulse time, Middle Channel, DH1**

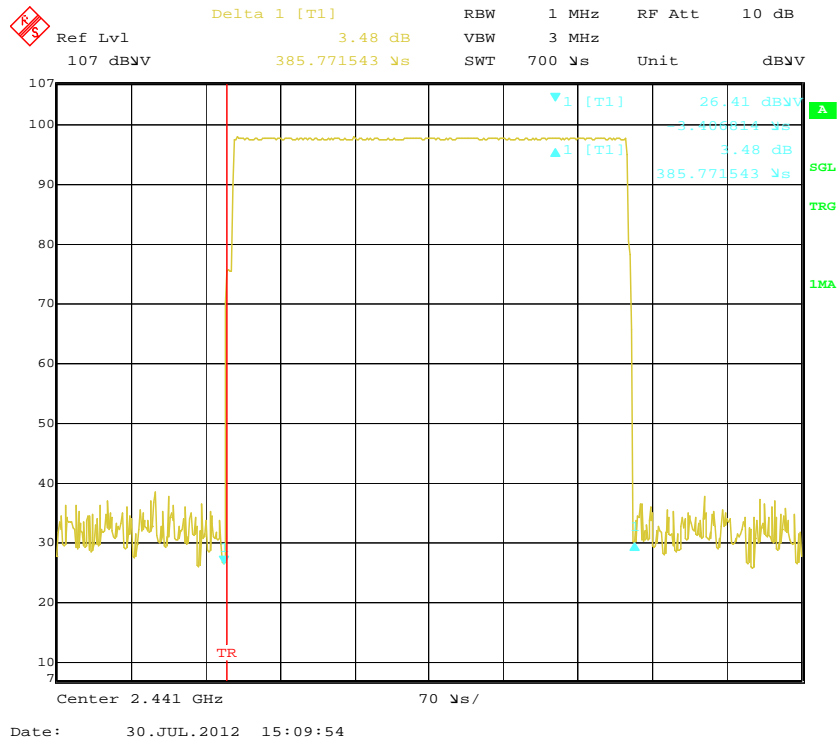


### Pulse time, High Channel, DH1

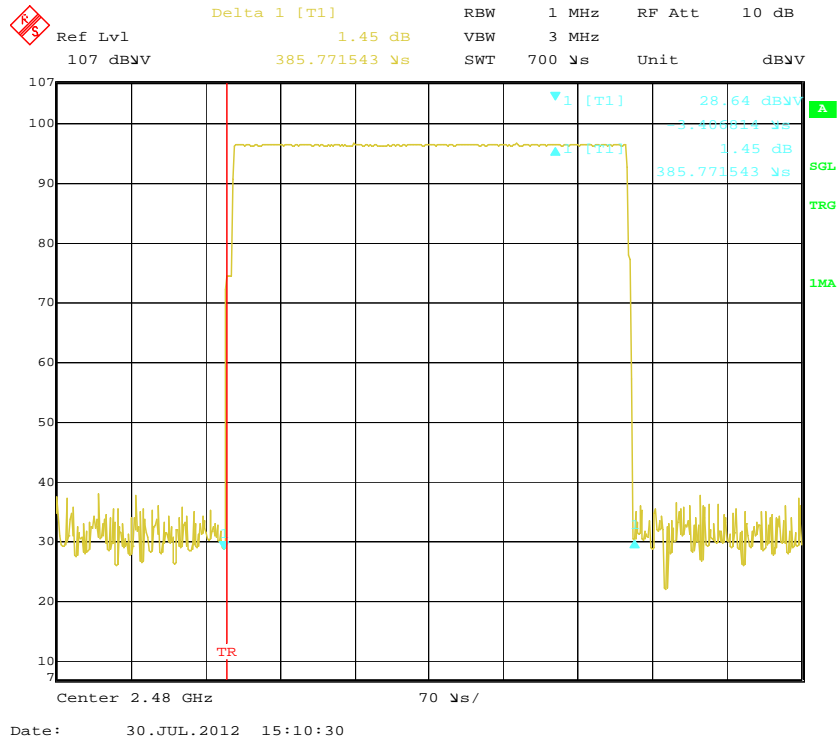


### Pulse time, Low Channel, DH3

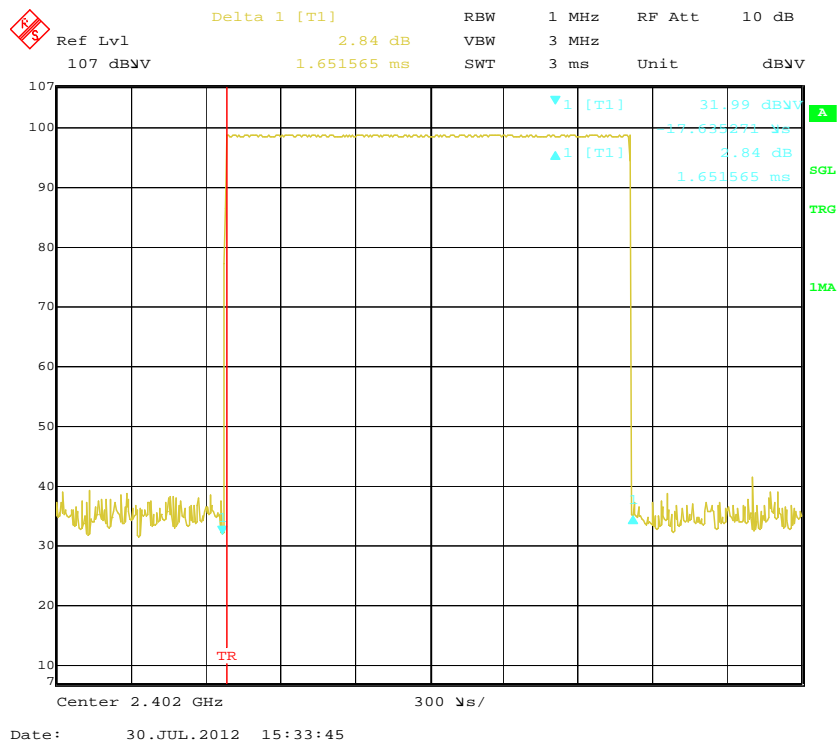

### Pulse time, Middle Channel, DH3

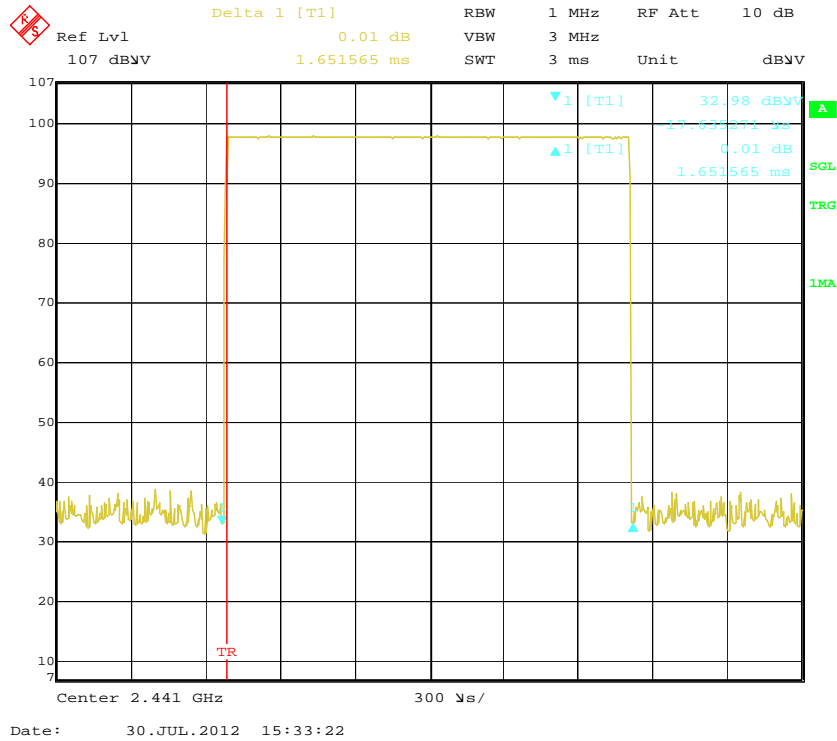


### Pulse time, High Channel, DH3

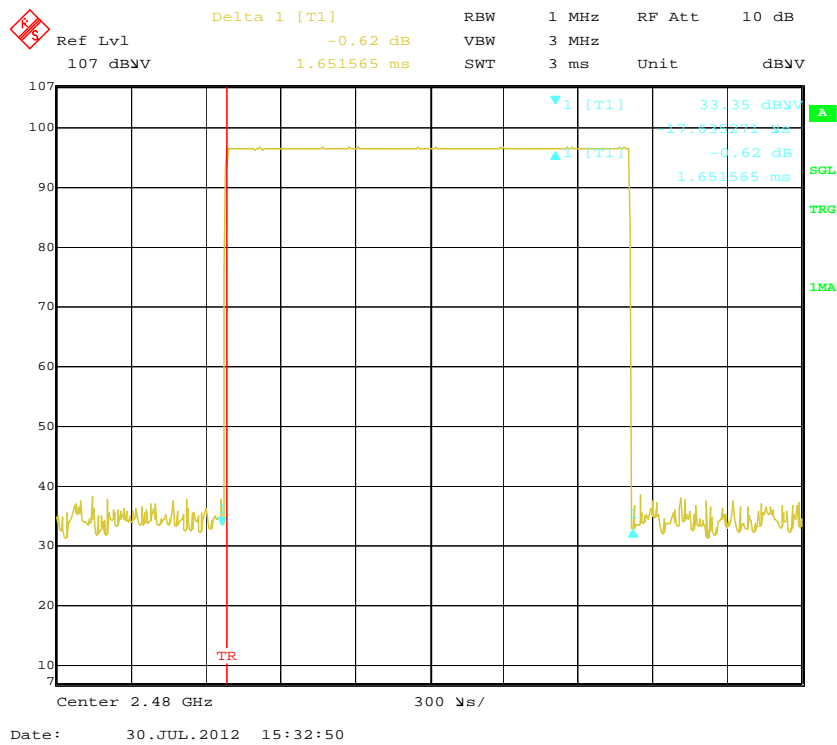





### Pulse time, Low Channel, DH5

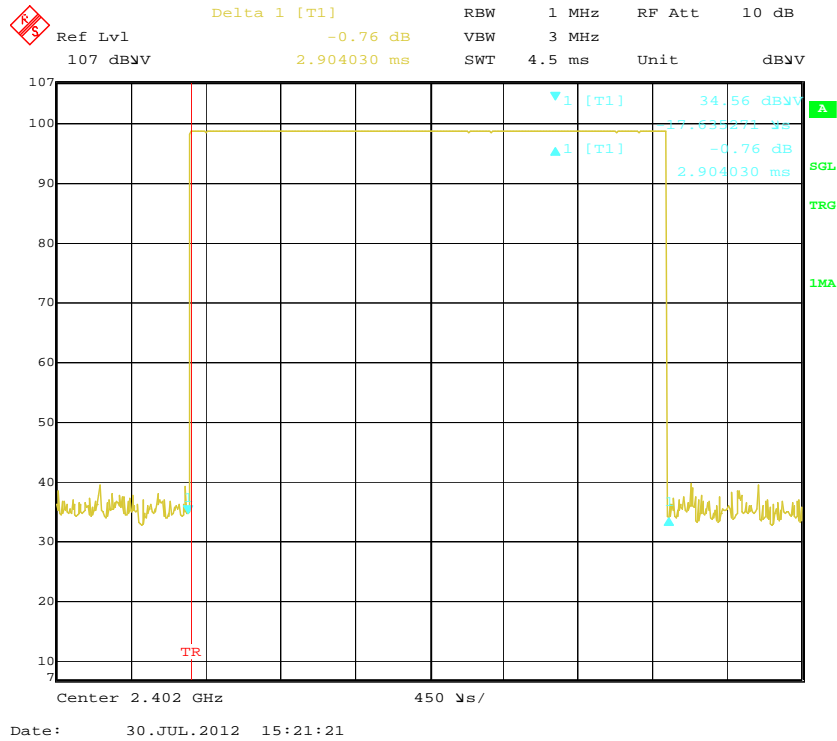

### Pulse time, Middle Channel, DH5

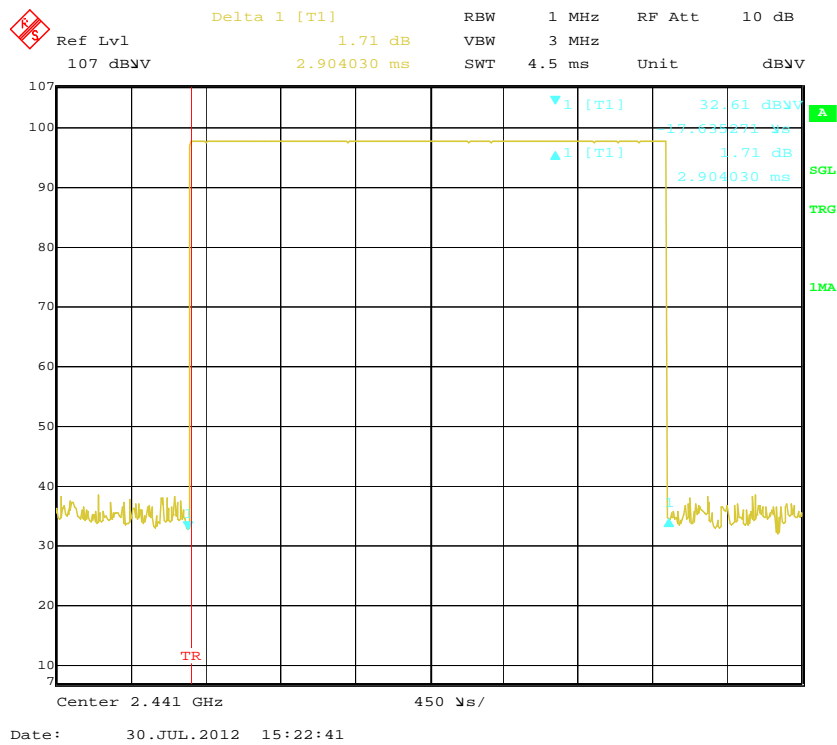


### Pulse time, High Channel, DH5

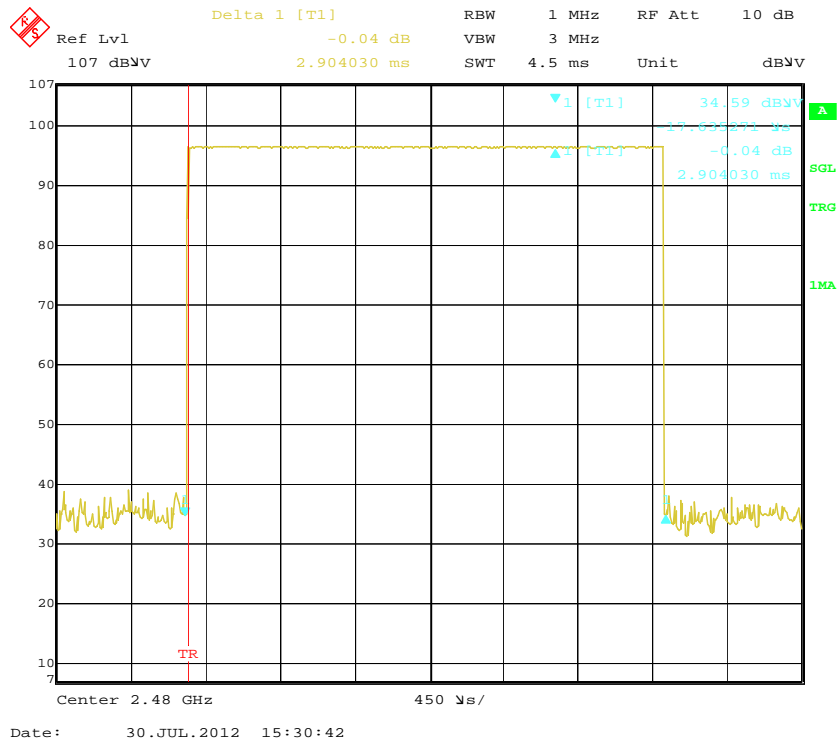


### EDR ( $\pi/4$ -DQPSK):


### Pulse time, Low Channel, DH1

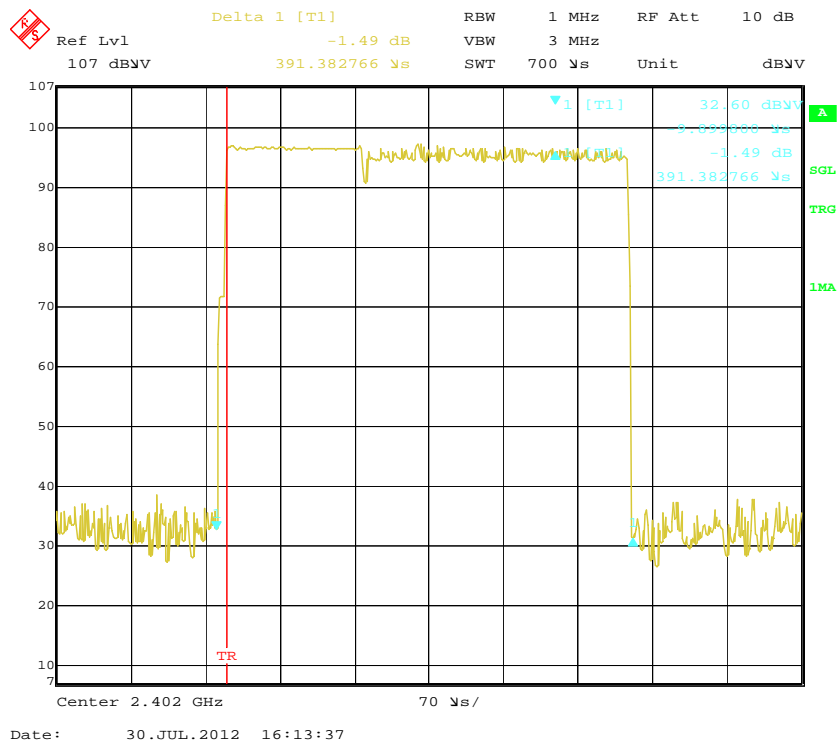


### Pulse time, Middle Channel, DH1

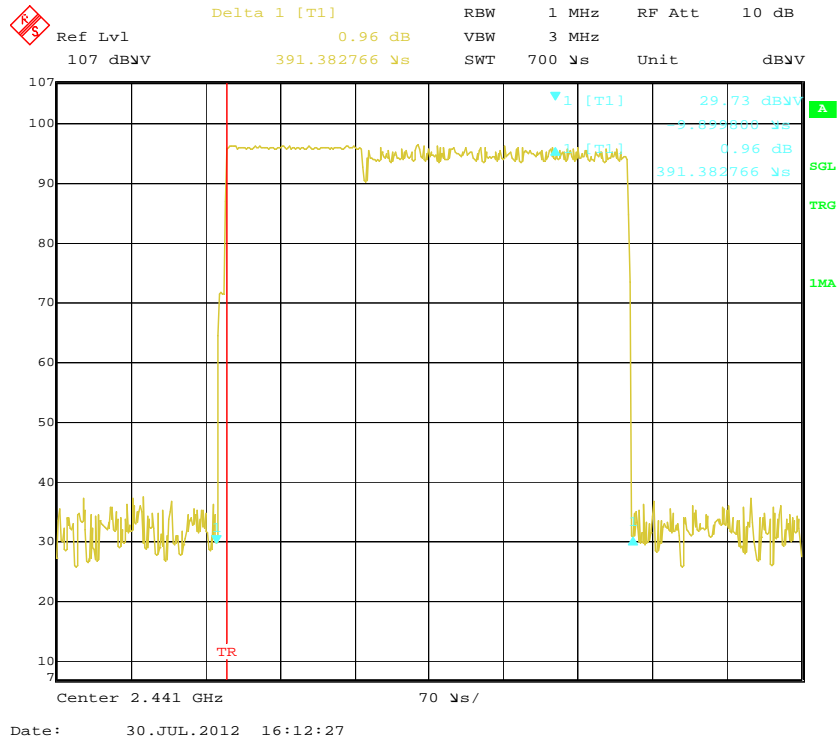


### Pulse time, High Channel, DH1

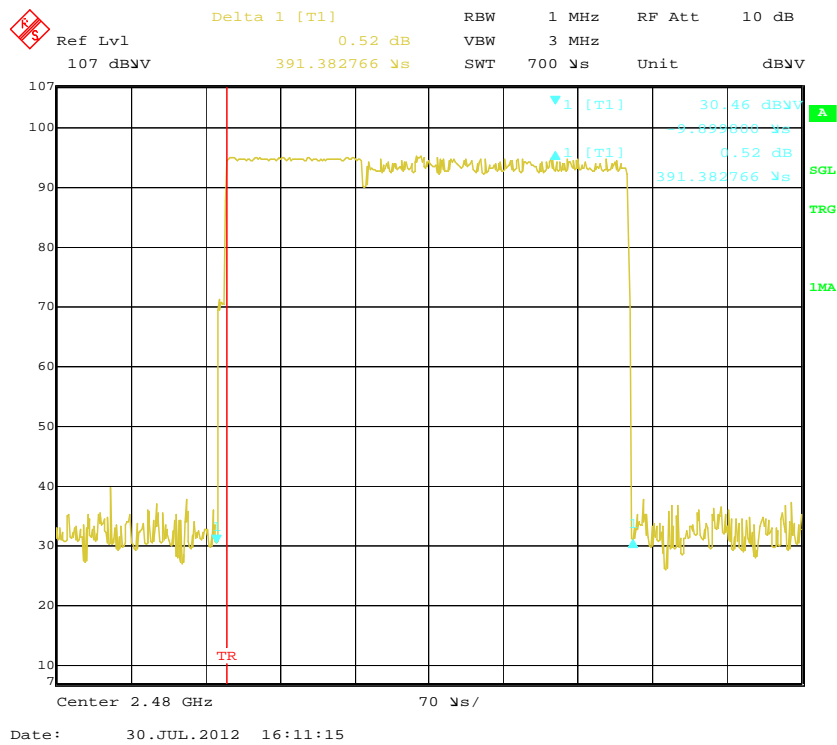


### Pulse time, Low Channel, DH3

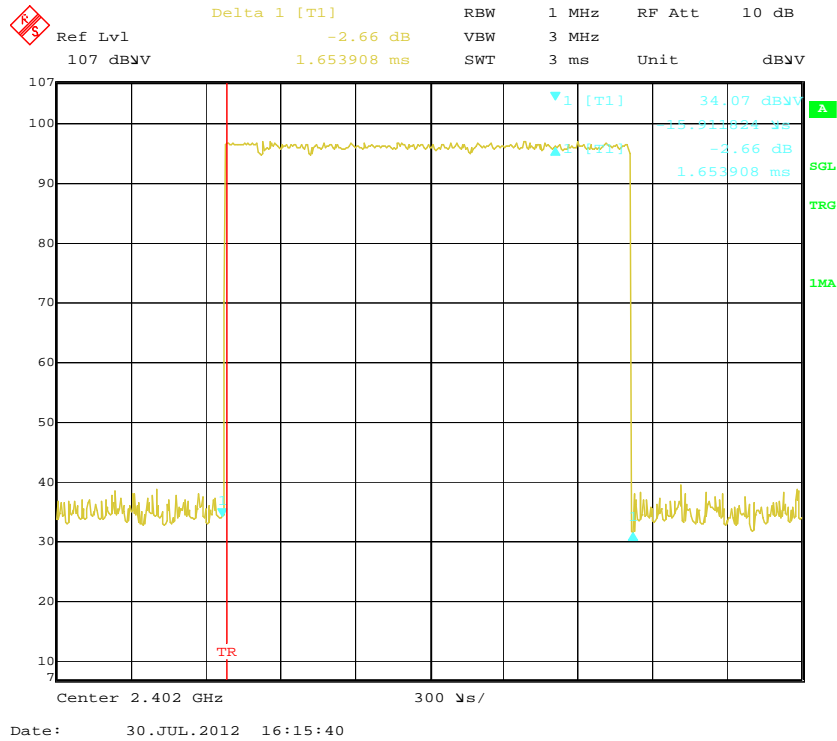


### Pulse time, Middle Channel, DH3

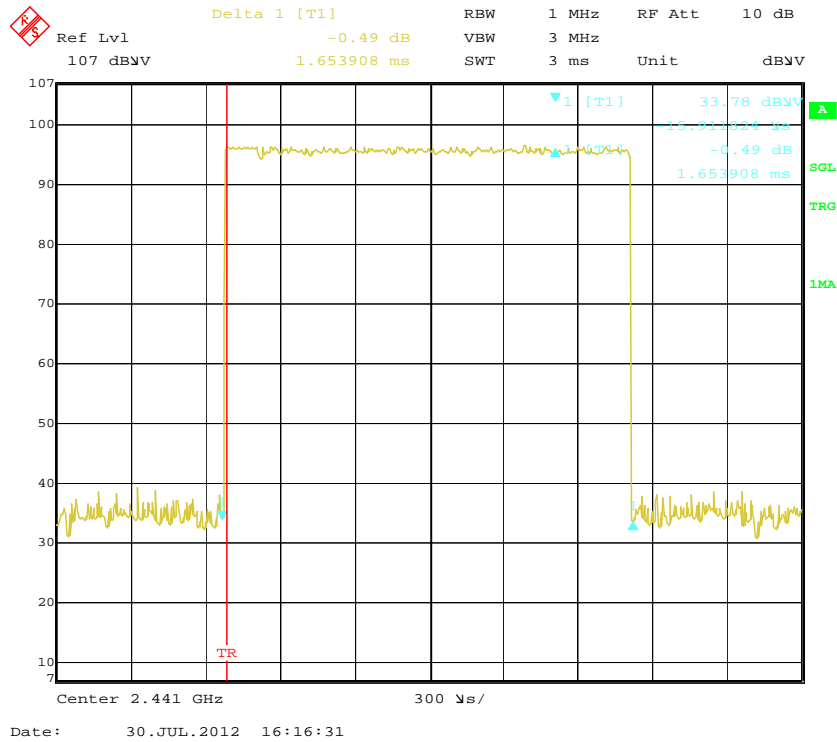


### Pulse time, High Channel, DH3

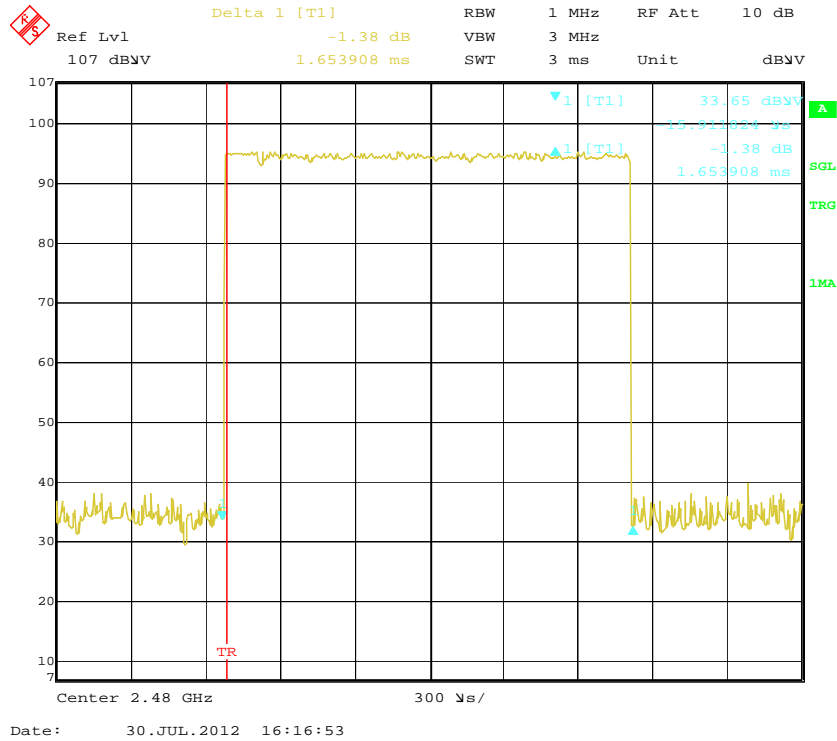


### Pulse time, Low Channel, DH5

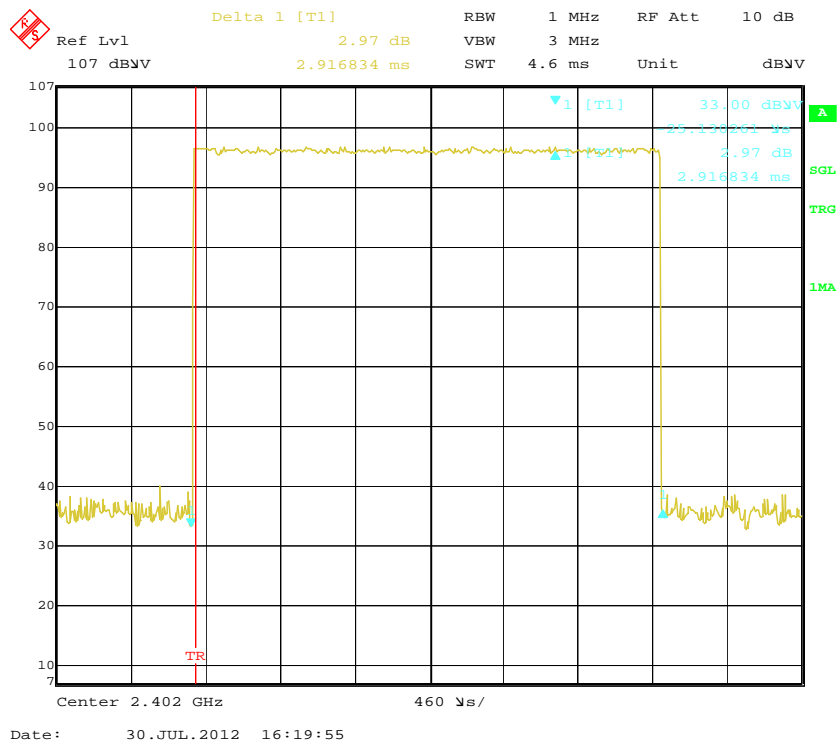

### Pulse time, Middle Channel, DH5

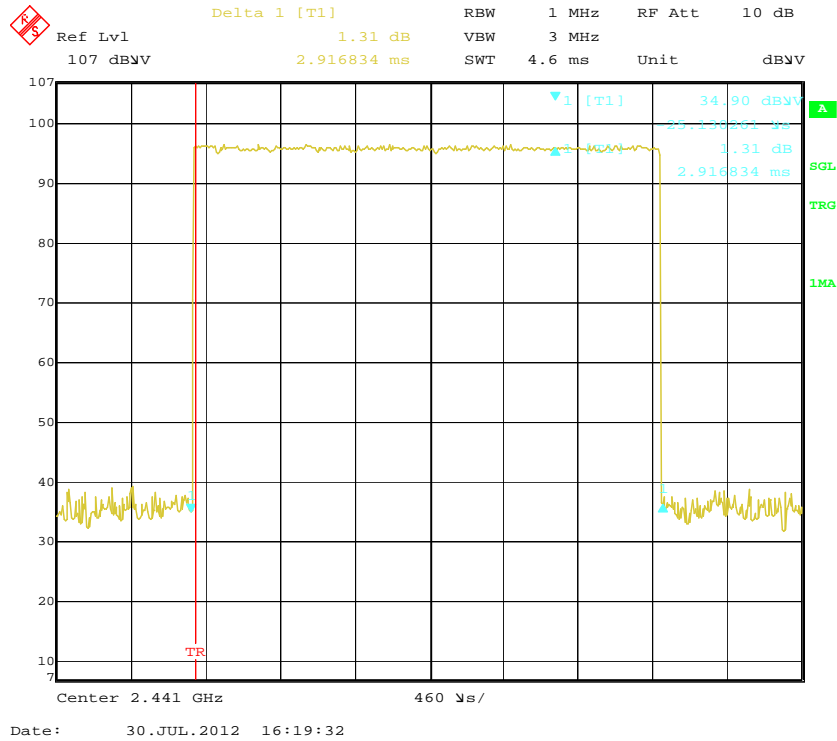


### Pulse time, High Channel, DH5

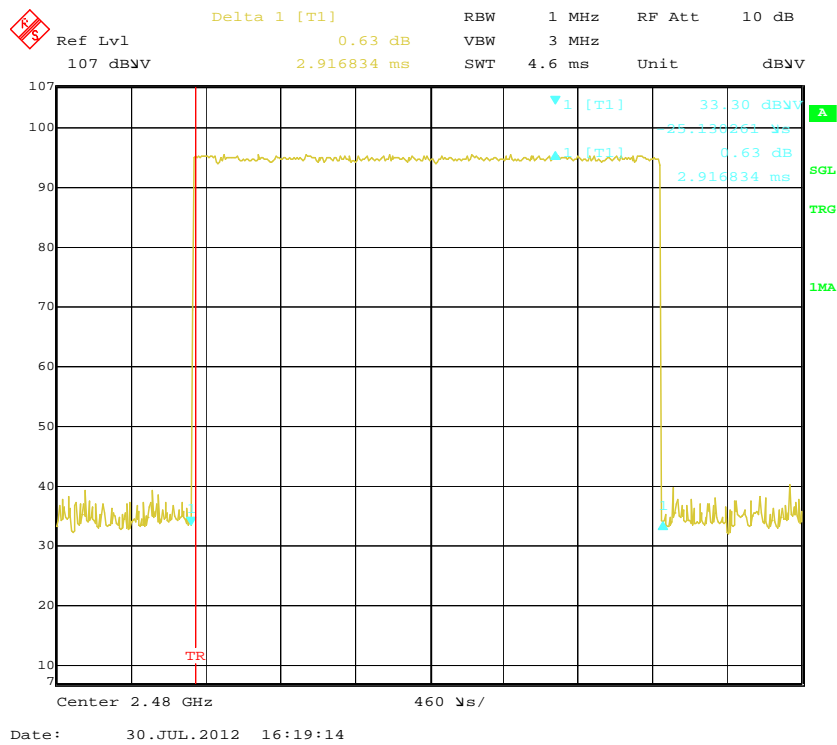


### Pulse time, Low Channel, DH1




### Pulse time, Middle Channel, DH1



### Pulse time, High Channel, DH1

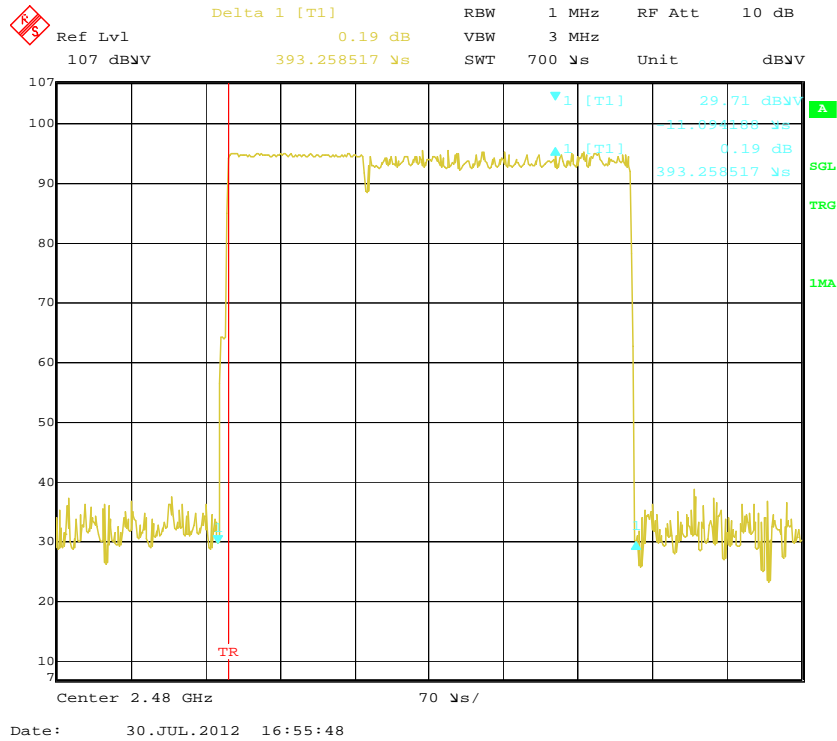


### Pulse time, Low Channel, DH3

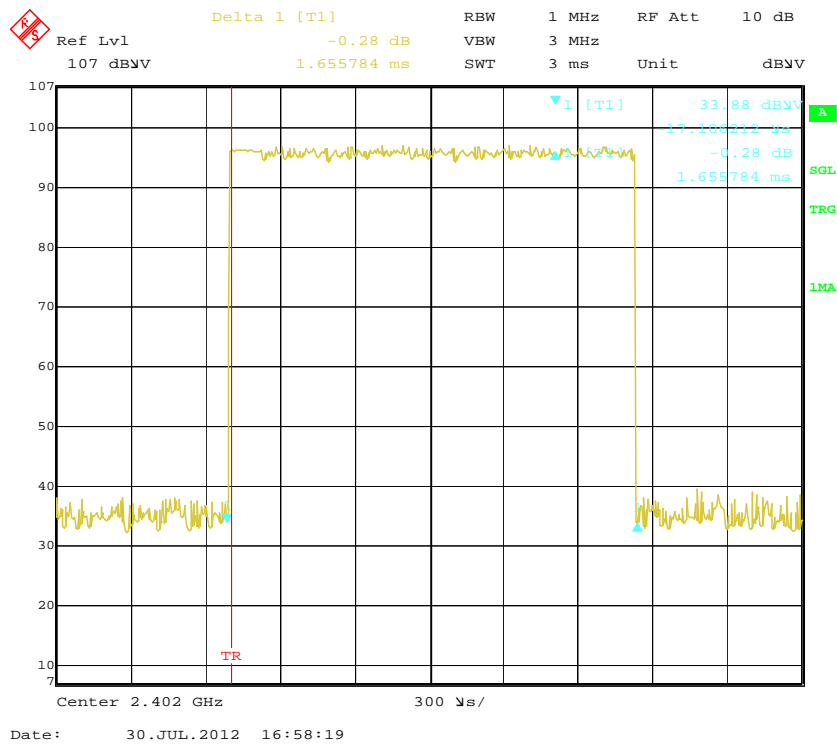




### Pulse time, Middle Channel, DH3

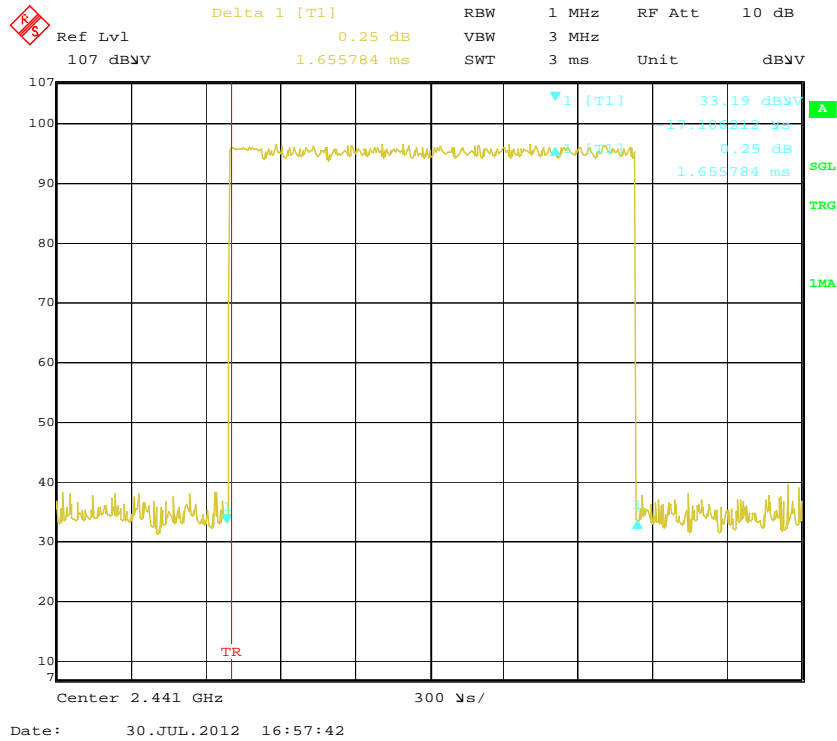

### Pulse time, High Channel, DH3

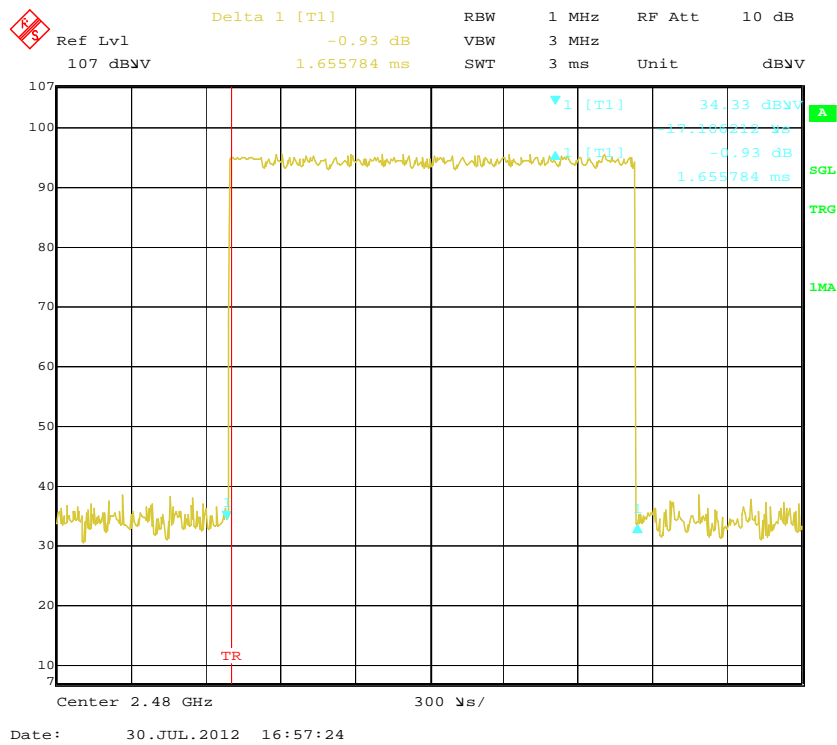

Ref Lvl 107 dBV Delta 1 [T1] -0.03 dB RBW 1 MHz VBW 3 MHz RF Att 10 dB

107 dBV 2.909291 ms SWT 4.5 ms Unit dBV

1 [T1] 34.03 dBV

-0.03 dB

2.909291 ms

TR

Center 2.402 GHz 450 ns/

Date: 30.JUL.2012 16:59:23

Ref Lvl 107 dBmV Delta 1 [T1] 0.19 dB RBW 1 MHz VBW 3 MHz RF Att 10 dB


107 dBmV 2.909291 ms SWT 4.5 ms Unit dBmV

Center 2.441 GHz 450 MHz

1 [T1] 34.24 dBmV 17.180212 us 0.19 dB 2.909291 ms

TR

### Pulse time, High Channel, DH5

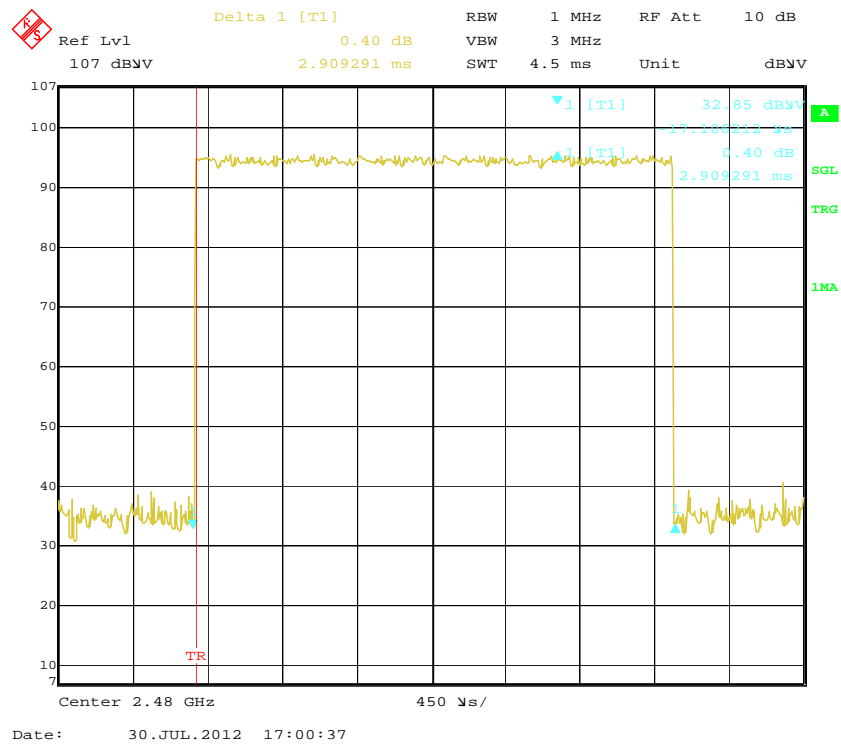

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

For radiated emissions

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Mini-Circuits	Amplifier	ZVA-213+	N/A	2011-11-24	2012-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2012-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100 kPa

The testing was performed by Gardon Zhang on 2012-07-30.

Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	Corrected Amplitude (dBμV/m)	Absolute Level (dBm)	Limit (dBm)
BDR (GFSK)	Low	2402	103.66	8.40	30
	Middle	2441	104.04	8.78	30
	High	2480	104.76	9.50	30
EDR (π/4-DQPSK)	Low	2402	98.06	2.80	30
	Middle	2441	97.84	2.58	30
	High	2480	97.70	2.44	30
EDR (8DPSK)	Low	2402	99.11	3.85	30
	Middle	2441	97.97	2.71	30
	High	2480	99.60	4.34	30

Note: According with KDB 558074D01

EIRP = Corrected Amplitude + 20log (d) – 104.8, d = 3m

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span including 100 kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1 MHz, VBW=3 MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
TESCOM	Bluetooth Tester	TC-3000B	3000B650083	2011-12-07	2012-12-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

**Test Data****Environmental Conditions**



<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100 kPa

*The testing was performed by Gardon Zhang on 2012-07-30.*

*Test Mode: Transmitting*


*Test Result: Compliance. Please refer to following table and plots*

<b>Mode</b>	<b>Band</b>	<b>Delta Peak to Band Emission (dBc)</b>	<b>Limit (dBc)</b>
<b>BDR (GFSK)</b>	Left band	46.96	>20
	Right band	53.65	>20
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Left band	48.82	>20
	Right band	52.08	>20
<b>EDR (8DPSK)</b>	Left band	48.29	>20
	Right band	51.41	>20

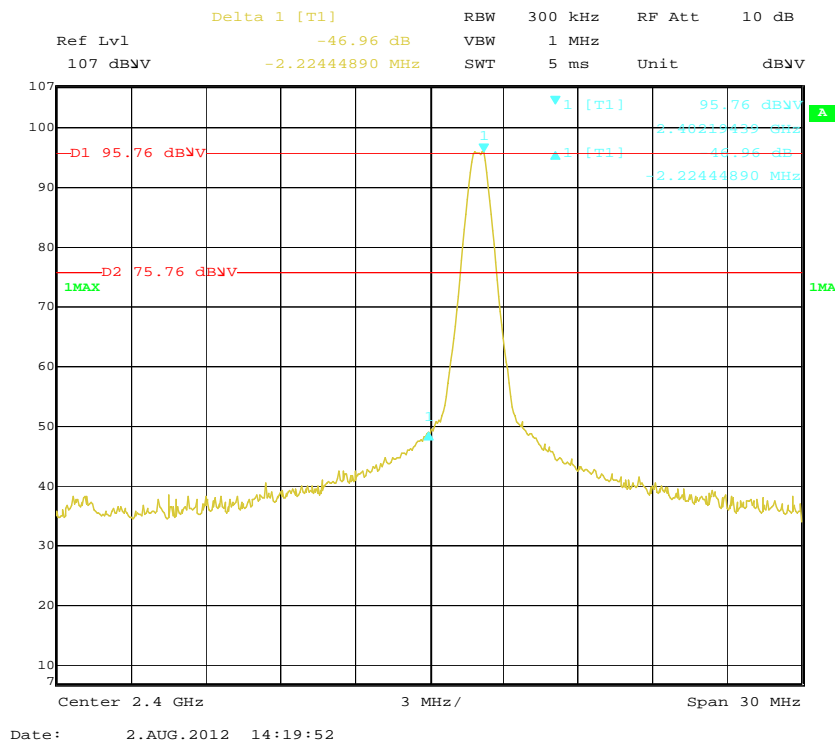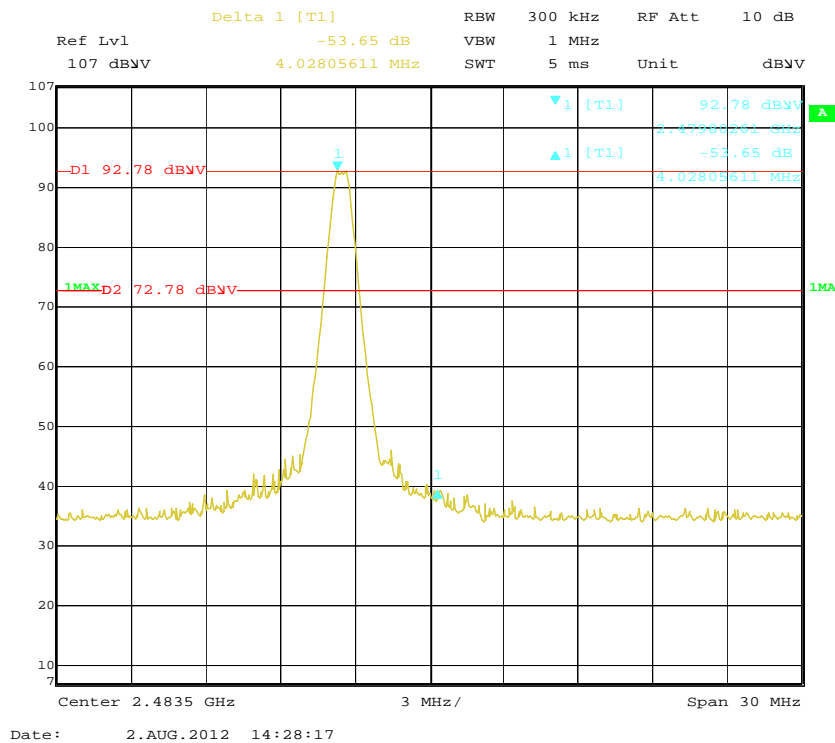
**BDR (GFSK): Band Edge-Left Side****BDR (GFSK): Band Edge-Right Side**



### EDR ( $\pi/4$ -DQPSK): Band Edge-Left Side

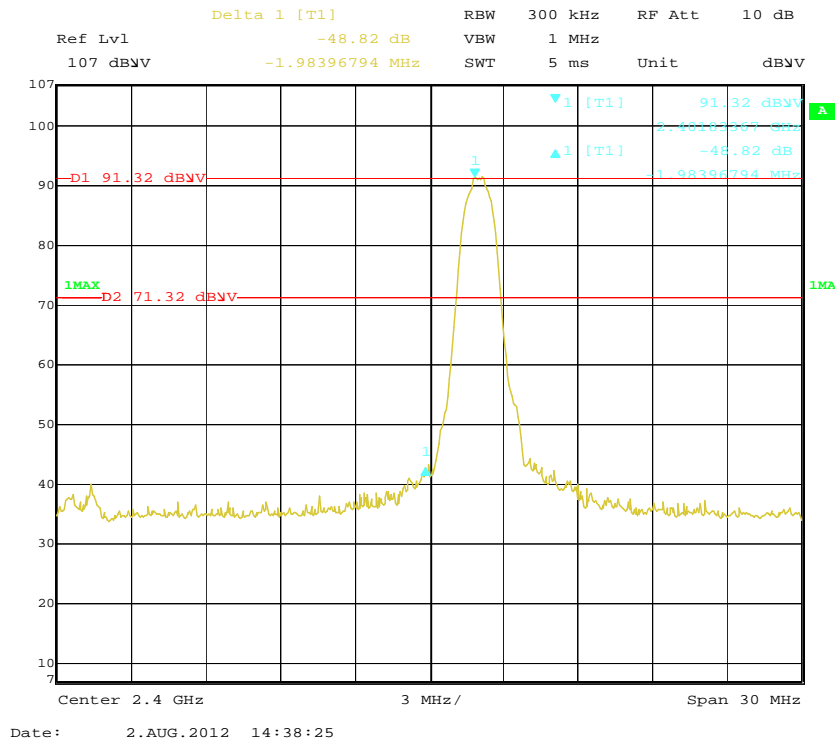

### EDR ( $\pi/4$ -DQPSK): Band Edge-Right Side

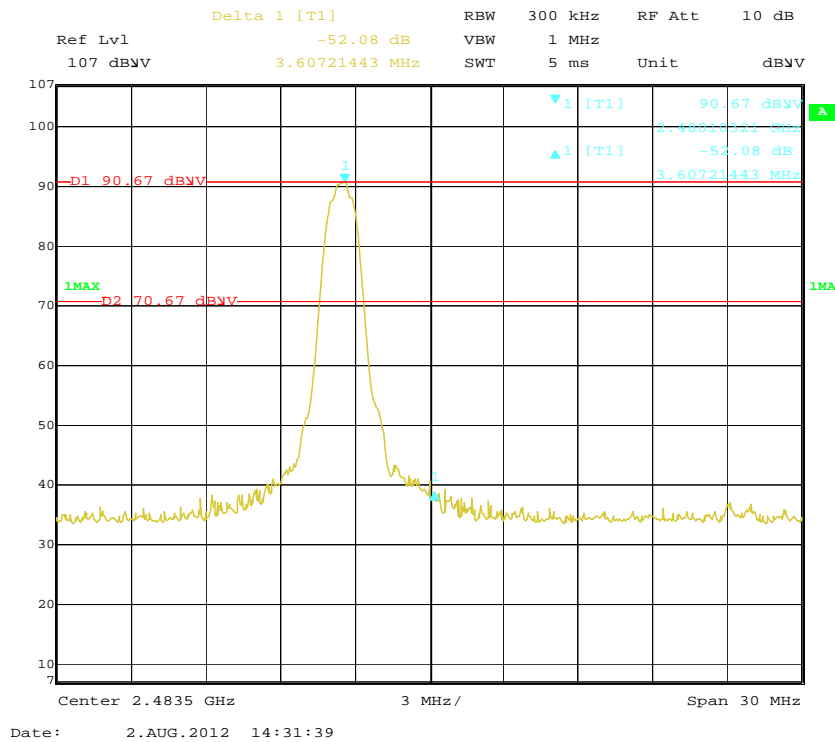

[illegible]

Delta 1 [T1] -51.41 dB

Ref Lvl	-51.41 dB	RBW	300 kHz	RF Att	10 dB
107 dBmV	4.44889780 MHz	VBW	1 MHz	SWT	5 ms
		Unit			dBmV

▼ 1 [T1] 91.83 dBmV  
▲ 1 [T1] -51.41 dB

D1 91.83 dBmV  
D2 71.83 dBmV

Center 2.4835 GHz      3 MHz/      Span 30 MHz

Date: 2.AUG.2012 14:47:27

\*\*\*\*\* END OF REPORT \*\*\*\*\*