

No. 1 Workshop, M-10, Middle section, Science & Technology Park,

Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594

Report No.: SZEM160700527301

## **FCC REPORT**

Application No:SZEM1607005273CRApplicant:AG ACQUISITION CORP.Manufacturer:AG ACQUISITION CORP.

Product Name: A50 BASE STATION

Model No.(EUT): TXDP01

Trade Mark:

**ASTRO GAMING** 

FCC ID: YQ6-TXDP01

**Standards:** 47 CFR Part 15, Subpart E (2015)

**Date of Receipt:** 2016-07-05

**Date of Test:** 2016-07-06 to 2016-07-08

**Date of Issue:** 2016-07-12

Test Result: PASS \*

. \* In the configuration tested, the EUT complied with the standards specified above.

### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 2 of 54

### 2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2016-07-12		Original

Authorized for issue by:		
Tested By	Benson Wang (Benson Wang) /Project Engineer	2016-07-08  Date
Prepared By	(Wendy Jiang) /Clerk	2016-07-12  Date
Checked By	Exic Fu (Eric Fu) /Reviewer	2016-07-12  Date

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms.e-document.htm">www.sgs.com/terms.e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 3 of 54

## 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Section 15.203	ANSI C63.10: 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Section 15.407(b)	ANSI C63.10: 2013	PASS
Duty Cycle	FCC KDB 789033 D02 General UNIT Test Procedures New Rules v01	ANSI C63.10: 2013	PASS
Conducted Output Power	47 CFR Part 15 Section 15.407(a)	ANSI C63.10: 2013	PASS
Equivalent Isotropic Radiated Power (e.i.r.p.)	47 CFR Part 15 Section 15.407(a)	ANSI C63.10: 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Section 15.407(e)	ANSI C63.10: 2013	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	47 CFR Part 15 Section 15.407(a)	ANSI C63.10: 2013	PASS
Power Spectral Density	47 CFR Part 15 Section 15.407(a)	ANSI C63.10: 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15 Section 15.407(b)	ANSI C63.10: 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Section 15.407(b)	ANSI C63.10: 2013	PASS



Report No.: SZEM160700527301

Page: 4 of 54

### 4 Contents

		Page
1 (	COVER PAGE	1
2 \	/ERSION	2
3 1	TEST SUMMARY	3
4 (	CONTENTS	4
	GENERAL INFORMATION	
5.1	CLIENT INFORMATION	5
5.2	GENERAL DESCRIPTION OF EUT	
5.3	TEST ENVIRONMENT AND MODE	
5.4	DESCRIPTION OF SUPPORT UNITS	
5.5	TEST LOCATION	
5.6	TEST FACILITY	
5.7		
5.8 5.9	ABNORMALITIES FROM STANDARD CONDITIONS	
5.9 5.10		
_	FEST RESULTS AND MEASUREMENT DATA	
_		
6.1	ANTENNA REQUIREMENTCONDUCTED EMISSIONS	
6.2 6.3	DUTY CYCLE	
6.4	CONDUCTED OUTPUT POWER	
6.5	EQUIVALENT ISOTROPIC RADIATED POWER (E.I.R.P.)	
6.6	26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	
6.7	6DB EMISSION BANDWIDTH	30
6.8	Power Spectral Density	
6.9		
•	6.9.1 Radiated emission below 1GHz	
6.10		
6.1		
_	PHOTOGRAPHS - EUT TEST SETUP	
	CONDUCTED EMISSION	
7.1 7.2		
7.2		
_		
8 <b>F</b>	PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	54



Report No.: SZEM160700527301

Page: 5 of 54

### 5 General Information

### 5.1 Client Information

Applicant:	AG ACQUISITION CORP.
Address of Applicant:	1441 UTE BLVD., SUITE 250, PARK CITY, UT 84098, United States
Manufacturer:	AG ACQUISITION CORP.
Address of Manufacturer:	1441 UTE BLVD., SUITE 250, PARK CITY, UT 84098,United States

### 5.2 General Description of EUT

Product Name:	A50 BASE STATION
Model No.:	TXDP01
Trade Mark:	ASTRO GAMING
Operation Frequency:	5.725-5.850GHz.
Channel Numbers:	5G WiFi, 802.11a(VHT20)
Modulation Type	For 802.11a: OFDM(8PSK/QPSK/16QAM/64QAM)
Sample Type:	Fixed production
Antenna Type:	PCB Printed Inverted F
Antenna Gain:	2.52dBi
Power Supply:	AC120V/60Hz

### Note:

In FCC 15.31, for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table, and the selected channel to perform the test as below:

Frequency Range of Operation Operating Frequency Range (in each Band)	Number of Measurement Frequencies Required	Location of Measurement Frequency in Band of Operation
1 MHz or less	1	centre
1 MHz to 10 MHz	2	1 near high end, 1 near
		low end
Greater than 10 MHz	3	1 near high end, 1 near
		centre

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 6 of 54

For 802.11a(HT20)

Mode	Channel	Frequency(MHz)	
IEEE 802.11a 20MHz	The Lowest channel	5745	
	The Middle channel	5785	
	The Highest channel	5825	



Report No.: SZEM160700527301

Page: 7 of 54

### 5.3 Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1005 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all
	kind of data rate.

### 5.4 Description of Support Units

The EUT has been tested with below unit .:

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	T430u	REF. No.SEA1800
USB cable(108cm shielded)	Skullcandy	N/A	N/A

### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM160700527301

Page: 8 of 54

### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### · CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

### A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

### VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

### • FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

### Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

### 5.7 Deviation from Standards

None.

### 5.8 Abnormalities from Standard Conditions

None.

### 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM160700527301

Page: 9 of 54

### 5.10 Equipment List

	Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2015-10-09	2016-10-09
3	LISN	ETS-LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	EMC0120	2015-08-30	2016-08-30
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	EMC0121	2015-08-30	2016-08-30
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	EMC0122	2015-08-30	2016-08-30
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2016-04-25	2017-04-25
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2015-08-01	2016-08-01
2	EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESCI	SEM004-01	2016-04-25	2017-04-25
3	Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-17	2016-01-26	2017-01-26
4	Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2016-04-25	2017-04-25
5	Loop Antenna	ETS-Lindgren	6502	SEM003-08	2015-08-14	2016-08-14

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 10 of 54

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2015-10-09	2016-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEM003-12	2014-11-24	2017-11-24
7	Low Noise Amplifier	Black Diamond Series	BDLNA- 0118- 352810	SEM005-05	2015-10-09	2016-10-09
8	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A

	RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2015-10-09	2016-10-09
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2015-10-17	2016-10-17
3	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
4	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2015-10-09	2016-10-09




Report No.: SZEM160700527301

11 of 54

### **Test results and Measurement Data**

### 6.1 Antenna Requirement

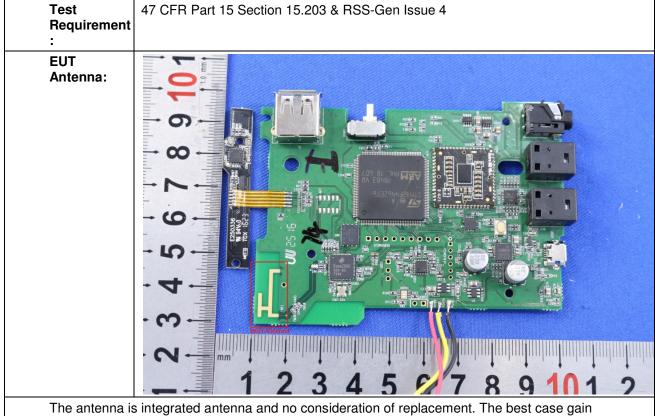

of the antenna is 2.52dBi.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 12 of 54


### 6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15 Section 15.40	)7(b)		
Test Method:	ANSI C63.10: 2013			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Limit (dBuV)			
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithn	n of the frequency.		1
Test Procedure:				



Report No.: SZEM160700527301

Page: 13 of 54

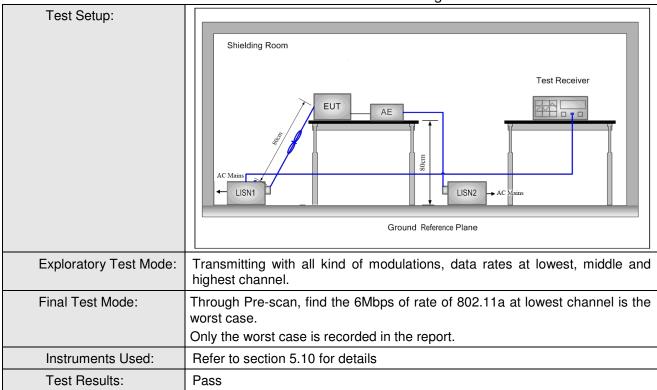

### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM160700527301

Page: 14 of 54

Live Line:

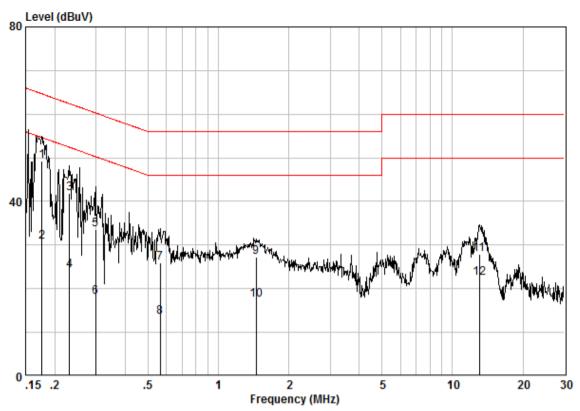

Site : Shielding Room Condition : CE LINE Job No. : 5273CR Test Mode : TX

		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17584	0.02	9.60	39.55	49.17	64.68	-15.51	QP
2	0.17584	0.02	9.60	21.01	30.63	54.68	-24.05	AVERAGE
3	0.23162	0.02	9.60	32.19	41.81	62.39	-20.58	QP
4	0.23162	0.02	9.60	14.63	24.25	52.39	-28.14	AVERAGE
5	0.29869	0.02	9.59	24.05	33.66	60.28	-26.62	QP
6	0.29869	0.02	9.59	8.45	18.06	50.28	-32.21	AVERAGE
7	0.56409	0.02	9.60	16.29	25.91	56.00	-30.09	QP
8	0.56409	0.02	9.60	3.86	13.48	46.00	-32.52	AVERAGE
9	1.449	0.03	9.59	17.56	27.17	56.00	-28.83	QP
10	1.449	0.03	9.59	7.71	17.33	46.00	-28.67	AVERAGE
11	13.057	0.15	9.74	18.06	27.96	60.00	-32.04	QP
12	13.057	0.15	9.74	12.60	22.49	50.00	-27.51	AVERAGE


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 15 of 54

#### Neutral Line:

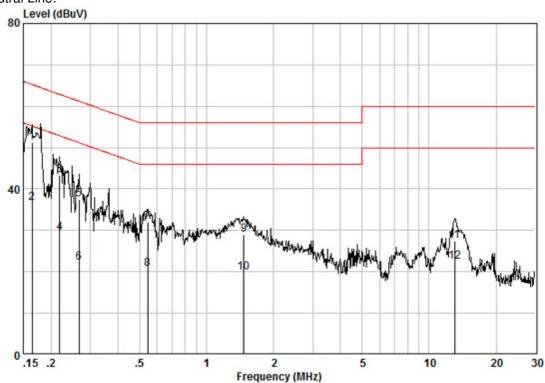

Site : Shielding Room Condition : CE NEUTRAL Job No. : 5273CR Test Mode : TX

			Cable	LISN	Read		Limit	Over	
		Freq	Loss	Factor	Level	Level	Line	Limit	Remark
		MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	@	0.16414	0.02	9.61	41.52	51.14	65.25	-14.11	QP
2		0.16414	0.02	9.61	26.91	36.54	55.25	-18.72	AVERAGE
3		0.21851	0.02	9.62	33.79	43.43	62.88	-19.44	QP
5		0.21851	0.02	9.62	19.87	29.51	52.88	-23.37	AVERAGE
5		0.26724	0.02	9.61	27.87	37.50	61.20	-23.70	QP
6		0.26724	0.02	9.61	12.52	22.15	51.20	-29.05	AVERAGE
7		0.54355	0.02	9.63	22.45	32.10	56.00	-23.90	QP
8		0.54355	0.02	9.63	11.02	20.67	46.00	-25.33	AVERAGE
9		1.472	0.03	9.64	19.42	29.09	56.00	-26.91	QP
10		1.472	0.03	9.64	10.14	19.81	46.00	-26.19	AVERAGE
11		13.057	0.15	9.86	17.51	27.52	60.00	-32.48	QP
12		13.057	0.15	9.86	12.33	22.35	50.00	-27.65	AVERAGE

### Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 16 of 54

### 6.3 Duty Cycle

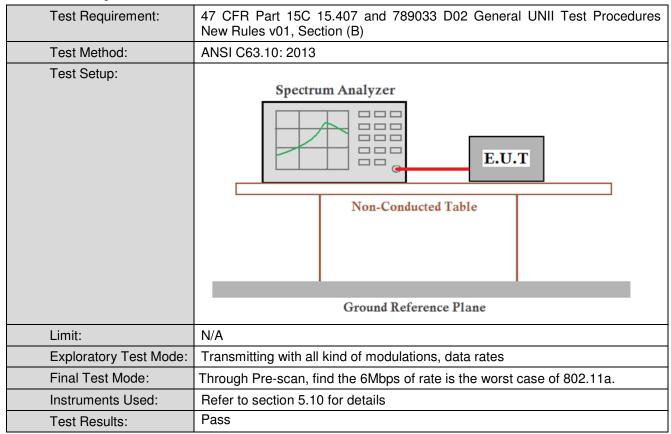

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM160700527301

Page: 17 of 54

#### **Measurement Data**

802.11a mode					
Test channel	On time	Period	Duty Cycle		
149	100	100	1		

Toot mode:	802.11a
Lest mode:	002.11d

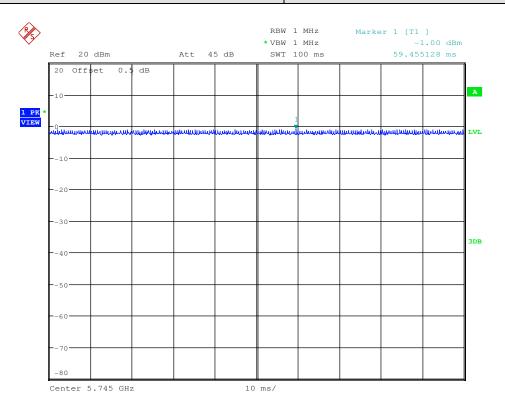

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 18 of 54

### **6.4 Conducted Output Power**

Test Requirement:	47 CFR Part 15 Section 15.407(a)		
Test Method:	ANSI C63.10: 2013		
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:  Offset the High-Frequency cable loss 0.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 5.10 for details		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates		
Final Test Mode:	Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; Only the worst case is recorded in the report.		
Limit:	The maximum conducted output power shall not exceed 1 W.		
Test Results:	Pass		



Report No.: SZEM160700527301

Page: 19 of 54

#### **Measurement Data:**

802.11a mode				
Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Result	
5745	4.16	30.00	Pass	
5785	4.25	30.00	Pass	
5825	3.63	30.00	Pass	




Report No.: SZEM160700527301


Page: 20 of 54

### Test plot as follows:

Test mode: 802.11a Test channel: 149

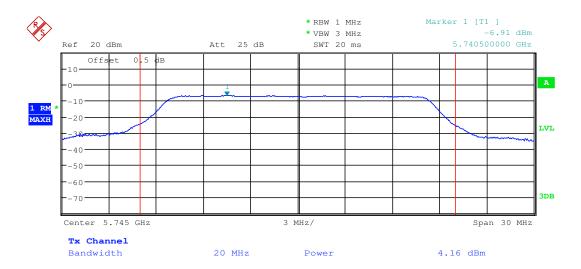

Test mode: 802.11a Test channel: 157

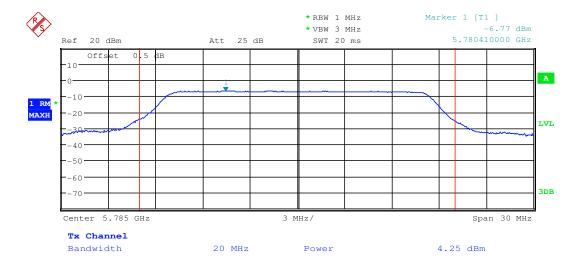


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 21 of 54



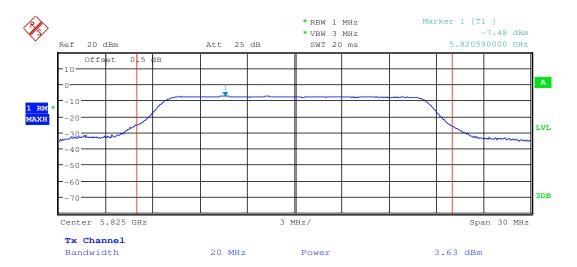



Report No.: SZEM160700527301

Page: 22 of 54

### 6.5 Equivalent Isotropic Radiated Power (e.i.r.p.)

Test Requirement:	47 CFR Part 15 Section 15.407(a)		
Test Method:	ANSI C63.10: 2013		
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:  Offset the High-Frequency cable loss 0.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 5.10 for details		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates		
Final Test Mode:	Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; Only the worst case is recorded in the report.		
Limit:	*The limit =the maximum output conducted power limit+ actual antenna gain		
Test Results:	Pass		



Report No.: SZEM160700527301

Page: 23 of 54

#### **Measurement Data:**


	802.11a mode		
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Result
5745	6.70	30.00	Pass
5785	6.79	30.00	Pass
5825	6.17	30.00	Pass



Report No.: SZEM160700527301

Page: 24 of 54

### 6.6 26dB Emission Bandwidth and 99% Occupied Bandwidth

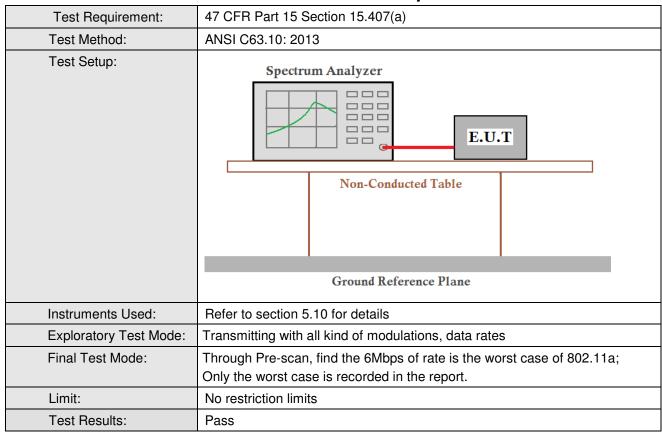



Report No.: SZEM160700527301

Page: 25 of 54

#### **Measurement Data:**

802.11a mode					
Frequency (MHz)	26dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)			
5745	32.707	18.000			
5785	32.308	17.910			
5825	32.305	17.850			




Report No.: SZEM160700527301

Page: 26 of 54


#### 26dB Emission Bandwidth

Test plot as follows:

Test mode:	802.11a	Test channel:	149
------------	---------	---------------	-----

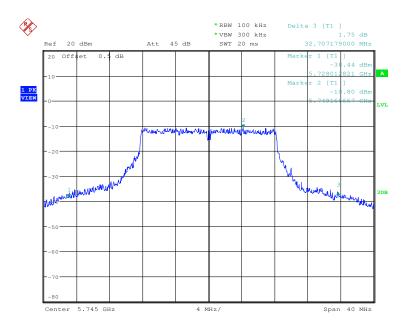

Test mode: 802.11a Test channel: 157

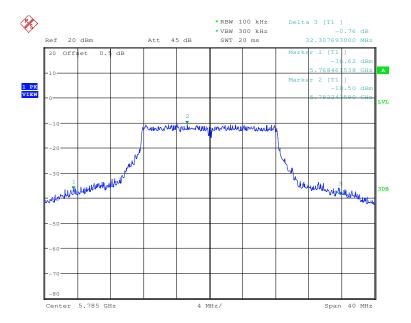


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 27 of 54

Test mode: 802.11a Test channel: 165

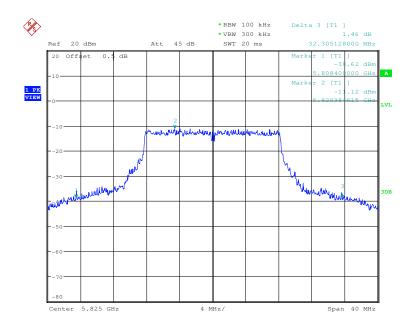




Report No.: SZEM160700527301

Page: 28 of 54


### 99% Occupied Bandwidth

Test plot as follows:

Test mode: 802.	2.11a Test channel:	149
-----------------	---------------------	-----

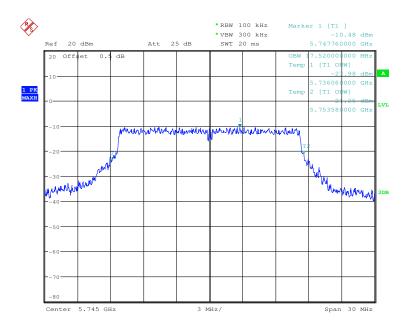

1001.1101.	Test mode:	802.11a	Test channel:	157
------------	------------	---------	---------------	-----

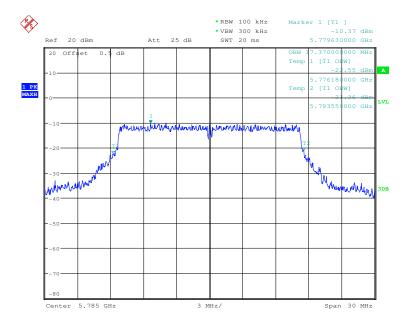


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 29 of 54

Test mode: 802.11a Test channel: 165

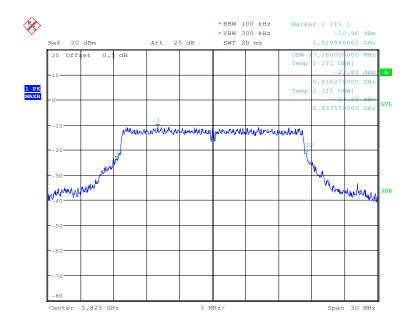




Report No.: SZEM160700527301

Page: 30 of 54

### 6.7 6dB Emission Bandwidth

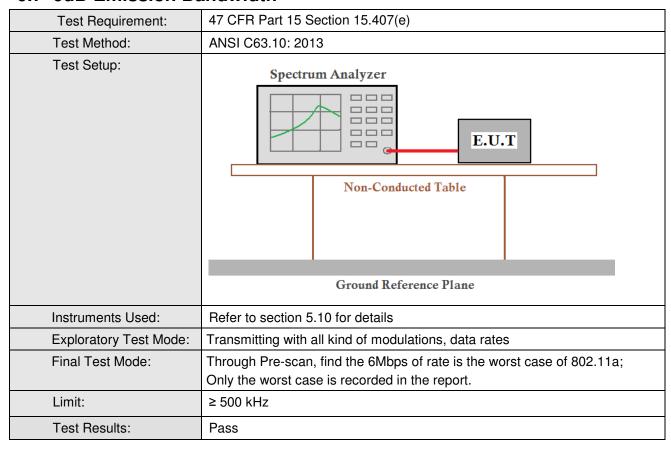



Report No.: SZEM160700527301

Page: 31 of 54

#### **Measurement Data:**

802.11a mode			
Frequency (MHz)	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
5745	16.680	≥500	Pass
5785	16.680	≥500	Pass
5825	16.680	≥500	Pass





Report No.: SZEM160700527301


Page: 32 of 54

### Test plot as follows:

Test mode: 802.11a Test channel: 149

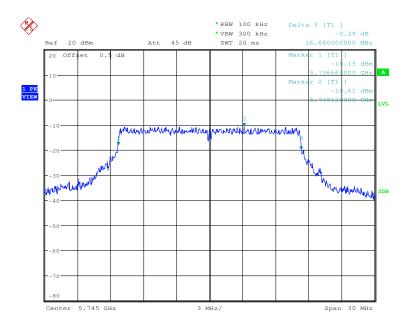



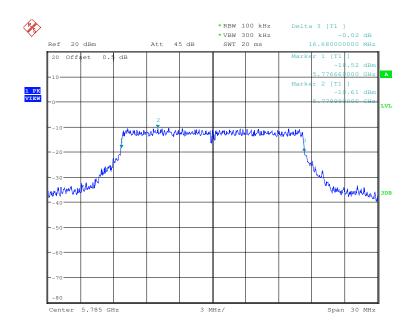


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 33 of 54

Test mode: 802.11a Test channel: 165

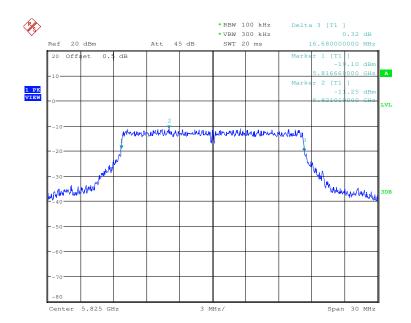




Report No.: SZEM160700527301

Page: 34 of 54

### 6.8 Power Spectral Density

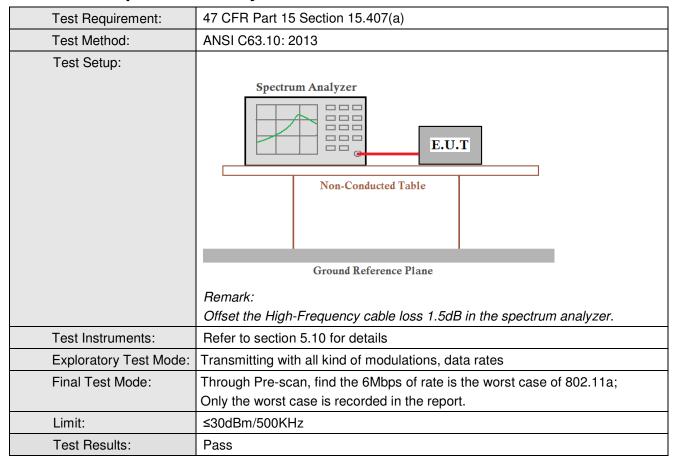



Report No.: SZEM160700527301

Page: 35 of 54

#### **Measurement Data:**

802.11a mode			
Test channel	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)	Result
149	-9.52	≤30dBm/500kHz	Pass
157	-9.44	≤30dBm/500kHz	Pass
165	-10.03	≤30dBm/500kHz	Pass





Report No.: SZEM160700527301


Page: 36 of 54

### Test plot as follows:

Test mode: 802.11a Test channel: 149

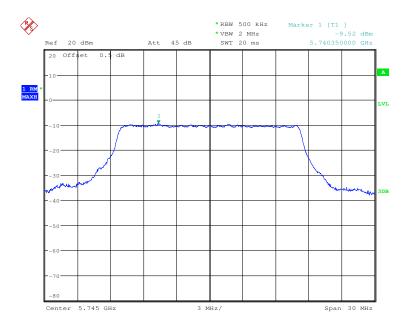



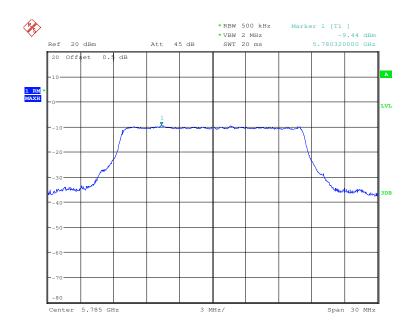


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160700527301

Page: 37 of 54

Test mode: 802.11a Test channel: 165

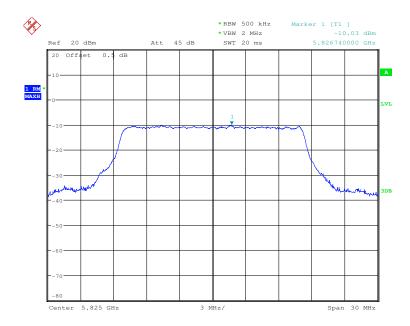




Report No.: SZEM160700527301

Page: 38 of 54

#### 6.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15 Section 15.407(b)
Test Method:	ANSI C63.10: 2013
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
	Measurement Distance: 10m (Semi-Anechoic Chamber)
Test Setup:	






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

T 1	Proced	
I Det	Procen	ıırd:
1 5 31	1 1005	uic.

- a. For below 1GHz test, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 and 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz test, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. Test the EUT in the outermost channels.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
- i. Repeat above procedures until all frequencies measured was complete.

**Exploratory Test Mode:** 

Transmitting with all kind of modulations, data rates.



Report No.: SZEM160700527301

Page: 39 of 54

Final Test Mode:	Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; For below 1GHz, through Pre-scan, find the 6Mbps of rate of 802.11a at lowest channel is the worst case.  Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM160700527301

Page: 40 of 54

#### 6.9.1 Radiated emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting mode	Vertical

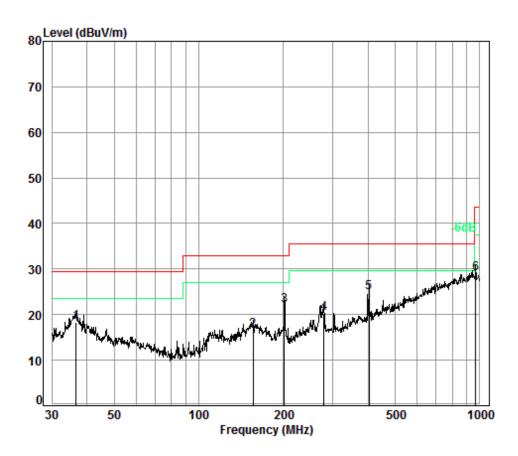

Condition: 10m VERTICAL

Job No. : 5273CR

Test Mode: TX


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	36.64	6.73	12.87	32.98	31.70	18.32	29.50	-11.18
2	156.46	7.48	13.40	32.74	28.53	16.67	33.00	-16.33
3	202.10	7.61	9.34	32.70	37.83	22.08	33.00	-10.92
4	279.04	8.00	12.13	32.62	32.76	20.27	35.60	-15.33
5 pp	404.67	8.31	14.99	32.60	34.12	24.82	35.60	-10.78
6	968.93	9.60	22.79	32.50	29.06	28.95	43.50	-14.55



Report No.: SZEM160700527301

Page: 41 of 54



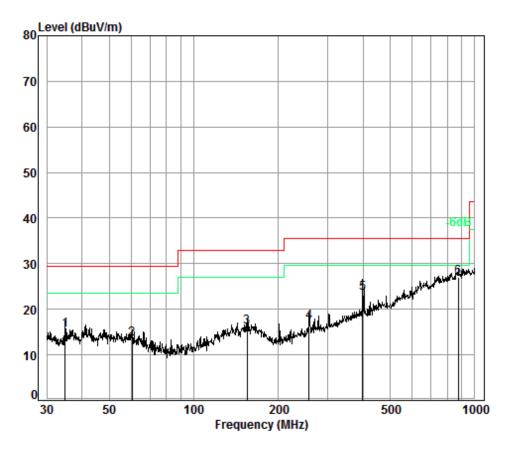

Condition: 10m Horizontal

Job No. : 5273CR

Test Mode: TX

	Freq			Preamp Factor				Over Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	34.88	6.70	12.64	32.98	29.10	15.46	29.50	-14.04
2	60.28	7.00	11.94	32.95	27.43	13.42	29.50	-16.08
3	154.82	7.48	13.40	32.74	27.90	16.04	33.00	-16.96
4	257.42	7.89	11.42	32.64	30.55	17.22	35.60	-18.38
5	399.03	8.30	14.84	32.60	33.09	23.63	35.60	-11.97
6 pp	872.18	9.46	21.86	32.53	28.25	27.04	35.60	-8.56



Report No.: SZEM160700527301

Page: 42 of 54

#### 6.9.2Transmitter emission above 1GHz

Test plot as follows:

Test mode: 802.11a		Freque	ency(MHz):	5745	Rema	rk:	Peak			
Frequency (MHz)	Anter Fact (dB/r	or	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Ove Limi (dB)	t	Polarization
7664.340	36.0	)3	10.88	37.44	42.68	52.15	74	-21.8	5	Vertical
9659.786	37.1	0	12.53	36.28	39.62	52.97	74	-21.0	3	Vertical
11490.000	37.4	<b>1</b> 5	14.01	36.68	34.34	49.12	74	-24.8	8	Vertical
13192.440	38.2	29	15.60	38.42	36.91	52.38	74	-21.6	2	Vertical
15740.830	41.1	4	17.26	38.60	33.52	53.32	74	-20.6	8	Vertical
17235.000	43.0	)5	19.50	37.03	27.98	53.50	74	-20.5	0	Vertical
7686.087	36.0	)4	10.89	37.44	40.75	50.24	74	-23.7	6	Horizontal
9659.786	37.1	0	12.53	36.28	39.75	53.10	74	-20.9	0	Horizontal
11490.000	37.4	<b>1</b> 5	14.01	36.68	34.71	49.49	74	-24.5	1	Horizontal
12751.430	37.9	8	14.86	37.89	36.28	51.23	74	-22.7	7	Horizontal
15214.630	40.7	<b>7</b> 1	16.75	39.44	34.68	52.70	74	-21.3	0	Horizontal
17235.000	43.0	)5	19.50	37.03	28.12	53.64	74	-20.3	6	Horizontal

Test mod	e:	;	802.11a	Freque	ency(MHz):	5785	Rema	rk:		Peak
Frequency (MHz)	Anten Fact (dB/r	or	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Ove Limi (dB)	t	Polarization
7678.832	36.0	)4	10.89	37.44	42.65	52.14	74	-21.8	86	Vertical
9659.786	37.1	0	12.53	36.28	40.40	53.75	74	-20.2	25	Vertical
11570.000	37.4	19	14.09	36.75	34.11	48.94	74	-25.0	6	Vertical
13167.540	38.2	27	15.59	38.38	36.70	52.18	74	-21.8	32	Vertical
15740.830	41.1	4	17.26	38.60	32.86	52.66	74	-21.3	34	Vertical
17355.000	43.2	23	19.92	37.01	27.66	53.80	74	-20.2	20	Vertical
7187.584	35.5	59	10.67	37.65	41.33	49.94	74	-24.0	6	Horizontal
9007.715	37.0	00	11.80	37.18	38.62	50.24	74	-23.7	'6	Horizontal
11570.000	37.4	19	14.09	36.75	33.39	48.22	74	-25.7	'8	Horizontal
12751.430	37.9	98	14.86	37.89	36.80	51.75	74	-22.2	25	Horizontal
15800.410	41.2	20	17.31	38.51	32.78	52.78	74	-21.2	22	Horizontal
17355.000	43.2	23	19.92	37.01	27.15	53.29	74	-20.7	'1	Horizontal



Report No.: SZEM160700527301

Page: 43 of 54

Test mode: 802.11a		Freque	ency(MHz):	5825	Rema	rk:	Peak	
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	
7079.786	35.48	10.63	37.69	42.46	50.88	74	-23.12	2 Vertical
9007.715	37.00	11.80	37.18	38.50	50.12	74	-23.88	8 Vertical
11650.000	37.50	14.18	36.83	33.04	47.89	74	-26.1	1 Vertical
13882.720	39.18	16.12	39.48	36.41	52.23	74	-21.7	7 Vertical
16040.990	41.38	17.51	38.15	32.93	53.67	74	-20.33	3 Vertical
17475.000	43.45	20.33	36.99	26.46	53.25	74	-20.7	5 Vertical
7214.789	35.59	10.68	37.63	40.03	48.67	74	-25.33	3 Horizontal
9659.786	37.10	12.53	36.28	39.47	52.82	74	-21.18	B Horizontal
11650.000	37.50	14.18	36.83	33.83	48.68	74	-25.32	2 Horizontal
13856.520	39.16	16.09	39.44	36.71	52.52	74	-21.48	B Horizontal
16040.990	41.38	17.51	38.15	31.46	52.20	74	-21.80	) Horizontal
17475.000	43.45	20.33	36.99	26.31	53.10	74	-20.90	) Horizontal

#### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
- Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM160700527301

Page: 44 of 54

#### 6.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15 Section 15.4	47 CFR Part 15 Section 15.407(b)					
Test Method:	ANSI C63.10: 2013						
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)				
Limit:	Frequency	Limit (dBuV/m @3m)	Remark				
	30MHz-88MHz	40.0	Quasi-peak Value				
	88MHz-216MHz	43.5	Quasi-peak Value				
	216MHz-960MHz	46.0	Quasi-peak Value				
	960MHz-1GHz	54.0	Quasi-peak Value				
	Above 1GHz	54.0	Average Value				
	Above IGHZ	74.0	Peak Value				
Test Setup:							

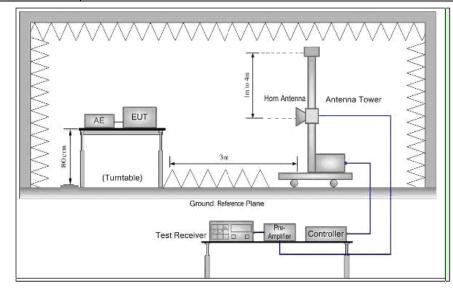



Report No.: SZEM160700527301

Page: 45 of 54

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.  b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.  c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.  d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.  e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.  f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  g. Test the EUT in the outermost channels.  h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.  i. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode:  Transmitting with all kind of modulations, data rates.  Final Test Mode:  Transmitting with all kind of modulations, data rates.  Final Test Mode:  Refer to section 5.10 for details  Test Results:  Pass		1 age. 43 01 34
antenna, which was mounted on the top of a variable-height antenna tower.  c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.  d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.  e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.  f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  g. Test the EUT in the outermost channels.  h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case.  i. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode:  Transmitting with all kind of modulations, data rates.  Final Test Mode:  Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; Only the worst case is recorded in the report.	Test Procedure:	the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.  d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.  e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.  f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  g. Test the EUT in the outermost channels.  h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case.  i. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode:  Transmitting with all kind of modulations, data rates.  Final Test Mode:  Transmitting with all kind of modulations, data rates.  Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; Only the worst case is recorded in the report.		antenna, which was mounted on the top of a variable-height antenna
and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.  e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.  f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  g. Test the EUT in the outermost channels.  h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case.  i. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode:  Transmitting with all kind of modulations, data rates.  Final Test Mode:  Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; Only the worst case is recorded in the report.  Refer to section 5.10 for details		ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the
Specified Bandwidth with Maximum Hold Mode.  f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the outermost channels. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode: Transmitting with all kind of modulations, data rates.  Final Test Mode: Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; Only the worst case is recorded in the report.  Instruments Used: Refer to section 5.10 for details		and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to
frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the outermost channels.  h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.  i. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode: Transmitting with all kind of modulations, data rates.  Final Test Mode: Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; Only the worst case is recorded in the report.  Instruments Used: Refer to section 5.10 for details		
h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.  i. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode: Transmitting with all kind of modulations, data rates.  Final Test Mode: Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; Only the worst case is recorded in the report.  Instruments Used: Refer to section 5.10 for details		frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each
for Transmitting mode, And found the X axis positioning which it is worse case.  i. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode: Transmitting with all kind of modulations, data rates.  Final Test Mode: Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; Only the worst case is recorded in the report.  Instruments Used: Refer to section 5.10 for details		g. Test the EUT in the outermost channels.
complete.  Exploratory Test Mode: Transmitting with all kind of modulations, data rates.  Final Test Mode: Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; Only the worst case is recorded in the report.  Instruments Used: Refer to section 5.10 for details		for Transmitting mode, And found the X axis positioning which it is
Final Test Mode: Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; Only the worst case is recorded in the report.  Instruments Used: Refer to section 5.10 for details		· · · · · · · · · · · · · · · · · · ·
Only the worst case is recorded in the report.  Instruments Used: Refer to section 5.10 for details	Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Instruments Used: Refer to section 5.10 for details	Final Test Mode:	Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a;
		Only the worst case is recorded in the report.
Test Results: Pass	Instruments Used:	Refer to section 5.10 for details
	Test Results:	Pass




Report No.: SZEM160700527301

Page: 46 of 54

Test plot as follows:

Test mode: 802.11a Frequency(MHz): 5745 Remark: Peak & Averavge Vertical

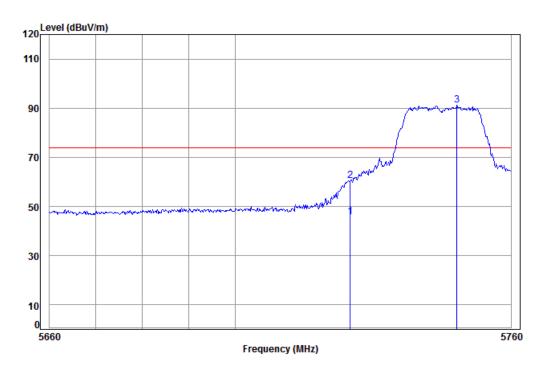

Condition: 3m Vertical Job No: : 3915CR

Mode: : 5745 Band edge


Cable Ant Preamp Limit 0ver Read Freq Loss Factor Factor Level Level Line Limit Remark MHz dBuV dBuV/m dBuV/m dB dB/m dB 54.00 -8.20 Average 1 av 5725.000 8.48 34.24 38.92 42.00 45.80 34.24 38.92 56.59 60.39 74.00 -13.61 Peak 5725.000 8.48 3 pp 5748.209 8.50 34.23 38.92 87.42 91.23 74.00 17.23 Peak



Report No.: SZEM160700527301

Page: 47 of 54

Test mode: 802.11	Frequency(MHz):	5745	Remark:	Peak & Averavge	Horizontal	
-------------------	-----------------	------	---------	-----------------	------------	--

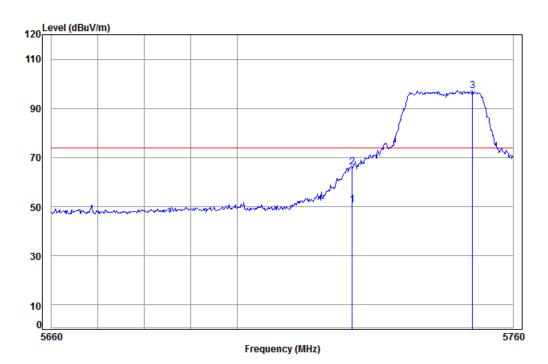

Condition: 3m Horizontal

Job No: : 3915CR

Mode: : 5745 Band edge


	Freq			Preamp Factor					Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
2	5725.000 5725.000 5751.230	8.48	34.24	38.92	62.35	66.15	74.00	-7.85	Peak



Report No.: SZEM160700527301

Page: 48 of 54

Test mode: 802.11a Frequency(MHz): 5825 Remark: Peak Vertical

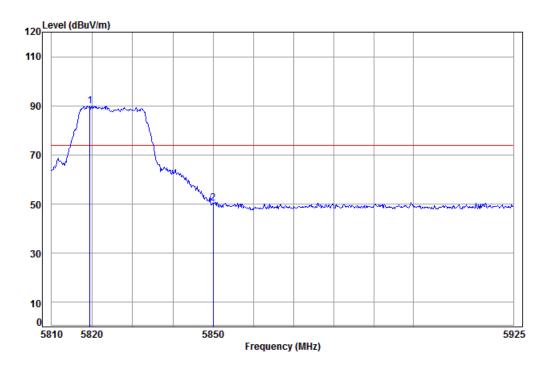

Condition: 3m Vertical

Job No: : 3915CR

5850.000

Mode: : 5825 Band edge

Ant Preamp Cable Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit Remark MHz dB dB/m dB dBuV dBuV/m dBuV/m 1 pp 5819.459 8.57 34.25 38.93 86.18 90.07 74.00 16.07 Peak


34.33 38.94 46.29 50.28 74.00 -23.72 Peak



Report No.: SZEM160700527301

Page: 49 of 54

Test mode:   802.11a   Frequency(MHz):   5825   Remark:	Test mode:	802.11a	Frequency(MHz):	5825	Remark:	Peak	Horizontal
---	------------	---------	-----------------	------	---------	------	------------

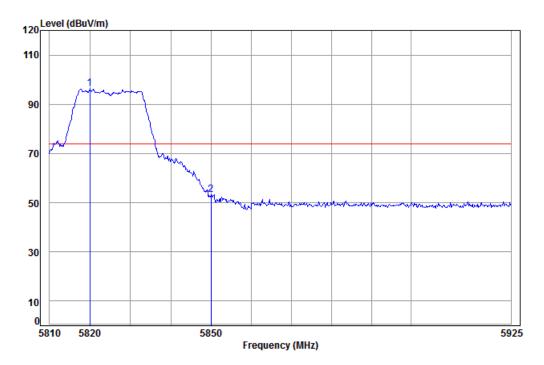

Condition: 3m Horizontal

Job No: : 3915CR

Mode: : 5825 Band edge

Freq			Preamp Factor					Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
 5819.916 5850.000								

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM160700527301

Page: 50 of 54

#### 6.11 Frequency Stability

Test Requirement:	47 CFR Part 15 Section 15.407(g)					
Test Method:	ANSI C63.10: 2013					
Test Setup:	Temperature Chamber					
	Spectrum Analyzer EUT  AC/DC Power supply					
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.					
Test Procedure:	<ul> <li>a. The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage.</li> <li>b. Turn the EUT on and couple its output to a spectrum analyzer.</li> <li>c. Turn the EUT off and set the chamber to the highest temperature specified.</li> <li>d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize.</li> <li>e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.</li> <li>f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.</li> </ul>					
Exploratory Test Mode:						
Final Test Mode:	Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; Only the worst case is recorded in the report.					



Report No.: SZEM160700527301

Page: 51 of 54

Test mode: 802.11a Frequency(MHz): 5745

Temperature (°C)	Voltage(VAC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45		5745.0076	7600	Pass
35	120	5745.0056	5600	Pass
25		5745.0023	2300	Pass
15	120	5745.0043	4300	Pass
5		5745.0054	5400	Pass
-5		5745.0067	6700	Pass
	138	5745.0054	5400	Pass
25	120	5745.0033	3300	Pass
	102	5745.0024	2400	Pass

Test mode:	802.11a	Frequency(MHz):	5785
------------	---------	-----------------	------

Temperature (°C)	Voltage(VAC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45		5785.0055	5500	Pass
35		5785.0076	7600	Pass
25	120	5785.0021	2100	Pass
15	120	5785.0045	4500	Pass
5		5785.0033	3300	Pass
-5		5785.0011	1100	Pass
	138	5785.0045	4500	Pass
25	120	5785.0077	7700	Pass
	102	5785.0044	4400	Pass



Report No.: SZEM160700527301

Page: 52 of 54

Test mode:	802.11a	Frequency(MHz):	5825
------------	---------	-----------------	------

Temperature (°C)	Voltage(VAC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45		5825.0066	6600	Pass
35	120	5825.0032	3200	Pass
25		5825.0013	1300	Pass
15	120	5825.0045	4500	Pass
5		5825.0023	2300	Pass
-5		5825.0034	3400	Pass
	138	5825.0054	5400	Pass
25	120	5825.0064	6400	Pass
	102	5825.0023	2300	Pass



Report No.: SZEM160700527301

Page: 53 of 54

#### 7 Photographs - EUT Test Setup

Test model No.: TXDP01

#### 7.1 Conducted Emission



#### 7.2 Radiated Emission






Report No.: SZEM160700527301

Page: 54 of 54

#### 7.3 Radiated Spurious Emission

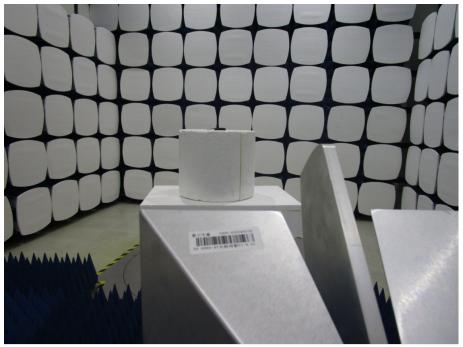

#### 8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1607005273CR.