

FCC Part22H&24E Test Report

Product Name : GPS Locator
Model No. : GL100M
FCC ID : YQD-GL100M

Applicant : Queclink Wireless Solutions Co., Ltd
Address : Room 501, Building 9, No 99, TianZhou Road,
Shanghai, China

Date of Receipt : 20/10/2011
Test Date : 20/10/2011~26/10/2011
Issued Date : 28/10/2011
Report No. : 11AS031R-HP-US-P07V01
Report Version : V 1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : 28/10/2011

Report No. : 11AS031R-HP-US-P07V01



Product Name : GPS Locator

Applicant : Queclink Wireless Solutions Co., Ltd

Address : Room 501, Building 9, No 99, TianZhou Road, Shanghai, China

Manufacturer : Queclink Wireless Solutions Co., Ltd

Address : Room 501, Building 9, No 99, TianZhou Road, Shanghai, China

Model No. : GL100M

FCC ID : YQD-GL100M

EUT Voltage : DC 3.4-4.2V

Brand Name : Queclink

Applicable Standard : FCC CFR Title 47 Part 2, TIA/EIA 603-C
FCC Part22 Subpart H, FCC Part24 Subpart E

Test Result : Complied

Performed Location : Suzhou EMC Laboratory
No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech
Development Zone., Suzhou, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Registration Number: 800392

Documented By : Alice Ni
(Engineering ADM: Alice Ni)

Reviewed By : Robin Wu
(Senior Engineer: Robin Wu)

Approved By : Marlin Chen
(Engineering Supervisor: Marlin Chen)

Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

Taiwan R.O.C.	: BSMI, NCC, TAF
Germany	: TUV Rheinland
Norway	: Nemko, DNV
USA	: FCC, NVLAP
Japan	: VCCI

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>
The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com



LinKou Testing Laboratory :

No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen, Lin-Kou Shiang, Taipei, Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com



Suzhou (China) Testing Laboratory :

No. 99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., Suzhou, China.
TEL : +86-512-6251-5088 / FAX : +86-512-6251-5098 E-Mail : service@quietek.com



TABLE OF CONTENTS

Description	Page
1. General Information	6
1.1. EUT Description	6
1.2. Mode of Operation	7
1.3. Tested System Details	8
1.4. Configuration of Tested System	9
1.5. EUT Exercise Software	10
2. Technical Test	11
2.1. Summary of Test Result	11
2.2. Test Environment	12
3. Peak Output Power	13
3.1. Test Equipment	13
3.2. Test Setup	14
3.3. Limit	14
3.4. Test Procedure	14
3.5. Uncertainty	16
3.6. Test Result	17
3.7. Test Photograph	19
4. Modulation Characteristic	22
4.1. Test Equipment	22
4.2. Test Setup	22
4.3. Limit	23
4.4. Test Procedure	23
4.5. Uncertainty	23
4.6. Test Result	24
5. Occupied Bandwidth	25
5.1. Test Equipment	25
5.2. Test Setup	25
5.3. Limit	26
5.4. Test Procedure	26
5.5. Uncertainty	26
5.6. Test Result	27
6. Spurious Emission At Antenna Terminals (+/- 1MHz)	31
6.1. Test Equipment	31
6.2. Test Setup	31
6.3. Limit	32
6.4. Test Procedure	32

6.5. Uncertainty	32
6.6. Test Result.....	33
7. Spurious Emission	35
7.1. Test Equipment.....	35
7.2. Test Setup.....	36
7.3. Limit.....	36
7.4. Test Procedure	36
7.5. Uncertainty	38
7.6. Test Result.....	39
7.7. Test Photograph	53
8. Frequency Stability Under Temperature & Voltage Variations.....	56
8.1. Test Equipment.....	56
8.2. Test Setup.....	56
8.3. Limit.....	57
8.4. Test Procedure	57
8.5. Uncertainty	57
8.6. Test Result.....	58
9. Attachment	60
➤ EUT Photograph.....	60

1. General Information

1.1. EUT Description

Product Name	GPS Locator
Brand Name	Queclink
Model No.	GL100M
Working Voltage	DC 3.4-4.2V
Hardware Version	1.01
Software Version	MTK 0828
RF Exposure Environment	Uncontrolled
GPS	
Operate Frequency	1575.42MHz
Type of modulation	BPSK
Antenna Type	Internal
Antenna Peak Gain	0dBi
2G	
Support Band	GSM850/PCS1900
Tx Frequency Range	GSM 850: 824MHz to 849MHz PCS 1900: 1850MHz to 1910MHz
Rx Frequency Range	GSM 850: 869MHz to 894MHz PCS 1900: 1930MHz to 1990MHz
GPRS Class	12
GPRS Type	Class B
Type of modulation	GMSK for GSM/GPRS
Antenna Type	Internal
Antenna Peak Gain	GPRS 850: -3dBi GPRS 1900: -1dBi
AC Adapter	M/N: P-051B-050050 Input: 100-240V~50/60Hz 0.5A Output: DC 5V, 0.5A

1.2. Mode of Operation

QuieTek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: GPRS 850 Link
Mode 2: GPRS 1900 Link

Note:


1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Radio Communication Tester	R&S	CMU 200	112012	N/A

1.4. Configuration of Tested System

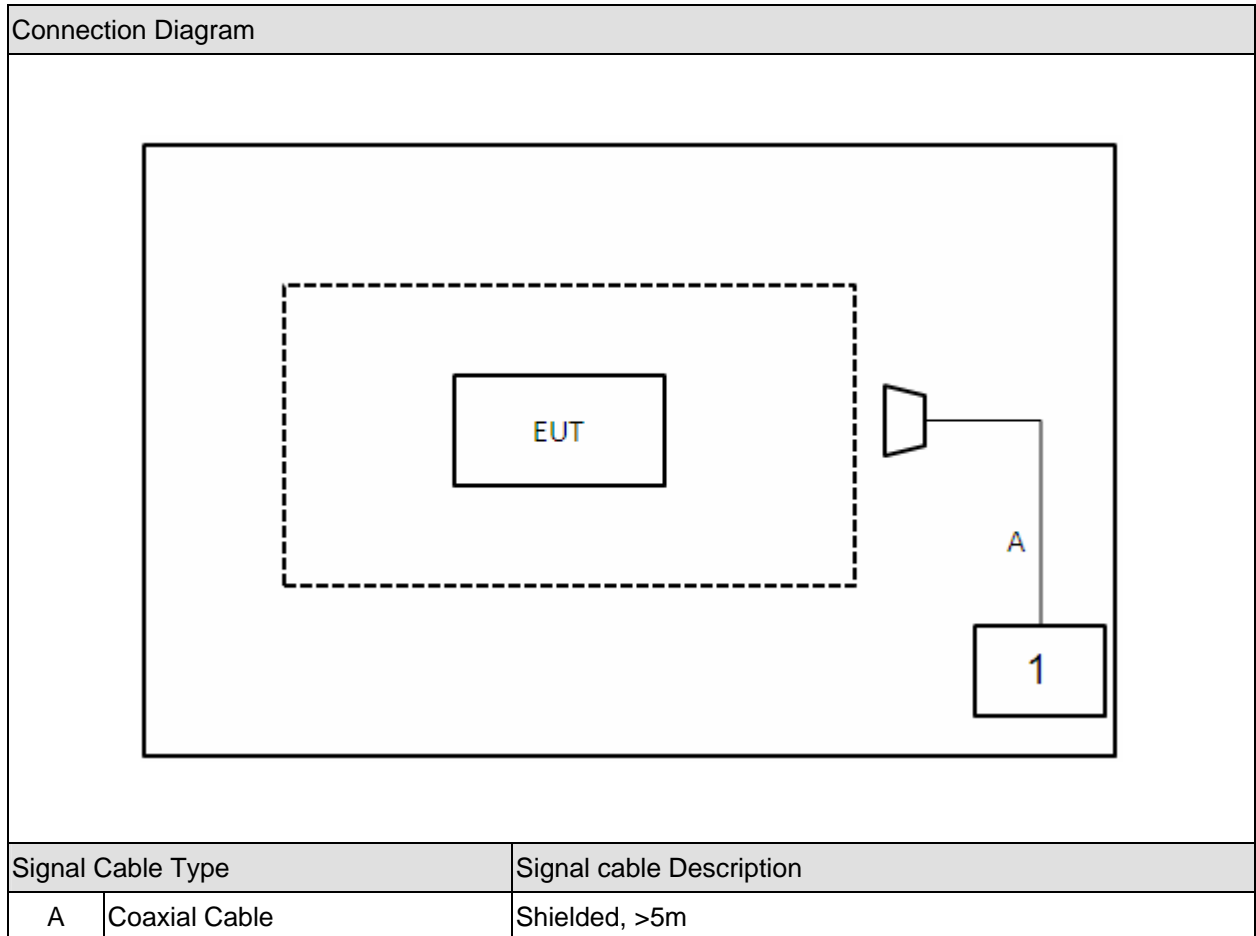

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	EUT Communicate with CMU200, then select channel to test.

2. Technical Test

2.1. Summary of Test Result

- ☒ No deviations from the test standards
☐ Deviations from the test standards as below description:

For GPRS 850 (FCC Part 22H & Part 2)

Emission			
Performed Item	Normative References	Test Performed	Deviation
Peak Output Power	FCC Part 22.913(a)(2) and Part 2.1046	Yes	No
Modulation Characteristic	FCC Part 2.1047(d)	Yes	No
Occupied Bandwidth	FCC Part 2.1049	Yes	No
Spurious Emission At Antenna Terminals (+/- 1MHz)	FCC Part 22.917(a) and Part 2.1049	Yes	No
Spurious Emission	FCC Part 22.917(b) and Part 2.1051, 2.1053	Yes	No
Frequency Stability Under Temperature & Voltage Variations	FCC Part 22.355 and 2.1055	Yes	No

For GPRS 1900 (FCC Part 24E & Part 2)

Emission			
Performed Item	Normative References	Test Performed	Deviation
Peak Output Power	FCC Part 24.232(b) and Part 2.1046	Yes	No
Modulation Characteristic	FCC Part 2.1047(d)	Yes	No
Occupied Bandwidth	FCC Part 24.238(b) and Part 2.1049	Yes	No
Spurious Emission At Antenna Terminals (+/- 1MHz)	FCC Part 24.238(a) and Part 2.1049	Yes	No
Spurious Emission	FCC Part 24.238(b) and Part 2.1051, 2.1053	Yes	No
Frequency Stability Under Temperature & Voltage Variations	FCC Part 24.235 and 2.1055	Yes	No

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	23
Humidity (%RH)	25-75	52
Barometric pressure (mbar)	860-1060	950-1000

3. Peak Output Power


3.1. Test Equipment

Peak Output Power / AC-5


Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2012.04.10
Radio Communication Tester	R&S	CMU 200	117088	2012.04.29
Dual Directional Coupler	Agilent	778D	20160	2012.04.20
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2012.04.20
PSG Analog Signal Generator	Agilent	E8257D	MY44321116	2012.04.23
Preamplifier	QuieTek	AP-025C	CHM-0503006	2012.05.05
Preamplifier	Miteq	NSP1800-25	1364185	2012.05.05
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2012.10.18
Half Wave Tuned Dipole Antenna	COM-POWER	AD-100	40137	2011.11.24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	737	2011.11.24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	499	2012.06.11
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC5-TH	2012.01.14

3.2. Test Setup

Conducted Power Measurement:

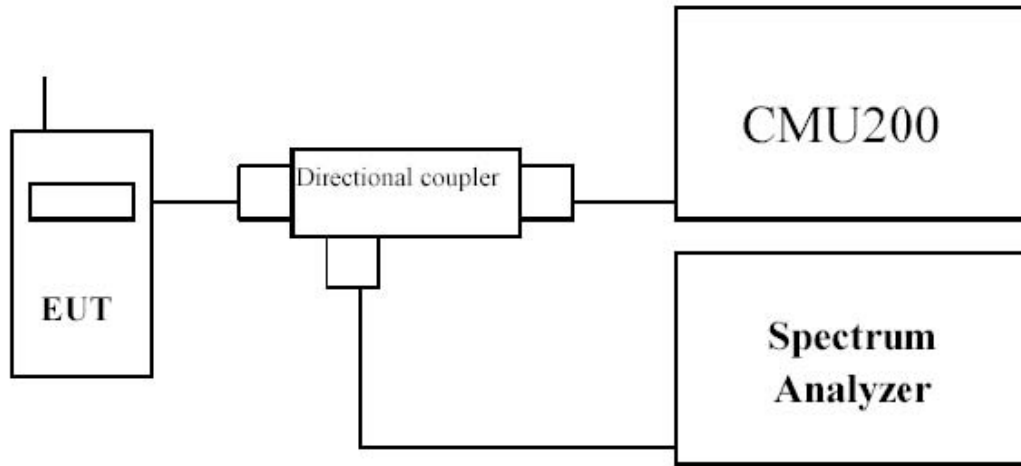

Radiated Power Measurement:

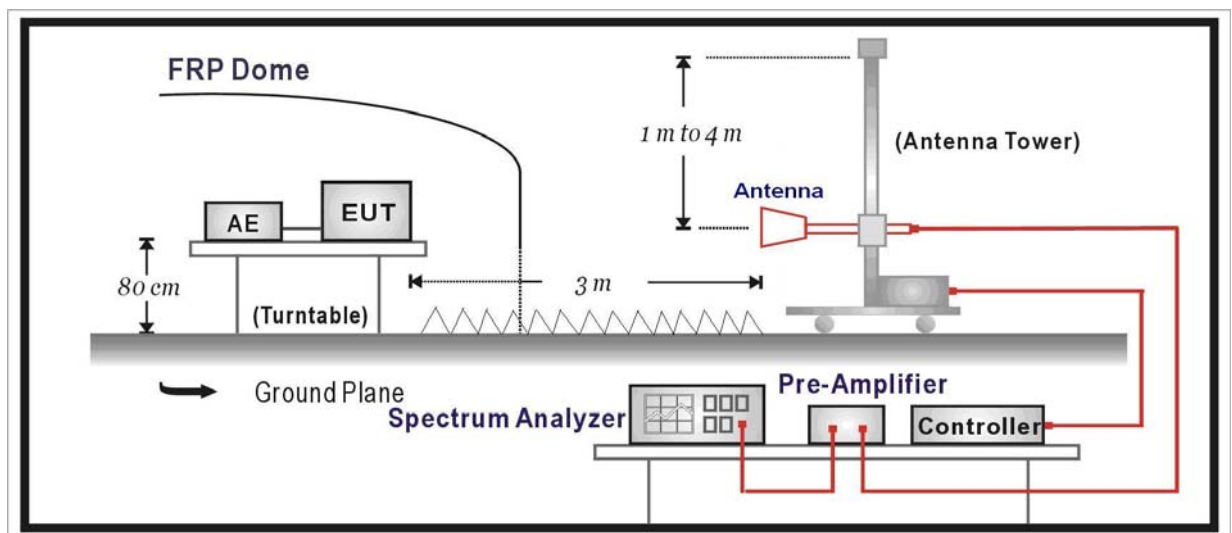

3.3. Limit

For FCC Part 22.913(a)(2):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(b):

The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

3.4. Test Procedure

Conducted Power Measurement:

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- c) EUT Communicate with CMU200, then selects a channel for testing.
- d) Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- e) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- f) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- g) The output of the test antenna shall be connected to the measuring receiver.
- h) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- i) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- j) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- k) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- l) The maximum signal level detected by the measuring receiver shall be noted.
- m) The transmitter shall be replaced by a substitution antenna.
- n) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- o) The substitution antenna shall be connected to a calibrated signal generator.
- p) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- q) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- r) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- s) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- t) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if

necessary.

- u) Test site anechoic chamber refer to ANSI C63.4: 2009.

3.5. Uncertainty

The measurement uncertainty is defined as for Conducted Power Measurement ± 1.2 dB,
for Radiated Power Measurement ± 3.2 dB

3.6. Test Result

Table 1

No. of timeslots	1	2	3	4
Duty Cycle	1 : 8	1 : 4	1 : 2.66	1 : 2
Timebased avg. power compared to slotted avg. power	-9 dB	-6 dB	-4.25 dB	-3 dB

This device supports GPRS Class 12 with maximum 4 slots uplink.

The following table shows the conducted power measured and time based average power calculated:

Table 2

GPRS850

Channel No.	Frequency (MHz)	Modulation	Avg. Burst Power (dBm)	Duty Cycle Factor (dB)	Frame Power (dBm)	ERP (dBm)	Limit (dBm)
128	824.2	GMSK	32.85	-9	23.85	24.37	38.50
189	836.4	GMSK	32.90	-9	23.90	24.51	38.50
251	848.8	GMSK	32.91	-9	23.91	26.05	38.50

GPRS1900

Channel No.	Frequency (MHz)	Modulation	Avg. Burst Power (dBm)	Duty Cycle Factor (dB)	Frame Power (dBm)	EIRP (dBm)	Limit (dBm)
512	1850.2	GMSK	29.86	-9	20.86	24.07	33.00
661	1880.0	GMSK	29.87	-9	20.87	23.49	33.00
810	1909.8	GMSK	29.90	-9	20.90	22.56	33.00

Radiated Measurement

GPRS850

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)								
824.2	-21.71	H	12.05	1.76	-0.02	10.27	38.50	-28.23
824.2	-8.35	V	26.15	1.76	-0.02	24.37	38.50	-14.13
Middle Channel 189 (836.40MHz)								
836.4	-23.81	H	10.07	1.75	0.10	8.42	38.50	-30.08
836.4	-8.91	V	26.16	1.75	0.10	24.51	38.50	-13.99
High Channel 251 (848.80MHz)								
848.8	-21.84	H	12.17	1.78	0.13	10.52	38.50	-27.98
848.8	-6.91	V	27.70	1.78	0.13	26.05	38.50	-12.45

GPRS1900


Frequency (MHz)	SA Reading (dBm)	Ant .Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)								
1850.2	7.14	H	5.21	2.68	10.40	12.93	33.00	-20.07
1850.2	18.47	V	16.35	2.68	10.40	24.07	33.00	-8.93
Middle Channel 661 (1880.00MHz)								
1880.0	10.21	H	8.26	2.68	10.43	16.01	33.00	-16.99
1880.0	18.03	V	15.74	2.68	10.43	23.49	33.00	-9.51
High Channel 810 (1909.80MHz)								
1909.8	8.69	H	6.92	2.70	10.44	14.66	33.00	-18.34
1909.8	17.03	V	14.82	2.70	10.44	22.56	33.00	-10.44

3.7. Test Photograph

Description: ERP Test Setup



Description: Substitution Antenna for ERP Test

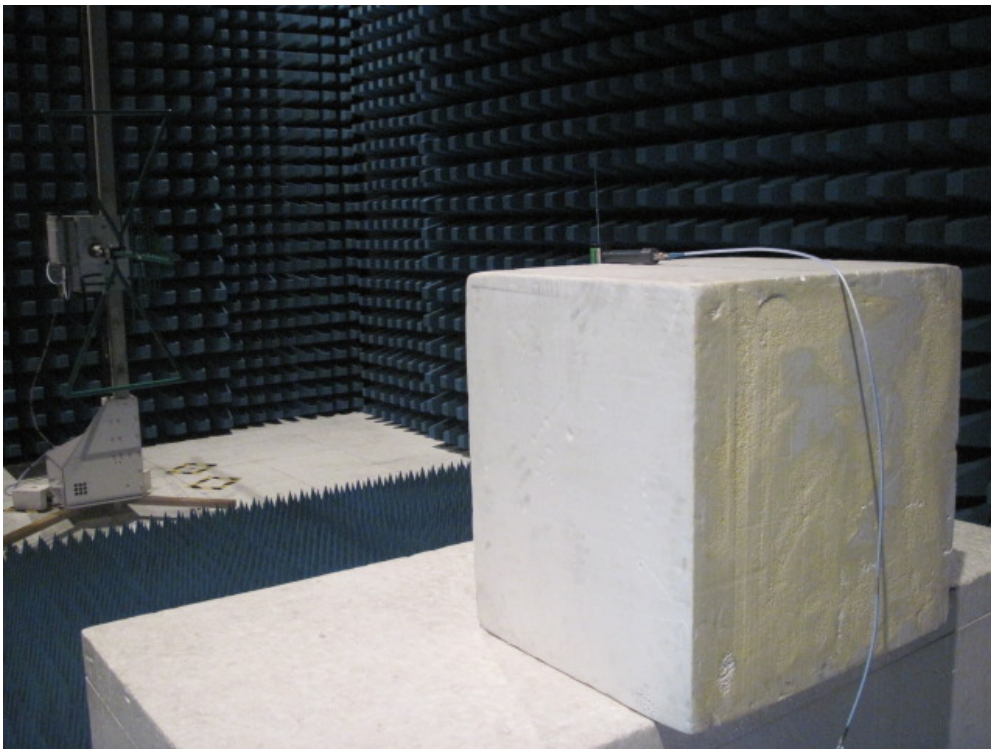

Description: EIRP Test Setup



Description: Substitution Antenna for EIRP Test



Description: Conducted Output Power Measurement Setup




4. Modulation Characteristic

4.1. Test Equipment

Modulation Characteristic / AC-6

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
PSA Series Spectrum Analyzer	Agilent	N9020A	MY49100159	2012.04.23
Radio Communication Tester	R&S	CMU 200	117088	2012.04.29
Dual Directional Coupler	Agilent	778D	20160	2012.04.20
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2012.04.20
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2012.01.14

4.2. Test Setup

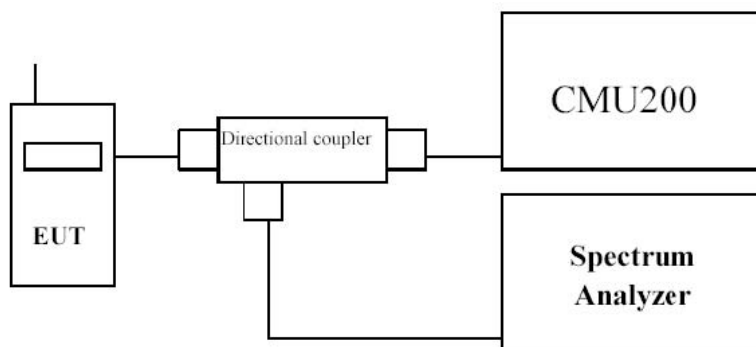

4.3. Limit

N/A

4.4. Test Procedure

GMSK is a form of binary signaling schemes which represent digital states as a shift between discrete sinusoidal frequencies called Frequency Shift Keying (FSK). Minimum Shift Keying (MSK) is continuous phase FSK with the smallest possible modulation index h . Modulation index is defined as: $h = 2 \cdot F \cdot T_b$

where F = Peak frequency deviation in Hz and T_b = Bit period in seconds

Two discrete frequencies, representing two distinct digital states, with equal phases at switch time $t = 0$ requires a minimum value of $h = 0.5$. The Gaussian part of GMSK describes the fact that the digital pulses are filtered in the time domain. This results in bits which are sinusoidal rather than square. The effective spectrum is then compressed with the average carrier frequency in the center of the passband. This is a great advantage because of the significantly reduced bandwidth. GMSK is utilized because of these bandwidth conservation properties.

The bandwidth for GSM is a 60 MHz up-link at 1850-1910 MHz and down-link at 1930-1990 MHz. The 65 MHz is divided into 299 channels, each of which is 200 kHz wide. Slight spectral spillage is allowed into neighboring channels (which is minimized by GMSK). This separated transmit/receive frequencies scheme under GSM enables easier duplex filtering.

Within the bandwidth, individual channels are subdivided into multiframes (made of 26 frames), frames (made of 8 time slots), and time slots (made of 8 fields). The time slots are 0.57 ms long allowing 156.25 bits of information including overhead.

The modulation used in GPRS is the same used in GSM. A GSM channel contains eight timeslots, each timeslot is dedicated to one circuit switched call. For GPRS the timeslots are assigned on an as needed basis, and more than one timeslot can be assigned for a particular transmission depending on the network and the device.

4.5. Uncertainty

The measurement uncertainty is defined as 0.1%

4.6. Test Result

The modulation of GPRS were verified and confirmed compliance with requirement.


5. Occupied Bandwidth

5.1. Test Equipment

Occupied Bandwidth / TR-8

Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	N9020A	MY49100159	2012.04.23
Radio Communication Tester	R&S	CMU 200	117088	2012.04.29
Dual Directional Coupler	Agilent	778D	20160	2012.04.20
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2012.04.20
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2012.01.14

5.2. Test Setup

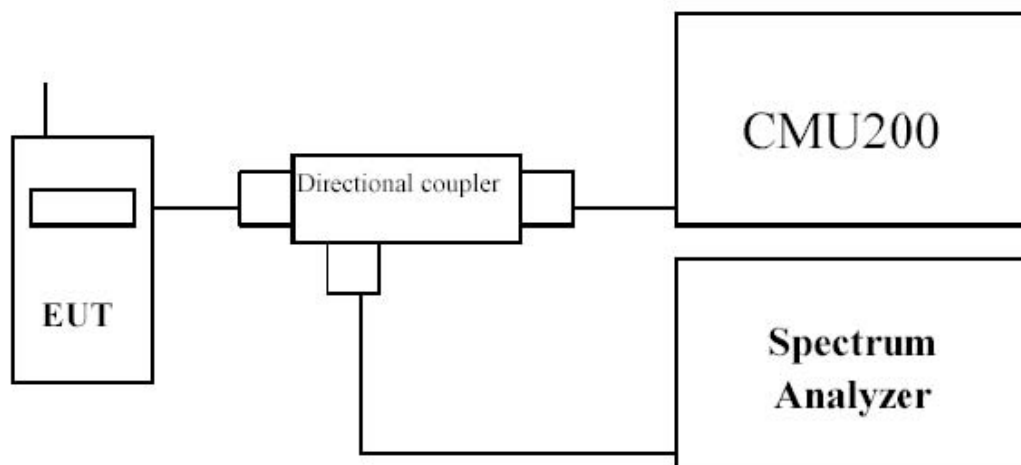

5.3. Limit

N/A

5.4. Test Procedure

Using Occupied Bandwidth measurement function of spectrum analyzer, and setting as follows:

For GPRS 850/1900 test --- RBW = 3 kHz and VBW = 10 kHz

5.5. Uncertainty

The measurement uncertainty is defined as ± 10 Hz

5.6. Test Result

Product	GPS Locator		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: GPRS 850 Link		
Date of Test	2011/10/23	Test Site	TR-8

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.20	318.2	248.38
189	836.40	316.0	247.38
251	848.80	317.8	248.56

Figure Channel 128 (824.20MHz)

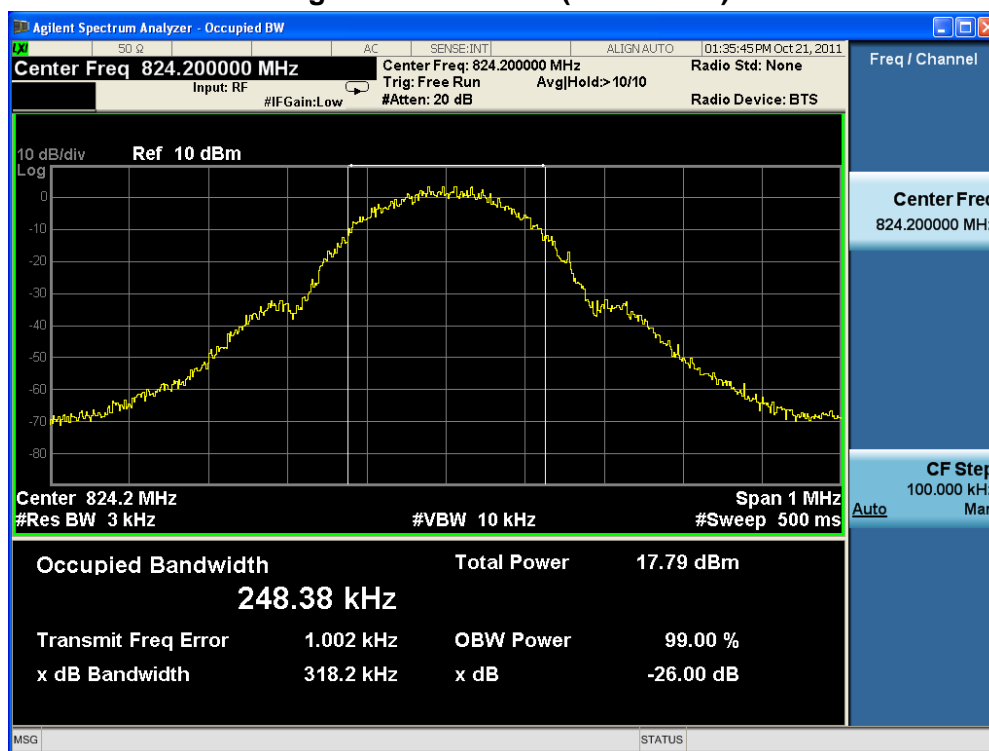


Figure Channel 189 (836.40MHz)


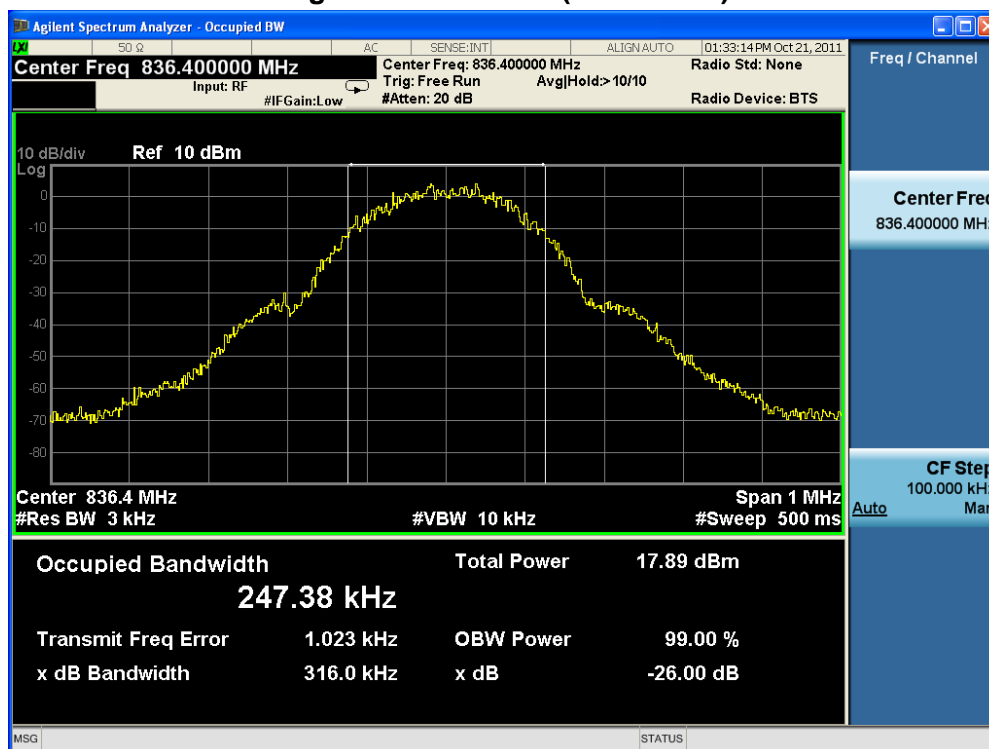


Figure Channel 251 (848.80MHz)

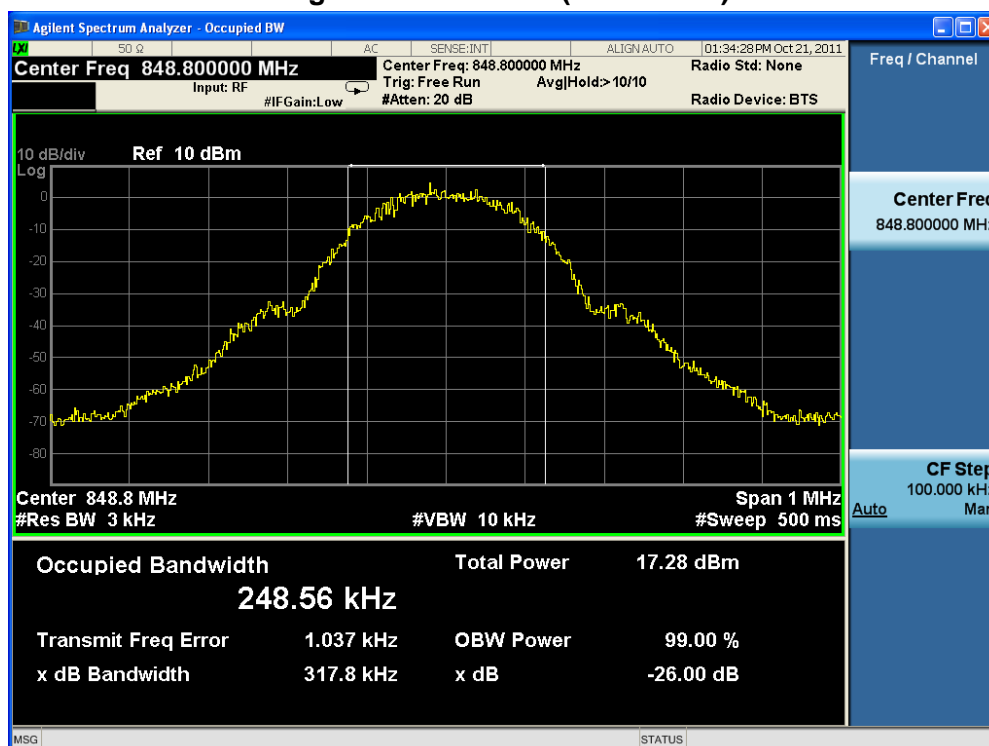

Product	GPS Locator		
Test Item	Occupied Bandwidth		
Test Mode	Mode 2: GPRS 1900 Link		
Date of Test	2011/10/23	Test Site	TR-8

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.20	318.4	246.93
661	1880.00	316.9	246.92
810	1909.80	319.7	248.32

Figure Channel 512 (1850.20MHz)

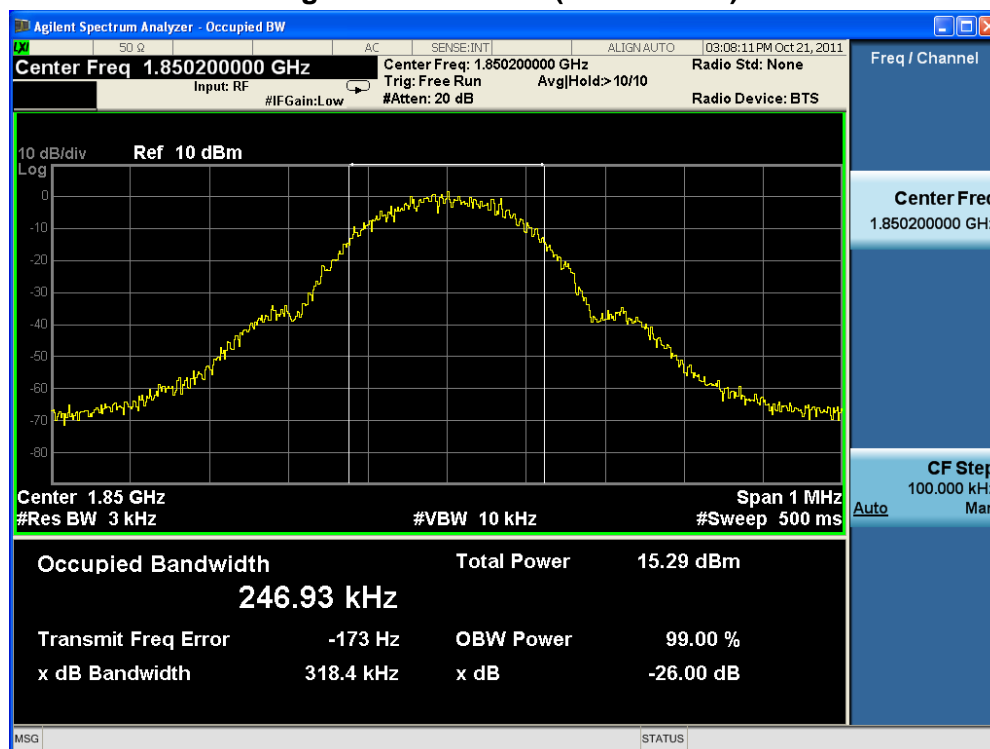


Figure Channel 661 (1880.00MHz)


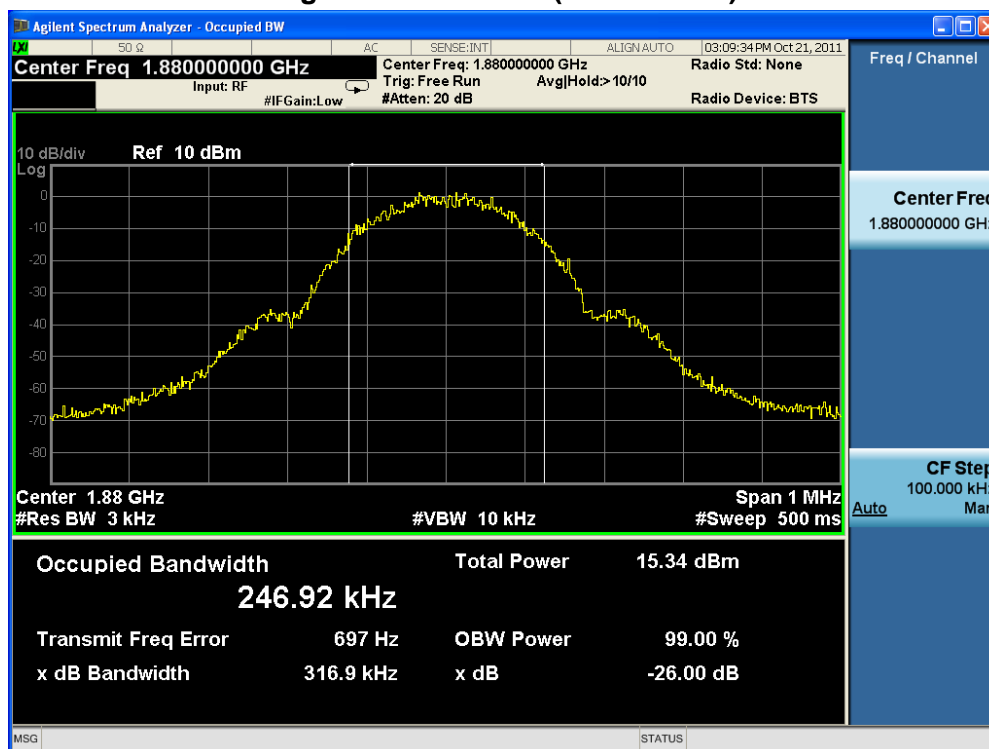


Figure Channel 810 (1909.80MHz)

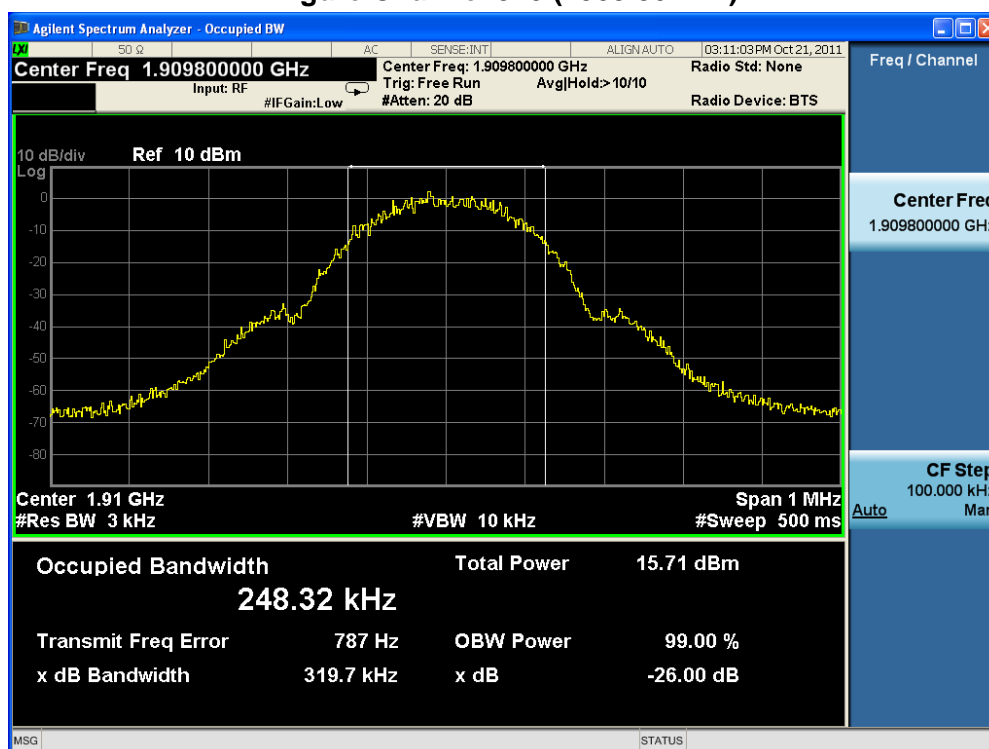


6. Spurious Emission At Antenna Terminals (+/- 1MHz)

6.1. Test Equipment

Spurious Emission At Antenna Terminals (+/- 1MHz) / TR-8

Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	N9020A	MY49100159	2012.04.23
Radio Communication Tester	R&S	CMU 200	117088	2012.04.29
Dual Directional Coupler	Agilent	778D	20160	2012.04.20
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2012.04.20
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2012.01.14

6.2. Test Setup

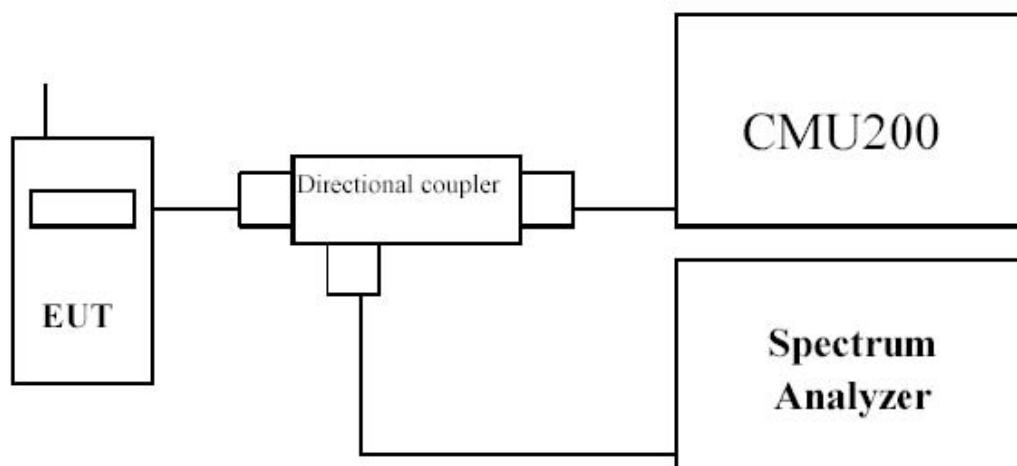

6.3. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

6.4. Test Procedure

In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

6.5. Uncertainty

The measurement uncertainty is defined as ± 1.2 dB.

6.6. Test Result

Product	GPS Locator		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 1: GPRS 850 Link		
Date of Test	2011/10/23	Test Site	TR-8

Figure Channel 128 (824.20MHz)


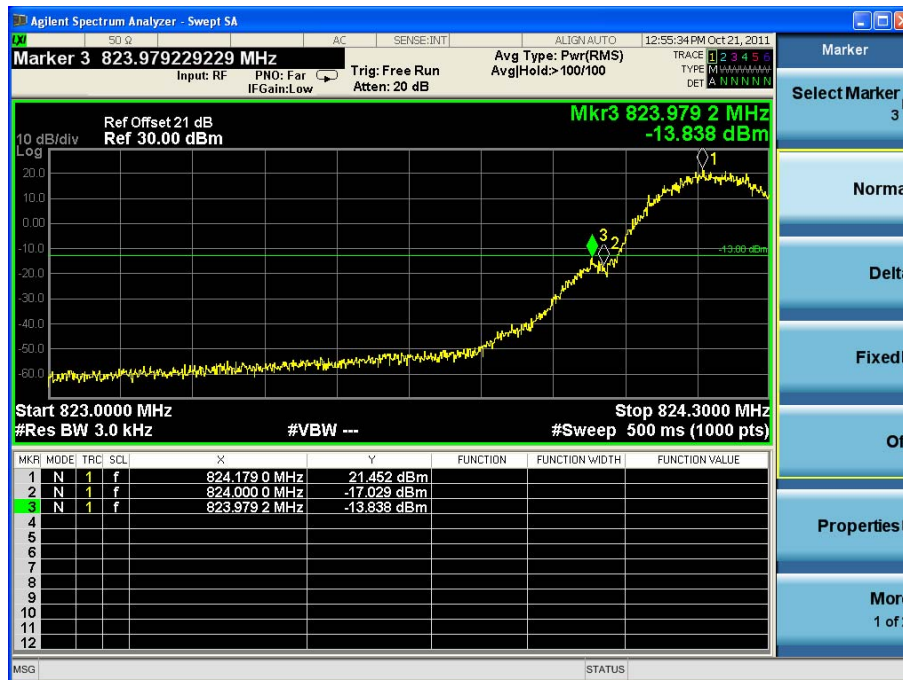


Figure Channel 251 (848.80MHz)

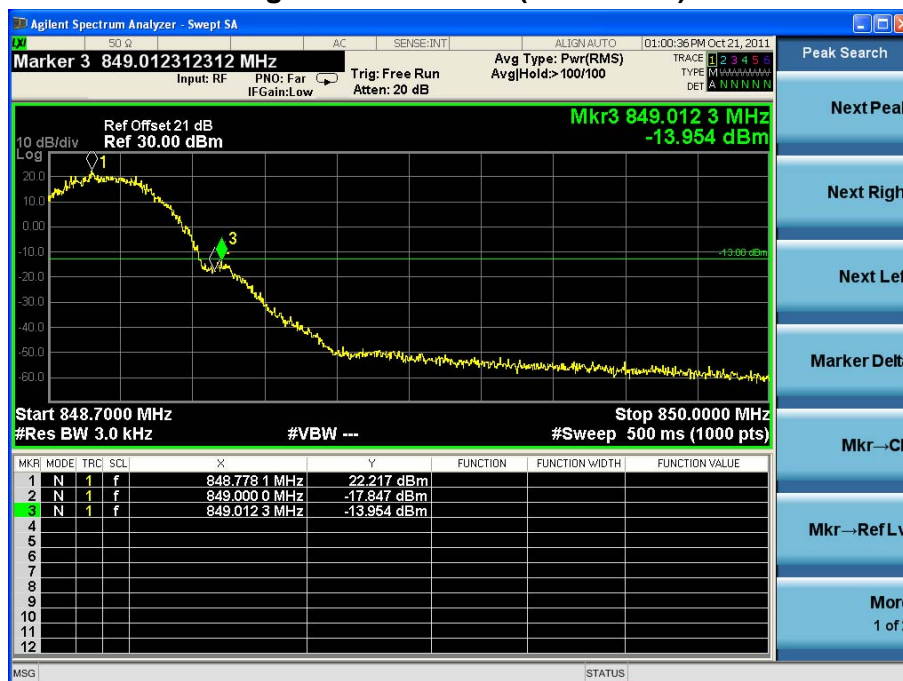

Product	GPS Locator		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 2: GPRS 1900 Link		
Date of Test	2011/10/23	Test Site	TR-8

Figure Channel 512 (1850.20MHz)


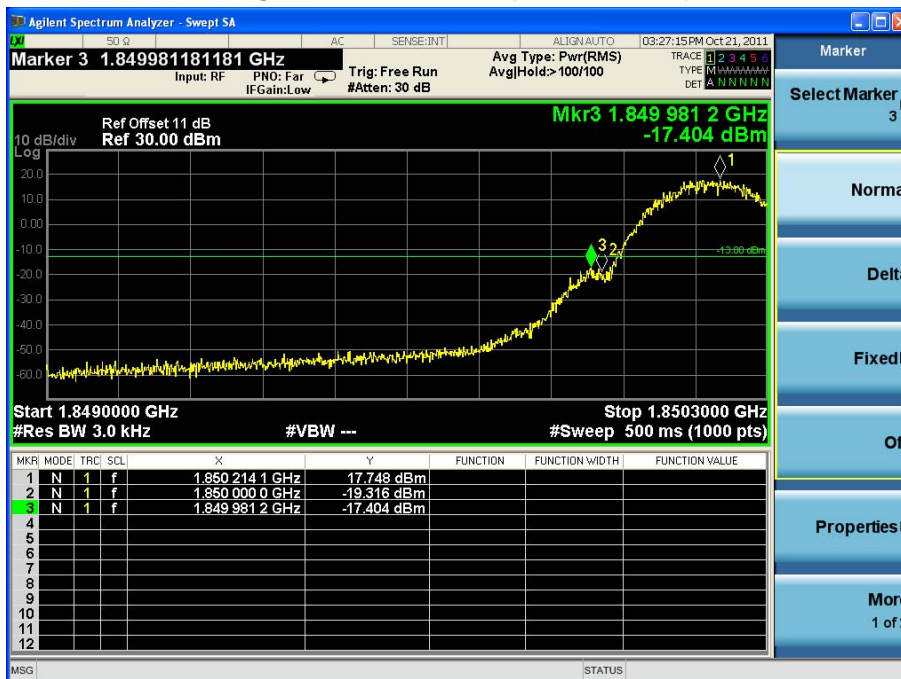


Figure Channel 810 (1909.80MHz)

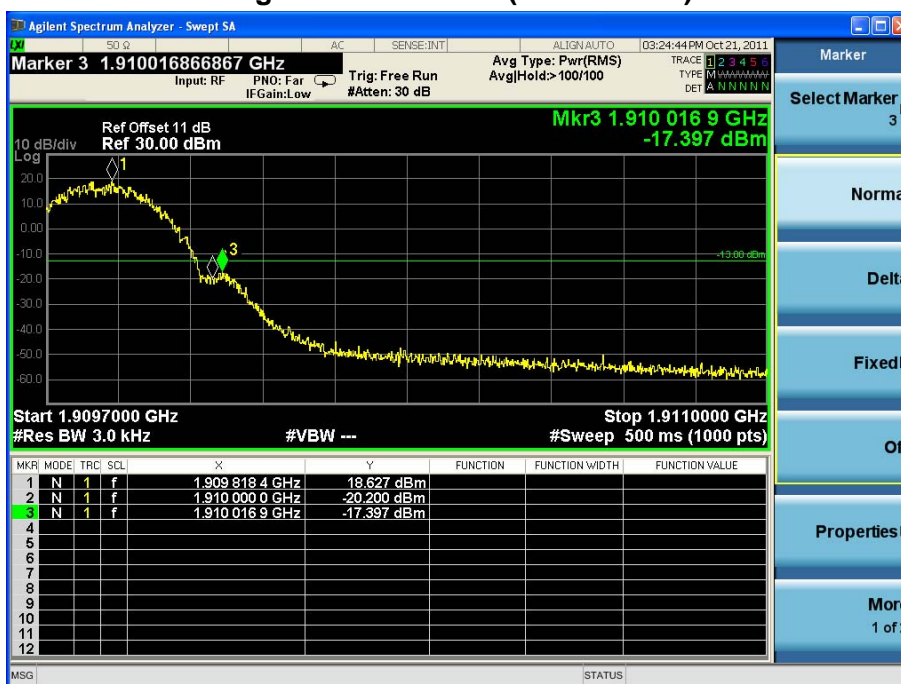

7. Spurious Emission


7.1. Test Equipment

Spurious Emission / AC-5


Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2012.04.10
Radio Communication Tester	R&S	CMU 200	117088	2012.04.29
Dual Directional Coupler	Agilent	778D	20160	2012.04.20
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2012.04.20
PSG Analog Signal Generator	Agilent	E8257D	MY44321116	2012.04.23
Preamplifier	QuieTek	AP-025C	CHM-0503006	2012.05.05
Preamplifier	Miteq	NSP1800-25	1364185	2012.05.05
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2012.10.18
Half Wave Tuned Dipole Antenna	COM-POWER	AD-100	40137	2011.11.24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	737	2011.11.24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	499	2012.06.11
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC5-TH	2012.01.14

7.2. Test Setup

Radiated Spurious Measurement: below 1GHz

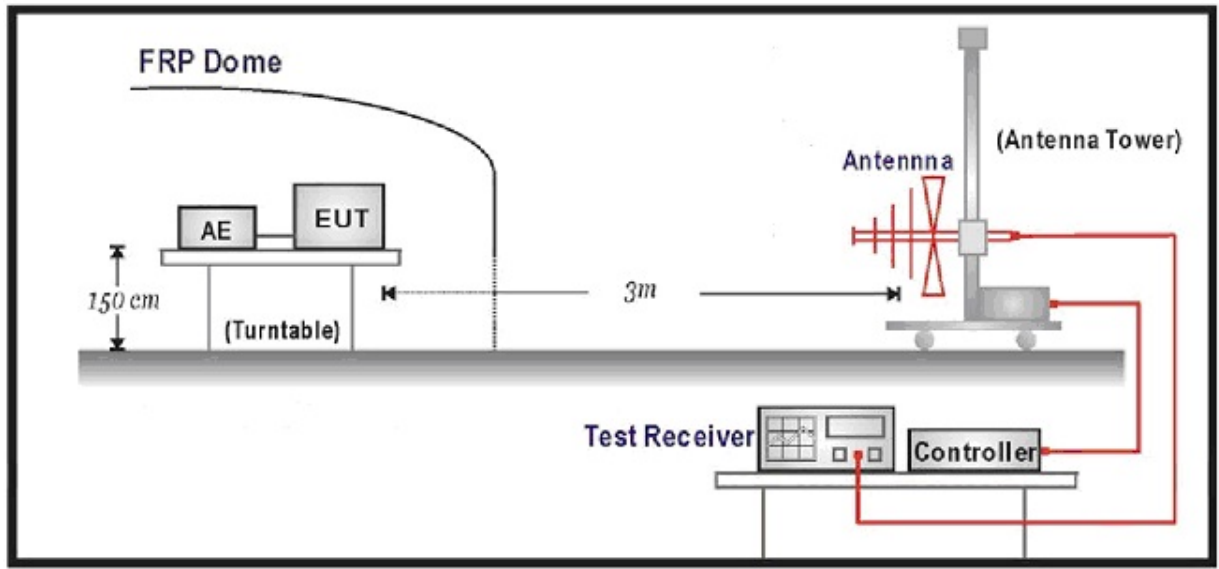

Radiated Spurious Measurement: above 1GHz

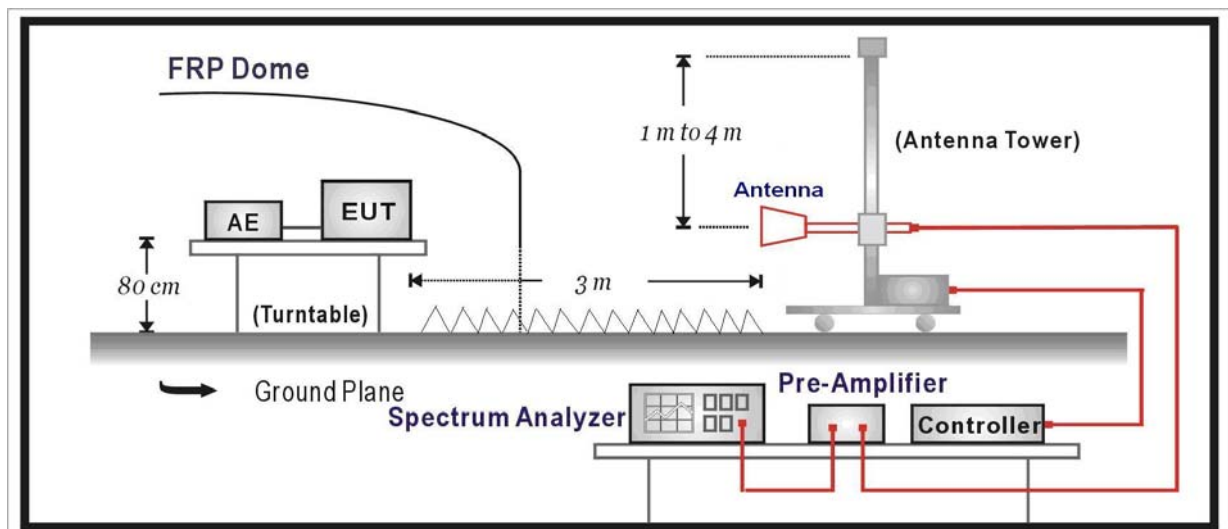

7.3. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

7.4. Test Procedure

Conducted Spurious Measurement:

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- c) EUT Communicate with CMU200, then select a channel for testing.
- d) Add a correction factor to the display of spectrum, and then test.
- e) The resolution bandwidth of the spectrum analyzer was set at 1 MHz, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:

- a) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c) The output of the test antenna shall be connected to the measuring receiver.
- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- v) The maximum signal level detected by the measuring receiver shall be noted.
- h) The transmitter shall be replaced by a substitution antenna.
- i) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- j) The substitution antenna shall be connected to a calibrated signal generator.
- k) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- l) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- m) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- n) The measurement shall be repeated with the test antenna and the substitution antenna

orientated for horizontal polarization.

- o) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- p) The frequency range was checked up to 10th harmonic.
- q) Test site anechoic chamber refer to ANSI C63.4: 2009

7.5. Uncertainty

The measurement uncertainty is defined as 3.2 dB for Radiated Power Measurement.

7.6. Test Result

Product	GPS Locator		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 1: GPRS 850 Link		
Date of Test	2011/10/23	Test Site	AC-5

Below 1GHz

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)								
256.50	-94.61	V	-67.64	1.45	0.04	-69.05	-13.00	-56.05
437.40	-96.01	V	-66.02	1.90	0.44	-67.48	-13.00	-54.48
256.50	-94.89	H	-66.94	1.45	0.04	-68.35	-13.00	-55.35
437.40	-96.44	H	-65.63	1.90	0.44	-67.09	-13.00	-54.09
Middle Channel 189 (836.40MHz)								
256.50	-94.71	V	-66.77	1.45	0.04	-68.18	-13.00	-55.18
437.40	-96.91	V	-66.10	1.90	0.44	-67.56	-13.00	-54.56
256.50	-94.90	H	-66.96	1.45	0.04	-68.37	-13.00	-55.37
437.40	-96.45	H	-65.64	1.90	0.44	-67.10	-13.00	-54.10
High Channel 251 (848.80MHz)								
256.50	-94.58	V	-67.62	1.45	0.04	-69.03	-13.00	-56.03
437.40	-95.93	V	-65.95	1.90	0.44	-67.41	-13.00	-54.41
256.50	-94.75	H	-67.91	1.45	0.04	-69.32	-13.00	-56.32
437.40	-96.47	H	-66.65	1.90	0.44	-68.11	-13.00	-55.11

Above 1GHz

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)								
1646.00	-50.91	V	-55.62	2.50	9.75	-48.37	-13.00	-35.37
2470.50	-60.73	V	-61.91	3.12	10.48	-54.55	-13.00	-41.55
1646.00	-53.64	H	-57.77	2.50	9.75	-50.52	-13.00	-37.52
2470.50	-59.29	H	-60.33	3.12	10.48	-52.97	-13.00	-39.97
Middle Channel 189 (836.40MHz)								
1671.50	-44.67	V	-49.48	2.52	9.95	-42.05	-13.00	-29.05
2513.00	-61.09	V	-62.56	3.18	10.62	-55.12	-13.00	-42.12
1671.50	-53.80	H	-58.11	2.52	9.95	-50.68	-13.00	-37.68

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2513.00	-60.02	H	-61.10	3.18	10.62	-53.66	-13.00	-40.66
High Channel 251 (848.80MHz)								
1697.00	-44.67	V	-49.56	2.54	10.06	-42.04	-13.00	-29.04
2547.00	-62.44	V	-63.02	3.14	10.68	-55.48	-13.00	-42.48
1697.00	-52.39	H	-56.79	2.54	10.06	-49.27	-13.00	-36.27
2547.00	-61.56	H	-61.89	3.14	10.68	-54.35	-13.00	-41.35

Product	GPS Locator		
Test Item	Spurious Emission		
Test Mode	Mode 2: GPRS 1900 Link		
Date of Test	2011/10/23	Test Site	AC-5

Below 1GHz

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)								
256.50	-94.75	V	-67.91	1.45	0.04	-69.32	-13.00	-56.32
437.40	-96.47	V	-66.65	1.90	0.44	-68.11	-13.00	-55.11
256.50	-94.64	H	-66.82	1.45	0.04	-68.23	-13.00	-55.23
437.40	-95.89	H	-65.25	1.90	0.44	-66.71	-13.00	-53.71
Middle Channel 661 (1880.00MHz)								
256.50	-95.06	V	-67.25	1.45	0.04	-68.66	-13.00	-55.66
437.40	-96.72	V	-66.07	1.90	0.44	-67.53	-13.00	-54.53
256.50	-94.64	H	-66.82	1.45	0.04	-68.23	-13.00	-55.23
437.40	-95.89	H	-65.25	1.90	0.44	-66.71	-13.00	-53.71
High Channel 810 (1909.80MHz)								
256.50	-95.19	V	-68.35	1.45	0.04	-69.76	-13.00	-56.76
437.40	-96.44	V	-66.62	1.90	0.44	-68.08	-13.00	-55.08
256.50	-95.07	H	-68.23	1.45	0.04	-69.64	-13.00	-56.64
437.40	-96.10	H	-66.28	1.90	0.44	-67.74	-13.00	-54.74



Above 1GHz


Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)								
3703.00	-60.88	V	-57.43	3.84	12.69	-48.58	-13.00	-35.58
5547.50	-63.35	V	-54.85	4.82	13.15	-46.52	-13.00	-33.52
3703.00	-60.08	H	-56.70	3.84	12.69	-47.85	-13.00	-34.85
5547.50	-65.30	H	-57.42	4.82	13.15	-49.09	-13.00	-36.09
Middle Channel 661 (1880.00MHz)								
3762.50	-58.97	V	-55.67	3.73	12.72	-46.68	-13.00	-33.68
5641.00	-63.65	V	-56.03	4.93	13.14	-47.82	-13.00	-34.82
3762.50	-58.74	H	-55.52	3.73	12.72	-46.53	-13.00	-33.53

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5641.00	-64.01	H	-56.08	4.93	13.14	-47.87	-13.00	-34.87
High Channel 810 (1909.80MHz)								
3822.00	-58.76	V	-55.04	4.02	12.73	-46.33	-13.00	-33.33
5726.00	-60.75	V	-52.13	4.87	13.11	-43.89	-13.00	-30.89
3822.00	-58.75	H	-54.89	4.02	12.73	-46.18	-13.00	-33.18
5726.00	-63.07	H	-54.83	4.87	13.11	-46.59	-13.00	-33.59


Product	GPS Locator		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 1: GPRS 850 Link		
Date of Test	2011/10/23	Test Site	TR-8



Channel 128

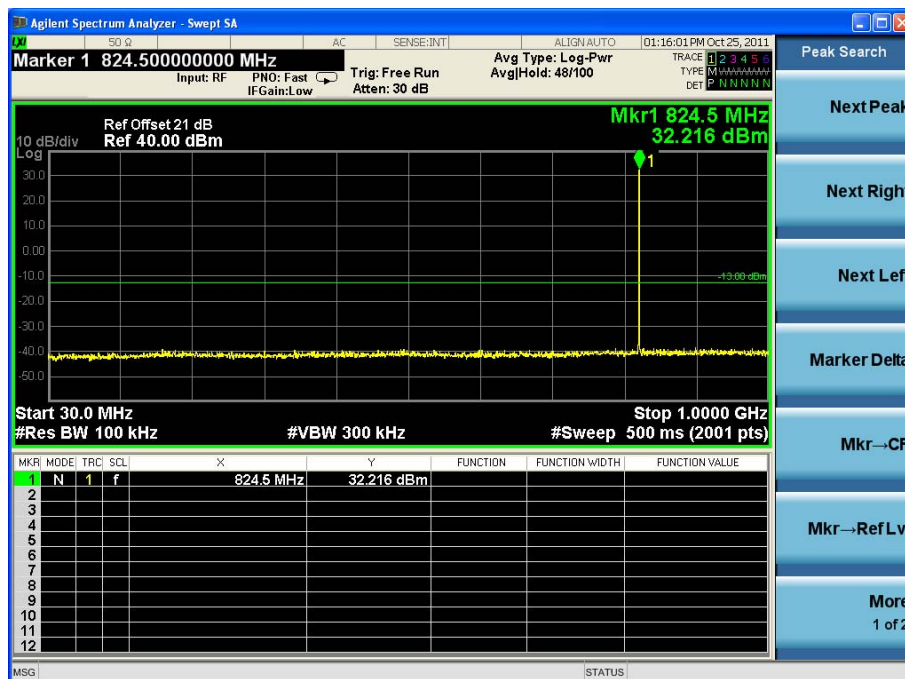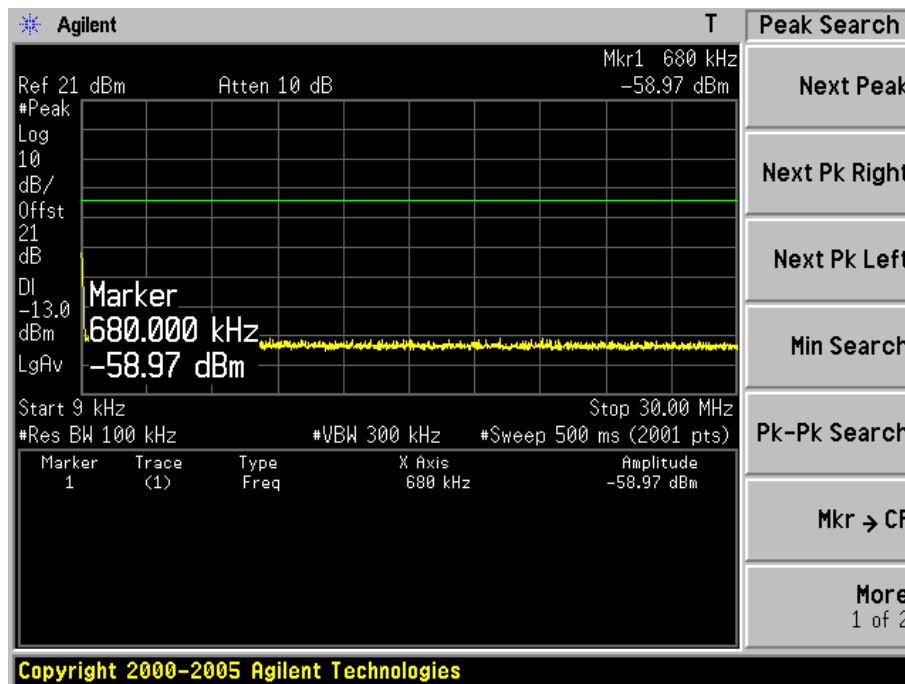


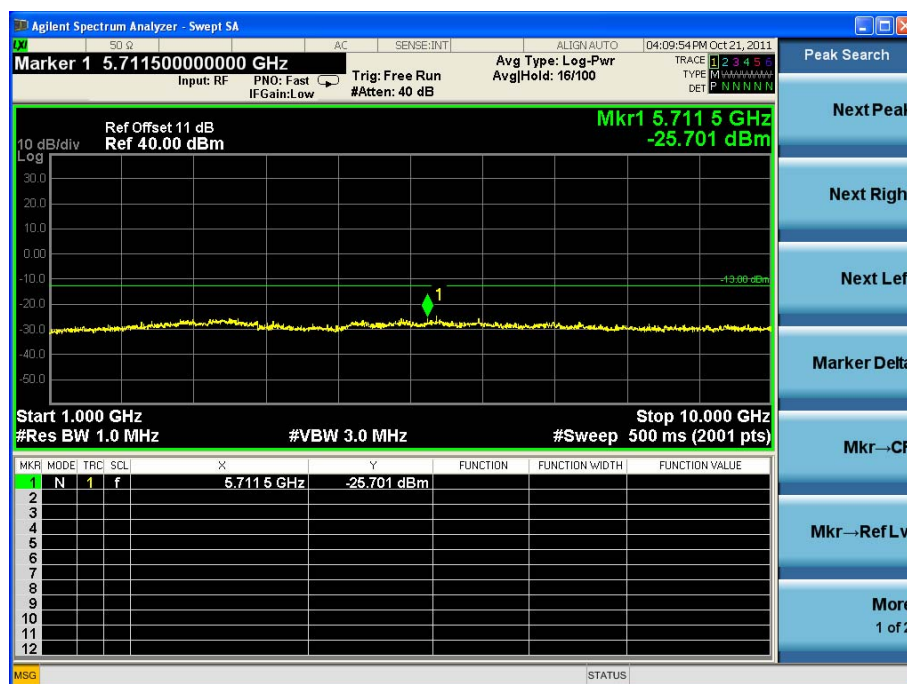



Channel 189

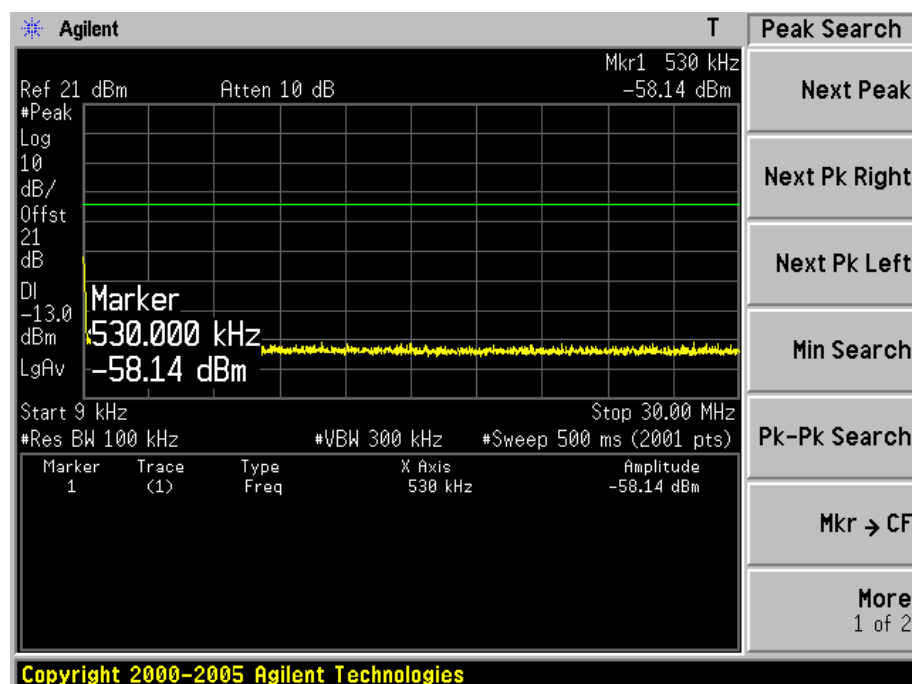

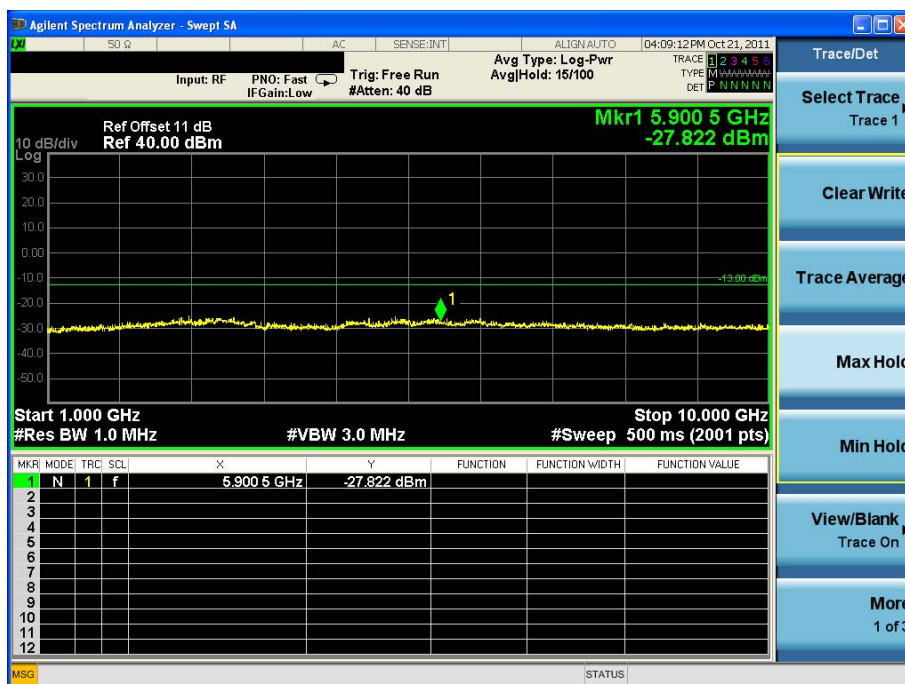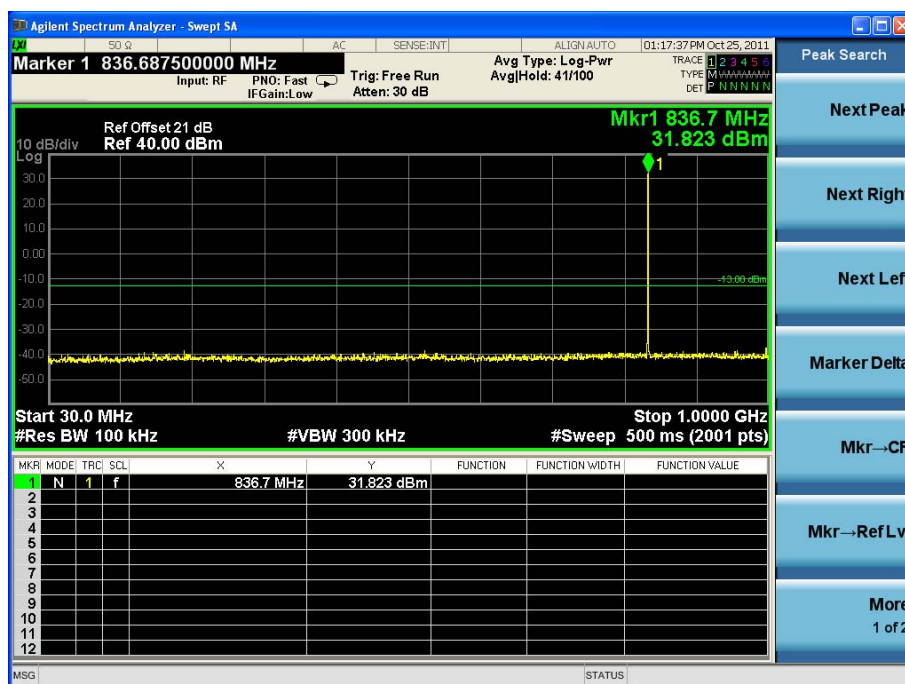



Channel 251

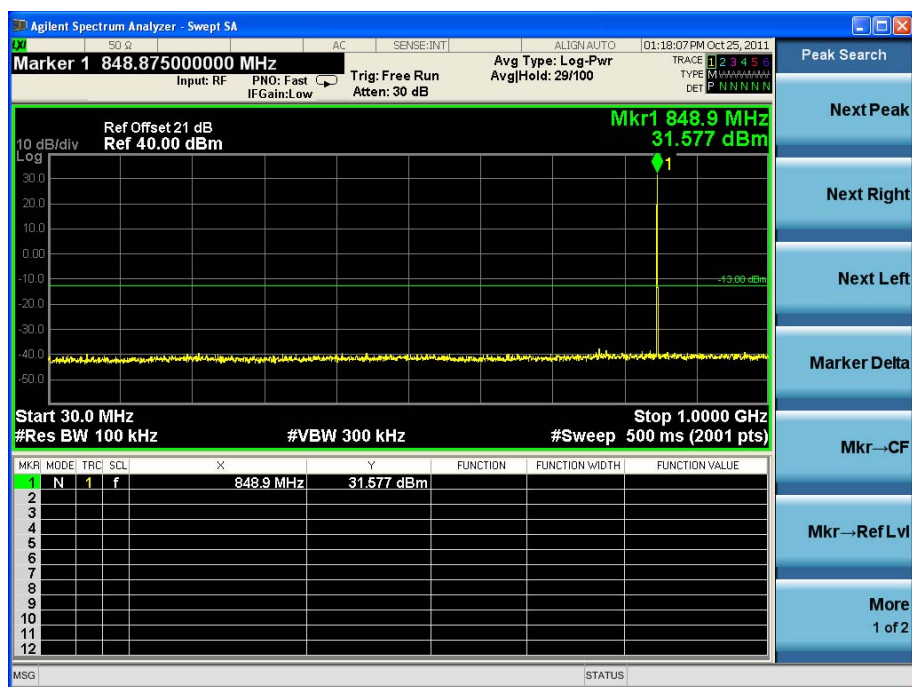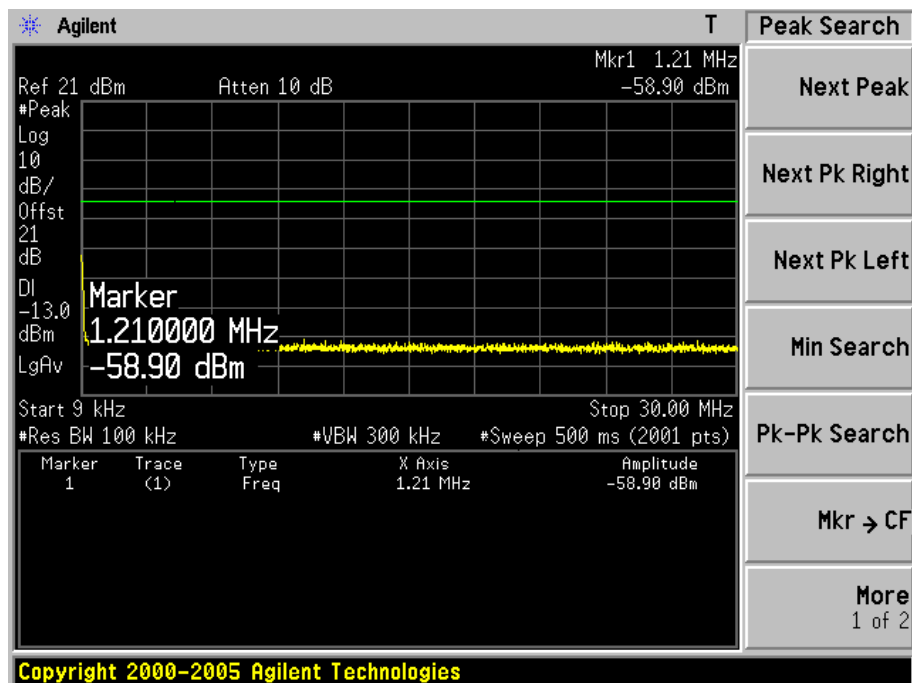


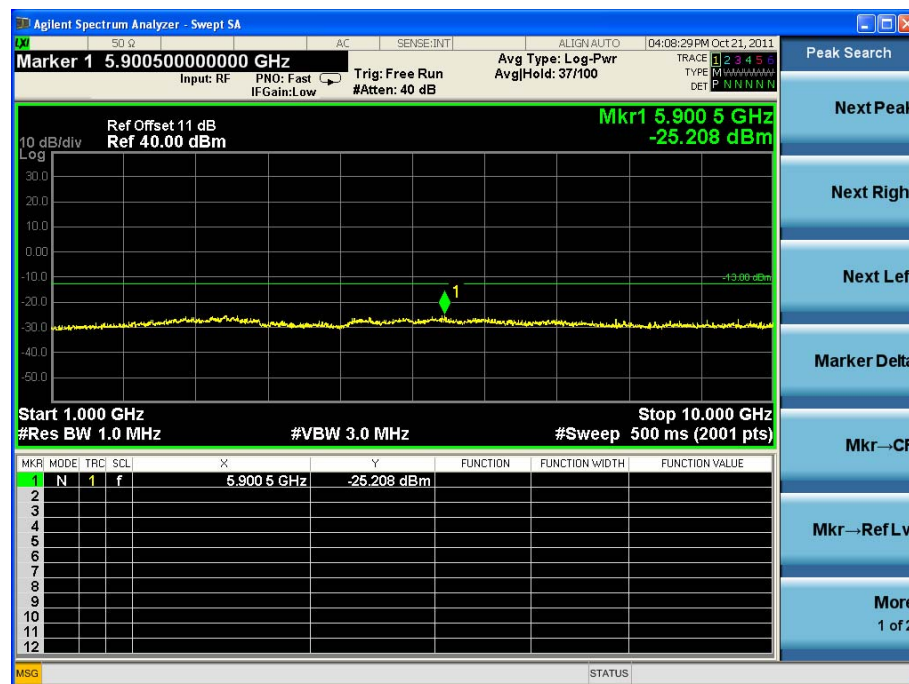

Product	GPS Locator		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 2: GPRS 1900 Link		
Date of Test	2011/10/23	Test Site	TR-8

Channel 512

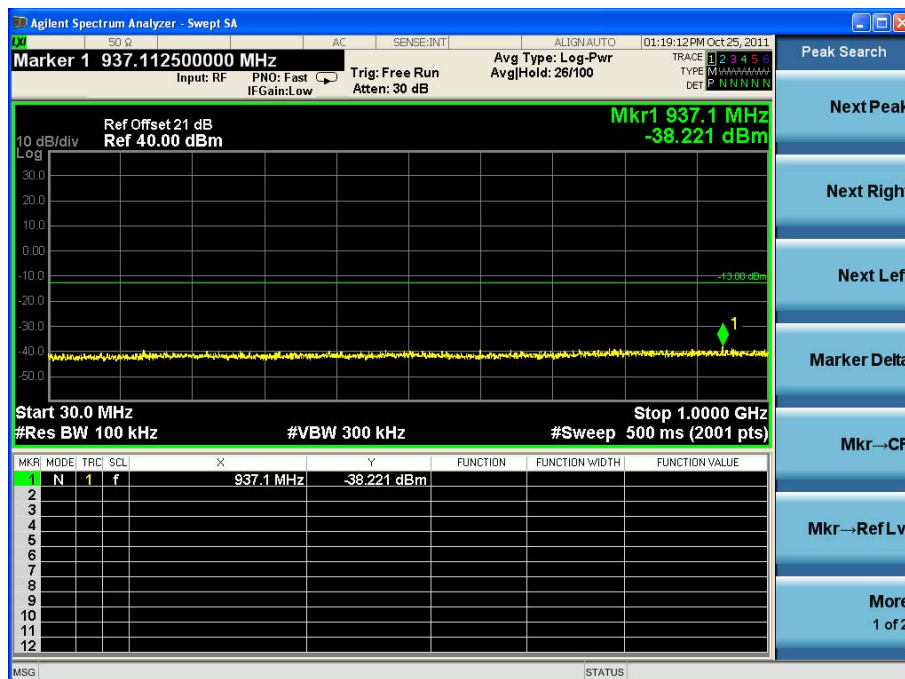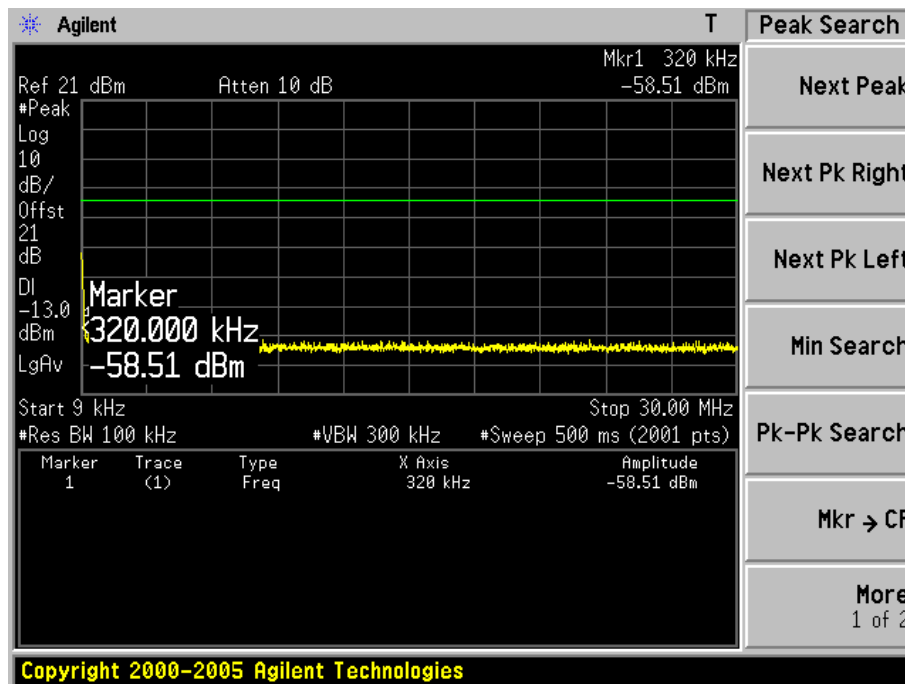

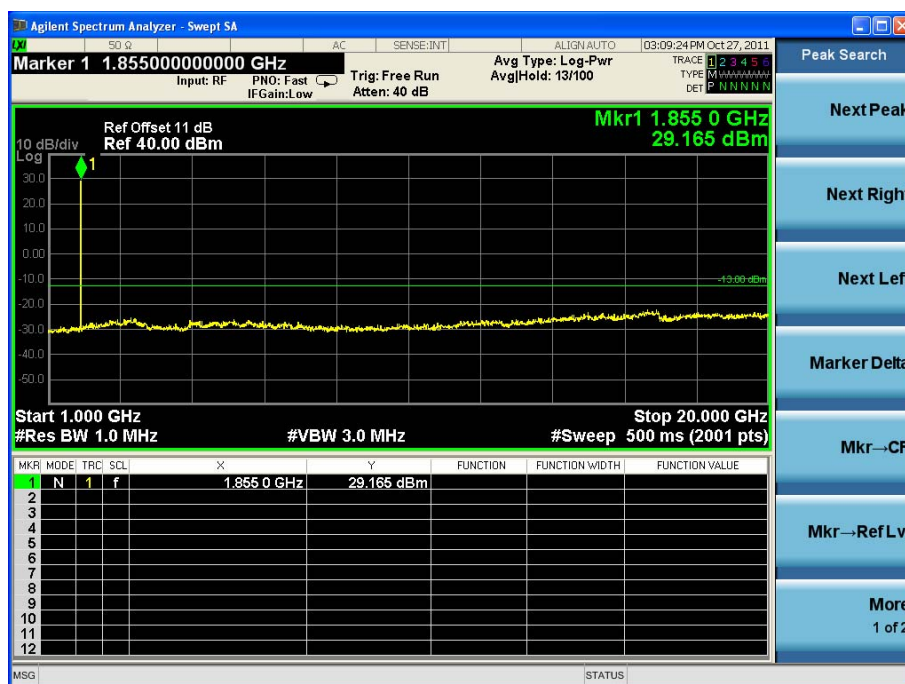

Channel 661

