Bluetooth

Frequency: 2441 MHz; Duty Cycle: 1:1.29033;   Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): f = 2441 MHz; σ = 2.036 S/m; $ε_r$ = 52.875; ρ = 1000 kg/m^3
DASY5 Configuration:
- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1360; Calibrated: 3/12/2015
- Probe: EX3DV4 - SN3686; ConvF(6.86, 6.86, 6.86); Calibrated: 8/28/2015;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm
(Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

Edge 3/802.15_GFSK_Ch 39_Mini Tab/Area Scan (6x14x1): Measurement grid: dx=12mm, dy=12mm
Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.0100 W/kg

Edge 3/802.15_GFSK_Ch 39_Mini Tab/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,
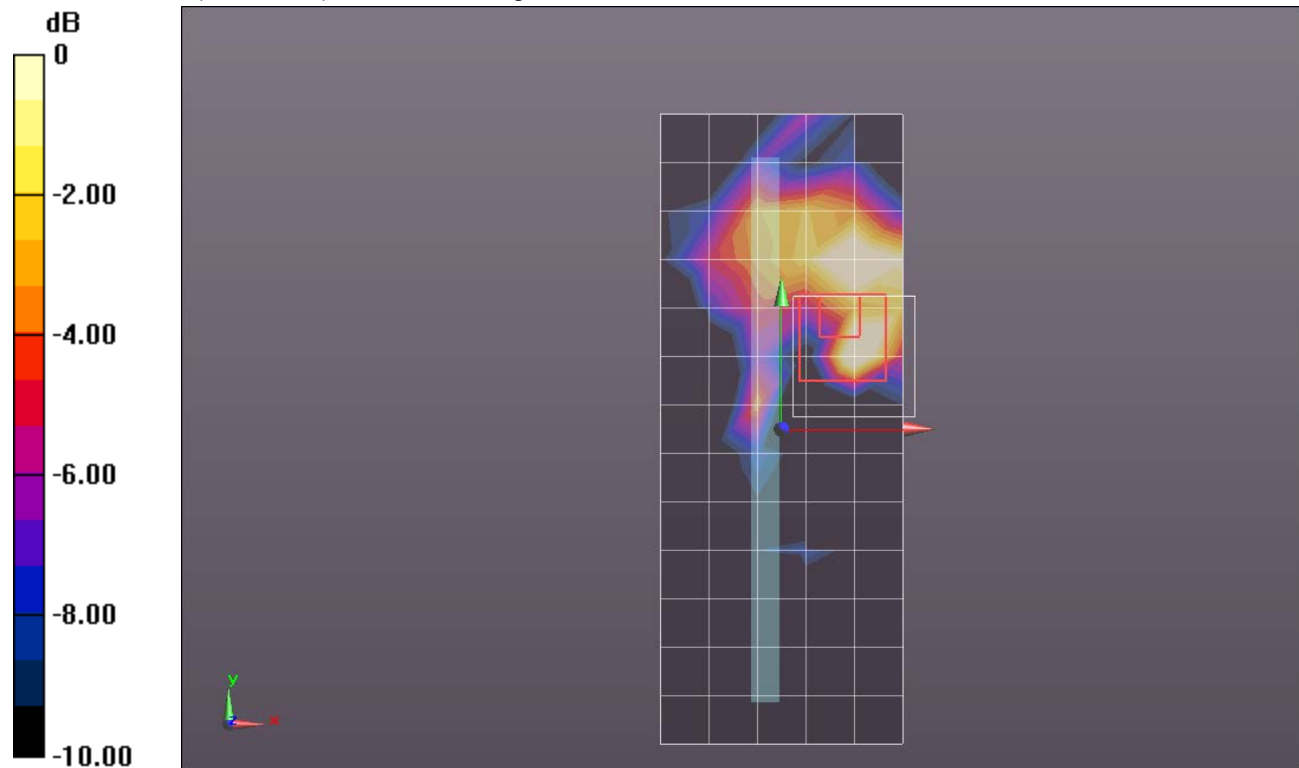dy=5mm, dz=5mm
Reference Value = 0.600 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 0.0140 W/kg
SAR(1 g) = 0.000776 W/kg; SAR(10 g) = 0.000157 W/kg
Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.00560 W/kg

0 dB = 0.00560 W/kg = -22.52 dBW/kg