

FCC TEST REPORT

FCC ID : YRYCF-60X2-B03

Applicant : Suzhou Hengyuanxin Precision technology Co., Ltd.

Address : No.10, Dongzhuang Road ,Luzhi, Wuzhong District,
Suzhou, Jiangsu,China

Equipment Under Test (EUT) :

Product Name : Seeker

Model No. : CF-60x2-b03

Standards : FCC 15 SUBPART B

Date of Test : Sep.13,2010

Test Engineer : Olic.Huang/Engineer



Reviewed By : Philo zhong/Manager



Test Result :	PASS *
----------------------	---------------

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,
Shenzhen 518105, China

Tel :+86-755-27553488

Fax:+86-755-27553868

* The sample detailed above has been tested to the requirements of Council Directives ANSI C63.4:2003.
The test results have been reviewed against the Directives above and found to meet their essential requirements.

WALTEK SERVICES

Reference No.: WT10083345-U-E-F

1 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 1GHz)	FCC PART 15, SUBPART B: 2008	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15, SUBPART B: 2008	ANSI C63.4: 2003	Class B	PASS

2 Contents

1	COVER PAGE	1
1	TEST SUMMARY	2
2	CONTENTS.....	3
3	GENERAL INFORMATION	4
3.1	CLIENT INFORMATION	4
3.2	DETAILS OF E.U.T.....	4
3.3	DESCRIPTION OF SUPPORT UNITS	4
3.4	STANDARDS APPLICABLE FOR TESTING	4
3.5	TEST FACILITY	5
3.6	TEST LOCATION	5
4	EQUIPMENT USED DURING TEST	6
5	EMISSIONS TEST RESULTS	9
5.1	CONDUCTED EMISSION DATA	9
5.1.1	<i>E.U.T. Operation</i>	<i>9</i>
5.1.2	<i>EUT Setup.....</i>	<i>10</i>
5.1.3	<i>Conducted Emission Test Result.....</i>	<i>11</i>
5.1.4	<i>Conducted Emission Test Setup View.....</i>	<i>13</i>
5.2	RADIATION EMISSION DATA	14
5.2.1	<i>Measurement Uncertainty.....</i>	<i>14</i>
5.2.2	<i>EUT Setup.....</i>	<i>15</i>
5.2.3	<i>Spectrum Analyzer Setup</i>	<i>15</i>
5.2.4	<i>Test Procedure.....</i>	<i>16</i>
5.2.5	<i>Corrected Amplitude & Margin Calculation.....</i>	<i>16</i>
5.2.6	<i>Summary of Test Results</i>	<i>16</i>
5.2.7	<i>Photograph-Test Setup</i>	<i>19</i>
6	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	20
6.1	EUT - FRONT VIEW.....	20
6.2	EUT - BACK VIEW	20
6.3	EUT - OPEN VIEW.....	21
6.4	PCB – FRONT VIEW	21
6.5	PCB – BACK VIEW.....	22
	FCC ID LABEL	23

3 General Information

3.1 Client Information

Applicant: Suzhou Hengyuanxin Precision technology Co., Ltd.

Applicant Address No.10, Dongzhuang Road ,Luzhi, Wuzhong District,
Suzhou, Jiangsu, China

Manufacturer: Suzhou Hengyuanxin Precision technology Co., Ltd.

Address of manufacturer: No.10, Dongzhuang Road ,Luzhi, Wuzhong District,
Suzhou, Jiangsu, China

Product Name: Seeker

Model No.: CF-60x2-b03

3.2 Details of E.U.T.

Power supply : Input: 5Vdc, 400mA

3.3 Description of Support Units

The EUT has been tested as an independent unit. All the tests were performed in the condition of USB input.

3.4 Standards Applicable for Testing

The customer requested FCC tests for a Seeker. The standards used was FCC PART 15 SUBPART B.

3.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.:880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:880581, June 24, 2008.

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration No.:7760A, Aug 03, 2010.

3.6 Test Location

All Emission tests were performed at:-

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd.,Songgang Street, Baoan District, Shenzhen, China

4 Equipment Used during Test

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
EMC Analyzer	Agilent/ E7405A	MY45114943	W2008001	9k-26.5GHz	Aug-03-10	Aug-02-11	Wws20081596	±1dB
Trilog Broadband Antenne 30-3000 MHz	SCHWARZB ECK MESS-ELEKTROM / VULB9163	336	W2008002	30-3000 MHz	Aug-03-10	Aug-02-11		±1dB
Broad-band Horn Antenna	SCHWARZB ECK MESS-ELEKTROM / BBHA 9120D(1201)	667	W2008003	1-18GHz	Aug-03-10	Aug-02-11		f<10 GHz: ±1dB 10GHz<f<18 GHz: ±1.5dB
Broadband Preamplifier	SCHWARZB ECK MESS-ELEKTROM / BBV 9718	9718-148	W2008004	0.5-18GHz	Aug-03-10	Aug-02-11		±1.2dB
10m Coaxial Cable with N-male Connectors usable up to 25GHz,	SCHWARZB ECK MESS-ELEKTROM / AK 9515 H	-	-	-	Aug-03-10	Aug-02-11		-
10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connector	SCHWARZB ECK MESS-ELEKTROM / AK 9513				Aug-03-10	Aug-02-11		
Positioning Controller	C&C LAB/ CC-C-IF				N/A	N/A		
Color Monitor	SUNSPO/ SP-14C				N/A	N/A		
Test Receiver	ROHDE&SC HWARZ/ ESPI	101155	W2005001	9k-3GHz	Aug-03-10	Aug-02-11	Wws20080942	±1dB
EMI Receiver	Beijingkehua n	KH3931		9k-1GHz	Aug-03-10	Aug-02-11		
Two-Line V-Network	ROHDE&SC HWARZ/ ENV216	100115	W2005002	50Ω/50μH	Aug-	Aug-02-11	Wws20080941	±10%

WALTEK SERVICES

Reference No.: WT10083345-U-E-F

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
					03-10			
Absorbing Clamp	ROHDE&SC HWAHZ/ MDS-21	100205	W2005003	impedance50 Ω loss : 17 dB	Aug- 03-10	Aug- 02-11	Wws200 80943	± 1 dB
10m 50 Ohm Coaxial Cable with N- plug, indivi dual length, usable up to 3(5)GHz, Connectors	SCHWARZB ECK MESS- ELEKTROM / AK 9514				Aug- 03-10	Aug- 02-11		
Digital Power Analyzer	Em Test AG/Switzerla nd/ DPA 500	V07451 03095	W2008012	Power: 2000VA Vol-range: 0- 300V Freq_range: 10-80Hz	Aug- 03-10	Aug- 02-11	Wwd200 81185	Voltage distinguish:0 .025% Power_freq distinguish:0 .02Hz
Power Source	Em Test AG/Switzerla nd/ ACS 500	V07451 03096	W2008013	Vol-range: 0- 300V Power_freq: 10-80Hz				
Electrostatic Discharge Simulator	Em Test AG/Switzerla nd/DITO	V07451 03094	W2008005	Contact discharge: 500V-10KV Air discharge: 500V-16.5KV	Aug- 03-10	Aug- 02-11	Wwc200 82400	7.5A current will be changed in $V_m=1.5V$
RF Generator	TESEQ GmbH/ NSG4070	25781	W2008008	Freq-range: 9K-1GHz RF voltage: - 60 dBm- +10dBm	Aug- 03-10	Aug- 02-11	Wws200 81890	Power_freq distinguish0. 1Hz RFelectricity distinguish 0.1 B
CDN M- Type	TESEQ GmbH/ CDN M016	25112	W2008009	Voltage correct factor 9.5 dB	Aug- 03-10	Aug- 02-11	Wwc200 82396	150K- 80MHz: ± 1 dB 80- 230MHz:-2- +3dB
EM-Clamp	TESEQ GmbH/ KEMZ 801	25453	W2008010	Freq_range: 0.15-1000 MHz	Aug- 03-10	Aug- 02-11	Wwc200 82397	0.3-400 MHz: ± 4 dB Other freq: ± 5 dB

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
Attenuator 6dB	TESEQ GmbH/ ATN6050	25365			Aug-03-10	Aug-02-11	Wws200 81597	
All Modules Generator	SCHAFFNE R/6150	34579	W2008006	voltage:200V-4.4KV Pulse current: 100A-2.2KA	Aug-03-10	Aug-02-11	Wwc200 82401	voltage: $\pm 10\%$ Pulse current: $\pm 10\%$
Capacitive Coupling Clamp	SCHAFFNE R/ CDN 8014	25311			Aug-03-10	Aug-02-11	Wwc200 82398	-
Signal and Data Line Coupling Network	SCHAFFNE R/ CDN 117	25627	W2008011	1.2/50 μ S	Aug-03-10	Aug-02-11	Wwc200 82399	-
AC Power Supply	TONGYUN/ DTDGC-4				Aug-03-10	Aug-02-11	Wws200 80944	-
Exposure Level Tester ELT-400	Narda Safety TEST Solutions/230 4/03	M-0155	w2008022	Test freq range: 1 — 400kHz	Aug-03-10	Aug-02-11	Wwd200 81191	Test uncertainty : 1 — 120kHz: $\pm 1.83\%$, 120 kHz-400 kHz: $\pm 4.06\%$
Magnetic Field Probe 100cm ²	Narda Safety TEST Solutions/230 0/90.10	M-1070	w2008021	Test freq range: 1 — 400kHz				Test uncertainty : 1Hz-10Hz: $\pm 16.2\%$, 10Hz - 120kHz: $\pm 2.2\%$, 120 kHz-400 kHz: $\pm 4.7\%$
Active Loop Antenna Charger 10kHz-30MHz	Beijing Dazhi / ZN30900A	-	-	10kHz-30MHz	Aug-03-10	Aug-02-11		$\pm 1\text{dB}$
Memory product	Kingston	-	-	SN:9EAE4B7 0-0165508	-	-	-	-
Printer	HP	P2015	WTD042	--	--	--	--	--
FAX	SAMSUNG	SF-550	WTD009	--	--	--	--	--
Keyboard	Yanshuangfei	OP-220	WTD005	--	--	--	--	--
Mouse	Yanshuangfei	KB-3	WTD091	--	--	--	--	--
PC	Lenovo	L196WD	WTD025	--	--	--	--	--
Monitor	Lenovo	A2600R	WTD036	--	--	--	--	--

WALTEK SERVICES

Reference No.: WT10083345-U-E-F

5 Emissions Test Results

5.1 Conducted Emission Data

Test Requirement:	FCC Part15 B 15.107
Test Method:	ANSI C63.4:2003.
Test Date:	Sep.13,2010
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

5.1.1 E.U.T. Operation

Operating Environment:	
Temperature:	25.5 °C
Humidity:	51 % RH
Atmospheric Pressure:	1012 mbar

EUT Operation :


The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

Remark: the EUT was working in the normal operation mode.

5.1.2 EUT Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 B 15.107 limits.

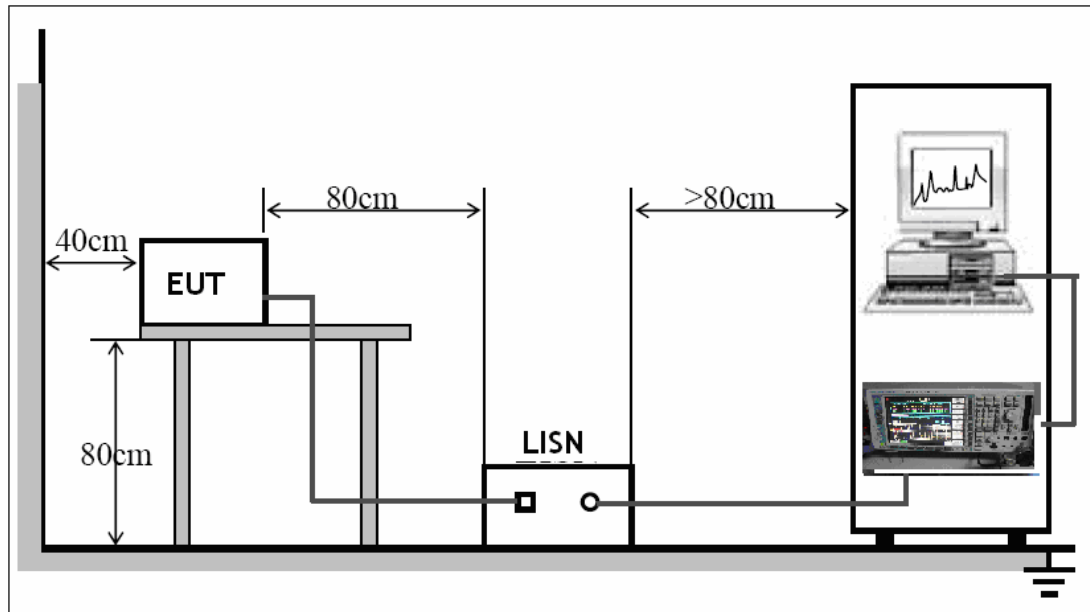


5.1.3 Conducted Emission Test Result

The test data as following:

Live Line

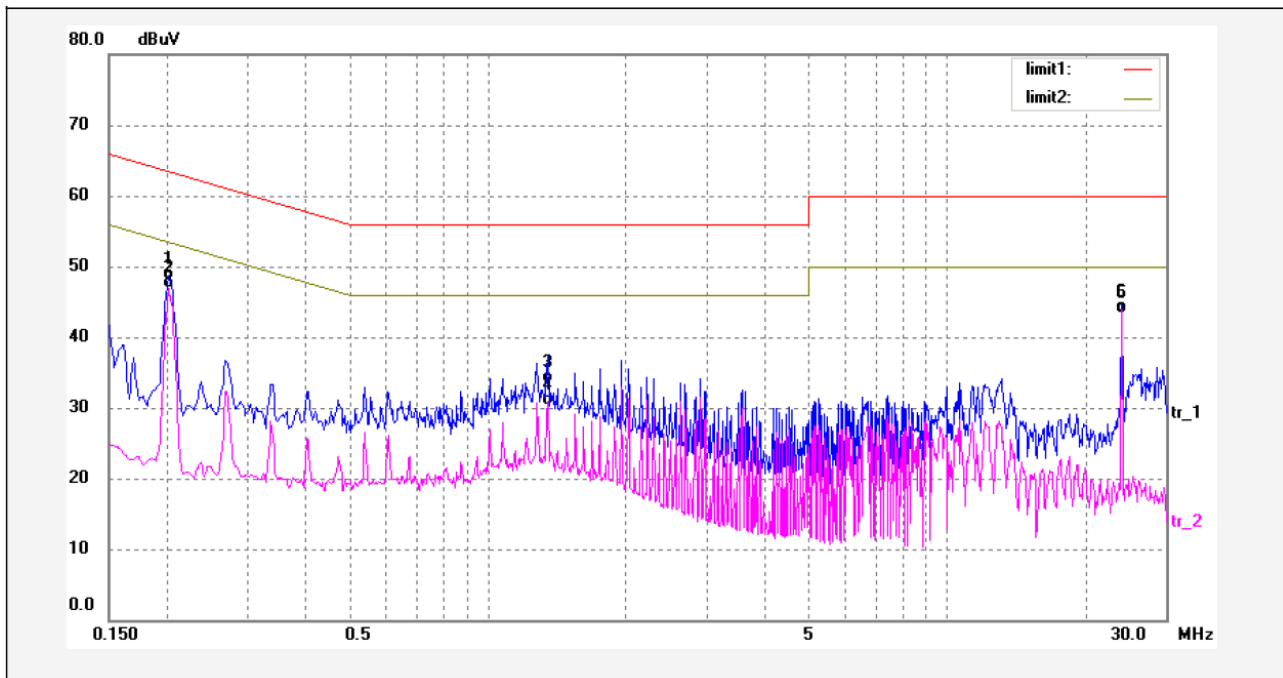

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.2020	37.51	10.67	48.18	63.52	-15.34	QP	
2	0.2020	36.26	10.67	46.93	53.52	-6.59	AVG	
3	1.3540	21.29	12.19	33.48	56.00	-22.52	QP	
4	1.3540	18.18	12.19	30.37	46.00	-15.63	AVG	
5	24.0780	30.83	12.48	43.31	60.00	-16.69	QP	
6	24.0780	31.03	12.48	43.51	50.00	-6.49	AVG	

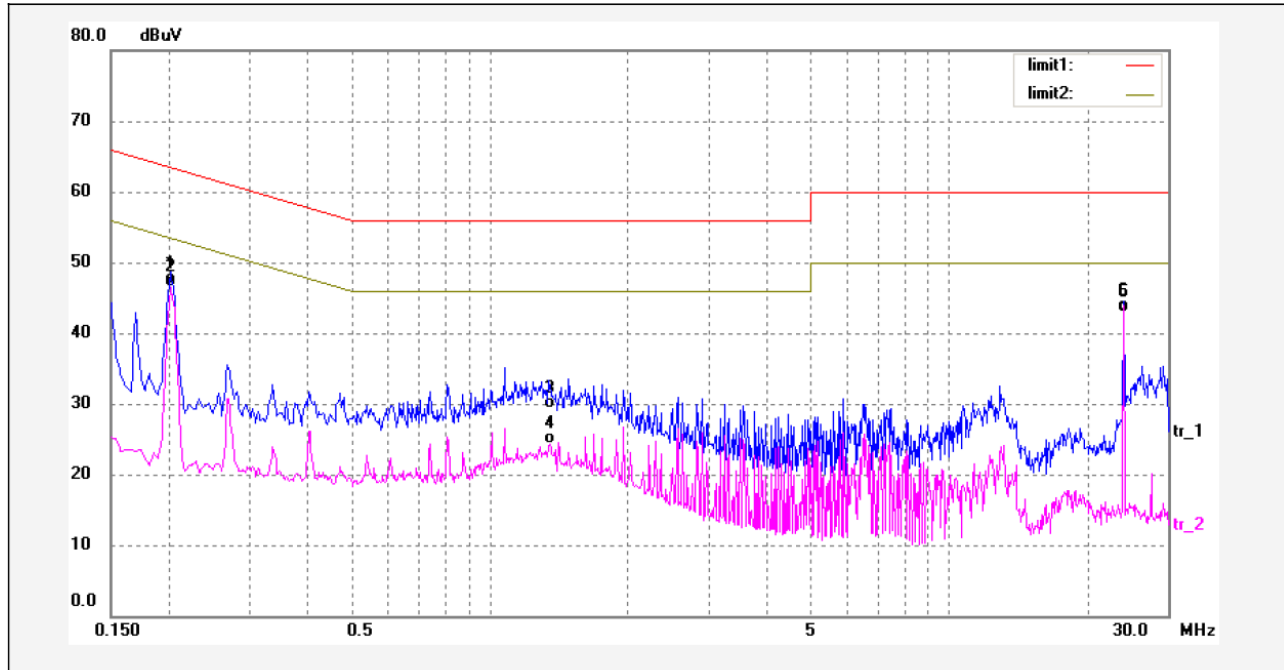Neutral Line

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.2020	36.29	10.67	46.96	63.52	-16.56	QP	
2	0.2020	35.86	10.67	46.53	53.52	-6.99	AVG	
3	1.3500	17.17	12.19	29.36	56.00	-26.64	QP	
4	1.3500	12.13	12.19	24.32	46.00	-21.68	AVG	
5	24.0780	30.38	12.48	42.86	60.00	-17.14	QP	
6	24.0780	30.55	12.48	43.03	50.00	-6.97	AVG	

5.1.4 Conducted Emission Test Setup View

Test setup front view



Test setup back view



5.2 Radiation Emission Data

Test Requirement:	FCC Part15 B 15.109
Test Method:	ANSI C63.4:2003
Test Date:	Sep.13,2010
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Class:	Class B
Limit:	40.0 dB μ V/m between 30MHz & 88MHz 43.5 dB μ V/m between 88MHz & 216MHz 46.0 dB μ V/m between 216MHz & 960MHz 54.0 dB μ V/m above 960MHz
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit


5.2.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Waltek EMC Lab is ± 5.03 dB.

5.2.2 EUT Setup

The radiated emission tests were performed in the 3m Semi-Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 B 15.109 limits.

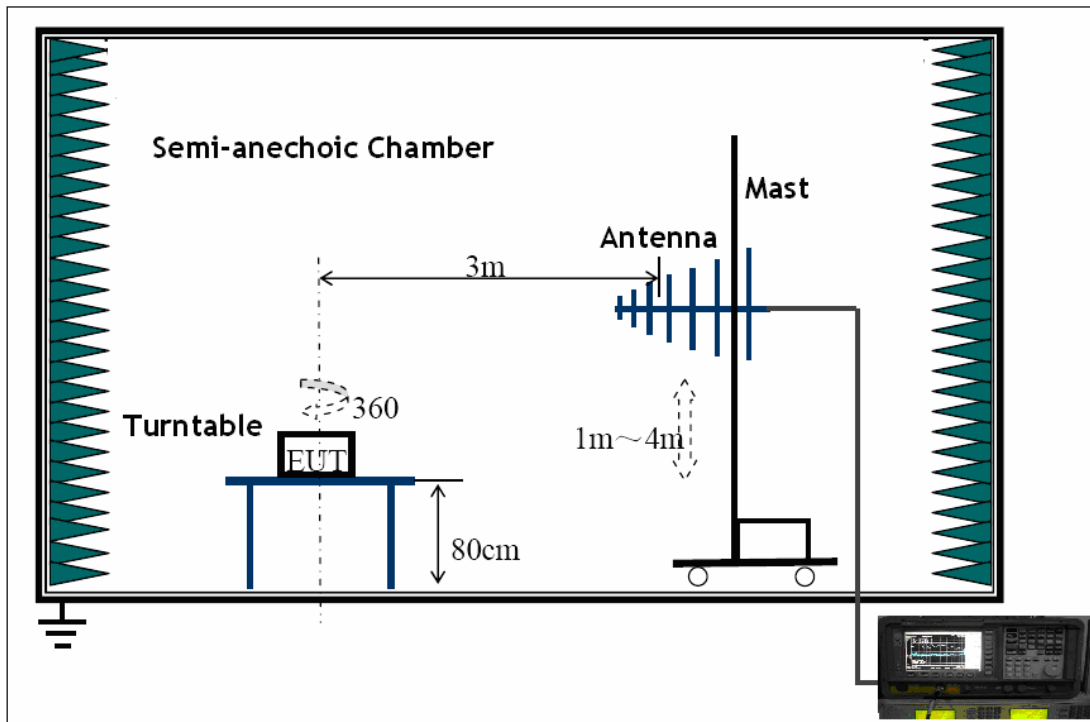

5.2.3 Spectrum Analyzer Setup

According to FCC Part15 B Rules, the system was tested 30 to 1000MHz.

Start Frequency	30 MHz
Stop Frequency	1000 MHz
Sweep Speed	Auto
IF Bandwidth	120 kHz
Video Bandwidth	100KHz
Quasi-Peak Adapter Bandwidth	120 kHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth	100KHz

5.2.4 Test Procedure

For the radiated emissions test.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dBμV of specification limits), and are distinguished with a "Qp" in the data table. But any frequency above 1000 MHz, the limit is based on average detector.

The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

5.2.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

5.2.6 Summary of Test Results


According to the data in this section , the EUT complied with the FCC Part15 B standards.

Remark: the EUT was working in the normal operation mode.

Test Antenna Polarization: **Horizontal**

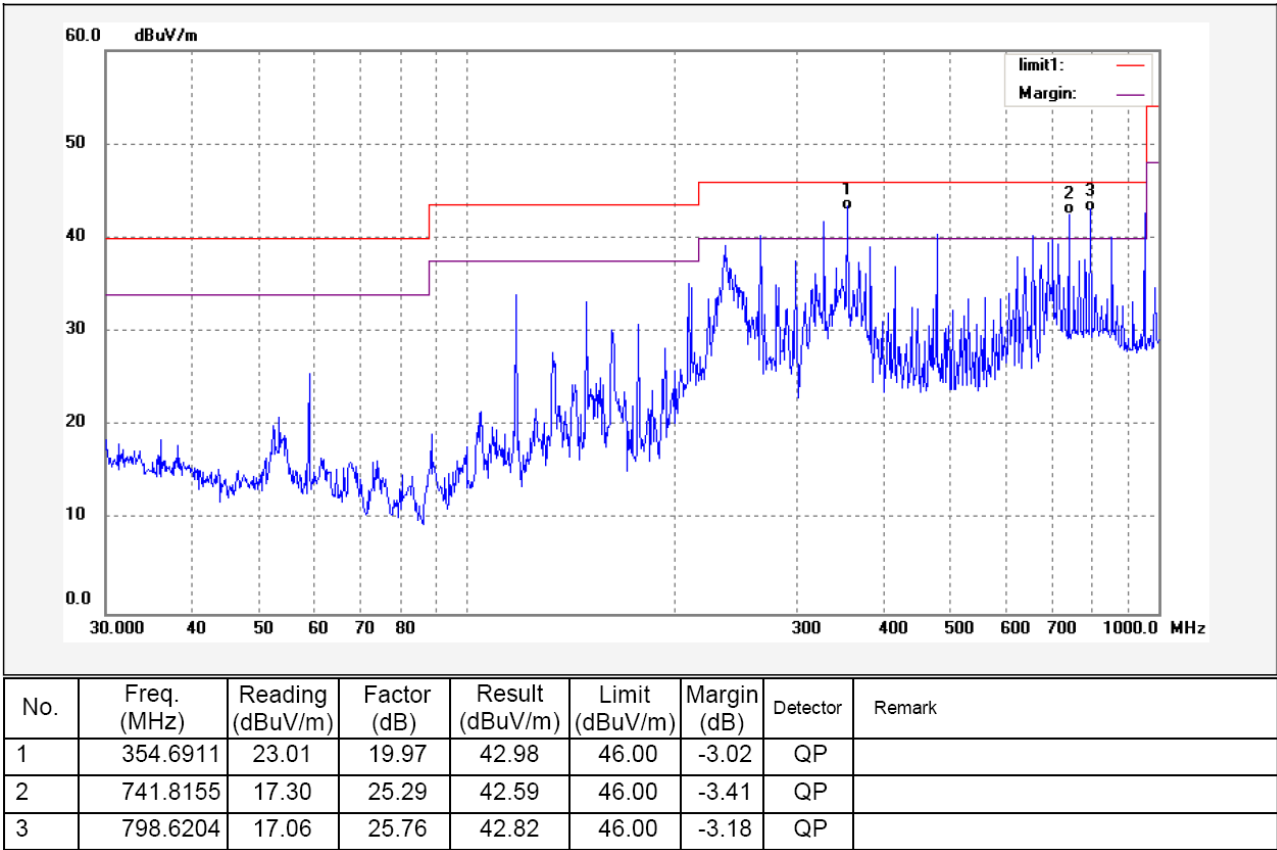


Test Antenna Polarization: **Vertical**

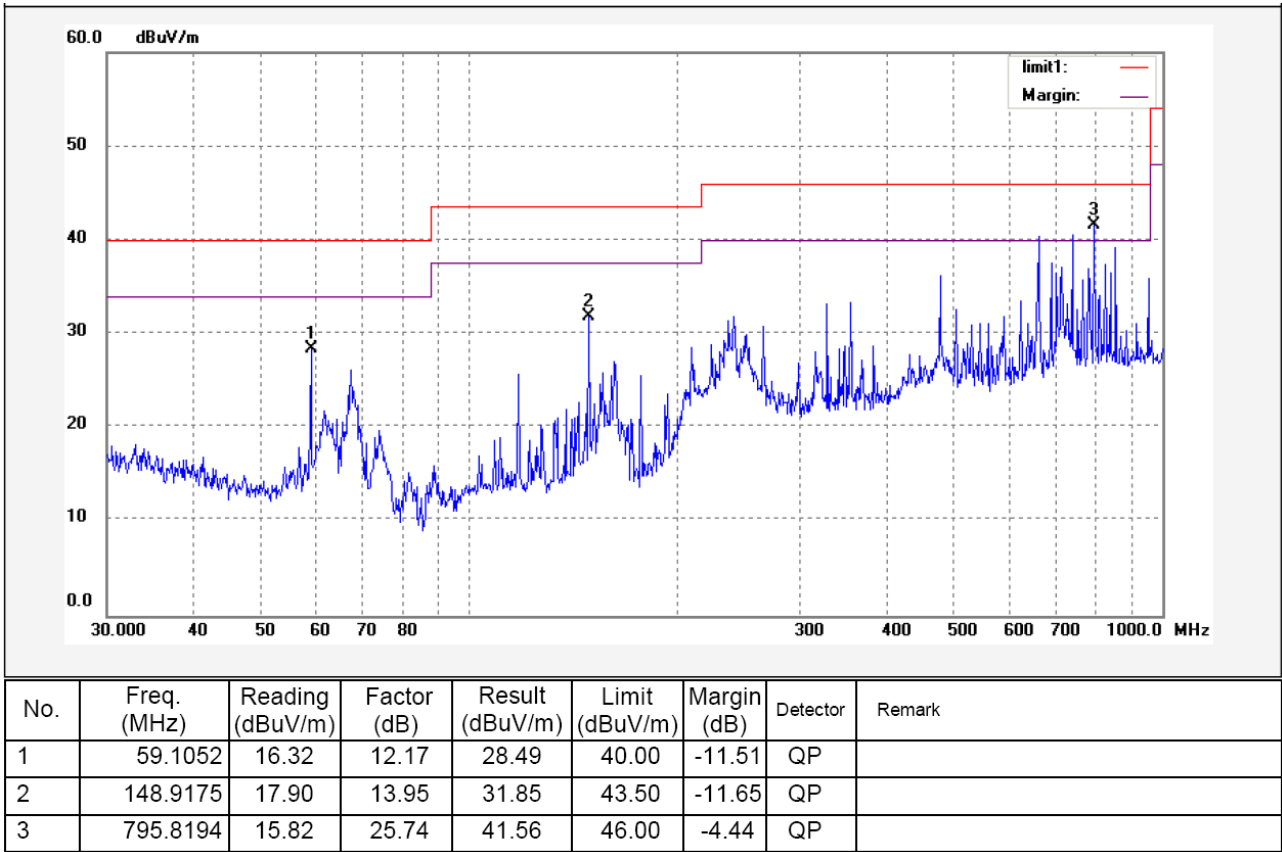


5.2.7 Photograph-Test Setup

Test Setup Front View

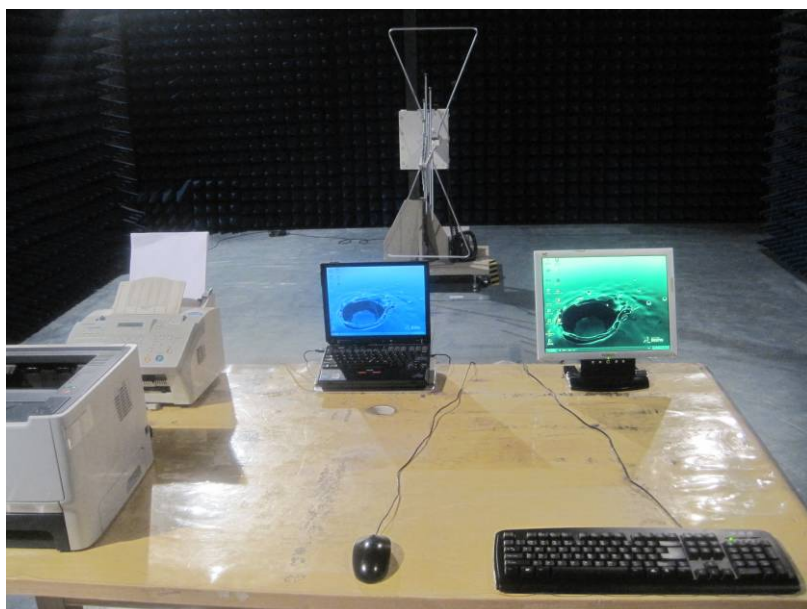

Test Setup Back View

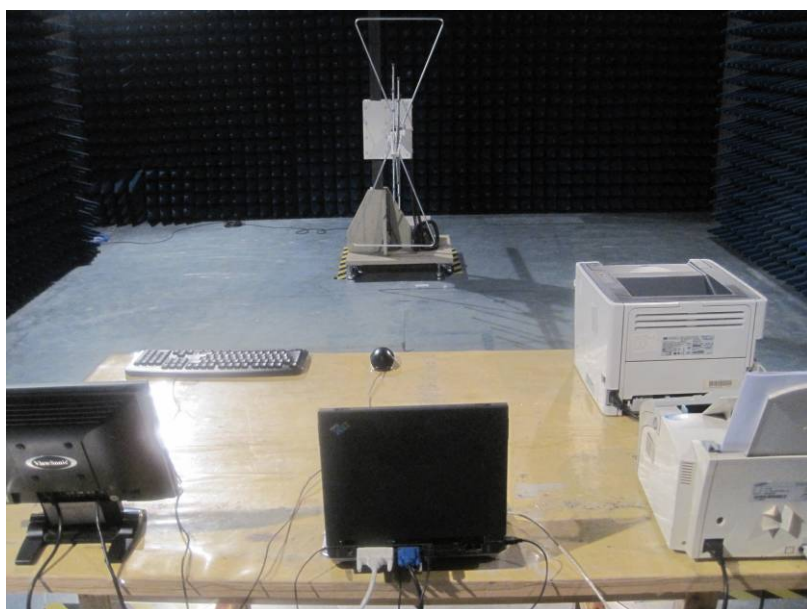

6 Photographs - Constructional Details


6.1 EUT - Front View




6.2 EUT - Back View




6.3 EUT - Open View

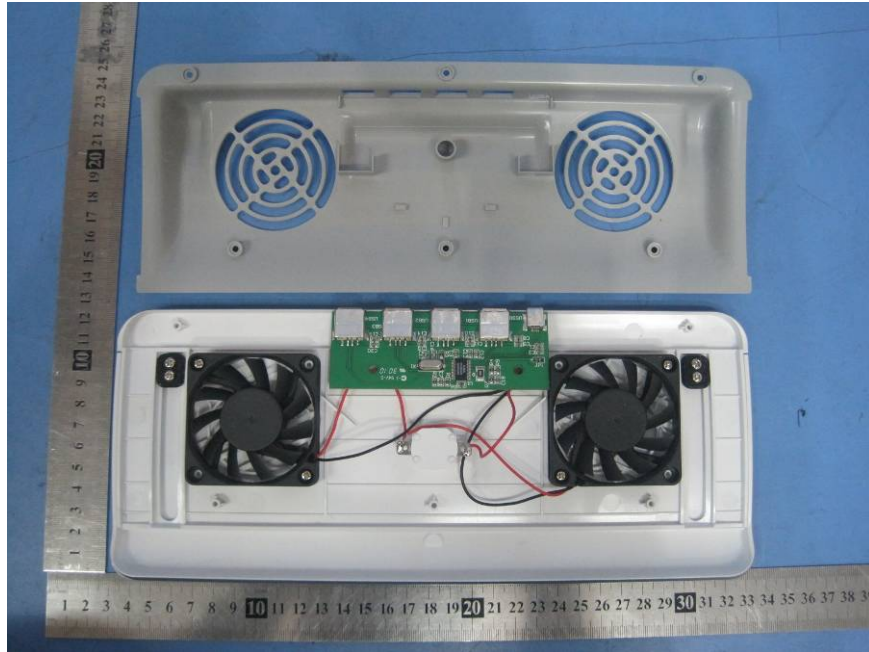

6.4 PCB – Front View

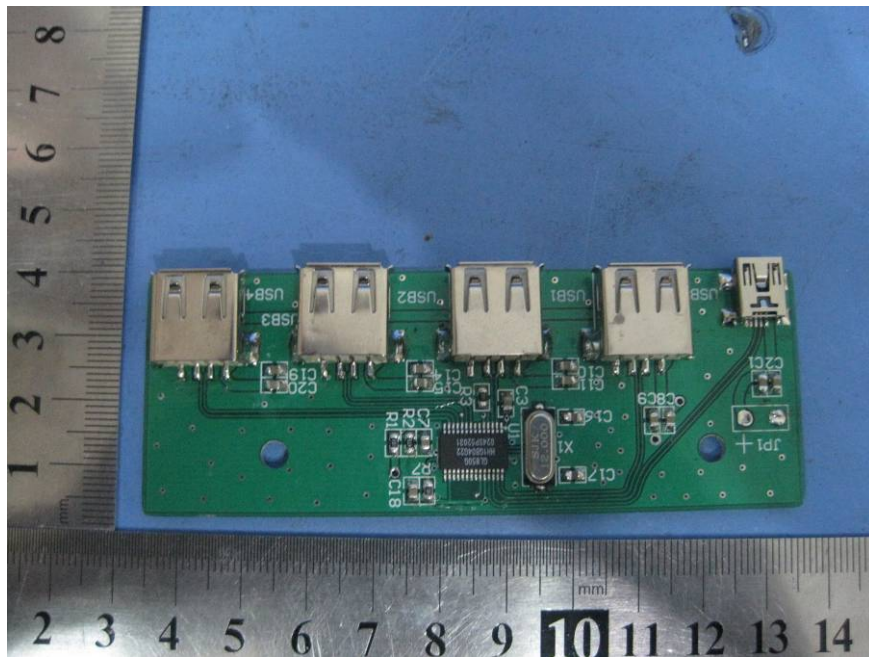

6.5 PCB – Back View

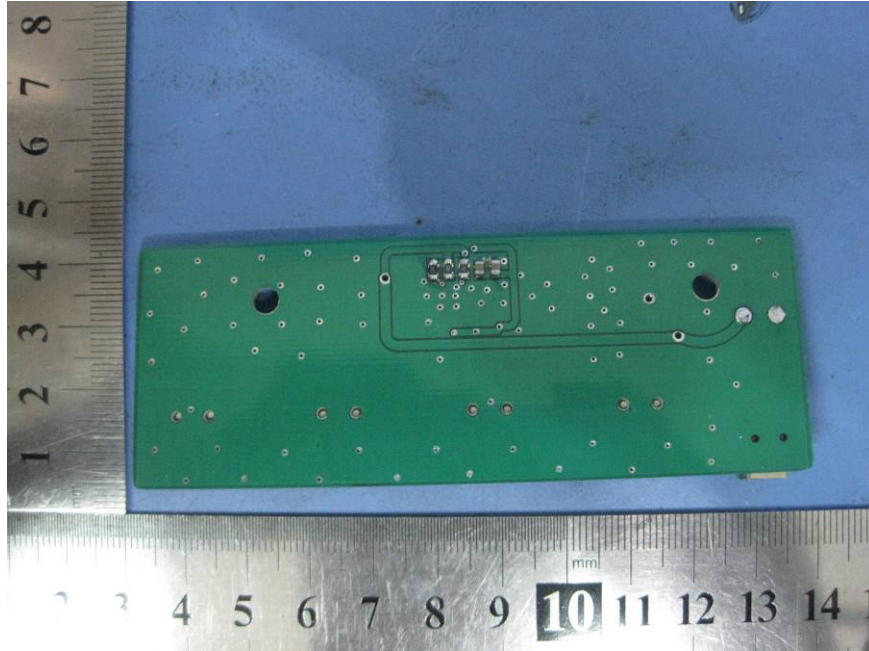

FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Top View/ proposed FCC Label Location

