

**FCC Part 15C**  
**Measurement and Test Report**  
**For**  
**Shenzhen G-Link Digital Technology Co., Ltd.**  
**4F, E building Huachuangda Technology Park, Hangcheng Road, Gushu,**  
**Xixiang, Bao An District, Shenzhen, China**

**FCC ID: YRZ66688**

<b>Report Concerns:</b> Original Report	<b>Equipment Type:</b> Netbook
<b>Model:</b>	<u>MA200</u>
<b>Report No.:</b>	<u>STR10088186I-1</u>
<b>Test Date:</b>	<u>2010-09-01 to 2010-09-13</u>
<b>Issue Date:</b>	<u>2010-09-13</u>
<b>Tested By:</b>	<u>Seven Song / Engineer</u> <i>Seven Song</i>
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
<b>Prepared By:</b>	<b>Shenzhen SEM.Test Electronic Service Co., Ltd</b> 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: <a href="http://www.semtest.com.cn">www.semtest.com.cn</a>

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	3
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT EXERCISE SOFTWARE	4
1.6 ACCESSORIES EQUIPMENT LIST AND DETAILS	4
1.7 EUT CABLE LIST AND DETAILS	4
<b>2. SUMMARY OF TEST RESULTS</b>	<b>5</b>
<b>3. CONDUCTED EMISSIONS</b>	<b>6</b>
3.1 MEASUREMENT UNCERTAINTY	6
3.2 TEST EQUIPMENT LIST AND DETAILS	6
3.3 TEST PROCEDURE	6
3.4 BASIC TEST SETUP BLOCK DIAGRAM	6
3.5 ENVIRONMENTAL CONDITIONS	7
3.6 SUMMARY OF TEST RESULTS/PLOTS	7
3.7 CONDUCTED EMISSIONS TEST DATA	7
<b>4. §15.203 - ANTENNA REQUIREMENT</b>	<b>13</b>
4.1 STANDARD APPLICABLE	13
4.2 TEST RESULT	13
<b>5. POWER SPECTRAL DENSITY</b>	<b>14</b>
5.1 STANDARD APPLICABLE	14
5.2 TEST EQUIPMENT LIST AND DETAILS	14
5.3 TEST PROCEDURE	14
5.4 ENVIRONMENTAL CONDITIONS	14
5.5 SUMMARY OF TEST RESULTS/PLOTS	15
<b>6. 6-DB BANDWIDTH</b>	<b>19</b>
6.1 STANDARD APPLICABLE	19
6.2 TEST EQUIPMENT LIST AND DETAILS	19
6.3 TEST PROCEDURE	19
6.4 ENVIRONMENTAL CONDITIONS	19
6.5 SUMMARY OF TEST RESULTS/PLOTS	19
<b>7. POWER OUTPUT</b>	<b>23</b>
7.1 STANDARD APPLICABLE	23
7.2 TEST EQUIPMENT LIST AND DETAILS	23
7.3 TEST PROCEDURE	23
7.4 ENVIRONMENTAL CONDITIONS	23
7.5 SUMMARY OF TEST RESULTS/PLOTS	24
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS</b>	<b>34</b>
8.1 MEASUREMENT UNCERTAINTY	34
8.2 STANDARD APPLICABLE	34
8.3 TEST EQUIPMENT LIST AND DETAILS	34
8.4 TEST PROCEDURE	34
8.5 TEST RECEIVER SETUP	35
8.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	36
8.7 ENVIRONMENTAL CONDITIONS	36
8.8 SUMMARY OF TEST RESULTS/PLOTS	36
<b>9. OUT OF BAND EMISSIONS</b>	<b>51</b>
9.1 STANDARD APPLICABLE	51
9.2 TEST EQUIPMENT LIST AND DETAILS	51
9.3 TEST PROCEDURE	51
9.4 TEST RECEIVER SETUP	51
9.5 ENVIRONMENTAL CONDITIONS	52
9.6 SUMMARY OF TEST RESULTS/PLOTS	52

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen G-link Digital Technology Co., Ltd.  
Address of applicant: 4F, E building Huachuangda Technology Park, Hangcheng Road, Gushu, Xixiang, Bao An District, Shenzhen, China

Manufacturer: Shenzhen G-link Digital Technology Co., Ltd.  
Address of manufacturer: 4F, E building Huachuangda Technology Park, Hangcheng Road, Gushu, Xixiang, Bao An District, Shenzhen, China

#### General Description of E.U.T

Items	Description
EUT Description:	Netbook
Trade Name:	/
Model No.:	MA200
Add Model:	MA2XX(XX=0-9.A-Z)
Rated Voltage:	DC 9V
RF Output Power	Max. 13.63dBm
Antenna Gain:	0
Frequency range:	2412MHz~2462MHz
Number of channels:	11
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Size:	21.5X14.5X3.5cm

*Note: The test data is gathered from a production sample, provided by the manufacture. The others models listed in the report have different appearance only of MA200 without circuit and electronic construction changed, declared by the manufacturer.*

### 1.2 Test Standards

The following report is prepared on behalf of the Shenzhen G-link Digital Technology Co., Ltd. in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

### 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted with Low Channel, Middle Channel and High Channel, accordingly in reference to the Operating Instructions.

### 1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

### 1.5 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components.

### 1.6 Accessories Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

### 1.7 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
DC Power Cable	1.5	Unshielded	Without Core
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203; § 15.247(c)(1)(i)	Antenna Requirement	Compliant
§ 15.207	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	Power Output	Compliant
§ 15.209(a)(d)	Radiated Emission	Compliant
§ 15.247(d)	Band edge	Compliant

### 3. CONDUCTED EMISSIONS

#### 3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.

#### 3.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2010-08-12	2011-08-11
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2010-08-12	2011-08-11
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2010-08-12	2011-08-11

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

#### 3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

#### 3.4 Basic Test Setup Block Diagram

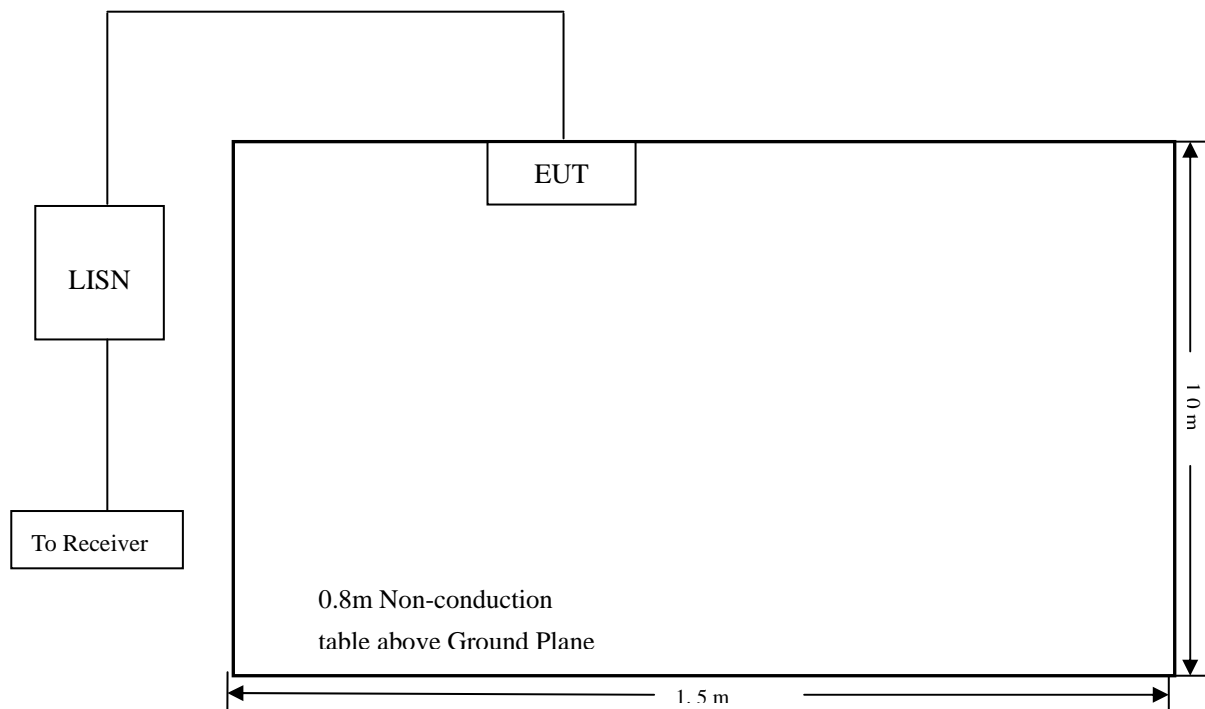

### 3.5 Environmental Conditions

Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 3.6 Summary of Test Results/Plots


According to the data in section 3.7, the EUT complied with the FCC 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:

**-2.9 dB $\mu$ V at 0.214 MHz** in the **Line Pk** Detector (adapter: AK15G-0900150U), 0.15-30MHz


### 3.7 Conducted Emissions Test Data

Adapter Model: SFF0900150A1BA

LINE CONDUCTED EMISSIONS				FCC 15.207	
Frequency	Amplitude	Detector	Phase	Limit	Margin
MHz	dB $\mu$ V	QP/Ave/Pk	Line/Neutral	dB $\mu$ V	dB
0.190	60.31	Pk	Neutral	64.04	-3.7
0.186	59.98	Pk	Line	64.21	-4.2
30.000	43.77	Ave	Line	50.00	-6.2
30.000	43.16	Ave	Neutral	50.00	-6.8
0.250	54.22	Pk	Neutral	61.76	-7.5
0.250	53.53	Pk	Line	61.76	-8.2
0.186	45.72	Ave	Neutral	54.21	-8.5
0.250	42.13	Ave	Neutral	51.76	-9.6
0.186	44.31	Ave	Line	54.21	-9.9
0.562	35.51	Ave	Neutral	46.00	-10.5
0.250	39.50	Ave	Line	51.76	-12.3
0.314	47.44	Pk	Line	59.86	-12.4
0.314	47.43	Pk	Neutral	59.86	-12.4
0.498	32.99	Ave	Line	46.03	-13.0
2.258	32.65	Ave	Line	46.00	-13.4
30.00	45.81	Pk	Line	60.00	-14.2
30.00	45.74	Pk	Neutral	60.00	-14.3
0.378	33.66	Ave	Neutral	48.32	-14.7
0.314	34.67	Ave	Neutral	49.86	-15.2
0.378	42.97	Pk	Neutral	58.32	-15.4
0.374	42.06	Pk	Line	58.41	-16.4
0.498	39.55	Pk	Line	56.03	-16.5
0.438	40.42	Pk	Neutral	57.10	-16.7
0.314	32.80	Ave	Line	49.86	-17.1

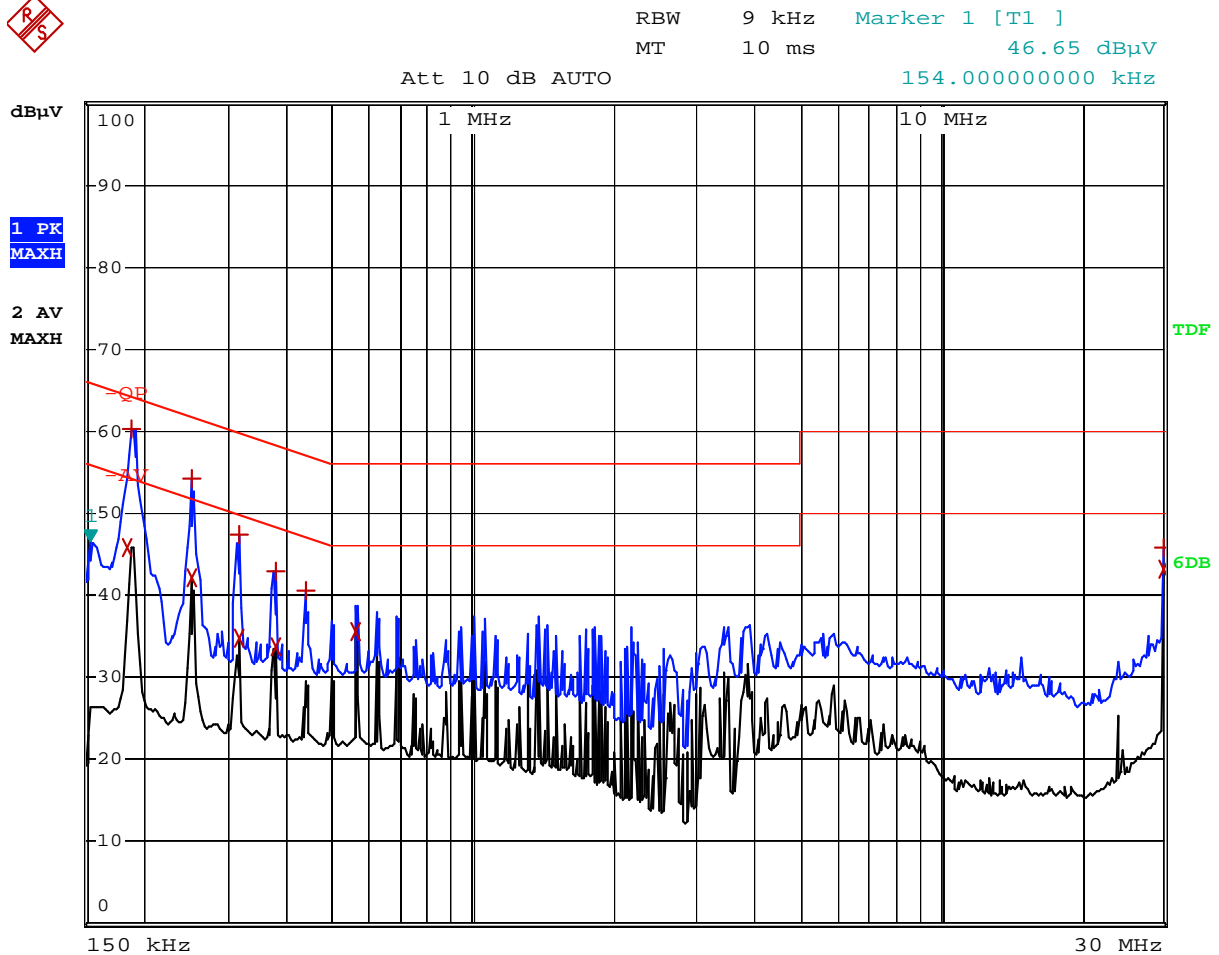**Plot of Conducted Emissions Test Data***Conducted Disturbance**EUT: Netbook**M/N: MA200**Operating Condition: Transmitting**Test Specification: N**Comment: AC 120V/60Hz/Adapter 9V (Adapter Model: SFF0900150A1BA)*

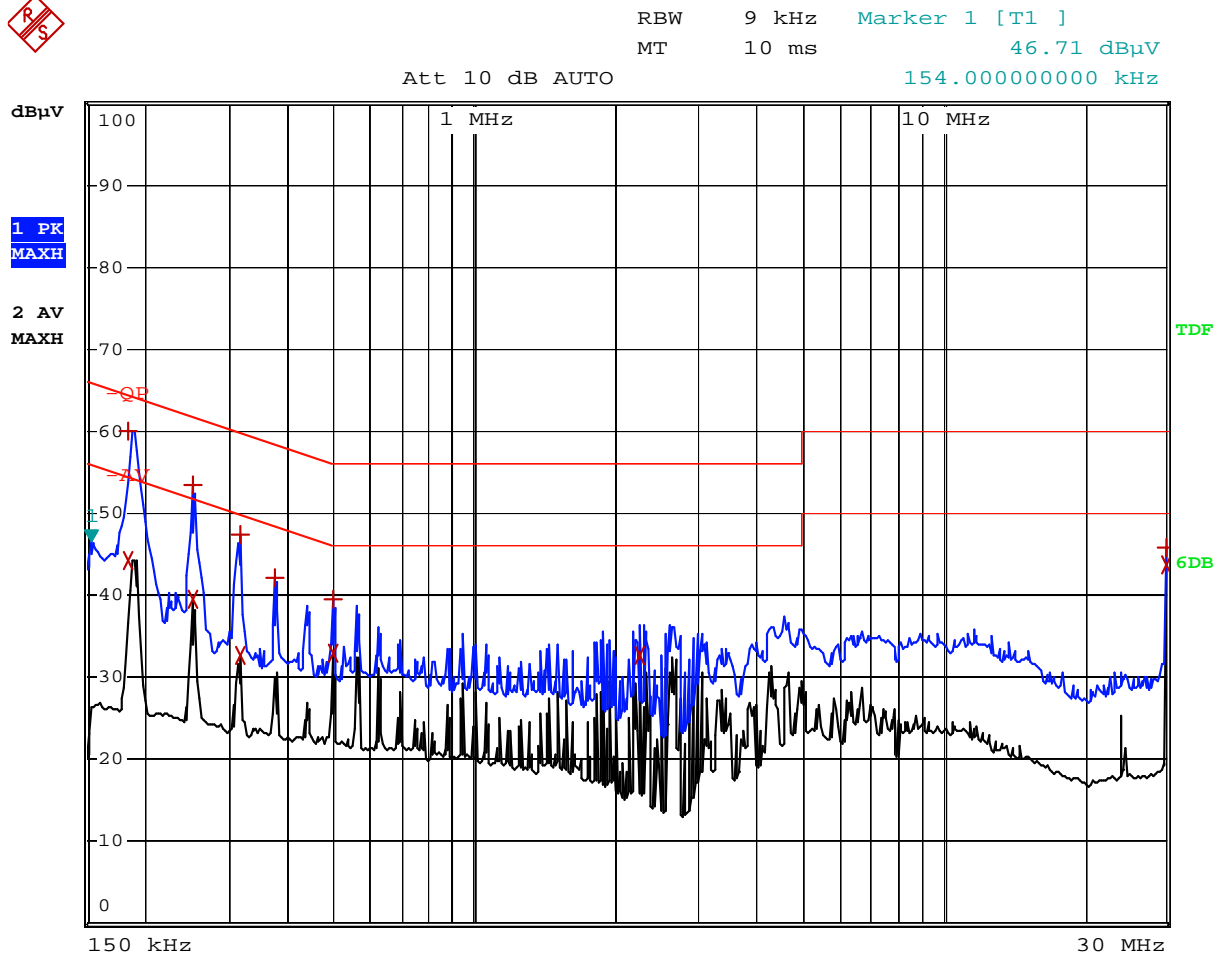

**Plot of Conducted Emissions Test Data***Conducted Disturbance**EUT: Netbook**M/N: MA200**Operating Condition: Transmitting**Test Specification: L**Comment: AC 120V/60Hz/Adapter 9V (Adapter Model: SFF0900150A1BA)*

Adapter Model: AK15G-0900150U

LINE CONDUCTED EMISSIONS				FCC 15.207	
Frequency	Amplitude	Detector	Phase	Limit	Margin
MHz	dB $\mu$ V	QP/Ave/Pk	Line/Neutral	dB $\mu$ V	dB
0.214	57.40	Pk	Line	64.96	-2.9
0.190	50.33	Ave	Line	54.04	-3.7
0.194	59.29	Pk	Neutral	63.86	-4.6
30.00	44.52	Ave	Line	50.00	-5.5
0.246	53.49	Pk	Line	63.05	-5.6
0.250	45.51	Ave	Line	51.76	-6.2
0.318	48.34	Pk	Line	61.89	-8.4
0.390	48.18	Pk	Neutral	58.06	-9.9
30.00	40.03	Ave	Neutral	50.00	-10.0
0.382	48.07	Pk	Neutral	58.24	-10.2
0.190	43.82	Ave	Neutral	54.04	-10.2
0.170	62.02	Pk	Neutral	54.04	-10.2
0.250	41.45	Ave	Neutral	51.76	-10.3
0.326	48.16	Pk	Line	59.76	-11.4
30.00	48.26	Pk	Line	59.55	-11.4
0.250	49.86	Pk	Neutral	61.76	-11.9
0.318	44.90	Pk	Neutral	59.76	-14.9
30.00	44.94	Pk	Neutral	60.00	-15.1
0.318	34.28	Ave	Line	49.76	-15.5
0.442	31.57	Pk	Line	47.02	-15.5
0.318	32.71	Ave	Neutral	49.76	-17.0
0.378	31.14	Pk	Line	48.32	-17.2
0.382	28.71	Ave	Neutral	48.24	-19.5

Plot of Conducted Emissions Test Data

Conducted Disturbance


EUT: Netbook

M/N: MA200

Operating Condition: Transmitting

Test Specification: N

Comment: AC 120V/60Hz/Adapter 9V (Adapter Model: AK15G-0900150U)

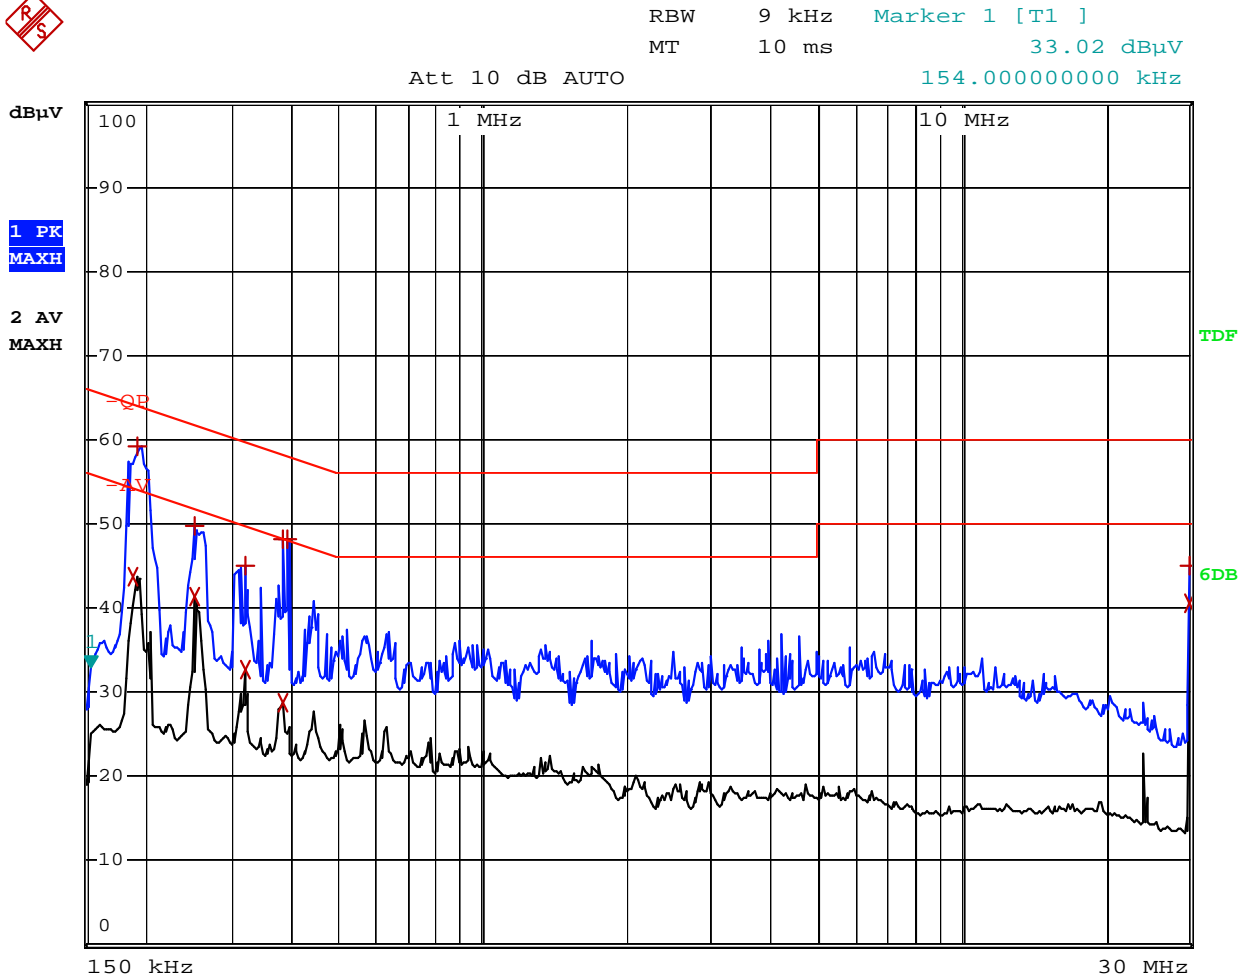

Plot of Conducted Emissions Test Data

Conducted Disturbance


EUT: Netbook

M/N: MA200

Operating Condition: Transmitting

Test Specification: L

Comment: AC 120V/60Hz/Adapter 9V (Adapter Model: AK15G-0900150U)

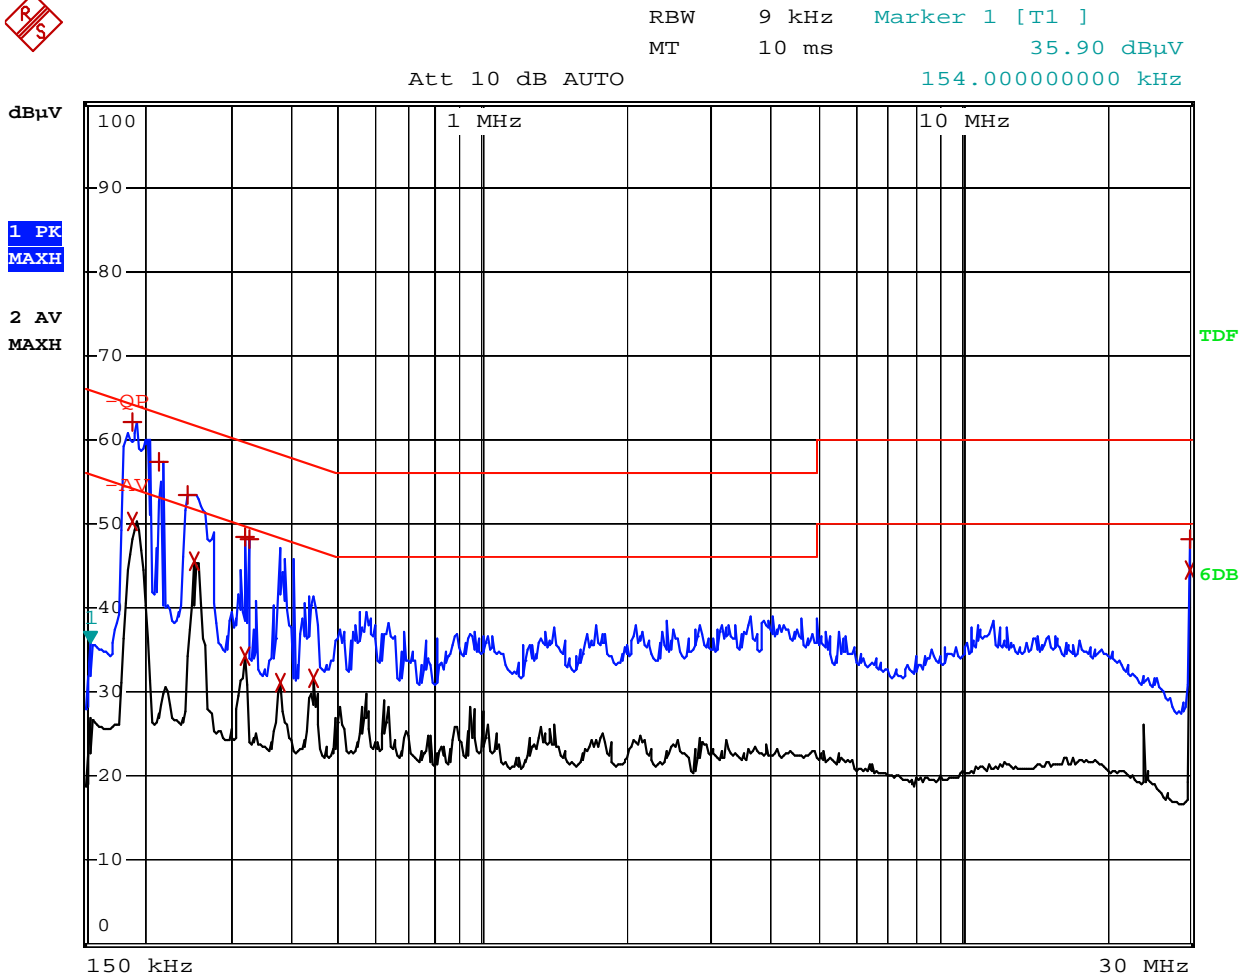

## **4. §15.203 - ANTENNA REQUIREMENT**

---

### **4.1 Standard Applicable**

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Test Result**

This product has an integral antenna, fulfill the requirement of this section.

## 5. POWER SPECTRAL DENSITY

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2010-08-12	2011-08-11
Attenuator	ATTEN	DC-4GHz	ATS100-4-20	2010-08-12	2011-08-11

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 5.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=3KHz, Span = 20MHz.
4. Repeat above procedures until all frequency measured was complete.

### 5.4 Environmental Conditions


Temperature:	20° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

### 5.5 Summary of Test Results/Plots


Test mode	Test channel	Reading dBm/3kHz	Limit dBm/3kHz
802.11b	Low channel (2412MHz)	-10.09	8
	Middle channel (2437MHz)	-11.56	8
	High channel (2462MHz)	-11.46	8
802.11g	Low channel (2412MHz)	-11.79	8
	Middle channel (2437MHz)	-12.00	8
	High channel (2462MHz)	-12.35	8

For 802.11b

Low Channel:

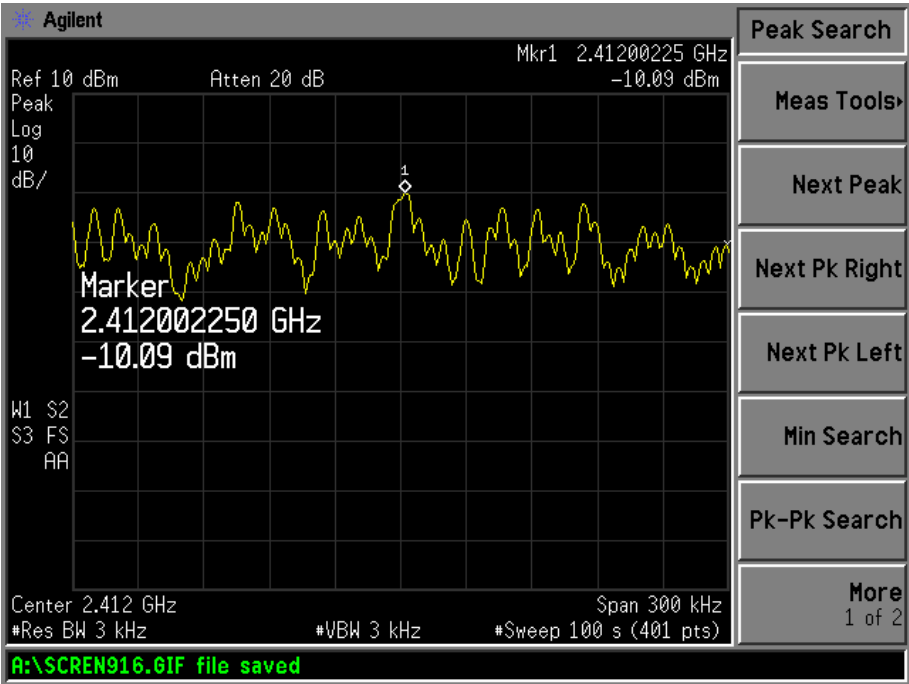


Middle Channel:

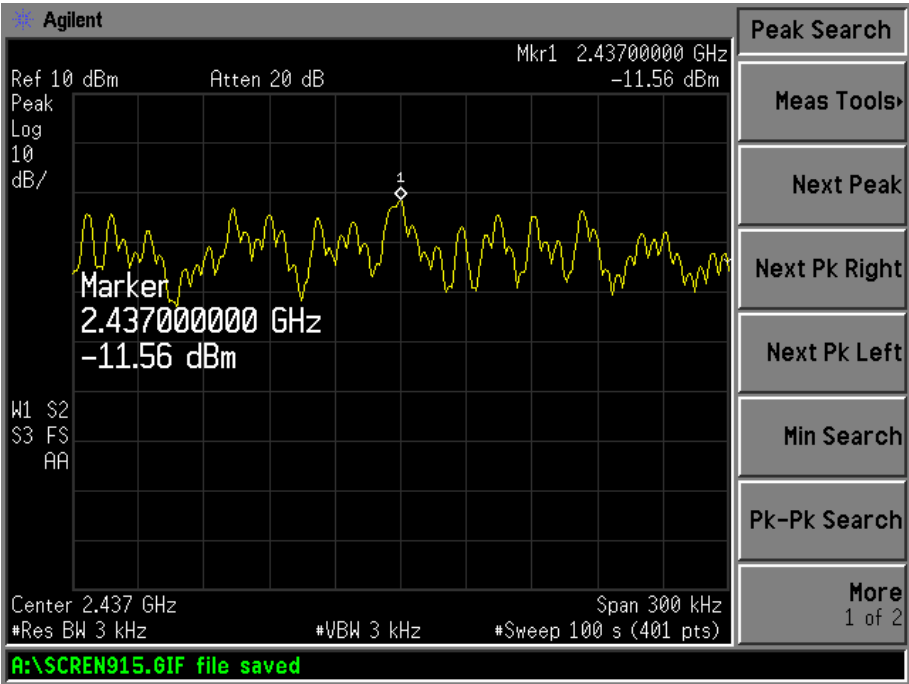




High Channel:

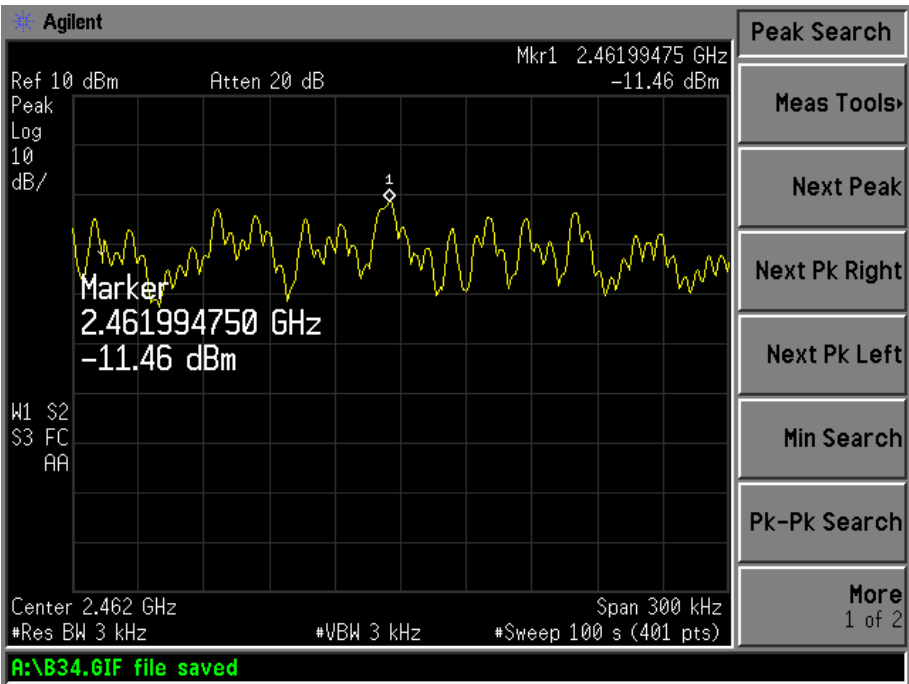


For 802.11g


Low Channel:

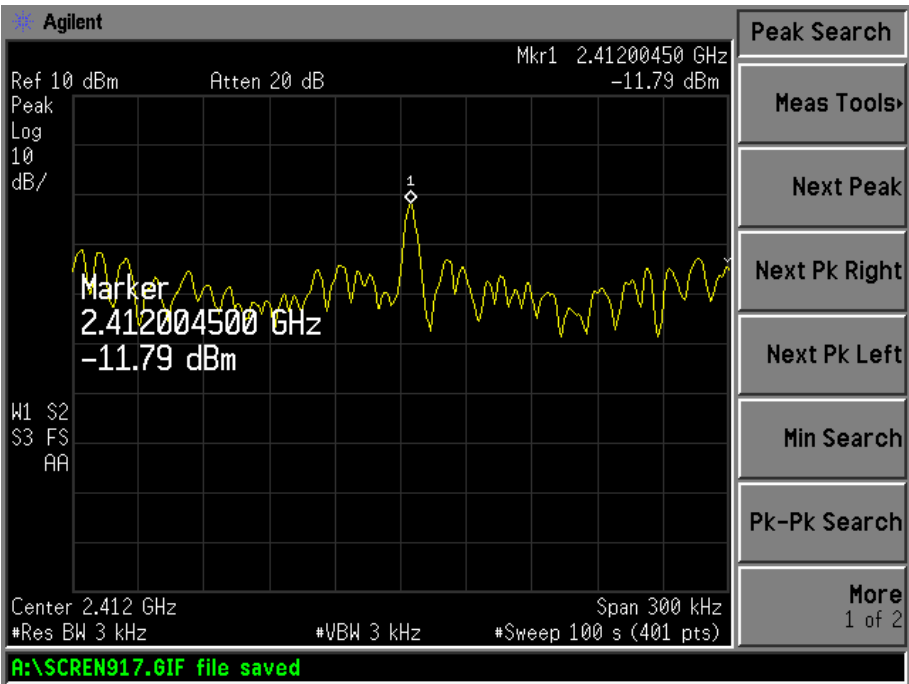

Middle Channel:

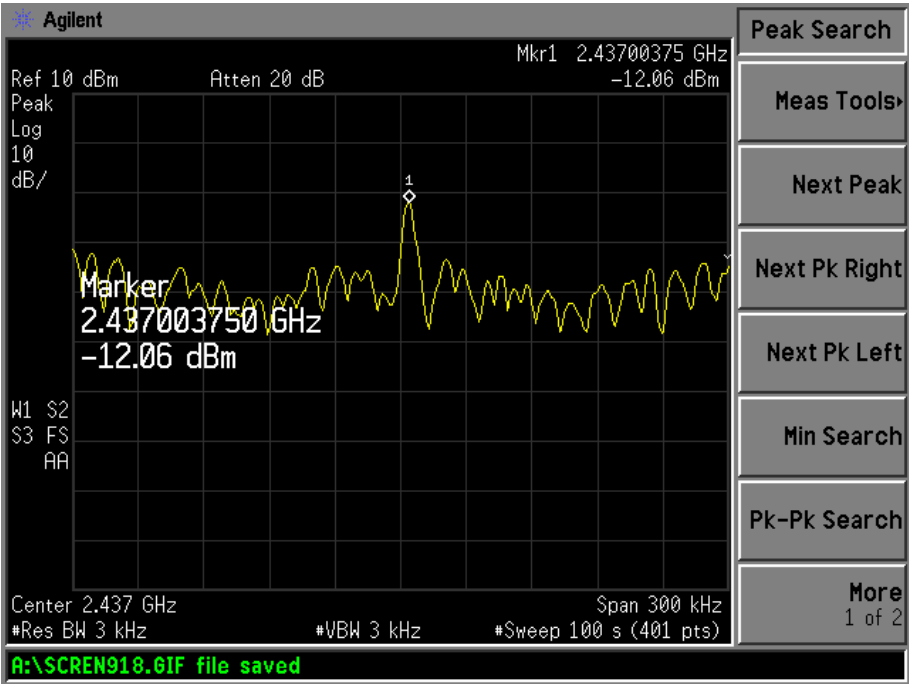

High Channel:

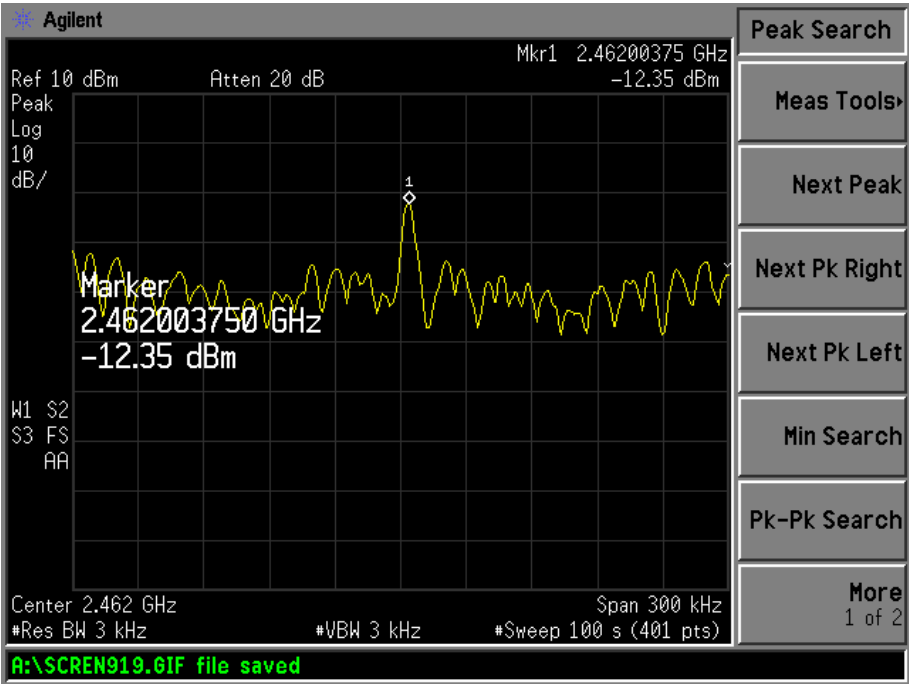

## 6. 6-dB BANDWIDTH

### 6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2010-08-12	2011-08-11
Attenuator	ATTEN	DC-4GHz	ATS100-4-20	2010-08-12	2011-08-11

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 6.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. The spectrum analyzer as RBW=300KHz (1 % of Bandwidth.), Sweep=auto
4. Mark the peak frequency and –6dB (upper and lower) frequency.

### 6.4 Environmental Conditions


Temperature:	24° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 6.5 Summary of Test Results/Plots


Test mode	Frequency MHz	6 dB Bandwidth kHz	Limit kHz
802.11b	2412	11180	500
	2437	11104	500
	2462	11200	500
802.11g	2412	16537	500
	2437	16544	500
	2462	16525	500

For 802.11b


Low Channel:

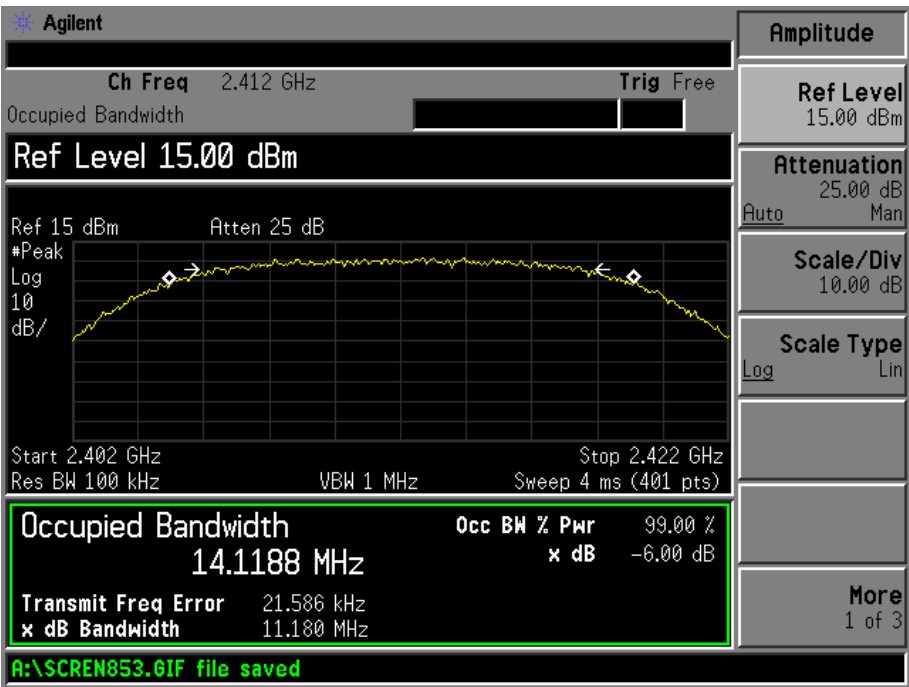


Mid Channel:

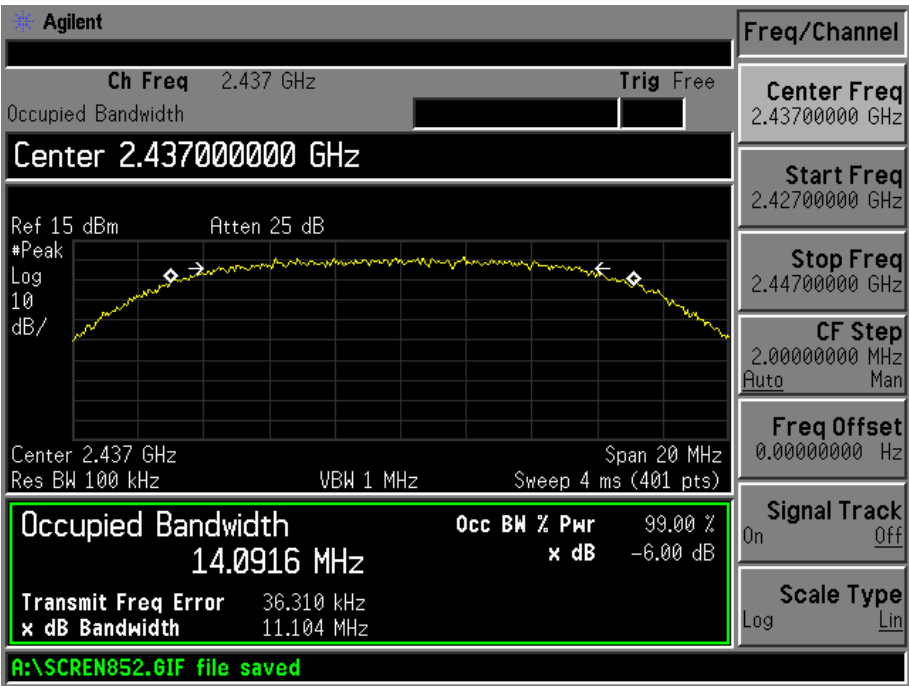


High Channel:

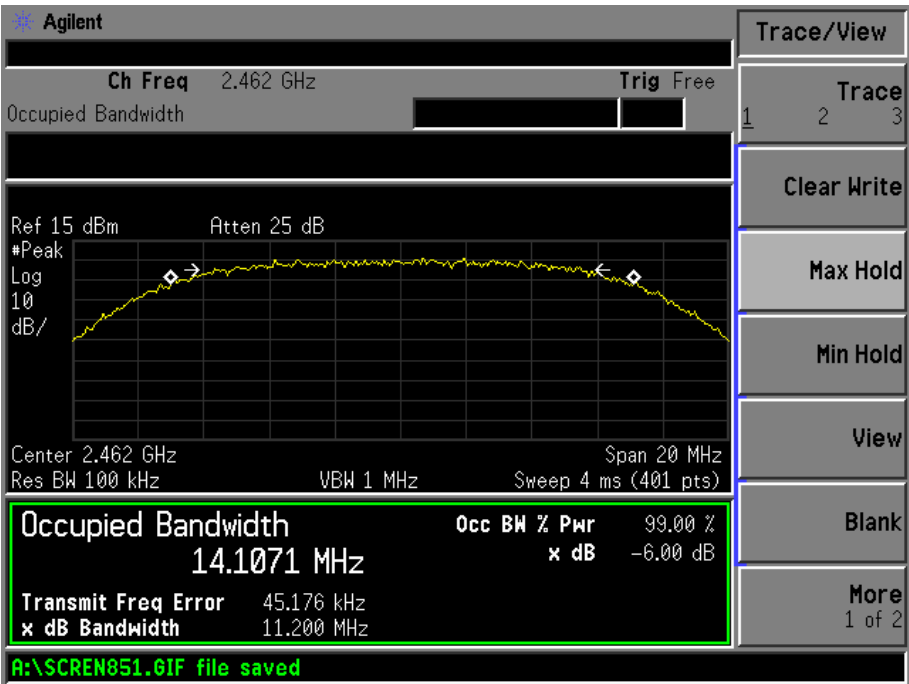


For 802.11g  
Low Channel:

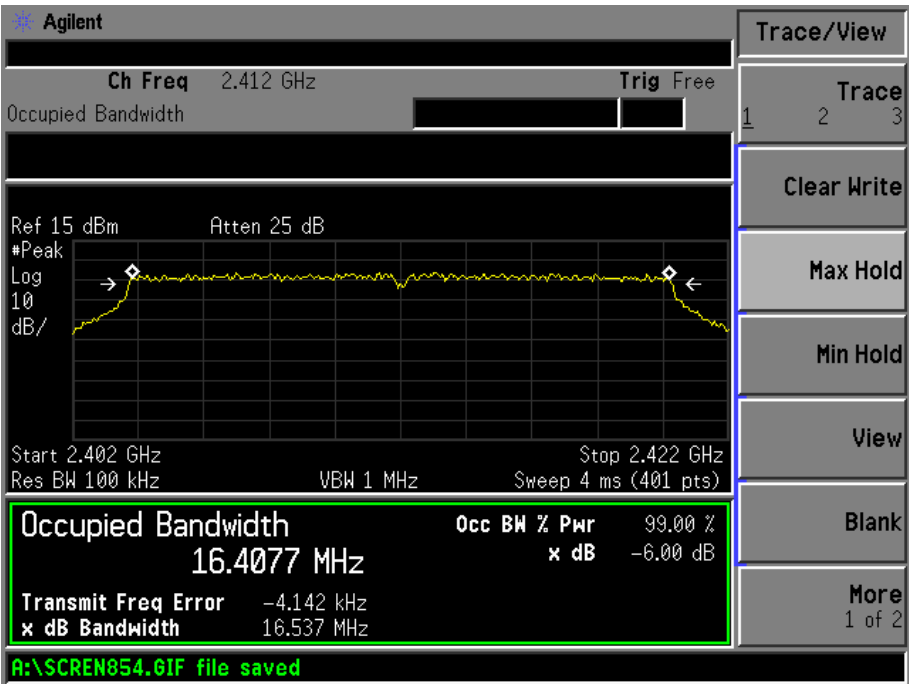

Mid Channel:

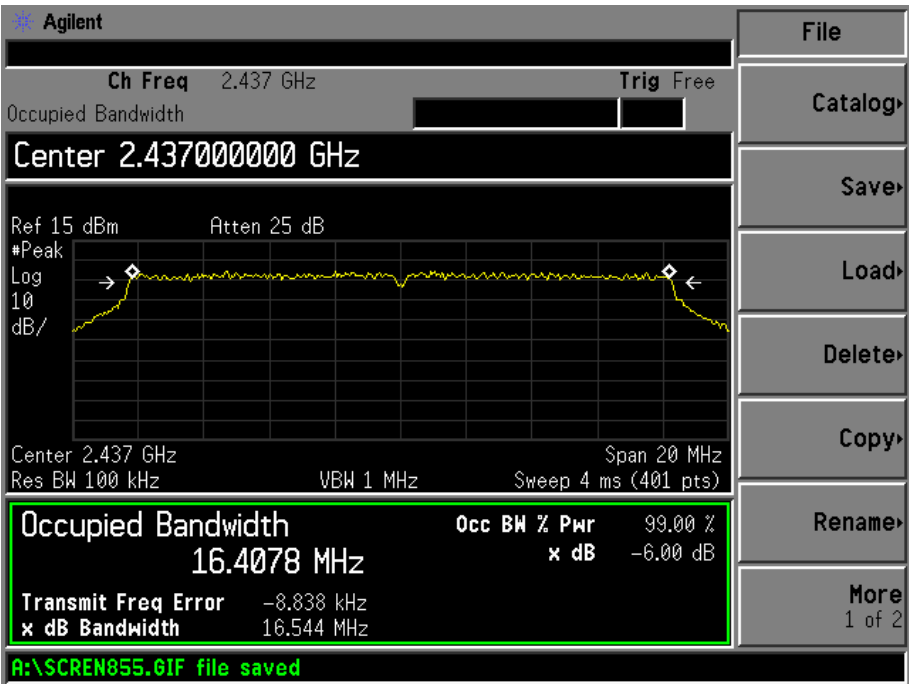

High Channel:

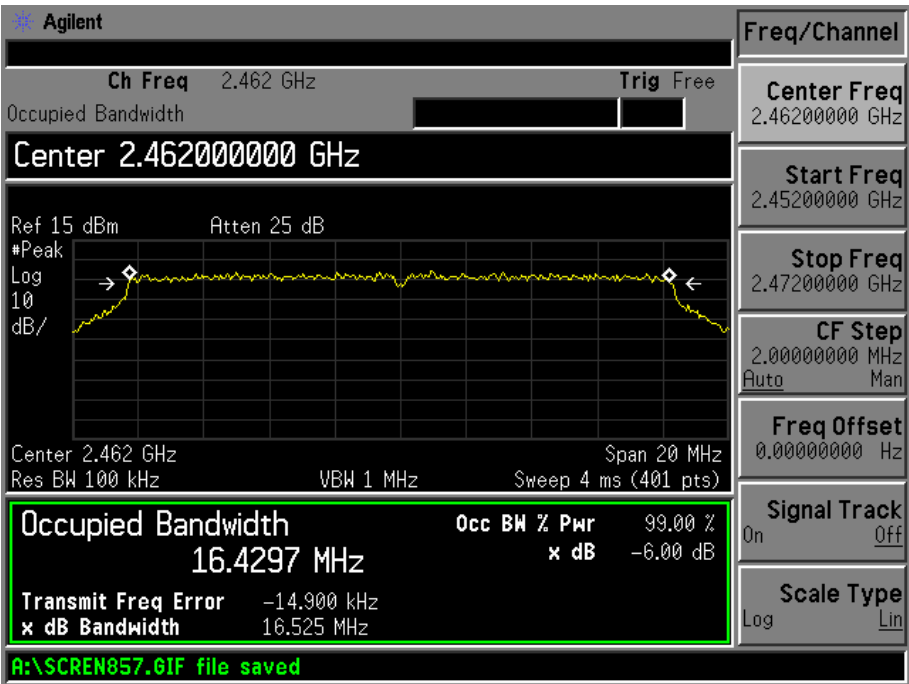

## 7. POWER OUTPUT

### 7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2010-08-12	2011-08-11
Attenuator	ATTEN	DC-4GHz	ATS100-4-20	2010-08-12	2011-08-11

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 7.3 Test Procedure

According to section 15.247(b)-power output of the KDB-558074 (2005), the method #1 of the power output option2 was used, the following is the measurement procedure.

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz.
3. Use a video filter with a bandwidth of 3 MHz or greater.
4. Use sample detector mode if bin width (i.e., span/number of points in spectrum display)  $<$  0.5 RBW. Otherwise use peak detector mode.
5. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”.
6. Trace average 100 traces in power averaging mode.
7. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges.

### 7.4 Environmental Conditions

Temperature:	21° C
Relative Humidity:	55%
ATM Pressure:	1011 mbar


**7.5 Summary of Test Results/Plots**

Test mode	Frequency MHz	Reading dBm	Output power W	Limit W
802.11b (1M Short)	2412	13.51	0.022439	1
	2437	13.48	0.022284	1
	2462	13.63	0.023067	1
802.11b (11M Short)	2412	13.37	0.021727	1
	2437	13.47	0.022233	1
	2462	13.37	0.021727	1
802.11b (1M Long)	2412	13.34	0.021577	1
	2437	13.25	0.021135	1
	2462	13.46	0.022182	1
802.11b (11M Long)	2412	13.40	0.021878	1
	2437	13.39	0.021827	1
	2462	13.52	0.022491	1
802.11g (6M)	2412	13.23	0.021038	1
	2437	13.13	0.020559	1
	2462	13.20	0.020893	1
802.11g (54M)	2412	13.21	0.020941	1
	2437	13.13	0.020559	1
	2462	13.23	0.021038	1




For 802.11b\_1M rate (Short)


Low Channel:

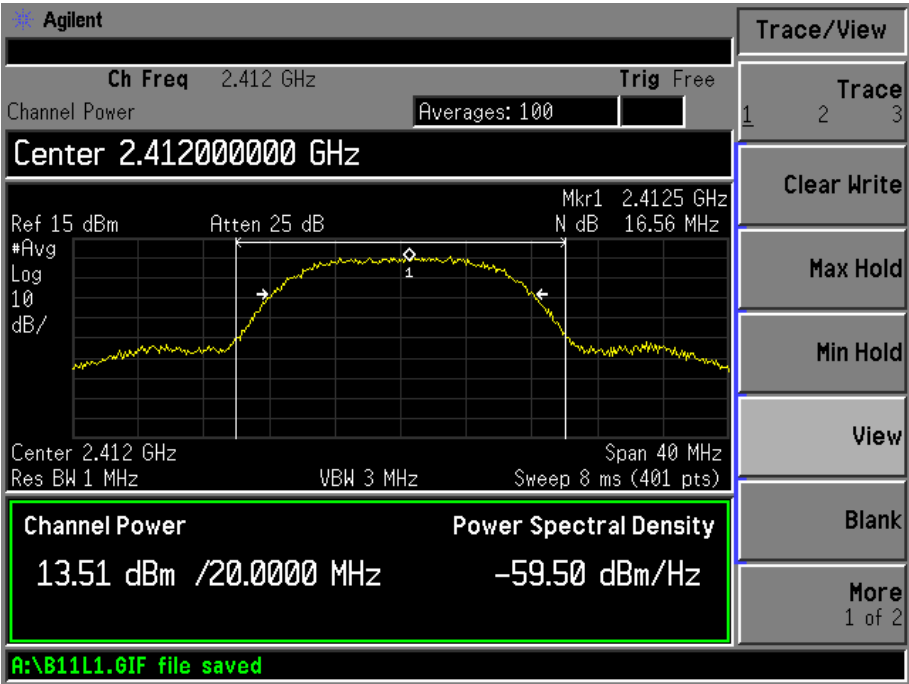

Middle Channel:

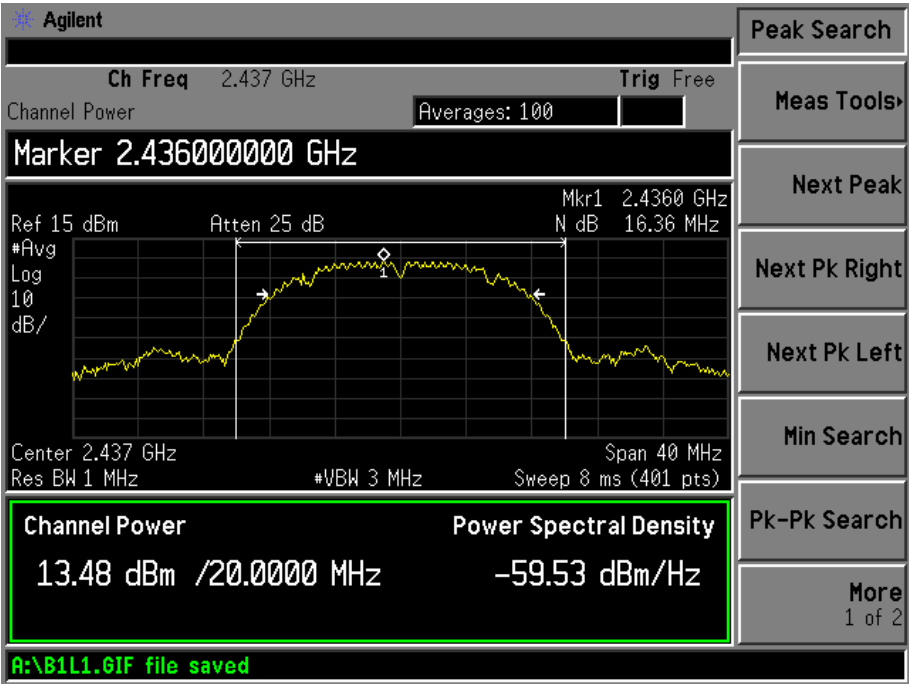


High Channel:

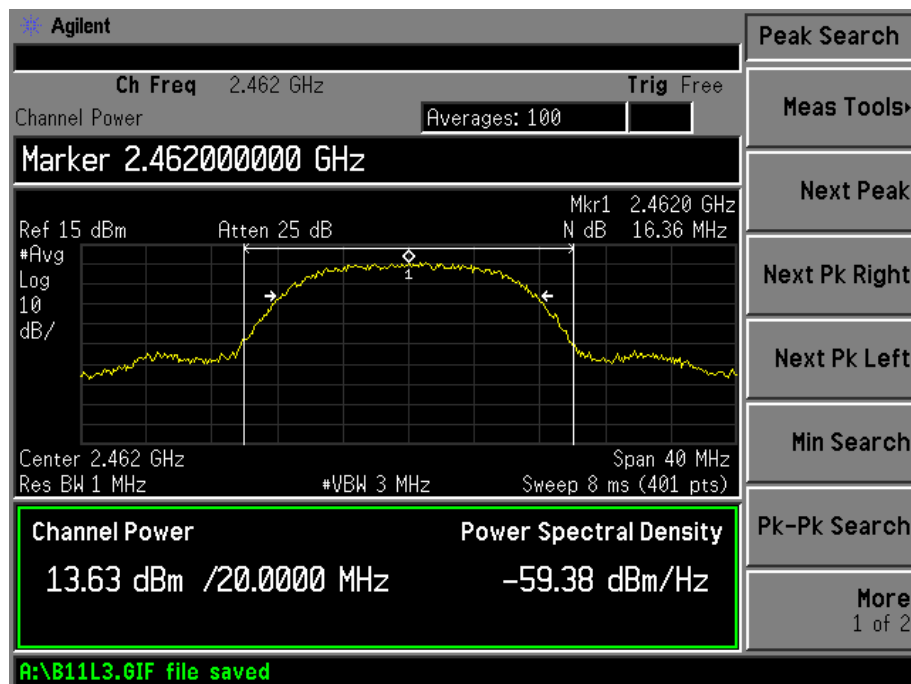


For 802.11b\_11M rate (Short)


Low Channel:

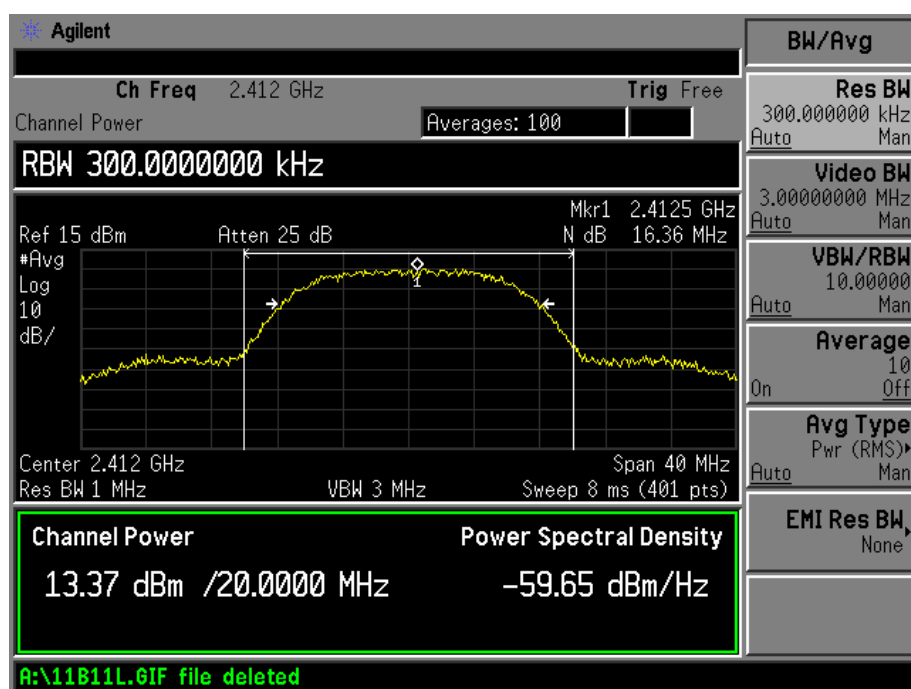

Middle Channel:

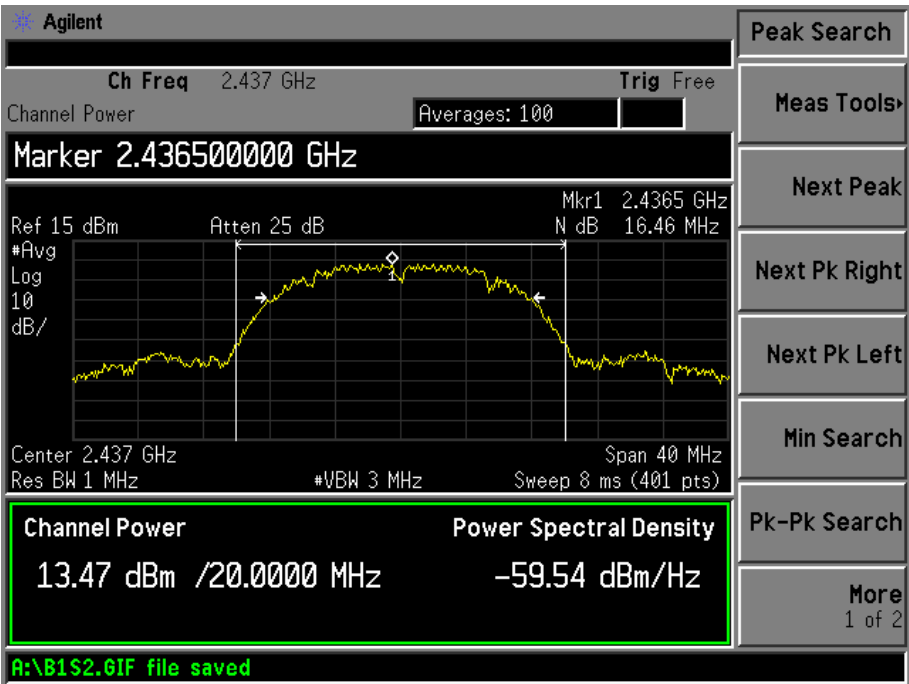


High Channel:

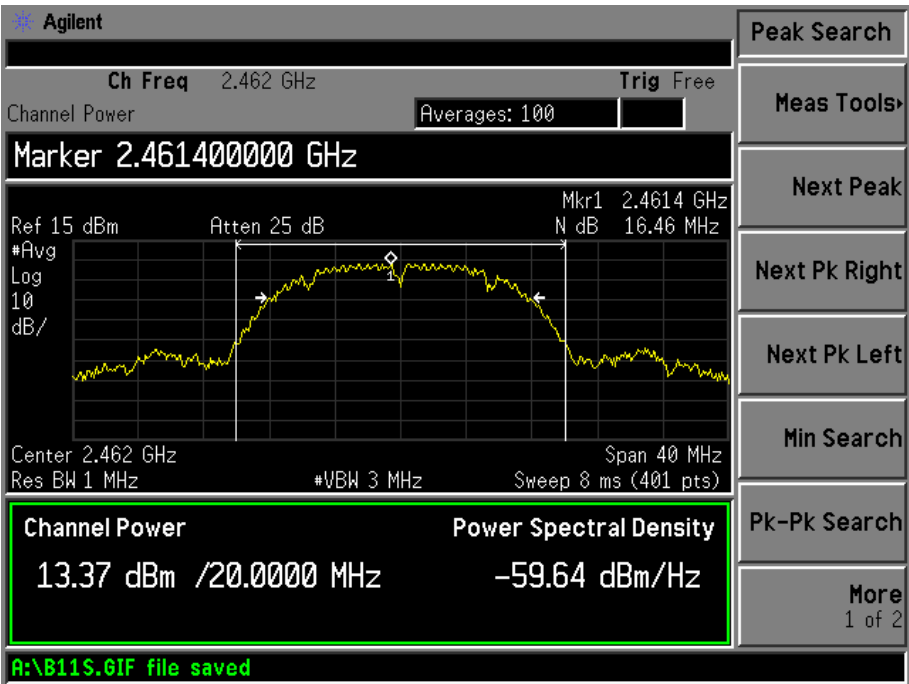


For 802.11b\_1M rate (Long)


Low Channel:

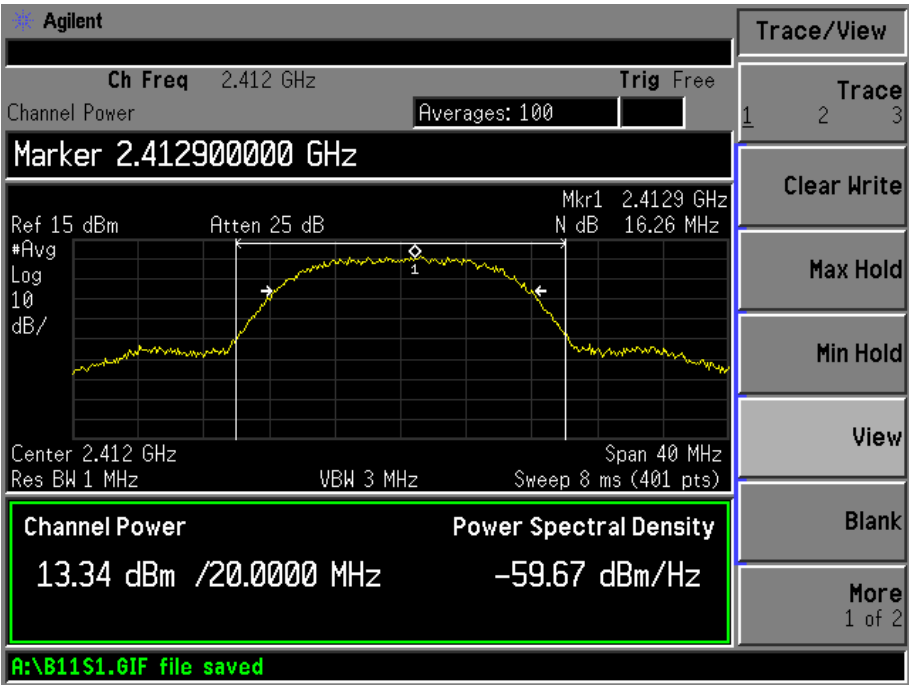

Middle Channel:

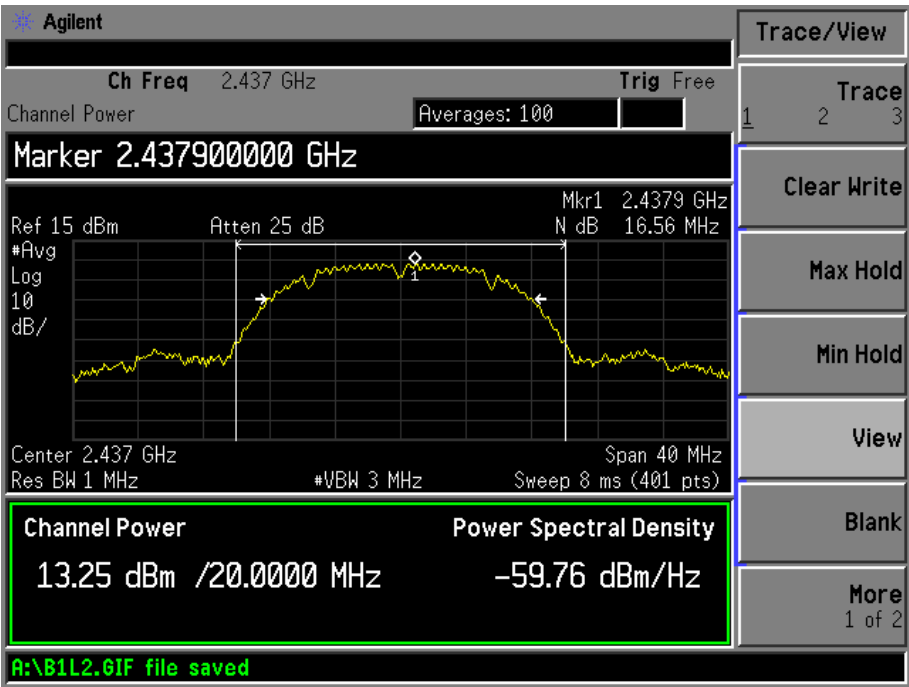


High Channel:

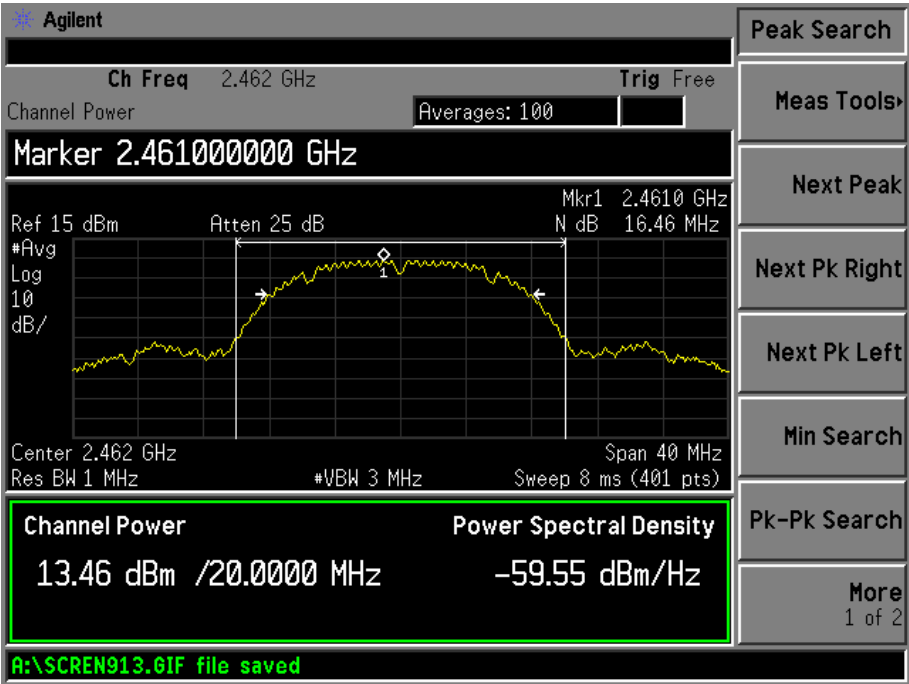


For 802.11b\_11M rate (Long)


Low Channel:

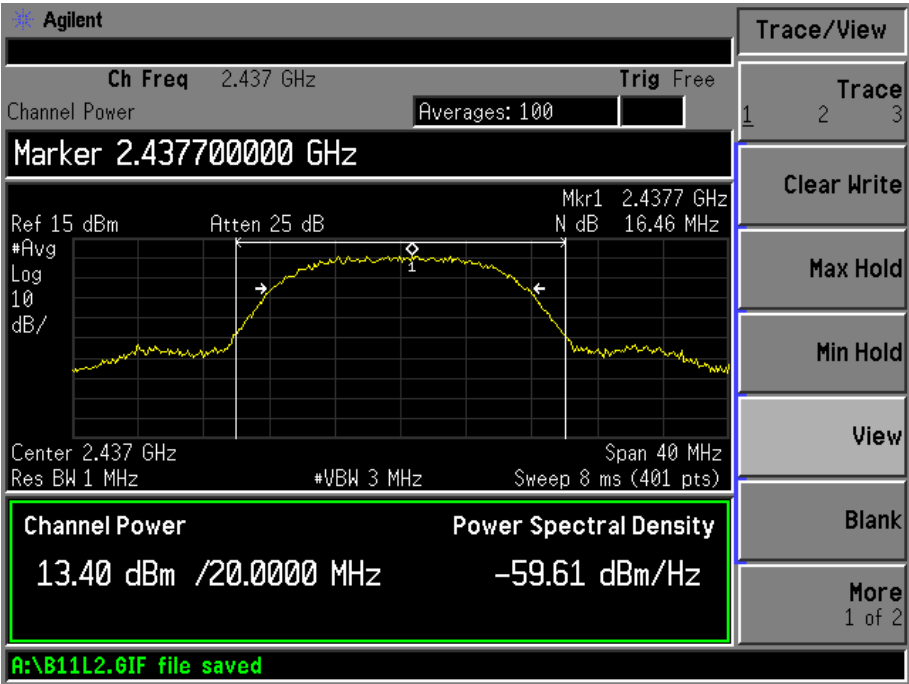

Middle Channel:

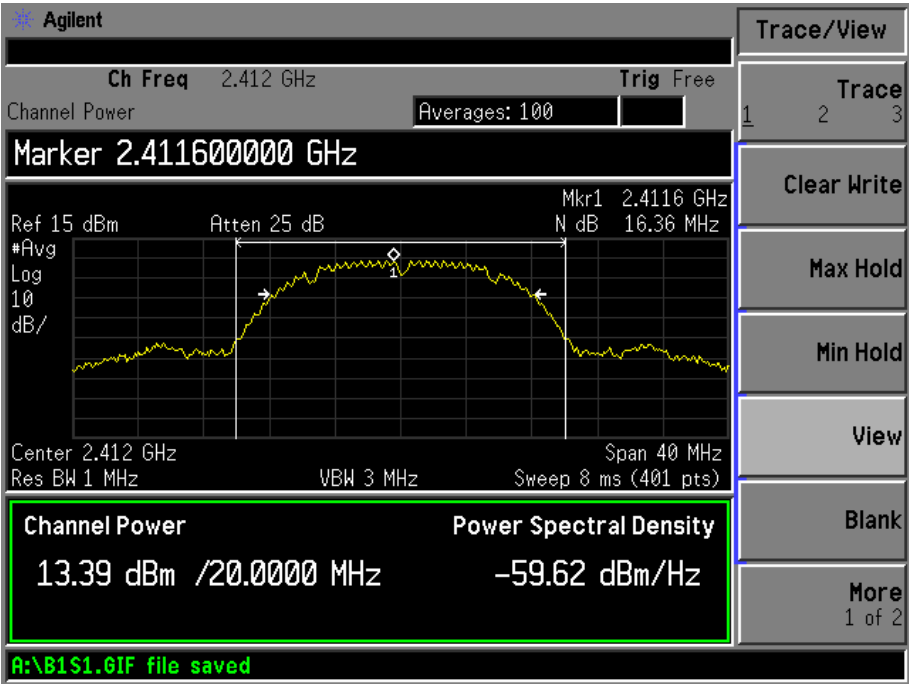


High Channel:

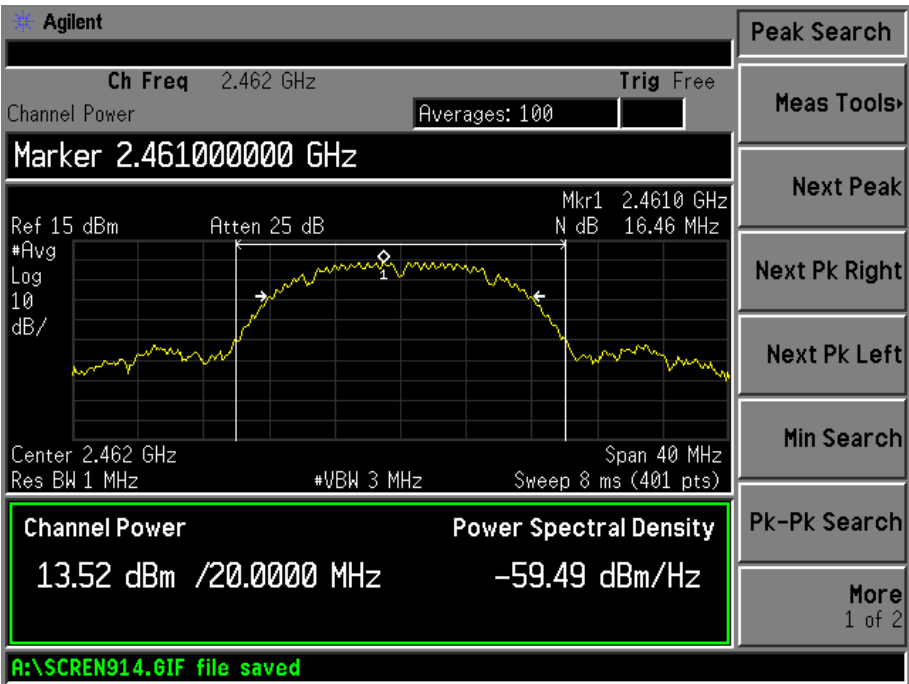


For 802.11g\_6M rate


Low Channel:

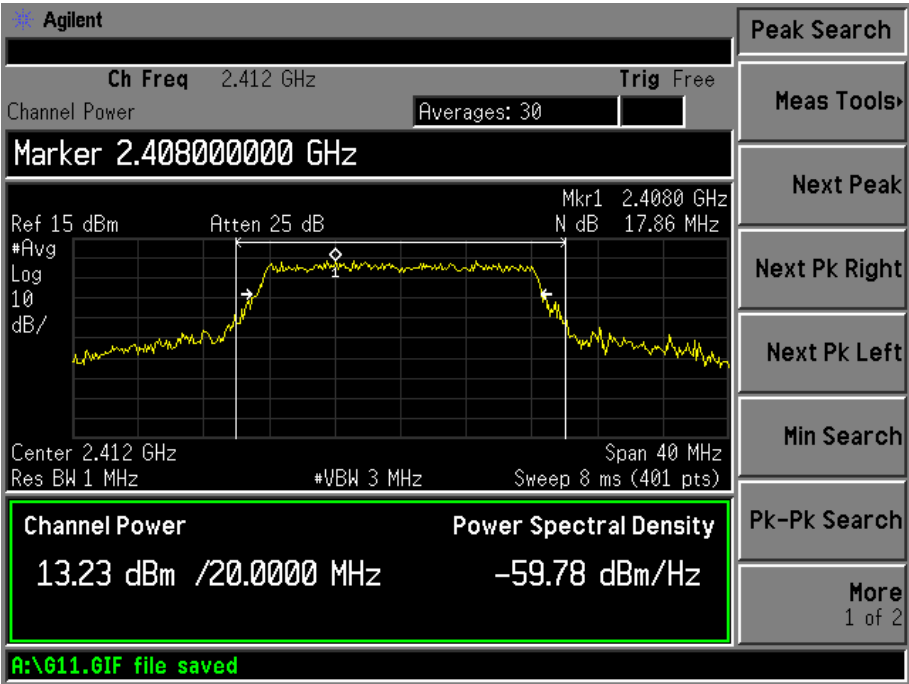

Middle Channel:

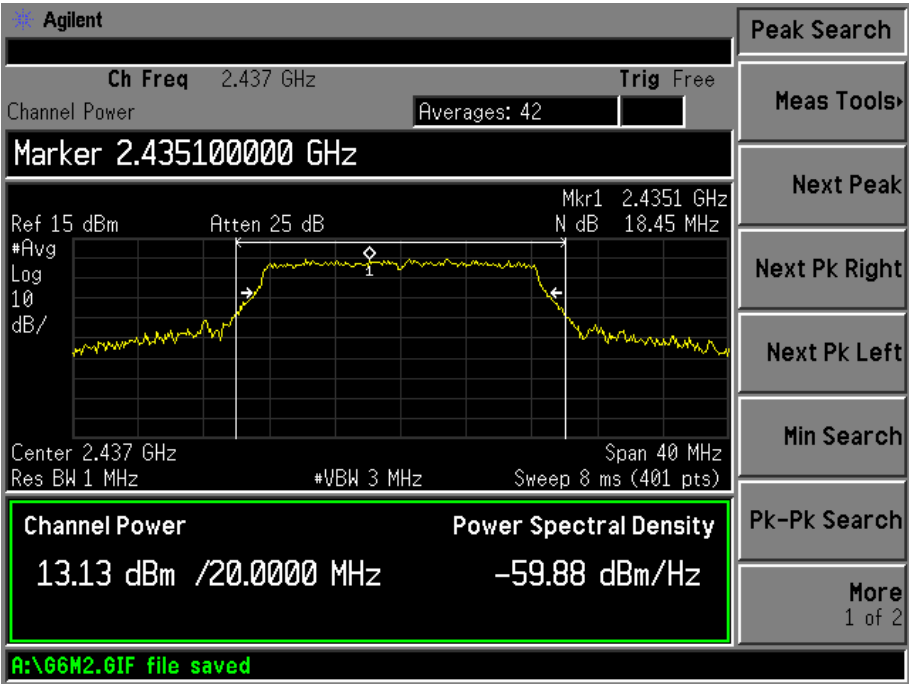


High Channel:

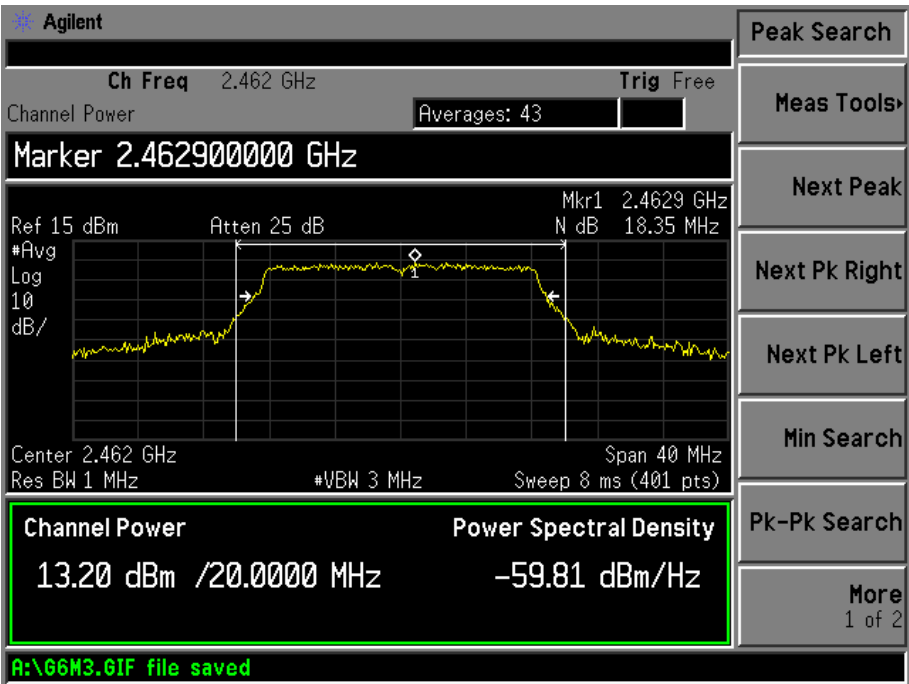


For 802.11g\_54M rate

Low Channel:

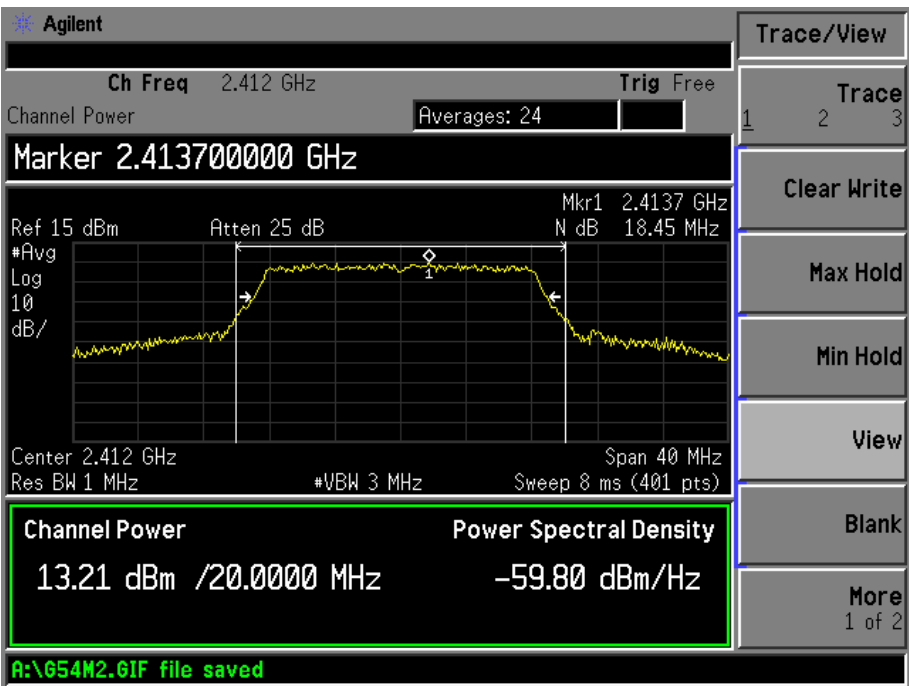




Middle Channel:

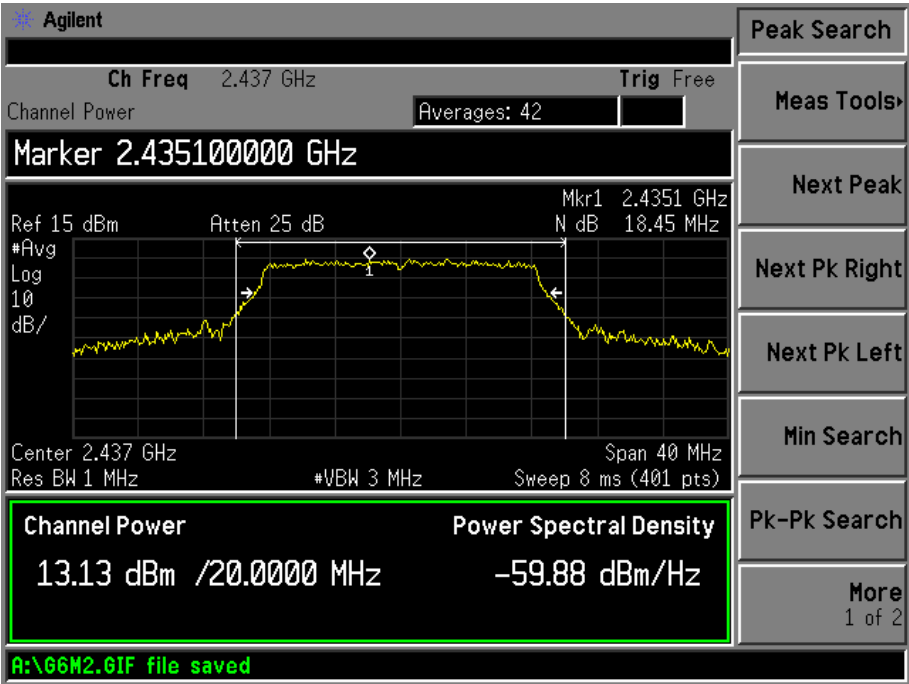

High Channel:

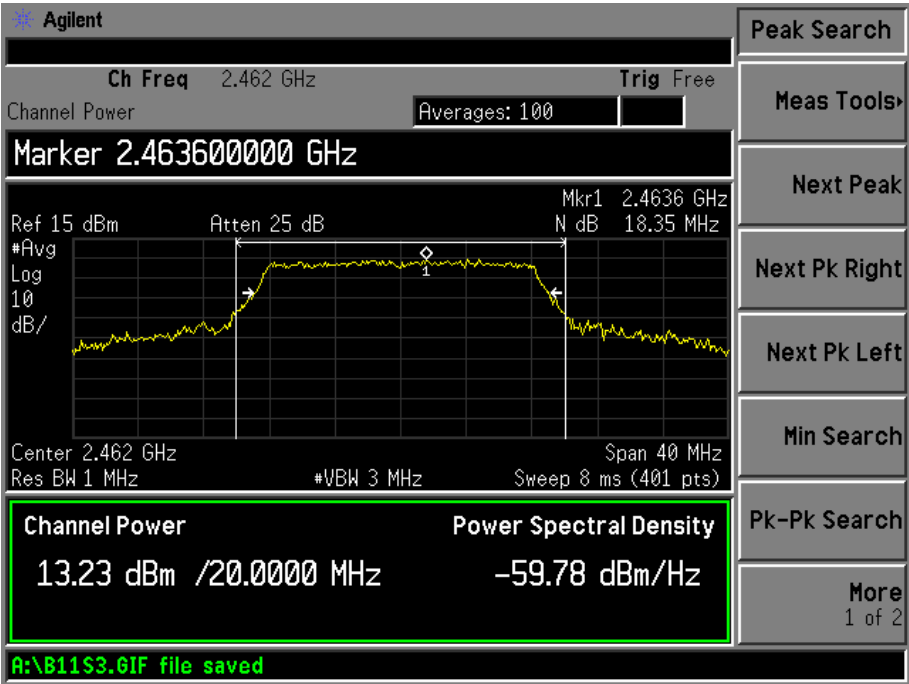

## 8. FIELD STRENGTH OF SPURIOUS EMISSIONS

### 8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.10$  dB.

### 8.2 Standard Applicable

According to §15.247(c), 15.205 15.209(b) & 15.35 (b), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Section 15.209:

30 - 88 MHz 40 dBuV/m @3M

88 -216 MHz 43.5 dBuV/m @3M

216 -960 MHz 46 dBuV/m @3M

Above 960 MHz 54dBuV/m @3M

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

### 8.3 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2010-04-16	2011-04-15
EMI Test Receiver	R&S	ESVB	825471/005	2010-08-12	2011-08-11
Positioning Controller	C&C	CC-C-1F	N/A	2010-08-12	2011-08-11
RF Switch	EM	EMSW18	SW060023	2010-08-12	2011-08-11
Pre-amplifier	Agilent	8447F	3113A06717	2010-08-12	2011-08-11
Pre-amplifier	Compliance Direction	PAP-0118	24002	2010-08-12	2011-08-11
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2010-07-21	2011-07-20
Horn Antenna	ETS	3117	00086197	2010-07-21	2011-07-20

### 8.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

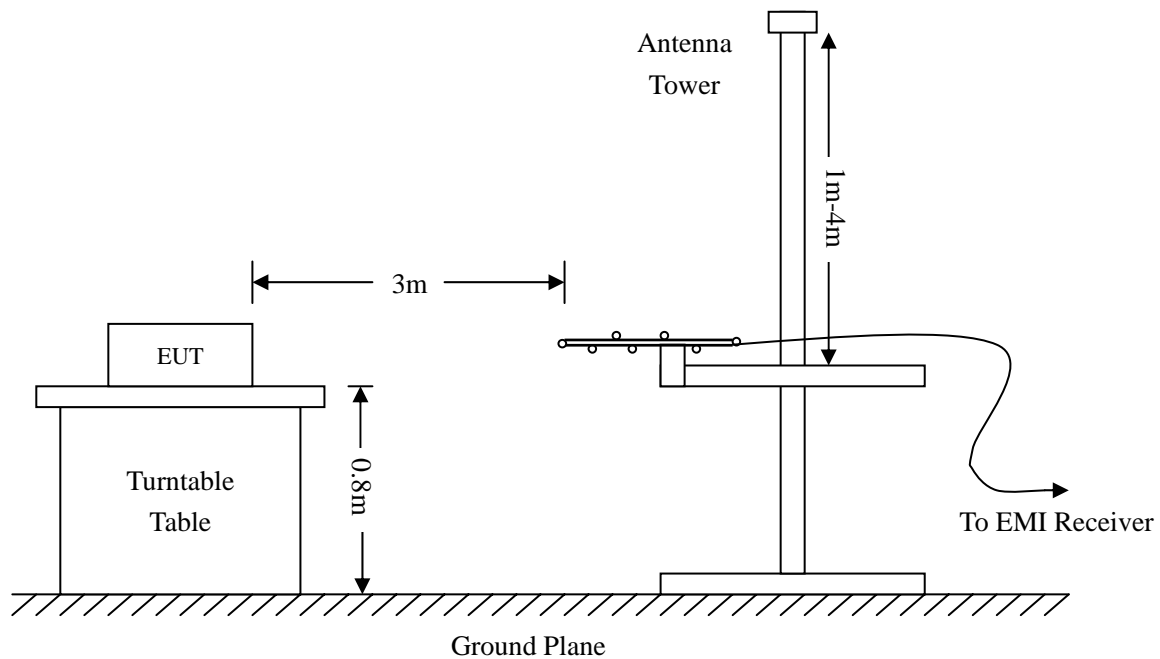

### 8.5 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

## 8.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

## 8.7 Environmental Conditions

Temperature:	22° C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 8.8 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:

**-4.2 dBμV at 4824.0 MHz in the Horizontal polarization, Transmitting 802.11b Low Channel test mode with, 30 MHz to 25 GHz, 3Meters**

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


Test Result/Plots:

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11b) Low Channel


Comment:

Horizontal

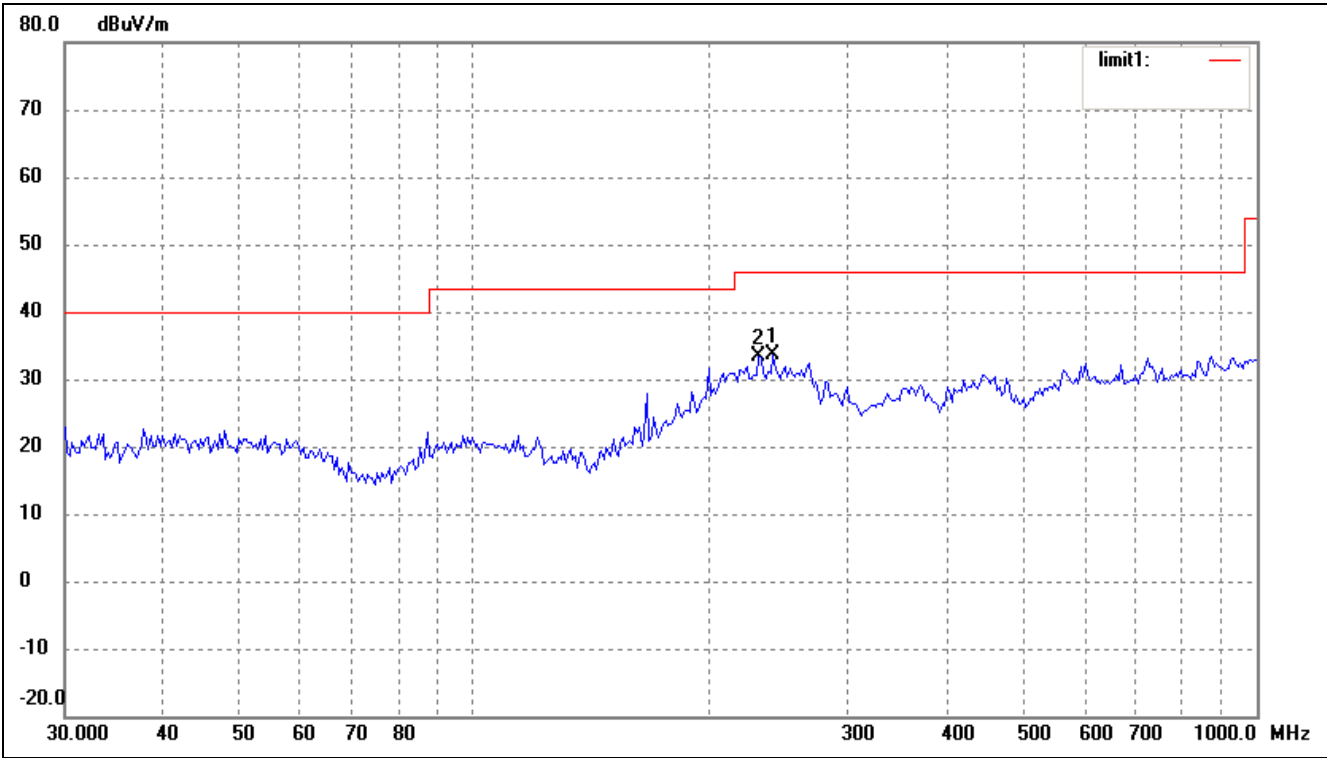


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	240.8304	26.26	7.46	33.72	46.00	-12.28	135	100	peak
2	230.9068	26.36	6.94	33.30	46.00	-12.70	237	200	peak

Vertical

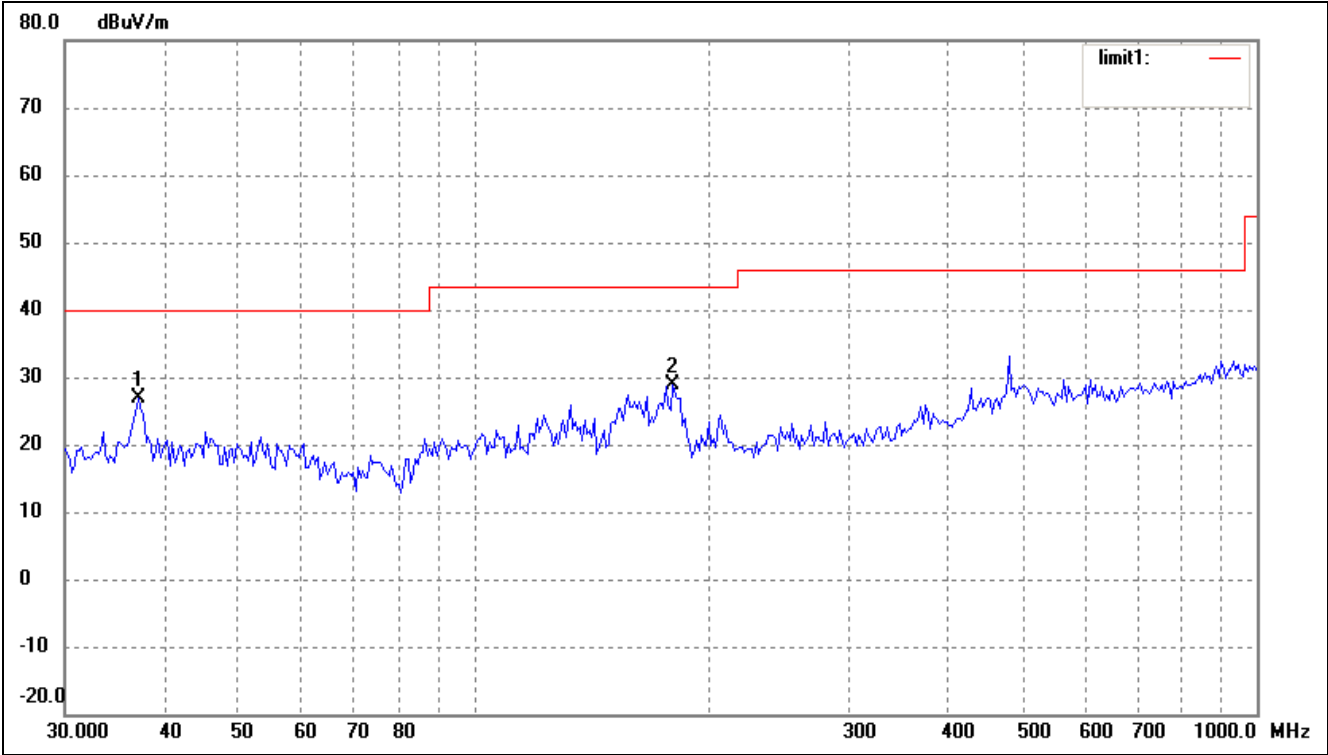


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	37.2855	19.69	7.21	26.90	40.00	-13.10	227	100	peak
2	179.3863	24.17	4.74	28.91	43.50	-14.59	95	100	peak

Spurious Emission From 30 MHz to 1 GHz  
Test mode: Transmitting (802.11b) Middle Channel  
Comment:  
Horizontal

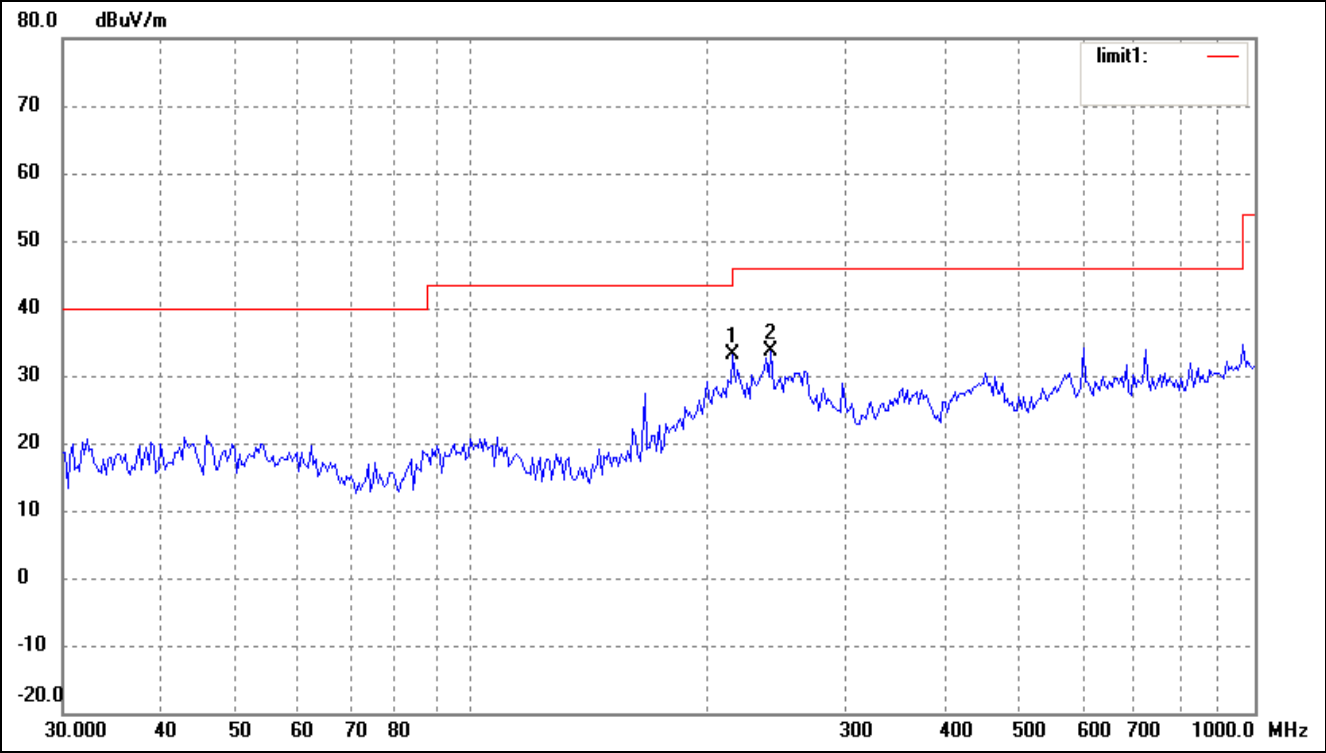

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	215.2678	27.04	6.18	33.22	43.50	-10.28	137	100	peak
2	240.8304	26.18	7.46	33.64	46.00	-12.36	229	100	peak

Vertical

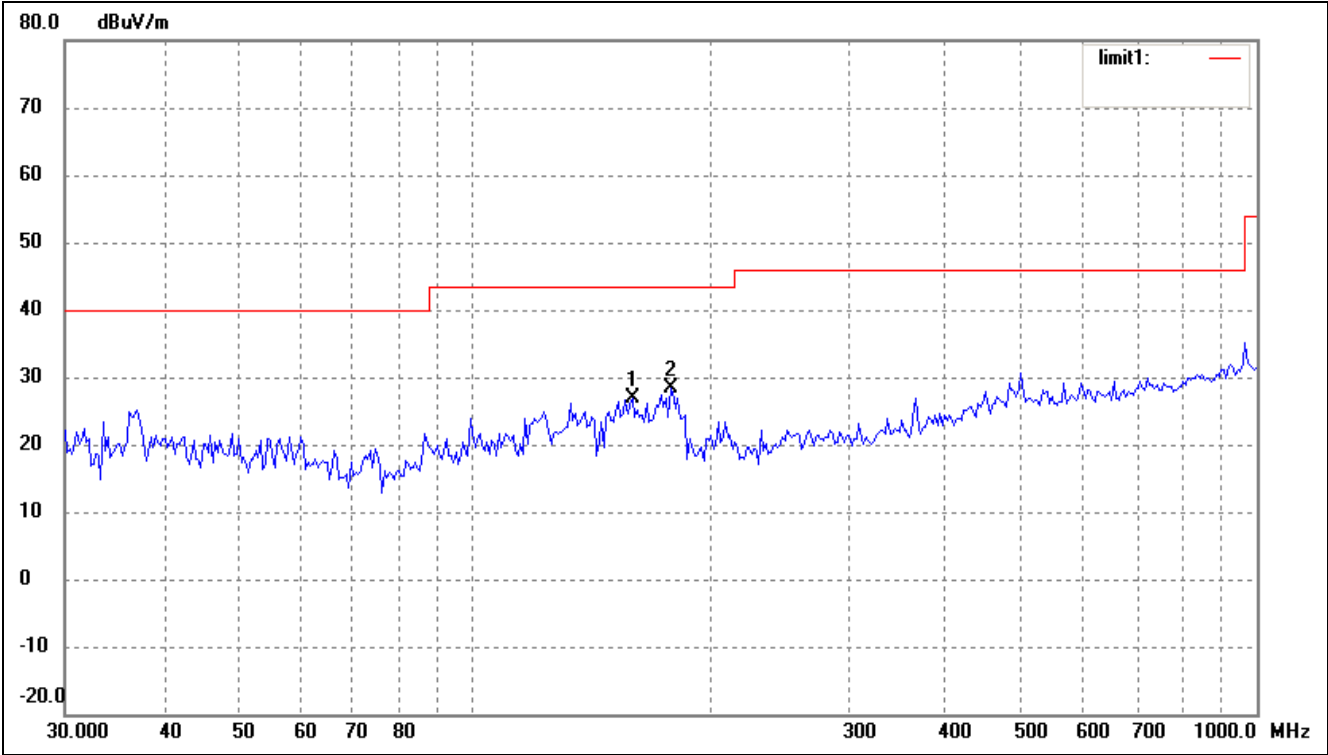

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	159.2251	23.07	3.71	26.78	43.50	-16.72	64	100	peak
2	178.1327	23.66	4.65	28.31	43.50	-15.19	341	100	peak




Spurious Emission From 30 MHz to 1 GHz  
Test mode: Transmitting (802.11b) High Channel  
Comment:  
Horizontal




No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	215.2678	26.35	6.18	32.53	43.50	-10.97	130	100	peak
2	267.5455	24.37	8.12	32.49	46.00	-13.51	230	200	peak

Vertical

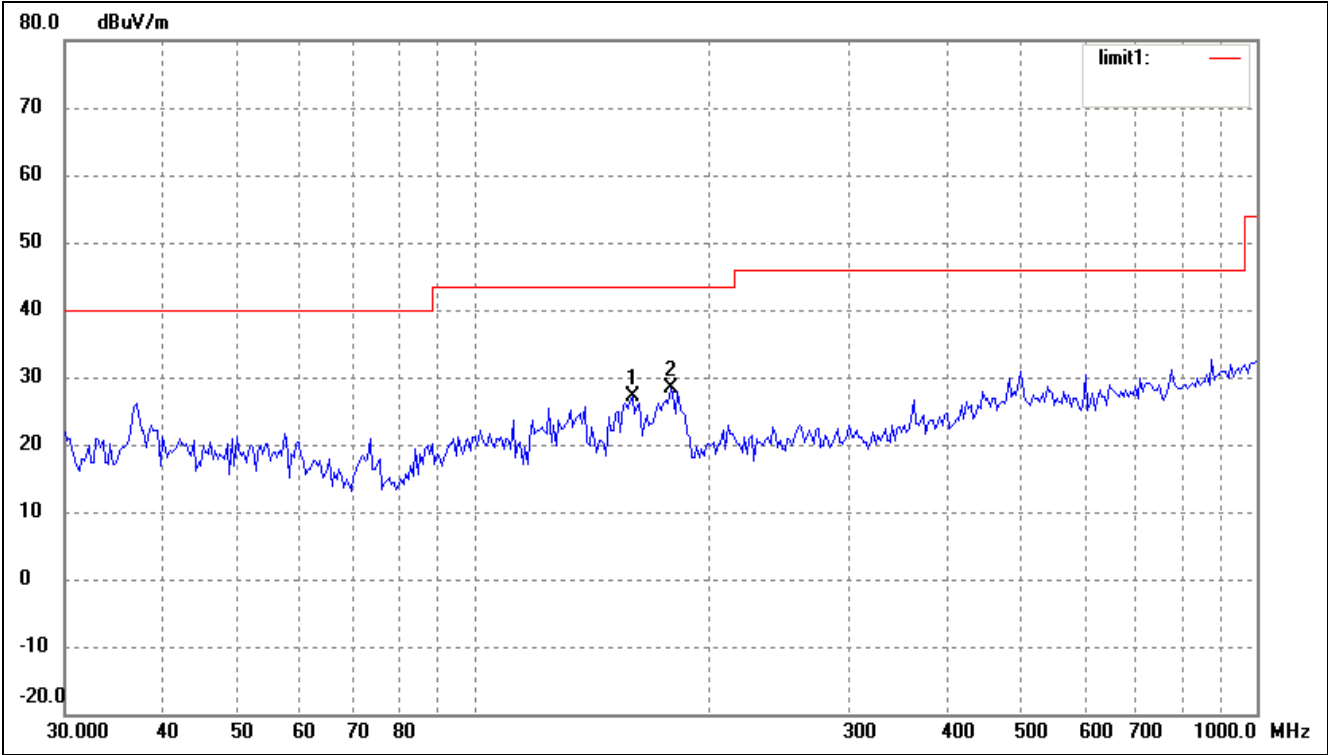


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	159.2251	23.39	3.71	27.10	43.50	-16.40	132	100	peak
2	178.1327	23.78	4.65	28.43	43.50	-15.07	210	100	peak

Spurious Emission From 30 MHz to 1 GHz  
Test mode: Transmitting (802.11g) Low Channel  
Comment:  
Horizontal

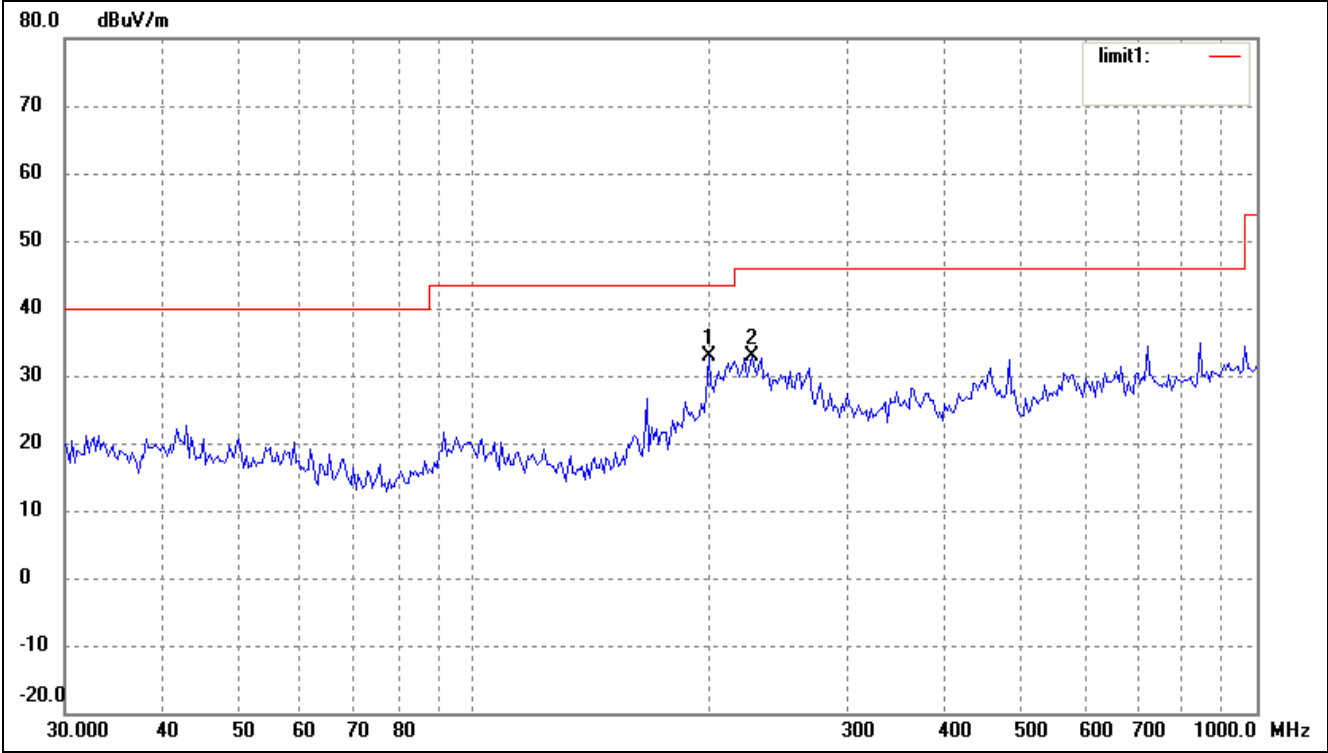

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	199.2855	27.29	5.68	32.97	43.50	-10.53	67	100	peak
2	226.0994	26.17	6.67	32.84	46.00	-13.16	284	100	peak

Vertical

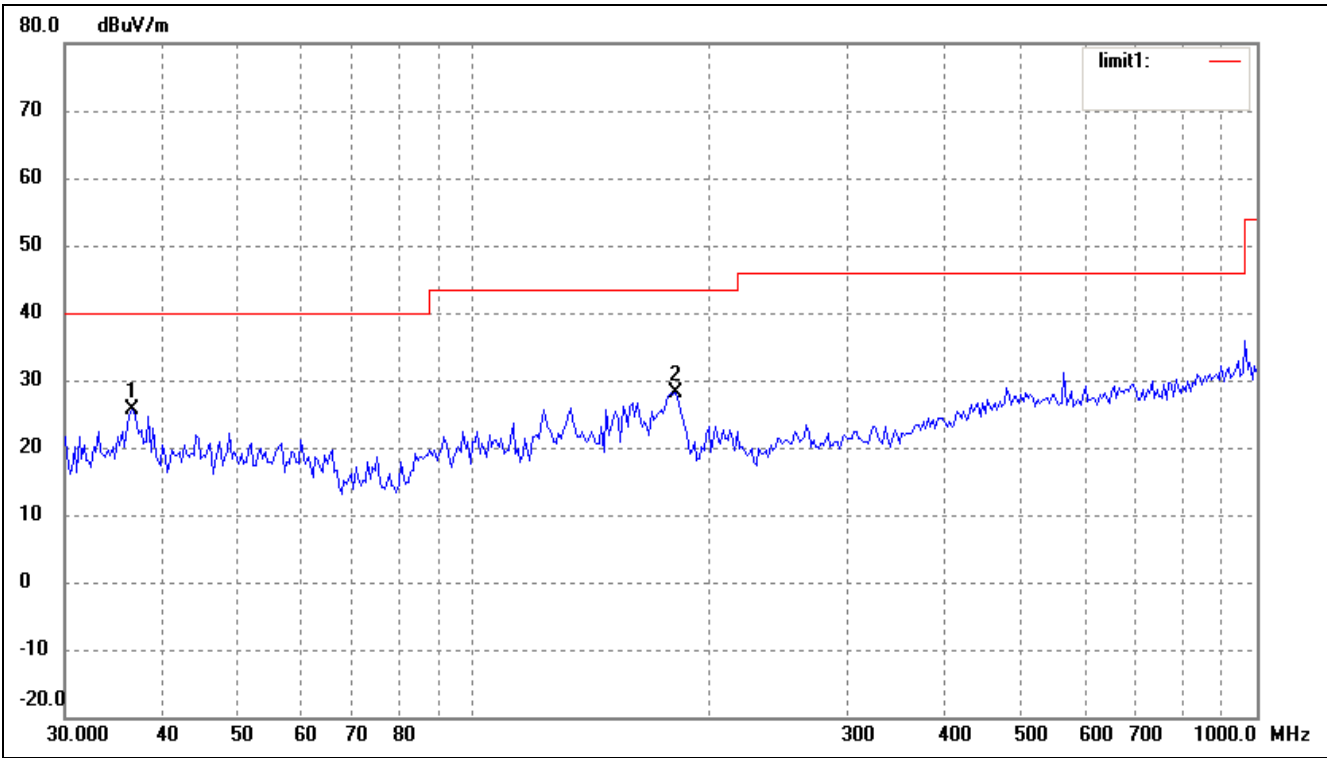


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	36.5092	18.72	7.01	25.73	40.00	-14.27	360	100	peak
2	180.6488	23.36	4.84	28.20	43.50	-15.30	100	100	peak

Spurious Emission From 30 MHz to 1 GHz

Test mode: Transmitting (802.11g) Middle Channel


Comment:

Horizontal

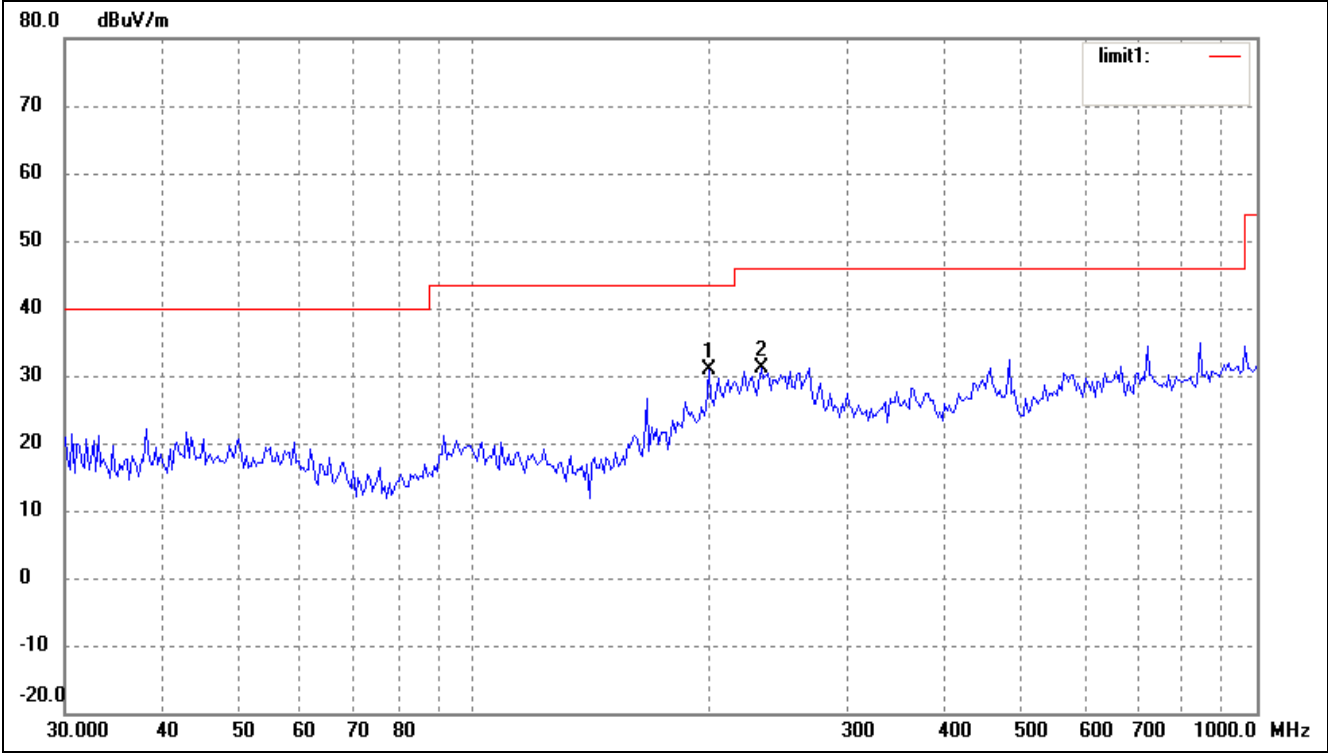


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	199.2855	25.29	5.68	30.97	43.50	-12.53	285	100	peak
2	232.5318	24.12	7.03	31.15	46.00	-14.85	194	100	peak

Vertical

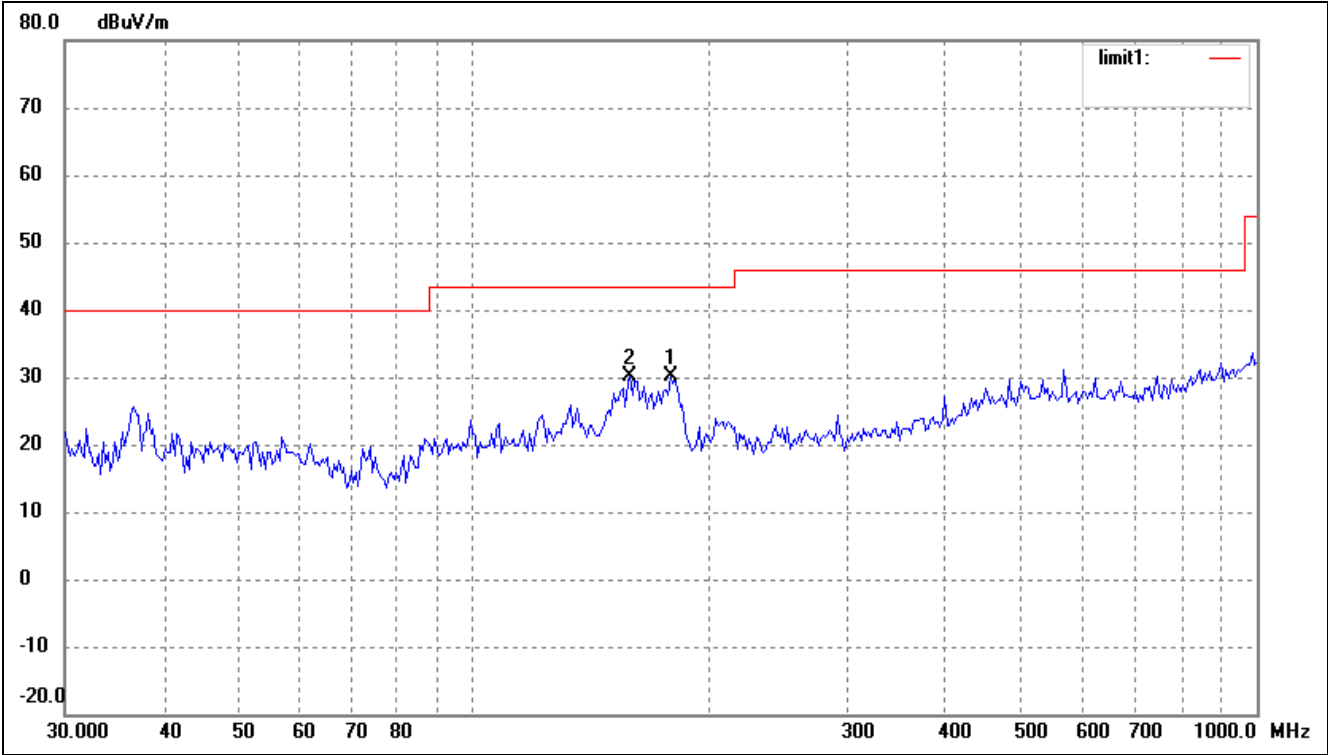


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	178.1327	25.52	4.65	30.17	43.50	-13.33	264	100	peak
2	158.1123	26.51	3.66	30.17	43.50	-13.33	138	100	peak

Spurious Emission From 30 MHz to 1 GHz  
Test mode: Transmitting (802.11g) High Channel  
Comment:  
Horizontal

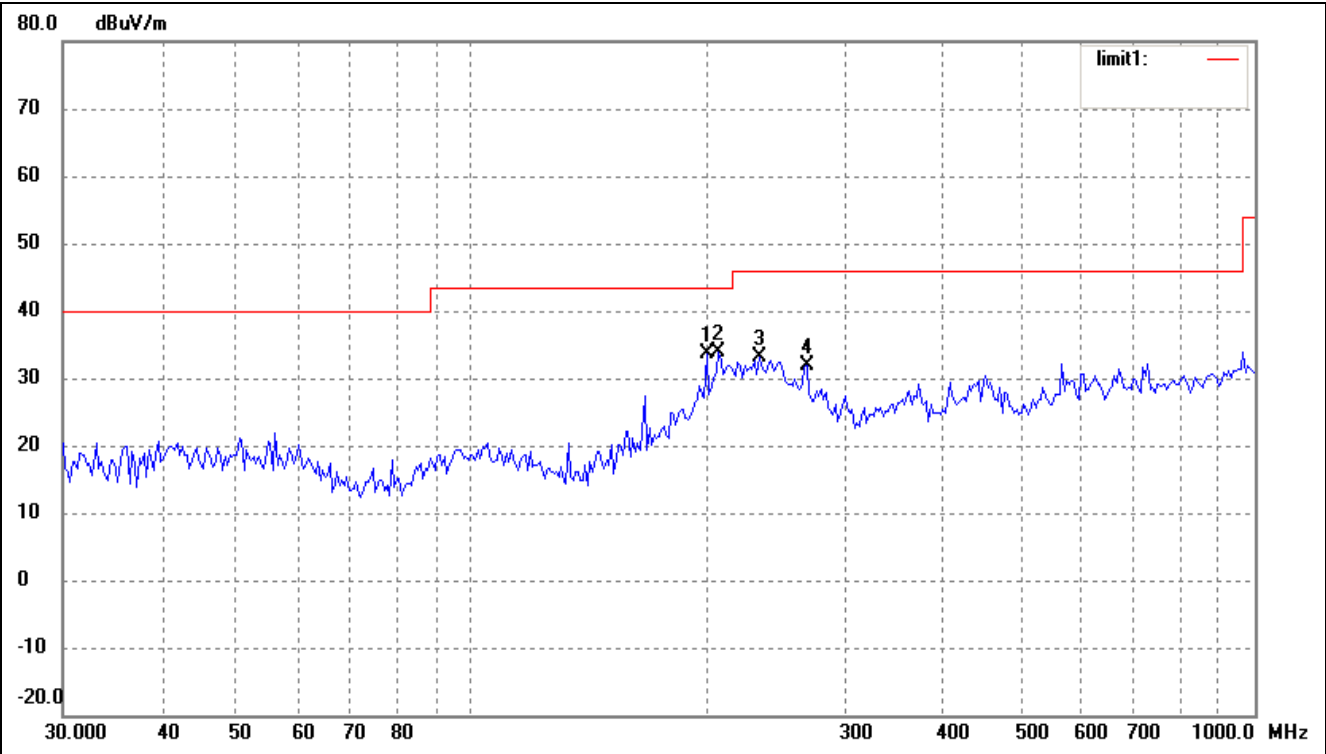

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	199.2855	27.96	5.68	33.64	43.50	-9.86	254	100	peak
2	206.3976	27.97	5.89	33.86	43.50	-9.64	167	100	peak
3	232.5318	26.09	7.03	33.12	46.00	-12.88	85	200	peak
4	267.5455	23.85	8.12	31.97	46.00	-14.03	103	100	peak

Vertical

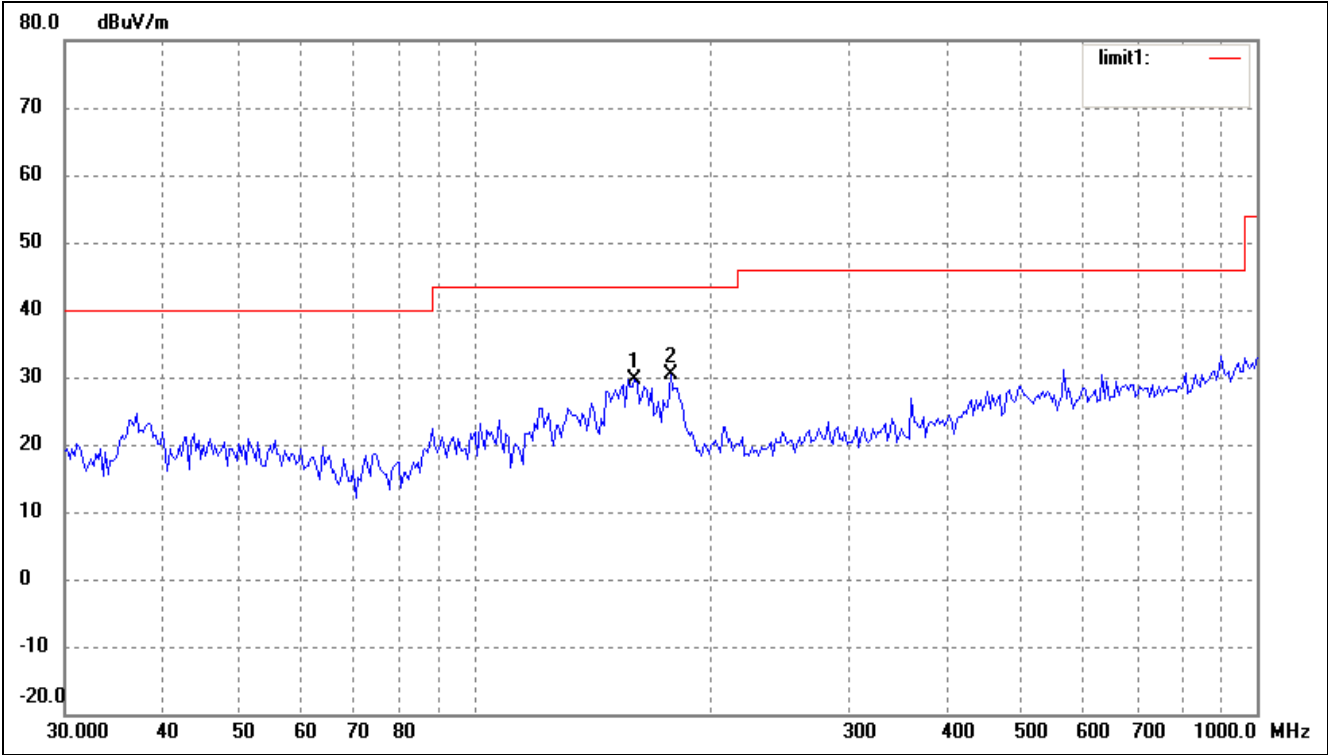

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	160.3457	25.94	3.75	29.69	43.50	-13.81	131	100	peak
2	178.1327	25.61	4.65	30.26	43.50	-13.24	224	100	peak



*Spurious Emission above 1GHz**Test Mode: Transmitting (802.11b)*

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4824.0	PK	53.7	90	V	34.1	5.2	33.0	60.0	74	-14.0
7236.0	PK	48.6	270	V	37.4	6.1	33.5	58.6	74	-15.4
7236.0	PK	49.4	180	H	37.4	6.1	33.5	59.4	74	-14.6
4824.0	PK	52.7	45	H	34.1	5.2	33.0	59.0	74	-15.0
4824.0	AV	43.5	270	V	34.1	5.2	33.0	49.8	54	-4.2
7236.0	AV	37.6	90	V	37.4	6.1	33.5	47.6	54	-6.4
7236.0	AV	36.2	45	H	37.4	6.1	33.5	46.2	54	-7.8
4824.0	AV	41.2	60	H	34.1	5.2	33.0	47.5	54	-6.5
Middle Channel (1G to 25GHz)										
7311.0	PK	50.4	45	V	37.4	6.1	33.5	60.4	74	-13.6
4874.0	PK	54.9	270	V	34.1	5.2	33.0	61.2	74	-12.8
7311.0	PK	49.4	45	H	37.4	6.1	33.5	59.4	74	-14.6
4874.0	PK	52.3	180	H	34.1	5.2	33.0	58.6	74	-15.4
7311.0	AV	38.5	270	V	37.4	6.1	33.5	48.5	54	-5.5
4874.0	AV	40.9	90	V	34.1	5.2	33.0	47.2	54	-6.8
7311.0	AV	36.4	60	H	37.4	6.1	33.5	46.4	54	-7.6
4874.0	AV	40.6	45	H	34.1	5.2	33.0	46.9	54	-7.1
High Channel (1G to 25GHz)										
4924.0	PK	55.0	270	V	34.1	5.2	33.0	61.3	74	-12.7
7386.0	PK	49.2	45	V	37.4	6.1	33.5	59.2	74	-14.8
4924.0	PK	54.1	180	H	34.1	5.2	33.0	60.4	74	-13.6
7386.0	PK	49.0	45	H	37.4	6.1	33.5	59.0	74	-15.0
4924.0	AV	42.2	90	V	34.1	5.2	33.0	48.5	54	-5.5
7386.0	AV	36.8	270	V	37.4	6.1	33.5	46.8	54	-7.2
4924.0	AV	40.3	60	H	34.1	5.2	33.0	46.6	54	-7.4
7386.0	AV	37.0	60	H	37.4	6.1	33.5	47.0	54	-7.0

*Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.*

*Spurious Emission Above 1GHz**Test Mode: Transmitting (802.11g)*

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4824.0	PK	51.9	90	V	34.1	5.2	33.0	58.2	74	-15.8
7236.0	PK	45.7	270	V	37.4	6.1	33.5	55.7	74	-18.3
7236.0	PK	45.4	180	H	37.4	6.1	33.5	55.4	74	-18.6
4824.0	PK	50.7	45	H	34.1	5.2	33.0	57.0	74	-17.0
4824.0	AV	41.0	270	V	34.1	5.2	33.0	47.3	54	-6.7
7236.0	AV	36.6	90	V	37.4	6.1	33.5	46.6	54	-7.4
7236.0	AV	36.5	45	H	37.4	6.1	33.5	46.5	54	-7.5
4824.0	AV	40.9	60	H	34.1	5.2	33.0	47.2	54	-6.8
Middle Channel (1G to 25GHz)										
7311.0	PK	48.8	45	V	37.4	6.1	33.5	58.8	74	-15.2
4874.0	PK	49.9	270	V	34.1	5.2	33.0	56.2	74	-17.8
7311.0	PK	46.0	45	H	37.4	6.1	33.5	56.0	74	-18.0
4874.0	PK	51.0	180	H	34.1	5.2	33.0	57.3	74	-16.7
7311.0	AV	36.3	270	V	37.4	6.1	33.5	46.3	54	-7.7
4874.0	AV	41.3	90	V	34.1	5.2	33.0	47.6	54	-6.4
7311.0	AV	37.3	60	H	37.4	6.1	33.5	47.3	54	-6.7
4874.0	AV	40.3	45	H	34.1	5.2	33.0	46.6	54	-7.4
High Channel (1G to 25GHz)										
4924.0	PK	52.3	270	V	34.1	5.2	33.0	58.6	74	-15.4
7386.0	PK	45.2	45	V	37.4	6.1	33.5	55.2	74	-18.8
4924.0	PK	50.1	180	H	34.1	5.2	33.0	56.4	74	-17.6
7386.0	PK	45.0	45	H	37.4	6.1	33.5	55.0	74	-19.0
4924.0	AV	42.0	90	V	34.1	5.2	33.0	48.3	54	-5.7
7386.0	AV	36.2	270	V	37.4	6.1	33.5	46.2	54	-7.8
4924.0	AV	41.2	60	H	34.1	5.2	33.0	47.5	54	-6.5
7386.0	AV	36.0	60	H	37.4	6.1	33.5	46.0	54	-8.0

*Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.*

## 9. OUT OF BAND EMISSIONS

### 9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 9.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2010-04-16	2011-04-15
EMI Test Receiver	R&S	ESVB	825471/005	2010-08-12	2011-08-11
Positioning Controller	C&C	CC-C-1F	N/A	2010-08-12	2011-08-11
RF Switch	EM	EMSW18	SW060023	2010-08-12	2011-08-11
Pre-amplifier	Agilent	8447F	3113A06717	2010-08-12	2011-08-11
Pre-amplifier	Compliance Direction	PAP-0118	24002	2010-08-12	2011-08-11
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2010-07-21	2011-07-20
Horn Antenna	ETS	3117	00086197	2010-07-21	2011-07-20

### 9.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW, VBW=100KHz, Span=50MHz, Sweep = auto
3. Set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, then mark the higher-level emission for comparing with the FCC rules.

### 9.4 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto


## 9.5 Environmental Conditions

Temperature:	21° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 9.6 Summary of Test Results/Plots


Test mode	Frequency MHz	Limit dBuV /dB	Result
802.11b	2310~2390.00	<54dBuv	Pass
	2400.00	>20dB ATT	Pass
	2483.50~2500	<54dBuv	Pass
802.11g	2310~2390.00	<54dBuv	Pass
	2400.00	>20dB ATT	Pass
	2483.50~2500	<54dBuv	Pass

For 802.11b  
Lowest Bandedge

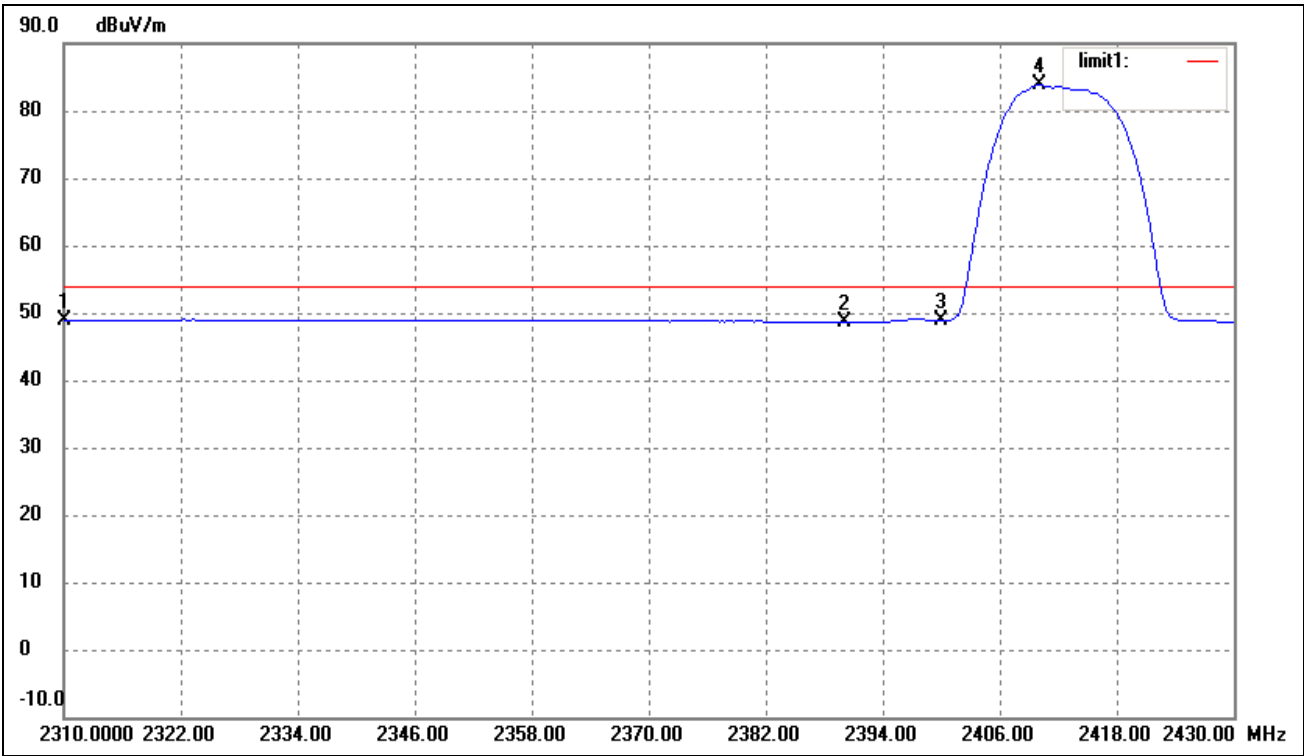


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	2310.000	12.44	36.49	48.93	54.00	-5.07	120	100	Ave
	2310.000	21.62	36.49	58.11	74.00	-15.89	120	100	peak
2	2390.000	12.04	36.67	48.71	54.00	-5.29	0	100	Ave
	2390.000	20.71	36.67	57.38	74.00	-16.62	0	100	peak
3	2400.000	12.15	36.69	48.84	54.00	-5.16	226	100	Ave
4	2410.080	47.10	36.72	83.82	/	/	360	100	Ave

For 802.11b  
Highest Bandedge

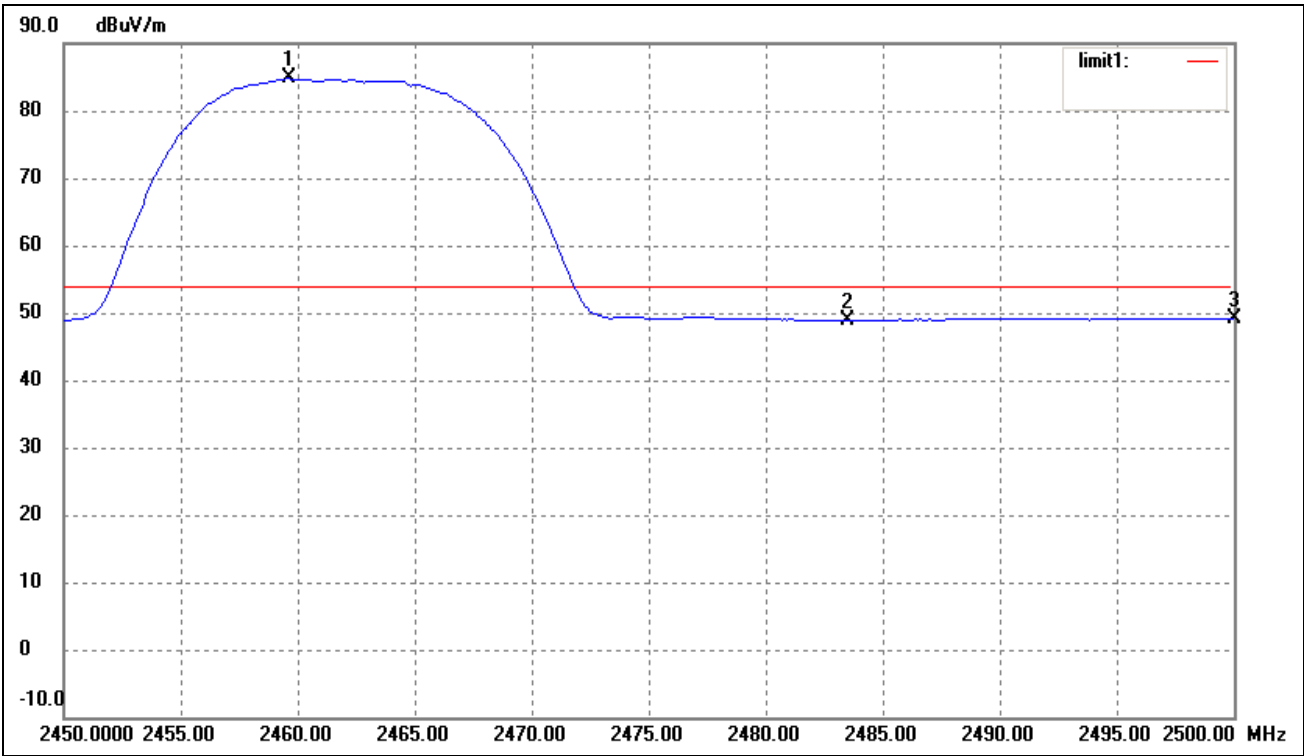


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	2459.600	47.92	36.84	84.76	/	/	264	100	Ave
2	2483.500	12.08	36.88	48.96	54.00	-5.04	360	100	Ave
	2483.500	21.75	36.88	58.63	74.00	-15.37	360	100	peak
3	2500.000	12.18	36.93	49.11	54.00	-4.89	110	100	Ave
	2500.000	21.61	36.93	58.54	74.00	-15.46	110	100	peak

For 802.11g  
Lowest Bandedge

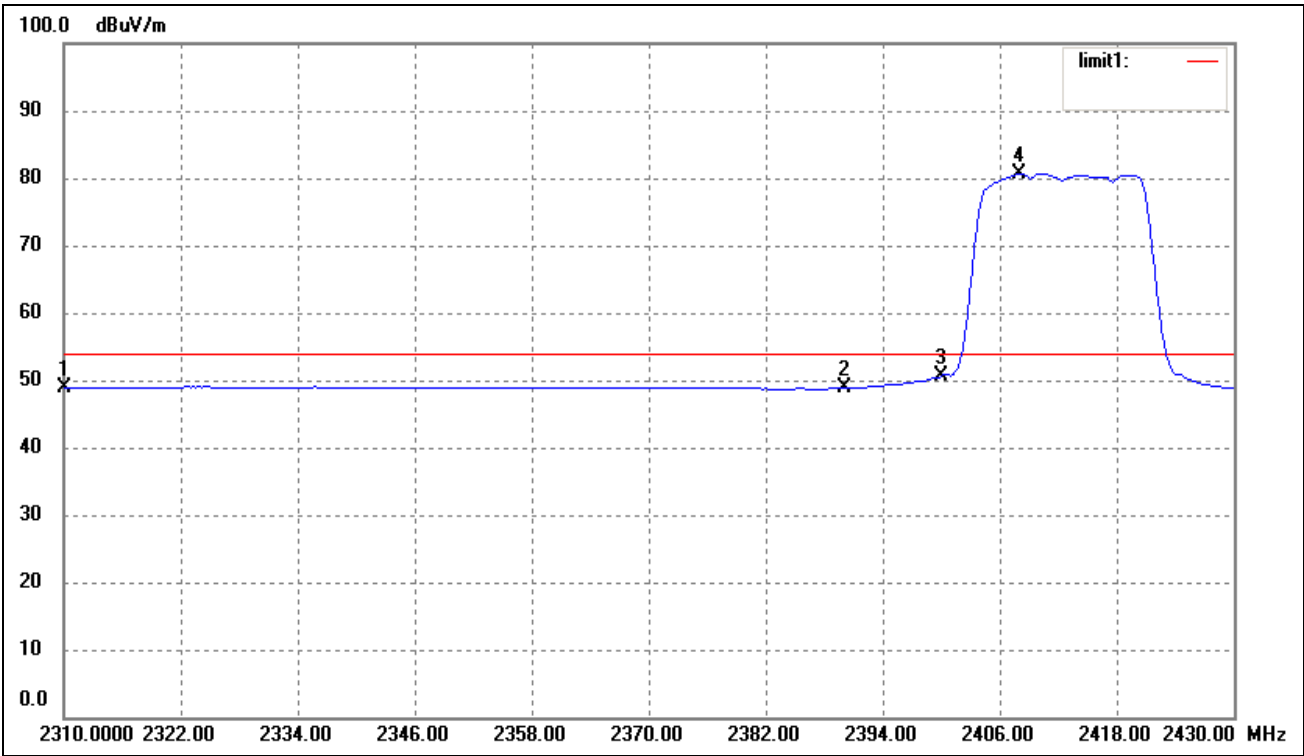

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	2310.000	12.45	36.49	48.94	54.00	-5.06	135	100	Ave
	2310.000	21.47	36.49	57.96	74.00	-16.04	135	100	peak
2	2390.000	12.14	36.67	48.81	54.00	-5.19	134	100	Ave
	2390.000	21.35	36.67	58.02	74.00	-15.98	134	100	peak
3	2400.000	13.90	36.69	50.59	54.00	-3.41	247	100	Ave
4	2407.920	43.88	36.71	80.59	/	/	130	100	Ave

Highest Bandedge

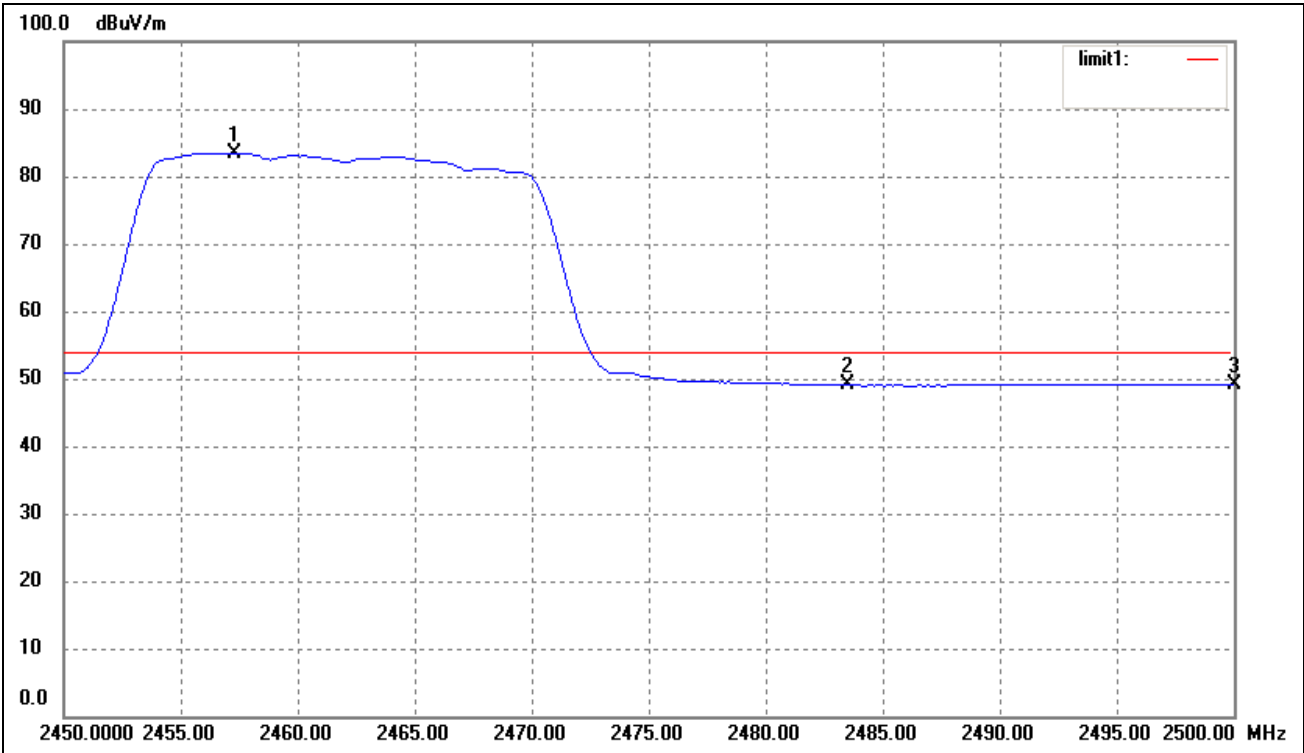

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	2457.300	46.66	36.82	83.48	/	/	300	100	Ave
2	2483.500	12.17	36.88	49.05	54.00	-4.95	194	100	Ave
	2483.500	21.34	36.88	58.22	74.00	-15.78	194	100	peak
3	2500.000	12.19	36.93	49.12	54.00	-4.88	226	100	Ave
	2500.000	21.71	36.93	58.64	74.00	-15.36	226	100	peak

\*\*\*\*\* END OF REPORT \*\*\*\*\*