
FCC: YUJ-PCB01647 IC: 9281A-PCB01647

PLUG IN THE POWER SUPPLY AND RF WILL COME ON AT 13.56MHz




RFID Board – Actual EUT



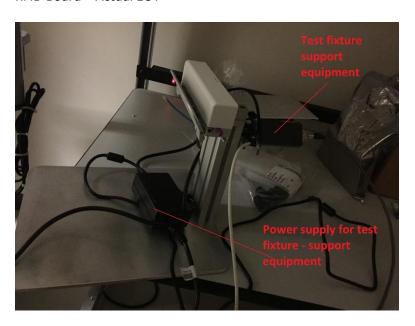



Showing two paddles one attached to compression device. RF Tag is installed in paddle for paddle identification.

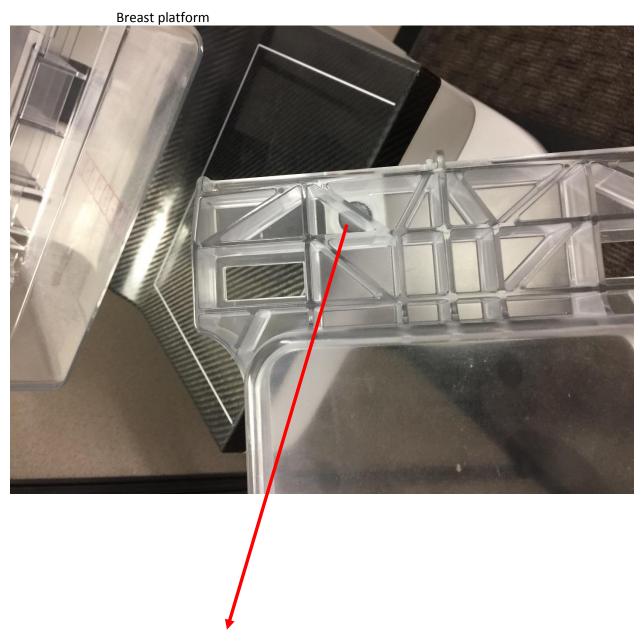

Round DOT is the RF tag in the paddle.

RFID is used to identify which paddle is used during X ray exam on a patient.