

Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 1 of 76

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name: TG03

FCC ID: YUW-TU12-J01

Report No.: EH/2010/80011

Issue Date: Sep. 01, 2010

FCC Rule Part: §15.247, Cat: DSS

Prepared for: Fujitsu Toshiba Mobile Communications Limited

1-1, Kamiodanaka 4, Nakahara, Kawasaki,

211-8588, JAPAN

Prepared by: SGS Taiwan Ltd.

Electronics & Communication Laboratory

No. 134, Wu Kung Rd., Wuku Industrial Zone,

Taipei County, Taiwan.





oting 1,400 ret) 0513 **Note:** This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 2 of 76

VERIFICATION OF COMPLIANCE

Applicant: Fujitsu Toshiba Mobile Communications Limited

1-1, Kamiodanaka 4, Nakahara, Kawasaki, 211-8588, JAPAN

Product Name: TG03

FCC ID: YUW-TU12-J01 File Number: EH/2010/80011

Date of test: Aug. 05, 2010 ~ Aug. 31, 2010

Date of EUT Received: Aug. 05, 2010

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jason Wie	Date:	Sep. 01, 2010
Prepared By:	Jason Wu/Asst. Supervisor	Date:	Sep. 01, 2010
Approved By:	Tiffany Kao / Clerk A LW H Sieh Arno Hsieh / Asst. Supervisor	Date:	Sep. 01, 2010

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 3 of 76

Version

Version No.	Date	Description
00	Sep. 01, 2010	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

**No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 4 of 76

Table of Contents

1.	GEN	ERAL INFORMATION	7
	1.1.	Product Description	7
	1.2.	Related Submittal(s) / Grant (s)	10
	1.3.	Test Methodology	10
	1.4.	Test Facility	10
	1.5.	Special Accessories	10
	1.6.	Equipment Modifications	10
2.	SYST	TEM TEST CONFIGURATION	11
	2.1.	EUT Configuration	11
	2.2.	EUT Exercise	11
	2.3.	Test Procedure	11
	2.4.	Configuration of Tested System	12
3.	SUM	MARY OF TEST RESULTS	13
4.	DES	CRIPTION OF TEST MODES	13
5.	CON	DUCTED EMISSION TEST	14
	5.1.	Standard Applicable	14
	5.2.	EUT Setup	14
	5.3.	Measurement Procedure	14
	5.4.	Measurement Equipment Used:	15
	5.5.	Measurement Result	15
6.	PEA:	K OUTPUT POWER MEASUREMENT	18
	6.1.	Standard Applicable	18
	6.2.	Measurement Equipment Used	18
	6.3.	Test Set-up:	18
	6.4.	Measurement Procedure:	19
	6.5.	Measurement Result	19
7.	20dB	BAND WIDTH	24
	7.1.	Standard Applicable	24
	7.2.	Measurement Equipment Used	24
	7.3.	Test Set-up	24
	7.4.	Measurement Procedure:	24
	7.5.	Measurement Result:	25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

**No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 5 of 76

8.	100K	Hz BANDWIDTH OF BAND EDGES MEASUREMENT	30
	8.1.	Standard Applicable	30
	8.2.	Measurement Equipment Used	30
	8.3.	Test SET-UP:	31
	8.4.	Measurement Procedure	32
	8.5.	Field Strength Calculation	32
	8.6.	Measurement Result	32
9.	SPUR	RIOUS RADIATED EMISSION TEST	37
	9.1.	Standard Applicable	40
	9.2.	Measurement Equipment Used:	40
	9.3.	Test SET-UP:	40
	9.4.	Measurement Procedure:	40
	9.5.	Field Strength Calculation	41
	9.6.	Measurement Result:	41
10.	FRE(QUENCY SEPARATION	57
	10.1.	Standard Applicable	60
	10.2.	Measurement Equipment Used:	60
	10.3.	Test Set-up:	60
	10.4.	Measurement Procedure:	60
	10.5.	Measurement Result:	60
11.	NUM	BER OF HOPPING FREQUENCY	62
	11.1.	Standard Applicable	62
	11.2.	Measurement Equipment Used:	62
	11.3.	Test Set-up:	62
	11.4.	Measurement Procedure:	62
	11.5.	Measurement Result:	62
12.	TIME	E OF OCCUPANCY (DWELL TIME)	65
	12.1.	Standard Applicable	65
	12.2.	Measurement Equipment Used:	65
	12.3.	Test Set-up:	65
	12.4.	Measurement Procedure:	65
	12.5.	Measurement Result	66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

**No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 6 of 76

13.	Peak 1	Power Spectral Density	73
		Standard Applicable	
	13.2.	Measurement Equipment Used:	73
	13.3.	Test Set-up:	73
	13.4.	Measurement Procedure:	73
	13.5.	Measurement Result	73
14.	ANTE	ENNA REQUIREMENT	76
	14.1.	Standard Applicable	76
	14.2	Antenna Connected Construction	76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

**No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 7 of 76

1. GENERAL INFORMATION

1.1. Product Description

110 110 date Department		
Product Name:	TG03	
FCC ID:	SP2-TU12-J01	
Data Cable (USB)	Model: HPC1579-010910(Type B), Supplier: Hoshiden	
Dayyar Cumly	3.9 Vdc re-ch	nargeable battery
Power Supply:	Battery:	Model No.: UF424261F-HMN, Supplier: Sanyo

GSM and WCDMA:

	Operating Frequency	Rated Power	
Callada a Dhana Cuanda da	GSM/GPRS 850 Class 12	824.2 MHz– 848.8MHz	33 dBm
Cellular Phone Standards Frequency Range and Power	GSM/GPRS 1900 Class 12	1850.2MHz – 1909.8MHz	30 dBm
	EDGE 850 Class 12	824.2 MHz– 848.8MHz	27 dBm
	EDGE 1900 Class 12	1850.2MHz – 1909.8MHz	26 dBm
	WCDMA/HSUPA/HSDPA Band V	826.4MHz –846.6MHz	24 dBm
IMEI:	353861040000133		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention. militation and pintsolition issues defined interent. Any holder of this document is advised that information contained neterol neterols the Company's militage at the time of its interention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 8 of 76

Final Amplifier Voltage and Current Information:

Test Mode	DC voltage (V)	DC current (mA)
GSM 850	3.9Vdc	340
DCS 1900	3.9Vdc	265
EDGE 850	3.9Vdc	205
EDGE 1900	3.9Vdc	180
WCDMA B5	3.9Vdc	535
HSUPA B5	3.9Vdc	530

WLAN:

	·
Frequency Range & Channel number:	802.11 b/g: 2412 – 2462 MHz
Rated Power:	802.11 b: 15.94 dBm (Peak) 802.11 g: 21.89 dBm (Peak)
Modulation type:	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Transmission Rate:	802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps
Antenna Designation:	Chip Antenna / Gain: -0.85 dBi

The EUT is compliance with IEEE 802.11 b/g Standard.



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 9 of 76

Bluetooth:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	V2.1 + EDR (GFSK + π /4DQPSK + 8DPSK)
Channel number:	79 channels
Transmit Power:	8.52 dBm (Peak)
Modulation type:	Frequency Hopping Spread Spectrum
Antenna Designation:	Chip Antenna / antenna gain: -0.85dBi

The EUT is compliance with Bluetooth 2.1 + EDR Standard.

GPS:

Receiver Frequency	L1 Band, 1575.42MHz
Frequency Conversion os- cillator	19.2MHz
Antenna Designation	PIFA Antenna

FeliCa Receive Frequency:	13.56MHz
---------------------------	----------

The FeliCa only support receiving function.

This report applies for Bluetooth 2.1 with EDR

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention. only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Report No.: EH/2010/80011 **Issue Date: Sep. 01, 2010**

Page: 10 of 76

1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: YUW-TU12-J01 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with FCC Public Notice DA 00-705

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

1.5. Special Accessories

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 **Issue Date: Sep. 01, 2010**

Page: 11 of 76

2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4: 2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and Subclause 8.3.1.2 of ANSI C63.4: 2003 and DA 00-705.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 12 of 76

2.4. Configuration of Tested System

Fig. 2-1 AC Power line and Radiated Emission Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1.	Adapter	Cosmos HosiDEN	0203PQA	N/A	N/A	Un-shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) tes only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

> www.tw.sgs.com Member of SGS Group

t (886-2) 2299-3279 台灣檢驗科技股份有限公司 f (886-2) 2298-0488



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 13 of 76

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)	20dB Bandwidth	No Limit
§15.247I	100 KHz Bandwidth Of Fre-	Compliant
	quency Band Edges	
§15.209(a) (f)	Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.247	Peak Power Density	Compliant
§15.203,	Antenna Requirement	Compliant
§15.247(b)(4)(i)	_	

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

Channel Low, Mid and High with highest rated data rate were chosen for full testing.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth Transmitter for channel Low, Mid and High the worst case E2position was reported and BDR mode and DH5 data rate will be worst case.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 **Issue Date: Sep. 01, 2010**

Page: 14 of 76

5. CONDUCTED EMISSION TEST

5.1. Standard Applicable

According to §15.207. frequency within 150KHz to 30MHz shall not exceed the limit table as below.

Frequency range		mits (uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

5.2. EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4: 2003.
- 2. The EUT was plug-in the AC/DC Power adapter. The host system was placed on the center of the back edge on the test table. The peripherals was placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host system was connected with 120Vac/60Hz power source.

5.3. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

www.tw.sgs.com

^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 15 of 76

5.4. Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCS30	828985/004	09/16/2009	09/15/2010			
LISN	Rolf-Heine	NNB-2/16Z	99012	02/02/2010	02/01/2011			
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	02/02/2010	02/01/2011			
Coaxial Cables	N/A	WK CE Cable	N/A	10/30/2009	10/29/2010			

5.5. Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Offices otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) tes only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 16 of 76

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Bluetooth Mode	Test Date:	Aug. 31, 2010
		Test By:	Jason

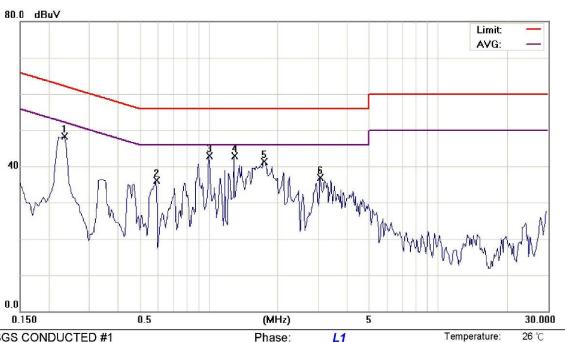

Site SGS CONDUCTED #1

Limit: CISPR22/11/EN55022 Class B

EUT: TG03 M/N: TU12-J01 Note: BT Operation

Power:	AC 120V/60Hz	Humidity:	50 %
Distance:		Air Pressure:	hpa

No. Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over			
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1	0.2350	48.21	0.12	48.33	62.27	-13.94	peak		
2	0.5900	35.89	0.12	36.01	56.00	-19.99	peak		
3	1.0000	42.78	0.12	42.90	56.00	-13.10	peak		
4 *	1.2900	42.87	0.13	43.00	56.00	-13.00	peak		
5	1.7400	41.17	0.15	41.32	56.00	-14.68	peak		
6	3.0700	36.79	0.18	36.97	56.00	-19.03	peak		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) teste militation and piralection is solved defined interent. Any holder of this document is advised and interent network network in the limits of Client. Any holder of this document is advised and interent network network in the limits of Client. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 17 of 76

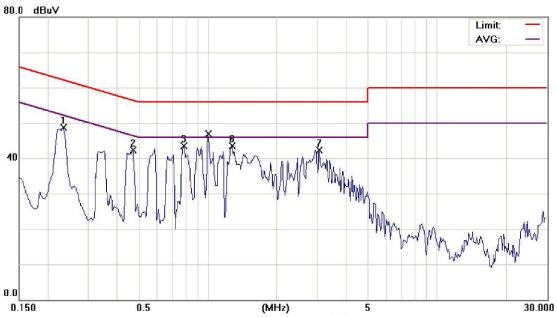

Site SGS CONDUCTED #1

Limit: CISPR22/11/EN55022 Class B

EUT: TG03 M/N: TU12-J01 Note: BT Operation

26 ℃ Temperature: Phase: N

AC 120V/60Hz Humidity: Power: Air Pressure: Distance: hpa

No. Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over			
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1	0.2350	48.53	0.13	48.66	62.27	-13.61	peak		
2	0.4700	42.10	0.12	42.22	56.51	-14.29	peak		
3	0.7800	43.46	0.13	43.59	56.00	-12.41	peak		
4	0.9984	43.44	0.13	43.57	56.00	-12.43	QP		
5 *	0.9984	33.58	0.13	33.71	46.00	-12.29	AVG		
6	1.2800	43.37	0.14	43.51	56.00	-12.49	peak		
7	3.0700	42.22	0.18	42.40	56.00	-13.60	peak		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention. militation and piralection is solved defined interent. Any holder of this document is advised and interent network network in the limits of Client. Any holder of this document is advised and interent network network in the limits of Client. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 18 of 76

6. PEAK OUTPUT POWER MEASUREMENT


6.1. Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

Measurement Equipment Used

5.2. Measurement Equipment Oseu							
Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Power Sensor	Anritsu	MA2411B	917032	01/21/2010	01/20/2012		
Power Meter	Anritsu	ML2495A	1005007	02/17/2010	02/16/2012		
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012		
Spectrum Analyzer	Agilent	E4440A	MY45304525	01/25/2010	01/24/2011		
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2010	01/04/2011		
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2010	07/04/2011		
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2010	07/04/2011		
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2010	07/04/2011		
Splitter	Agilent	11636B	N/A	07/05/2010	07/04/2011		

6.3. Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 19 of 76

6.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (BDR model: max peak RBW/VBW = 1MHz, EDR model: max peak RBW = 1.5MHz VBW = 5MHz
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

6.5. Measurement Result

BDR Mode

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	8.52	0.00	8.52	0.00711	1
2441.00	7.71	0.00	7.71	0.00590	1
2480.00	8.26	0.00	8.26	0.00670	1

EDR Mode

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	7.76	0.00	7.76	0.00597	1
2441.00	7.02	0.00	7.02	0.00504	1
2480.00	7.56	0.00	7.56	0.00570	1

offset: 0.5dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) teste only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 20 of 76

Peak Power Output Data Plot (CH Low) (BDR mode)

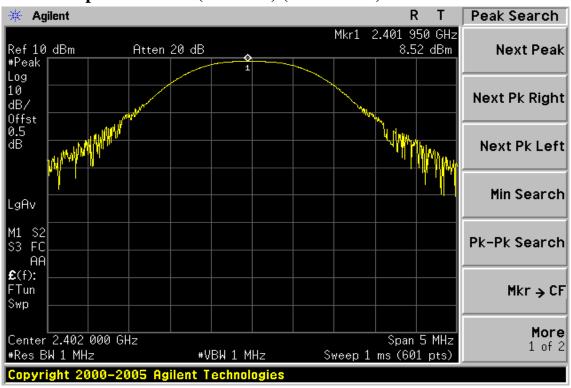

Peak Power Output Data Plot (CH Mid) (BDR mode)

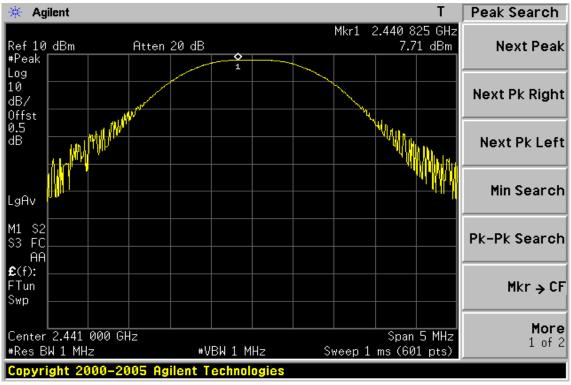

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 21 of 76

Peak Power Output Data Plot (CH High) (BDR mode)

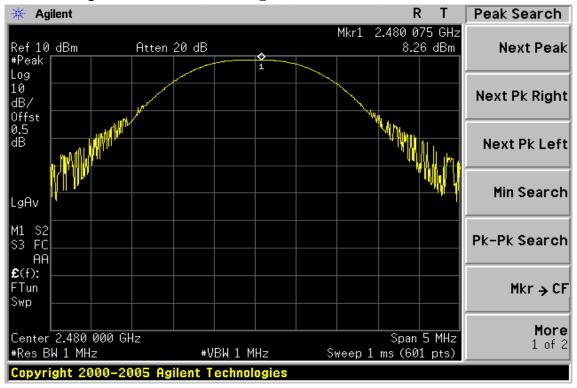

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 22 of 76

Peak Power Output Data Plot (CH Low) (EDR mode)



Peak Power Output Data Plot (CH Mid) (EDR mode)

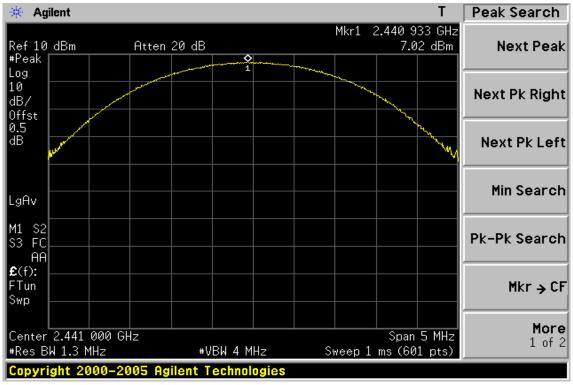

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 23 of 76

Peak Power Output Data Plot (CH High) (EDR mode)

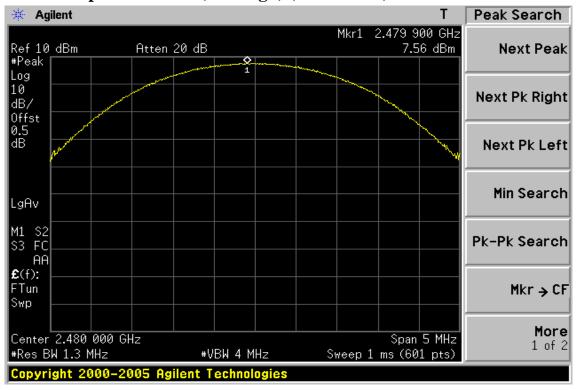

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sqs.com



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 24 of 76

7. 20dB BAND WIDTH

7.1. Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

7.2. Measurement Equipment Used

Refer to section 6.2 for details.

7.3. Test Set-up

Refer to section 6.3 for details.

7.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW > 1 % of Bandwidth., VBW > RBW, Span= 3MHz, Sweep=auto
- 4. Mark the peak frequency and –20dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 25 of 76

7.5. Measurement Result:

BDR Mode

СН	Bandwidth
	(MHz)
Lower	0.973
Mid	0.974
Higher	0.975

EDR Mode

СН	Bandwidth
	(MHz)
Lower	1.281
Mid	1.274
Higher	1.272

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Tailwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taipei C

Report No.: EH/2010/80011 **Issue Date: Sep. 01, 2010**

Page: 26 of 76

20dB Band Width Test Data CH-Low (BDR mode)

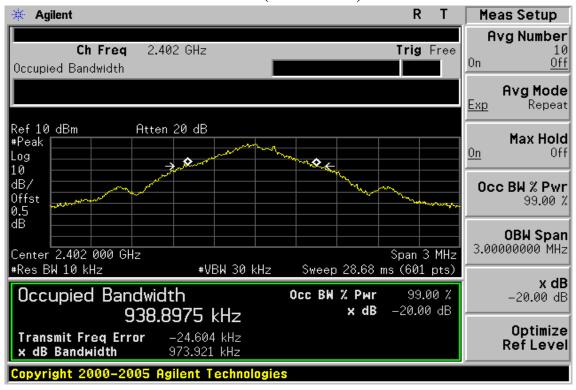

20dB Band Width Test Data CH-Mid (BDR mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 27 of 76

20dB Band Width Test Data CH-High (BDR mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279


Report No.: EH/2010/80011 **Issue Date: Sep. 01, 2010**

Page: 28 of 76

20dB Band Width Test Data CH-Low (EDR mode)



20dB Band Width Test Data CH-Mid (EDR mode)

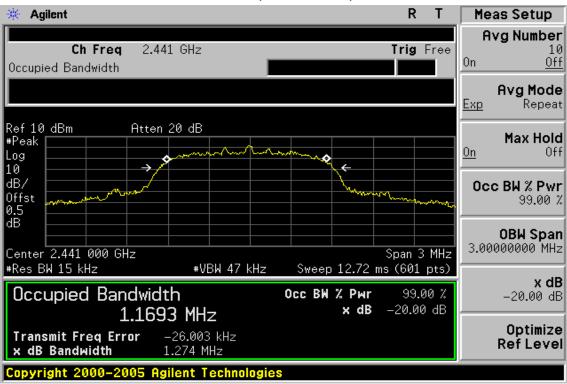

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 29 of 76

20dB Band Width Test Data CH-High (EDR mode)

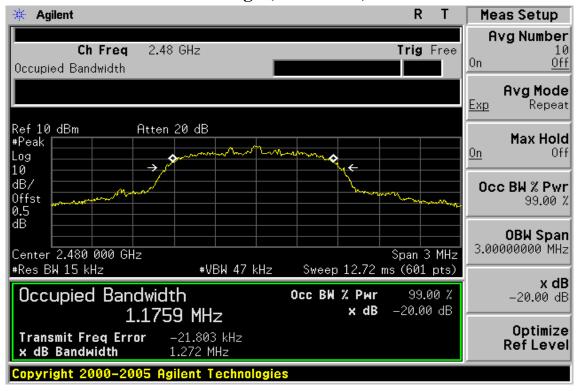

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279

Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 30 of 76

100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1. Standard Applicable

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

8.2. Measurement Equipment Used

8.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2. Radiated emission:

966 Chamber										
EQUIPMENT	EQUIPMENT MFR MODEL SERIAL LAST CAL									
TYPE		NUMBER	NUMBER	CAL.						
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2010	02/11/2011					
Bilog Antenna	SCHWAZBECK	VULB9160	3136	11/19/2009	11/18/2010					
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	03/09/2009	03/08/2011					
Pre-Amplifier	Agilent	8447D	1937A02834	11/28/2009	11/28/2010					
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2010	01/04/2011					
Radio Communication Analyzer	R & S	CMU200	102189	10/31/2008	10/30/2010					
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011					
Turn Table	HD	DT420	N/A	N.C.R	N.C.R					
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R					
Controller	HD	HD100	N/A	N.C.R	N.C.R					
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2010	01/04/2011					
Low Loss Cable HUBER+SU		SUCOFLEX 104PEA-3M	3m	01/05/2010	01/04/2011					
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 31 of 76


8.3. Test SET-UP:

8.3.1. Conducted Emission at antenna port:


Refer to section 6.3 for details.

8.3.2. Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

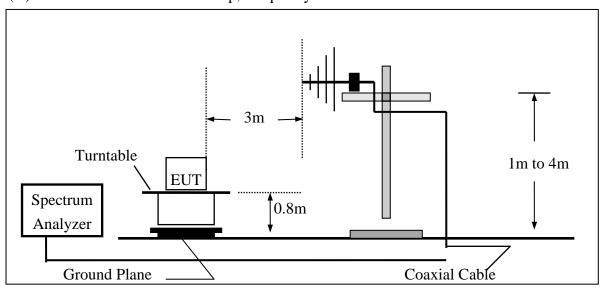

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

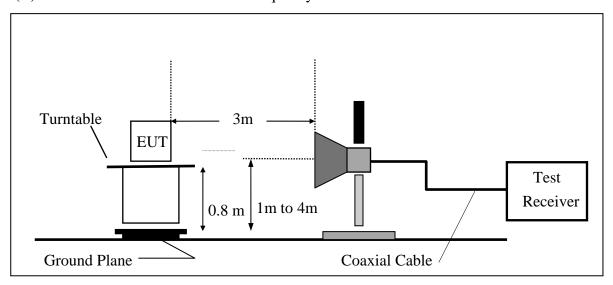

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 32 of 76

8.4. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.
- 7. Radiated Emission refer to section 9.

8.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6. Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279

Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 33 of 76

Band Edges Test Data CH-Low (Worst: BDR mode)

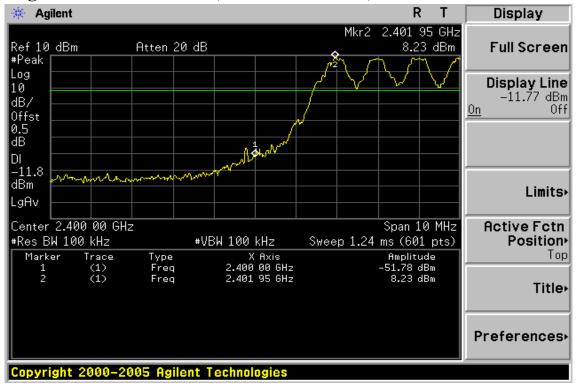

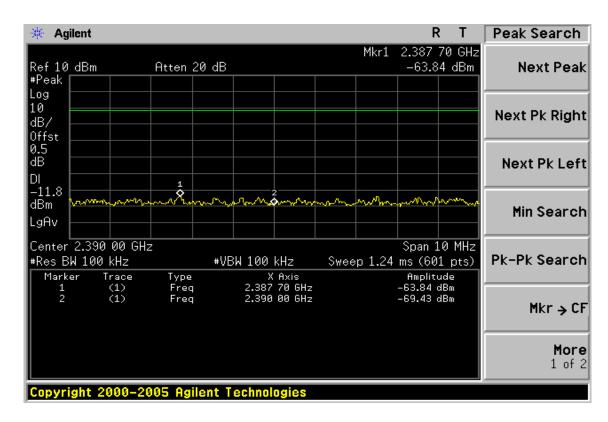

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 34 of 76

Band Edges Test Data CH-High



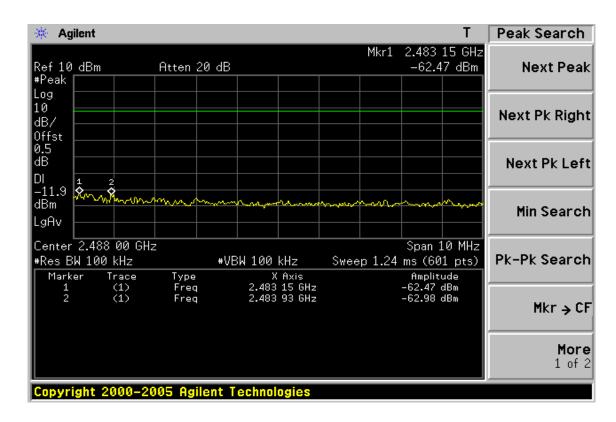

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State and States are stated and states are stated and states are states and states are states only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 35 of 76

Radiated Emission: (Worst: BDR mode)

Operation Mode TX CH Low Test Date Aug. 31, 2010

Fundamental Frequency 2402 MHz Test By Jason Temperature 25 °C Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	ıal FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	(dB)	
2390.00	52.53		-1.39	51.14		74.00	54.00	-22.86	Peak
2364.95	55.32	44.36	-1.55	53.77	42.81	74.00	54.00	-11.19	AV
Operation	Mode	TX C	CH Low			Tes	t Date	Aug. 31, 2	010
Fundamental Frequency		ncy 2402	MHz			Test By		Jason	
Temperature 2		25 ℃				Pol		Hor.	
Humidity		65 %							

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	(dB)	
2390.00	53.00		-1.39	51.61		74.00	54.00	-22.39	Peak
2320.15	54.75	45.61	-1.73	53.02	43.88	74.00	54.00	-10.12	AV

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS columno
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 36 of 76

Radiated Emission: (Worst: BDR mode)

Operation Mode TX CH High Test Date Aug. 31, 2010

Fundamental Frequency 2480 MHz Jason Test By Temperature Pol Ver. 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2483.50	52.85	42.97	-0.92	51.93	42.05	74.00	54.00	-11.95	AV

Operation Mode TX CH High Test Date Aug. 31, 2010 Fundamental Frequency 2480 MHz Test By Jason Temperature Pol Hor. 25 °C Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	(dB)	
2483 50	53 04	44 22	-0.92	52.12.	43 30	74 00	54 00	-10 70	ΑV

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2010/80011 **Issue Date: Sep. 01, 2010**

Page: 37 of 76

Band Edges Test Data CH-Low (Co-Location)



Band Edges Test Data CH-High

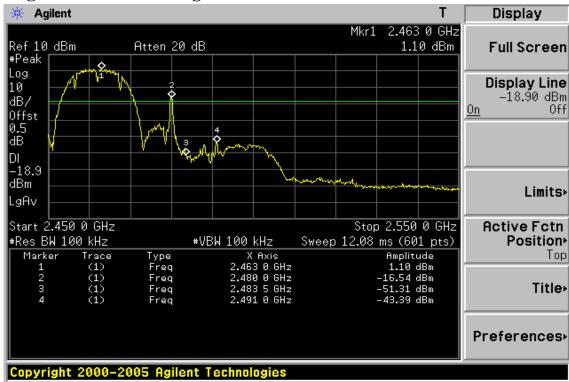

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

台灣檢驗科技股份有限公司

Ships of the testing ships the testing ships the sample(s) testing and testing only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sqs.com



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 38 of 76

Radiated Emission: (Co-Location)

Operation Mode TX CH Low Oct. 28, 2010 Test Date

Fundamental Frequency 2412 MHz +2402 MHz Test By Jason Temperature 25 °C Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2390.00	54.13	42.67	-1.39	52.74	41.28	74.00	54.00	-12.72	AV

Operation Mode TX CH Low Test Date Oct. 28, 2010

Fundamental Frequency 2412 MHz +2402 MHz Test By Jason Temperature Pol Hor. 25 ℃

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	(dB)	
2390.00	54.28	43.68	-1.39	52.89	42.29	74.00	54.00	-11.71	AV

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS columno
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 39 of 76

Radiated Emission: (Co-Location)

Test Date Operation Mode TX CH High Oct. 28, 2010

Fundamental Frequency 2462 MHz +2480 MHz Test By Jason Temperature Pol Ver. 25 ℃

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2483.50	53.87	42.39	-0.92	52.95	41.47	74.00	54.00	-12.53	AV
Operation Fundamen Temperatu Humidity	tal Freque		C	480 MHz			est Date est By ol	Oct. 28, Jason Hor.	2010

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	(dB)	
2483.50	54.72	44.39	-0.92	53.80	43.47	74.00	54.00	-10.53	AV

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS columno
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 **Issue Date: Sep. 01, 2010**

Page: 40 of 76

9. SPURIOUS RADIATED EMISSION TEST

9.1. Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

9.2. Measurement Equipment Used:

9.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

9.2.2. Radiated emission:

Refer to section 8.2 for details.

9.3. Test **SET-UP**:

9.3.1. Conducted Emission at antenna port:

Refer to section 6.3 for details.

9.3.2. Radiated emission:

Refer to section 8.3 for details.

9.4. Measurement Procedure:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 41 of 76

9.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6. Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) teste only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com







Report No.: EH/2010/80011 **Issue Date: Sep. 01, 2010**

Page: 42 of 76

Conducted Spurious Emission Measurement Result (Worst: BDR mode) Ch Low 30MHz - 3GHz

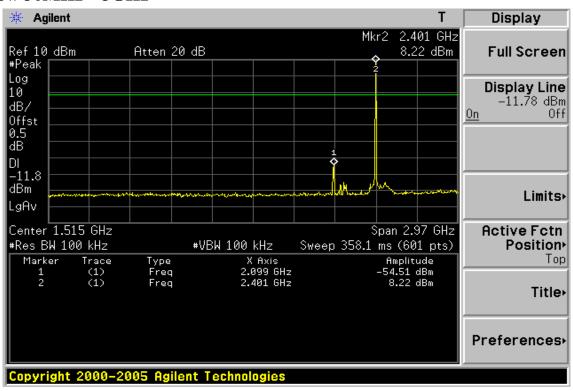

Ch Low 3GHz – 26.5GHz

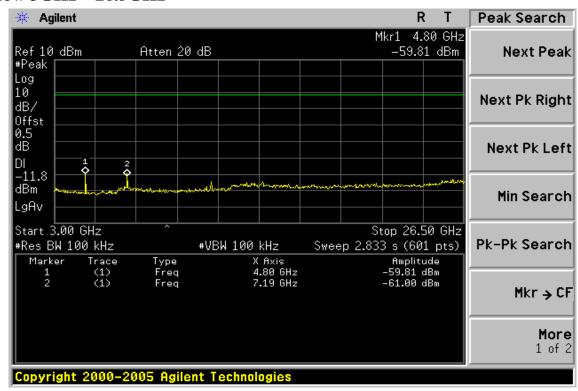

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 43 of 76

Ch Mid 30MHz - 3GHz

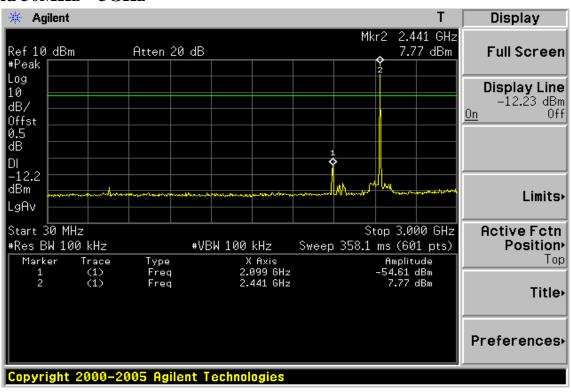

Ch Mid 3GHz - 26.5GHz

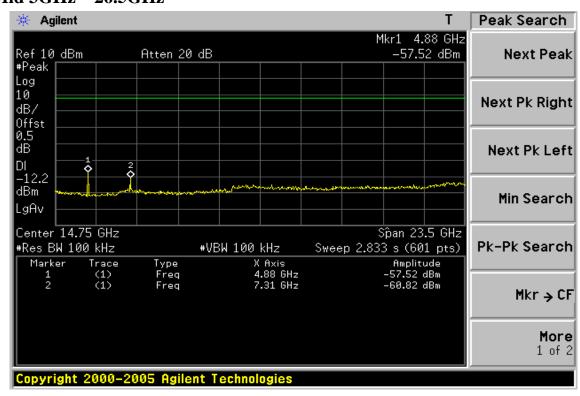

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279


f (886-2) 2298-0488 www.tw.sqs.com




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 44 of 76

Ch High 30MHz – 3GHz

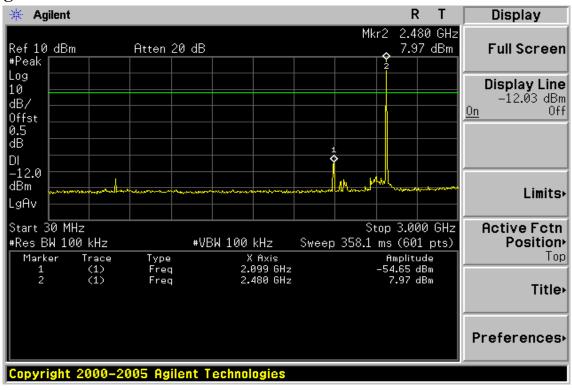

Ch High 3GHz – 26.5GHz

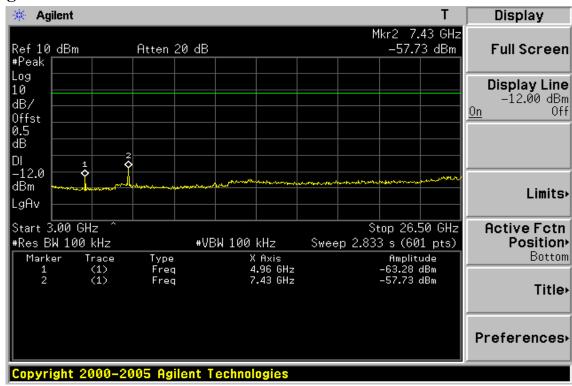

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.


t (886-2) 2299-3279




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 45 of 76

Conducted Spurious Emission Measurement Result (Co-Location) Ch Low 30MHz - 3GHz

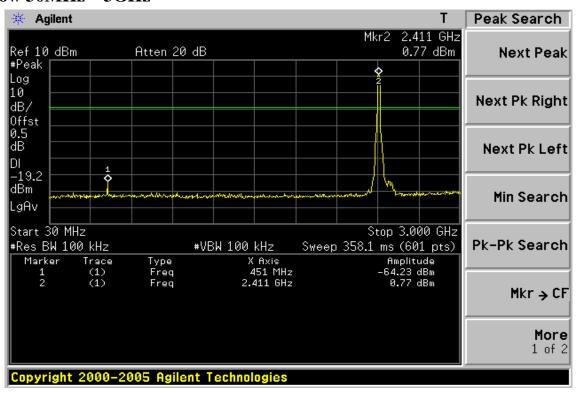

Ch Low 3GHz – 26.5GHz

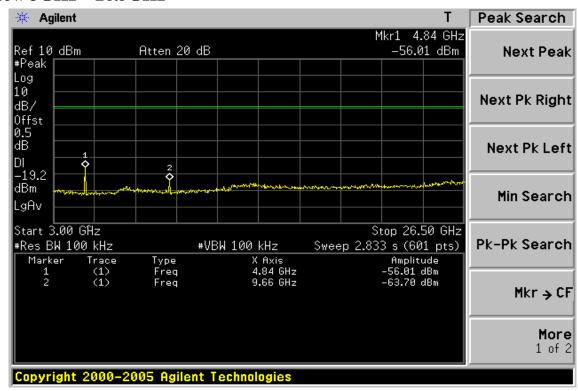

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 46 of 76

Ch Mid 30MHz - 3GHz

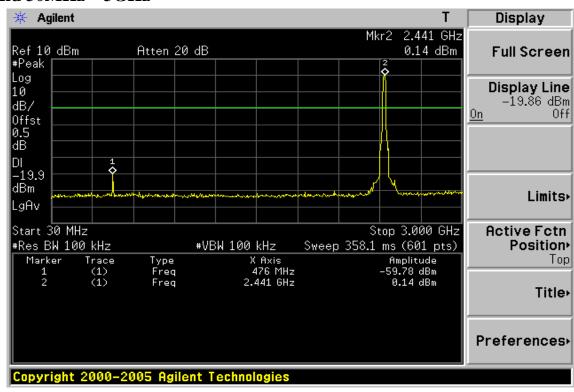

Ch Mid 3GHz - 26.5GHz

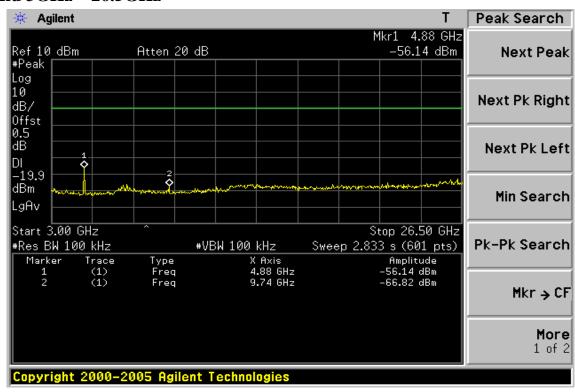

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.


t (886-2) 2299-3279




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 47 of 76

Ch High 30MHz – 3GHz

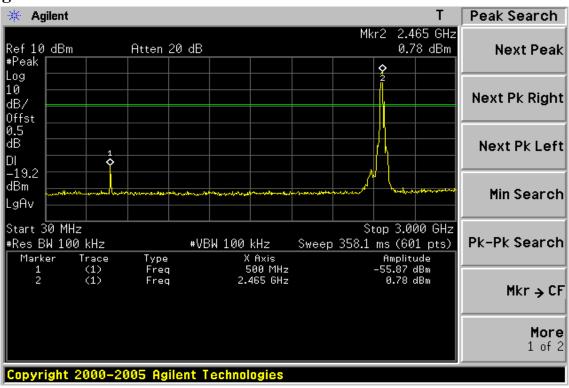

Ch High 3GHz – 26.5GHz

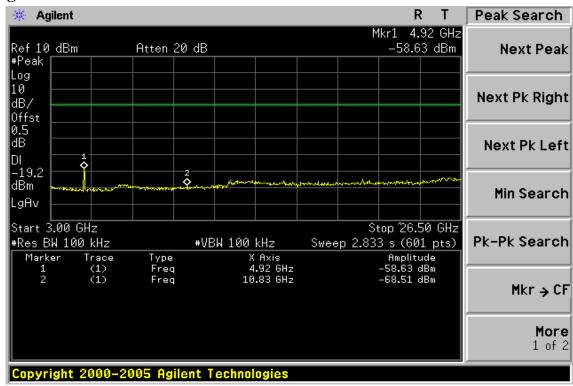

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 48 of 76

Radiated Spurious Emission Measurement Result (below 1GHz) (BDR mode)

Operation Mode TX CH Low **Test Date** Aug. 31, 2010

Fundamental Frequency 2402MHz Jason Test By Temperature 25 °C Pol Ver./Hor.

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
30.00	V	Peak	48.30	-14.97	33.33	40.00	-6.67
68.80	V	Peak	43.63	-15.85	27.78	40.00	-12.22
93.05	V	Peak	51.21	-17.35	33.86	43.50	-9.64
103.72	V	Peak	46.20	-16.71	29.49	43.50	-14.01
152.22	V	Peak	31.51	-12.94	18.57	43.50	-24.93
385.02	V	Peak	32.55	-10.51	22.04	46.00	-23.96
37.76	Н	Peak	40.82	-14.24	26.58	40.00	-13.42
69.77	Н	Peak	43.27	-16.11	27.16	40.00	-12.84
93.05	Н	Peak	46.71	-17.35	29.36	43.50	-14.14
103.72	Н	Peak	40.96	-16.71	24.25	43.50	-19.25
166.77	Н	Peak	31.39	-13.79	17.60	43.50	-25.90
418.97	Н	Peak	29.39	-9.42	19.97	46.00	-26.03

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 49 of 76

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode TX CH Mid Test Date Aug. 31, 2010

Fundamental Frequency 2441MHz Jason Test By Temperature 25 °C Pol Ver./Hor.

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
30.00	V	Peak	48.35	-14.97	33.38	40.00	-6.62
68.80	V	Peak	43.69	-15.85	27.84	40.00	-12.16
93.05	V	Peak	51.08	-17.35	33.73	43.50	-9.77
103.72	V	Peak	46.40	-16.71	29.69	43.50	-13.81
141.55	V	Peak	31.77	-13.56	18.21	43.50	-25.29
391.81	V	Peak	33.31	-10.28	23.03	46.00	-22.97
30.00	Н	Peak	42.85	-14.97	27.88	40.00	-12.12
69.77	Н	Peak	42.32	-16.11	26.21	40.00	-13.79
93.05	Н	Peak	46.89	-17.35	29.54	43.50	-13.96
102.75	Н	Peak	42.23	-16.78	25.45	43.50	-18.05
149.31	Н	Peak	30.40	-12.90	17.50	43.50	-26.00
648.86	Н	Peak	30.03	-4.97	25.06	46.00	-20.94

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 50 of 76

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode TX CH High Test Date Aug. 31, 2010

Fundamental Frequency 2480MHz Jason Test By Temperature 25 °C Pol Ver./Hor.

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
30.00	V	Peak	48.23	-14.97	33.26	40.00	-6.74
48.80	V	Peak	44.55	-15.85	28.70	40.00	-11.30
93.05	V	Peak	52.25	-17.35	34.90	43.50	-8.60
103.72	V	Peak	46.15	-16.71	29.44	43.50	-14.06
152.22	V	Peak	32.57	-12.94	19.63	43.50	-23.87
388.90	V	Peak	32.94	-10.38	22.56	46.00	-23.44
30.00	Н	Peak	42.61	-14.97	27.64	40.00	-12.36
37.76	Н	Peak	40.70	-14.24	26.46	40.00	-13.54
69.77	Н	Peak	42.75	-16.11	26.64	40.00	-13.36
93.05	Н	Peak	46.77	-17.35	29.42	43.50	-14.08
102.75	Н	Peak	42.16	-16.78	25.38	43.50	-18.12
151.25	Н	Peak	30.25	-12.89	17.36	43.50	-26.14

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 51 of 76

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Low Test Date Aug. 31, 2010

Fundamental Frequency 2402 MHz Test By Jason Temperature Pol Ver. 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4804.0	46.22	46.07	6.02	52.24	52.09	74.00	54.00	-1.91	AV
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		
16814.0						74.00	54.00		
19216.0						74.00	54.00		
21618.0						74.00	54.00		
24020.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 52 of 76

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Low Test Date Aug. 31, 2010

Fundamental Frequency 2402 MHz Test By Jason Temperature Pol Hor. 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4804.0	45.72	46.38	6.02	51.74	52.40	74.00	54.00	-1.60	AV
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		
16814.0						74.00	54.00		
19216.0						74.00	54.00		
21618.0						74.00	54.00		
24020.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

www.tw.sgs.com



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 53 of 76

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Mid Test Date Aug. 31, 2010

Fundamental Frequency 2441 MHz Test By Jason Temperature 25 °C Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4882.0	47.96	47.12	6.17	54.13	53.29	74.00	54.00	-0.71	Peak
7323.0						74.00	54.00		
9764.0						74.00	54.00		
12205.0						74.00	54.00		
14646.0						74.00	54.00		
17087.0						74.00	54.00		
19528.0						74.00	54.00		
21969.0						74.00	54.00		
24410.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 54 of 76

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Mid Test Date Aug. 31, 2010

Fundamental Frequency 2441 MHz Test By Jason Temperature 25 °C Pol Hor.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4882.0	47.13	46.44	6.17	53.30	52.61	74.00	54.00	-1.39	AV
7323.0						74.00	54.00		
9764.0						74.00	54.00		
12205.0						74.00	54.00		
14646.0						74.00	54.00		
17087.0						74.00	54.00		
19528.0						74.00	54.00		
21969.0						74.00	54.00		
24410.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 55 of 76

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH High Test Date Aug. 31, 2010

Fundamental Frequency 2480 MHz Test By Jason Temperature Pol Ver. 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4960.0	48.09	46.68	6.38	54.47	53.06	74.00	54.00	-0.94	AV
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		
17360.0						74.00	54.00		
19840.0						74.00	54.00		
22320.0						74.00	54.00		
24800.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 56 of 76

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH High Test Date Aug. 31, 2010

Fundamental Frequency 2480 MHz Test By Jason Temperature Pol Hor. 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4960.0	47.28	46.12	6.38	53.66	52.50	74.00	54.00	-1.50	AV
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		
17360.0						74.00	54.00		
19840.0						74.00	54.00		
22320.0						74.00	54.00		
24800.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 **Issue Date: Sep. 01, 2010**

Page: 57 of 76

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b) (Co-Location)

Operation Mode 802.11b TX CH Low Oct. 28, 2010 Test Date

Fundamental Frequency 2412MHz +2402 MHz Test By Jason Temperature Pol Ver. 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actual FS		Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b) (Co-Location)

Operation Mode 802.11b TX CH Low Oct. 28, 2010 Test Date

Fundamental Frequency 2412MHz +2402 MHz Test By Jason Temperature 25 °C Pol Hor

Humidity 65 %

	Peak	\mathbf{AV}		Actual FS		Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dRuV)	(dRuV)	CF(dR)	(dRuV/m)	(dRuV/m)	(dRuV/m)	(dBuV/m)	(dB)	
(171112)	(uDu v)	(uDu v)	CF (ub)	(uDu V/III)	(uDu V/III)	(uDu v/III)	(uDu V/III)	(uD)	

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com

Member of SGS Group



Report No.: EH/2010/80011 **Issue Date: Sep. 01, 2010**

Page: 58 of 76

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b) (Co-Location)

Operation Mode 802.11b TX CH Mid Oct. 28, 2010 Test Date

Fundamental Frequency 2437MHz +2442 MHz Test By Jason Temperature Pol Ver 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actual FS		Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0	46.28	44.25	6.17	52.45	50.42	74.00	54.00	-3.58	AV

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b) (Co-Location)

Operation Mode 802.11b TX CH Mid Oct. 28, 2010 Test Date

Fundamental Frequency 2437MHz +2442 MHz Test By Jason Temperature 25 °C Pol Hor

Humidity 65 %

	Peak	\mathbf{AV}		Actual FS		Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

台灣檢驗科技股份有限公司

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 **Issue Date: Sep. 01, 2010**

Page: 59 of 76

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b) (Co-Location)

Operation Mode 802.11b TX CH High Oct. 28, 2010 Test Date

Fundamental Frequency 2462MHz +2480MHz Test By Jason Temperature Pol Ver 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.0	40.50		6.28	46.78		74.00	54.00	-7.22	Peak
4958.5	47.56	45.12	6.36	53.92	51.48	74.00	54.00	-2.52	AV

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b) (Co-Location)

Operation Mode 802.11b TX CH High Oct. 28, 2010 Test Date Fundamental Frequency 2462MHz +2480 MHz Test By Jason

Temperature 25 °C Pol Hor

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.0	39.14		6.28	45.42		74.00	54.00	-8.58	Peak
4958.5	41.26		6.36	47.62		74.00	54.00	-6.38	Peak

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200
- 5 Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 60 of 76

10. FREQUENCY SEPARATION

10.1. Standard Applicable

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

10.2. Measurement Equipment Used:

Refer to section 6.2 for details.

10.3. Test Set-up:

Refer to section 6.3 for details.

10.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz/100KHz, Adjust Span to 3.0 MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

10.5. Measurement Result:

Channel separation (MHz)	Limit	Result
1	>=25KHz or 2/3 times 20dB bandwidth	PASS

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 61 of 76

Frequency Separation Test Data

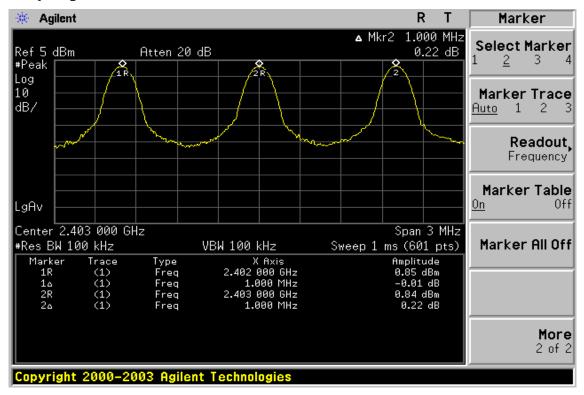

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 62 of 76

11. NUMBER OF HOPPING FREQUENCY

11.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

11.2. Measurement Equipment Used:

Refer to section 6.2 for details.

11.3. Test Set-up:

Refer to section 6.3 for details.

11.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW, VBW=430KHz/1.3MHz,
- 5. Max hold, view and count how many channel in the band.

11.5. Measurement Result:

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010


Page: 63 of 76

Channel Number

2.4 GHz - 2.441GHz

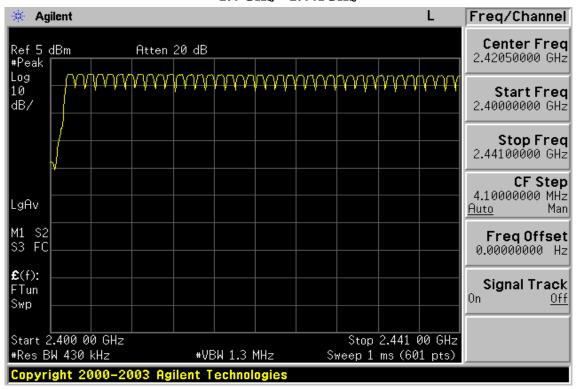

2.441 GHz - 2.4835GHz

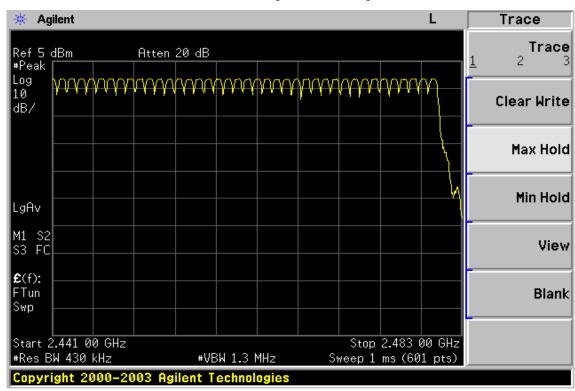

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488


www.tw.sqs.com



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 64 of 76

AFH Mode

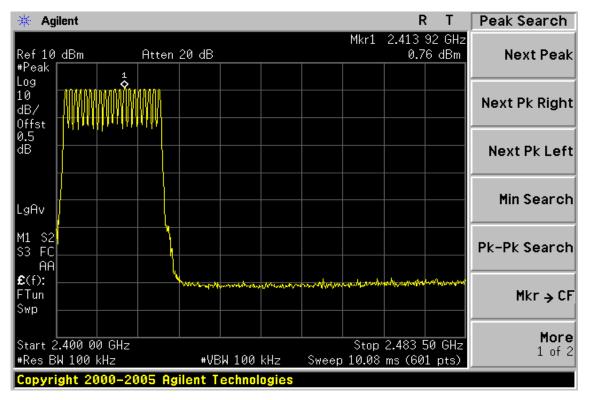

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) lested and such sample(s) are retained for so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention. militation and piralection is solved defined interent. Any holder of this document is advised and interent network network in the limits of Client. Any holder of this document is advised and interent network network in the limits of Client. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 65 of 76

12. TIME OF OCCUPANCY (DWELL TIME)

12.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

12.2. Measurement Equipment Used:

Refer to section 6.2 for details.

12.3. Test Set-up:

Refer to section 6.3 for details.

12.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=1MHz/1MHz, Span=0Hz, Adjust Sweep=2ms-5ms.
- 5. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 66 of 76

12.5. Measurement Result

A period time = 0.4 (ms) * 79 = 31.6 (s)CH Low 0.39 (ms) * (1600/2/79) * 31.6 = 124.80 (ms)DH1 time slot = DH3 time slot = 1.645 (ms) * (1600/4/79) * 31.6 = 263.20 (ms)DH5 time slot = 2.892 (ms) * (1600/6/79) * 31.6 = 308.48 (ms)CH Mid DH1 time slot = 0.39 (ms) * (1600/2/79) * 31.6 = 124.80 (ms)1.65 (ms) * (1600/4/79) * 31.6 = 264.00 (ms)DH3 time slot = DH5 time slot = 2.892 (ms) * (1600/6/79) * 31.6 = 308.48 (ms)CH High DH1 time slot = 0.39 (ms) * (1600/2/79) * 31.6 = 124.80 (ms)1.65 (ms) * (1600/4/79) * 31.6 = 264.00 (ms)DH3 time slot =DH5 time slot = 2.892 (ms) * (1600/6/79) * 31.6 = 308.48 (ms)

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010


Page: 67 of 76

CH-Low

DH1

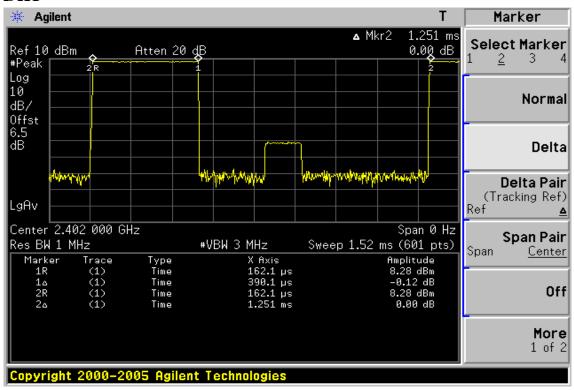

DH3

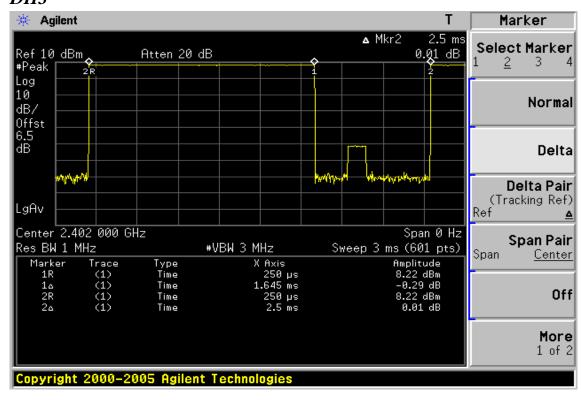

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 68 of 76

DH5

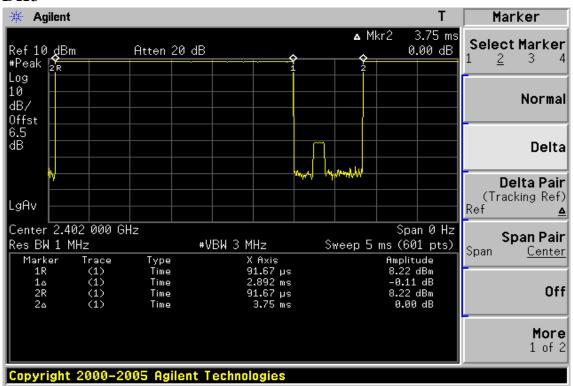

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) teste militation and piral instruction issues defined interent. Any holder of this document is advised and information contained networn reference the Company's minings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279

台灣檢驗科技股份有限公司




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010


Page: 69 of 76

CH-Mid

DH1

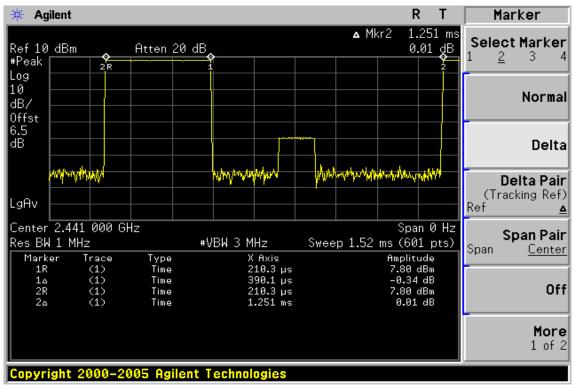

DH3

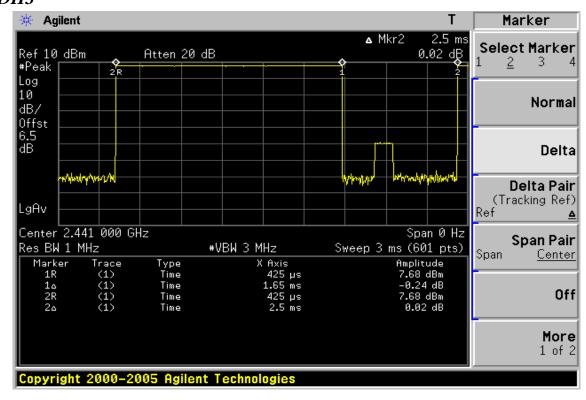

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 70 of 76

DH5

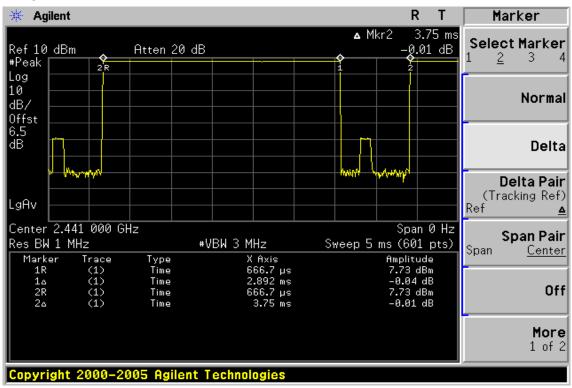

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) teste only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279




Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010


Page: 71 of 76

CH-High

DH1

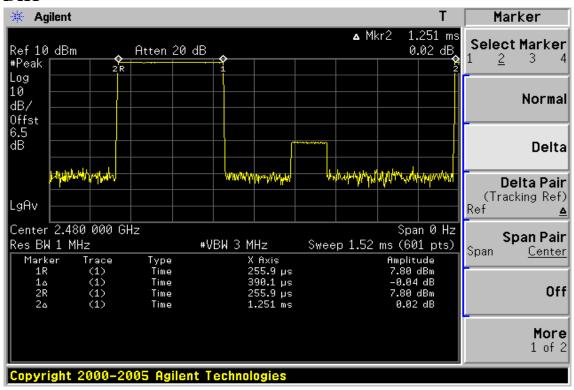

DH3

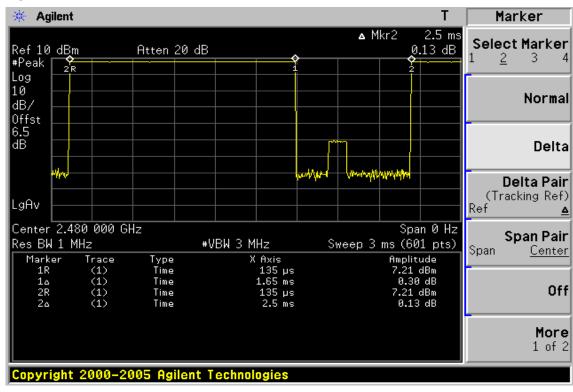

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ships of the testing ships the testing ships the sample(s) testing and testing the testing ships the sample(s) testing and testing the sample(s) testing and testing the sample(s) testing and testin only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 72 of 76

DH5

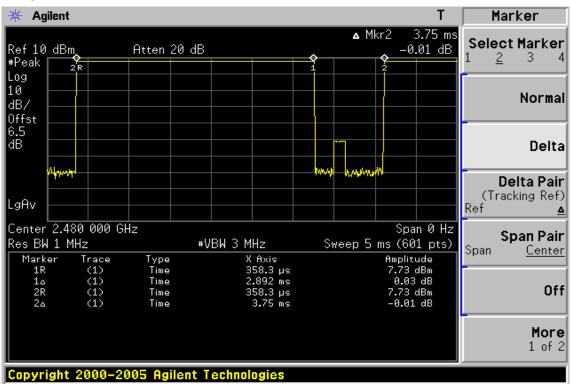

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) teste only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 73 of 76

13. Peak Power Spectral Density

13.1. Standard Applicable

According to §15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

13.2. Measurement Equipment Used:

Refer to section 6.2 for details.

13.3. Test Set-up:

Refer to section 6.3 for details.

13.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 1.5MHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.

13.5. Measurement Result

СН	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
Low	-0.95	0.00	-0.95	8
Mid	-1.59	0.00	-1.59	8
High	-1.09	0.00	-1.09	8

offset 0.5dB

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemfor electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, inde nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 74 of 76

Power Spectral Density Test Plot (Worst: BDR mode) (CH-Low)

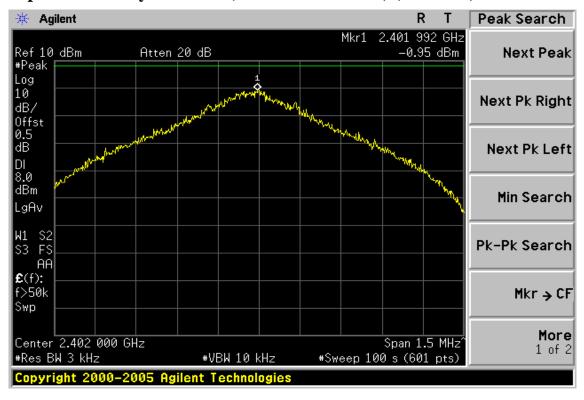

Power Spectral Density Test Plot (Worst: BDR mode) (CH-Mid)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sqs.com



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 75 of 76

Power Spectral Density Test Plot (Worst: BDR mode) (CH-High)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

She stated the States the State of the State of the State of the State of State of State of State of States of Stat only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/80011 Issue Date: Sep. 01, 2010

Page: 76 of 76

14. ANTENNA REQUIREMENT

14.1. Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

14.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is -0.85dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.