


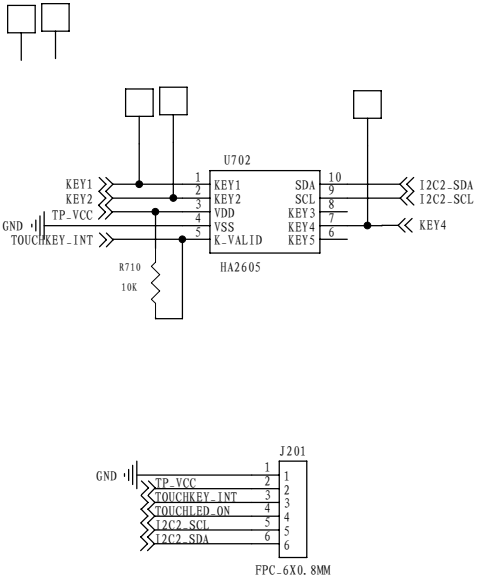
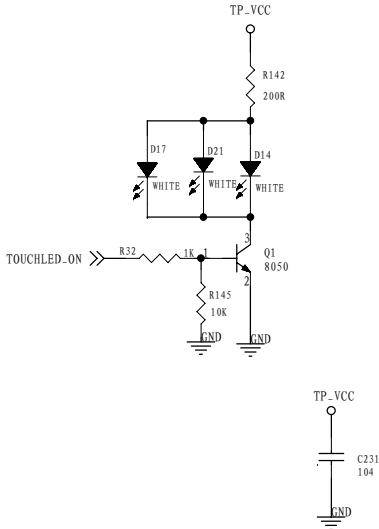
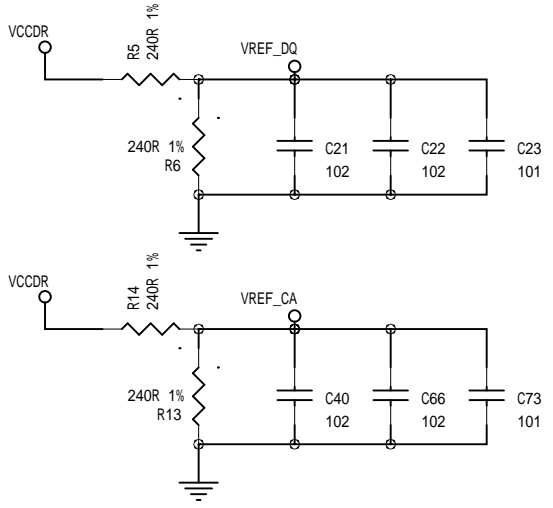



KEY

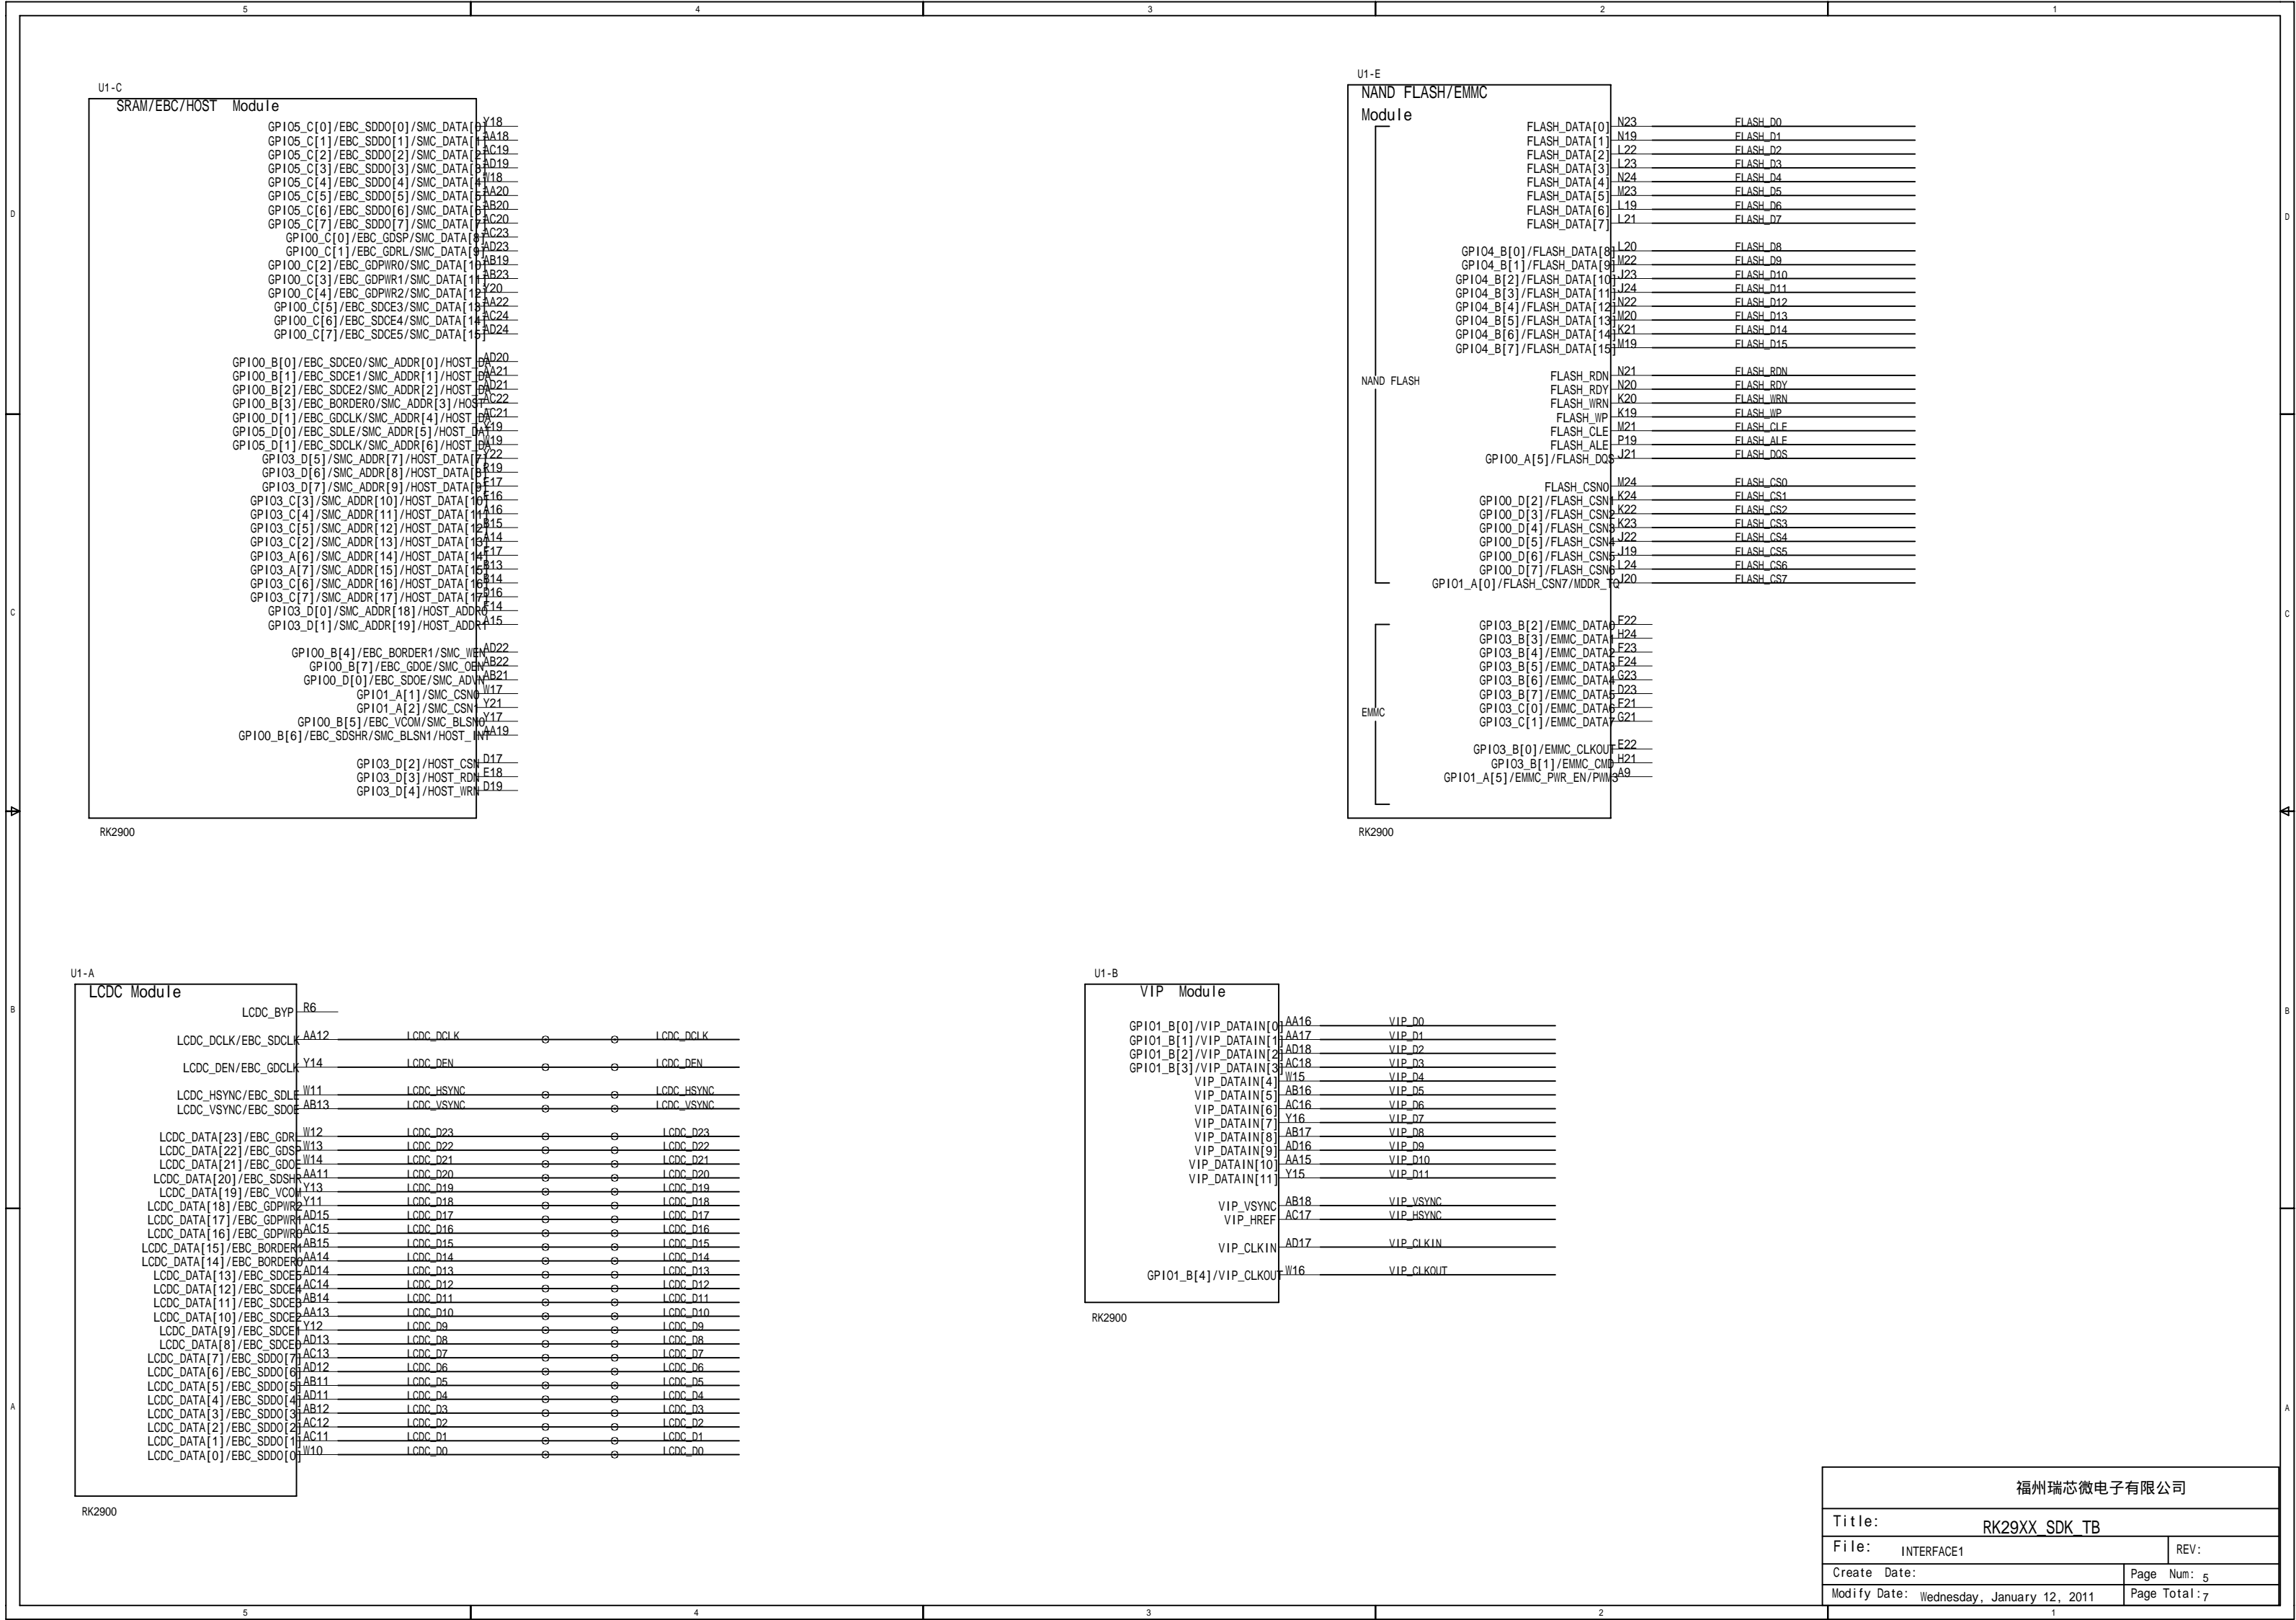


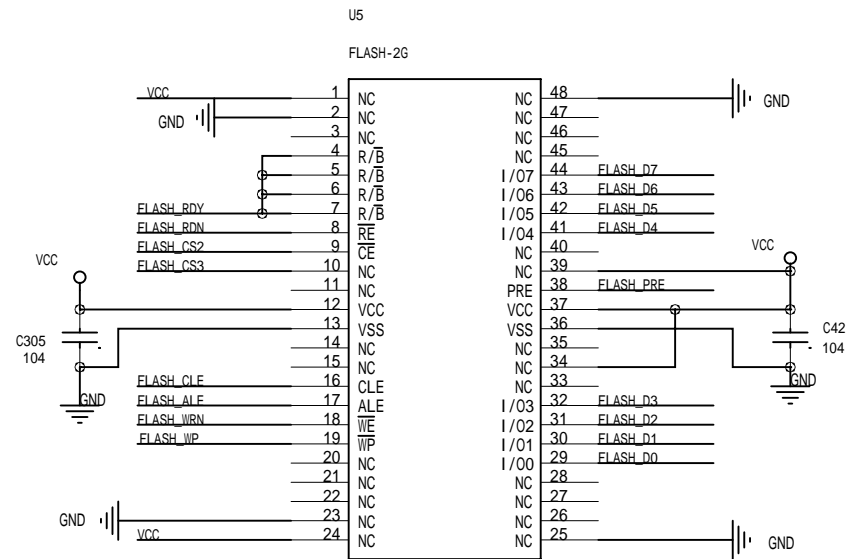


FLASH

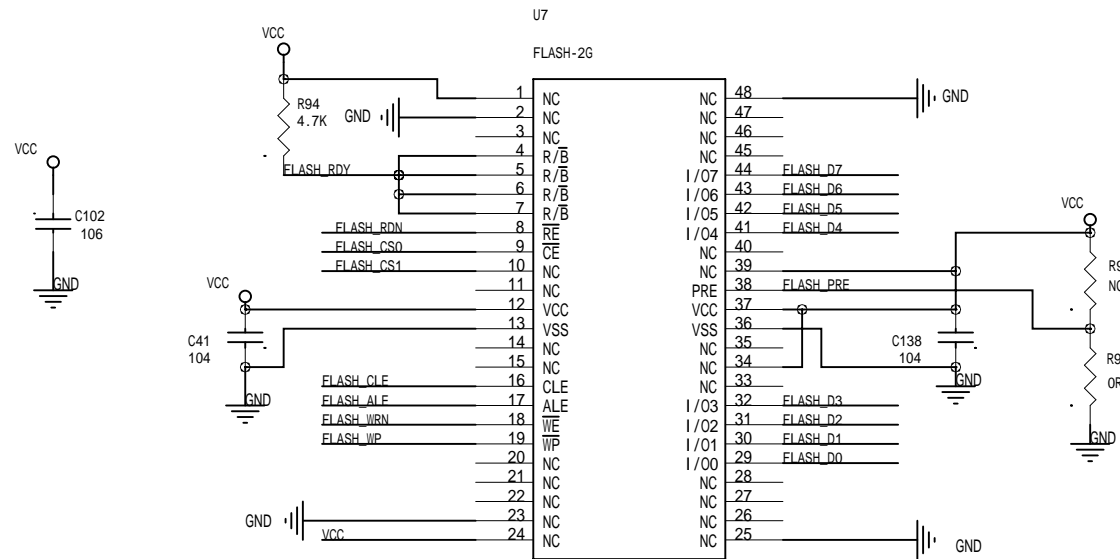

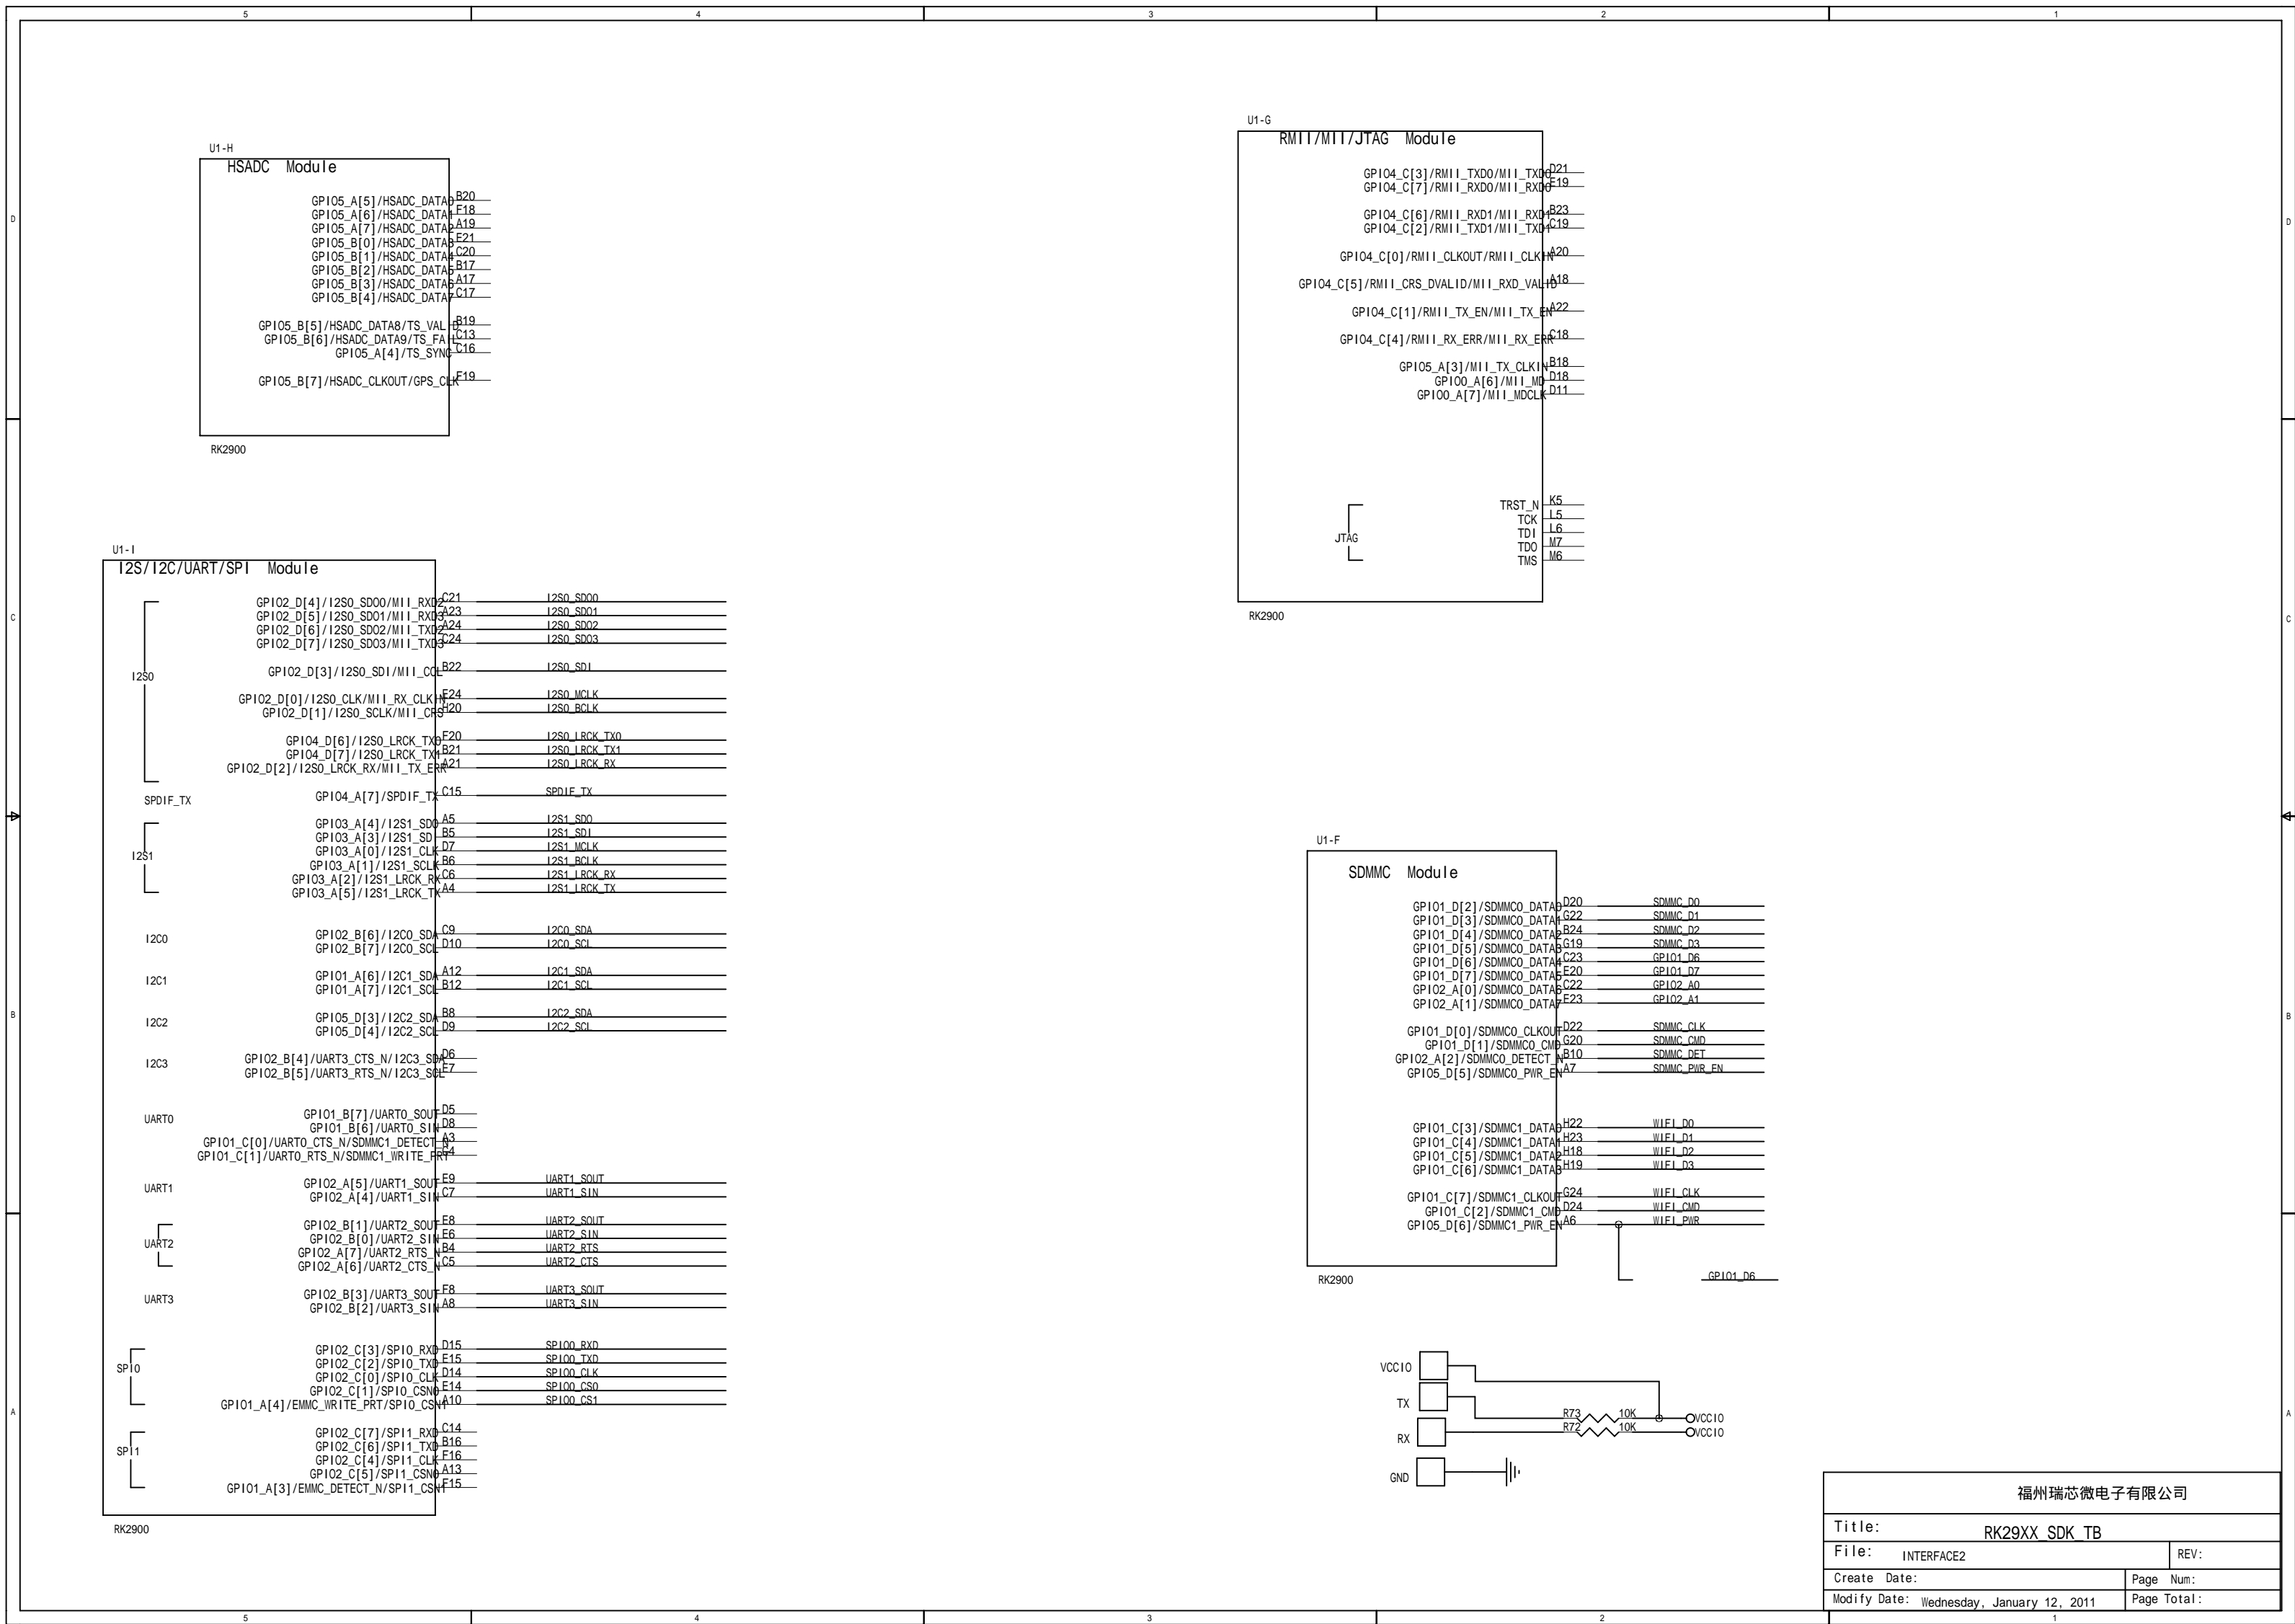


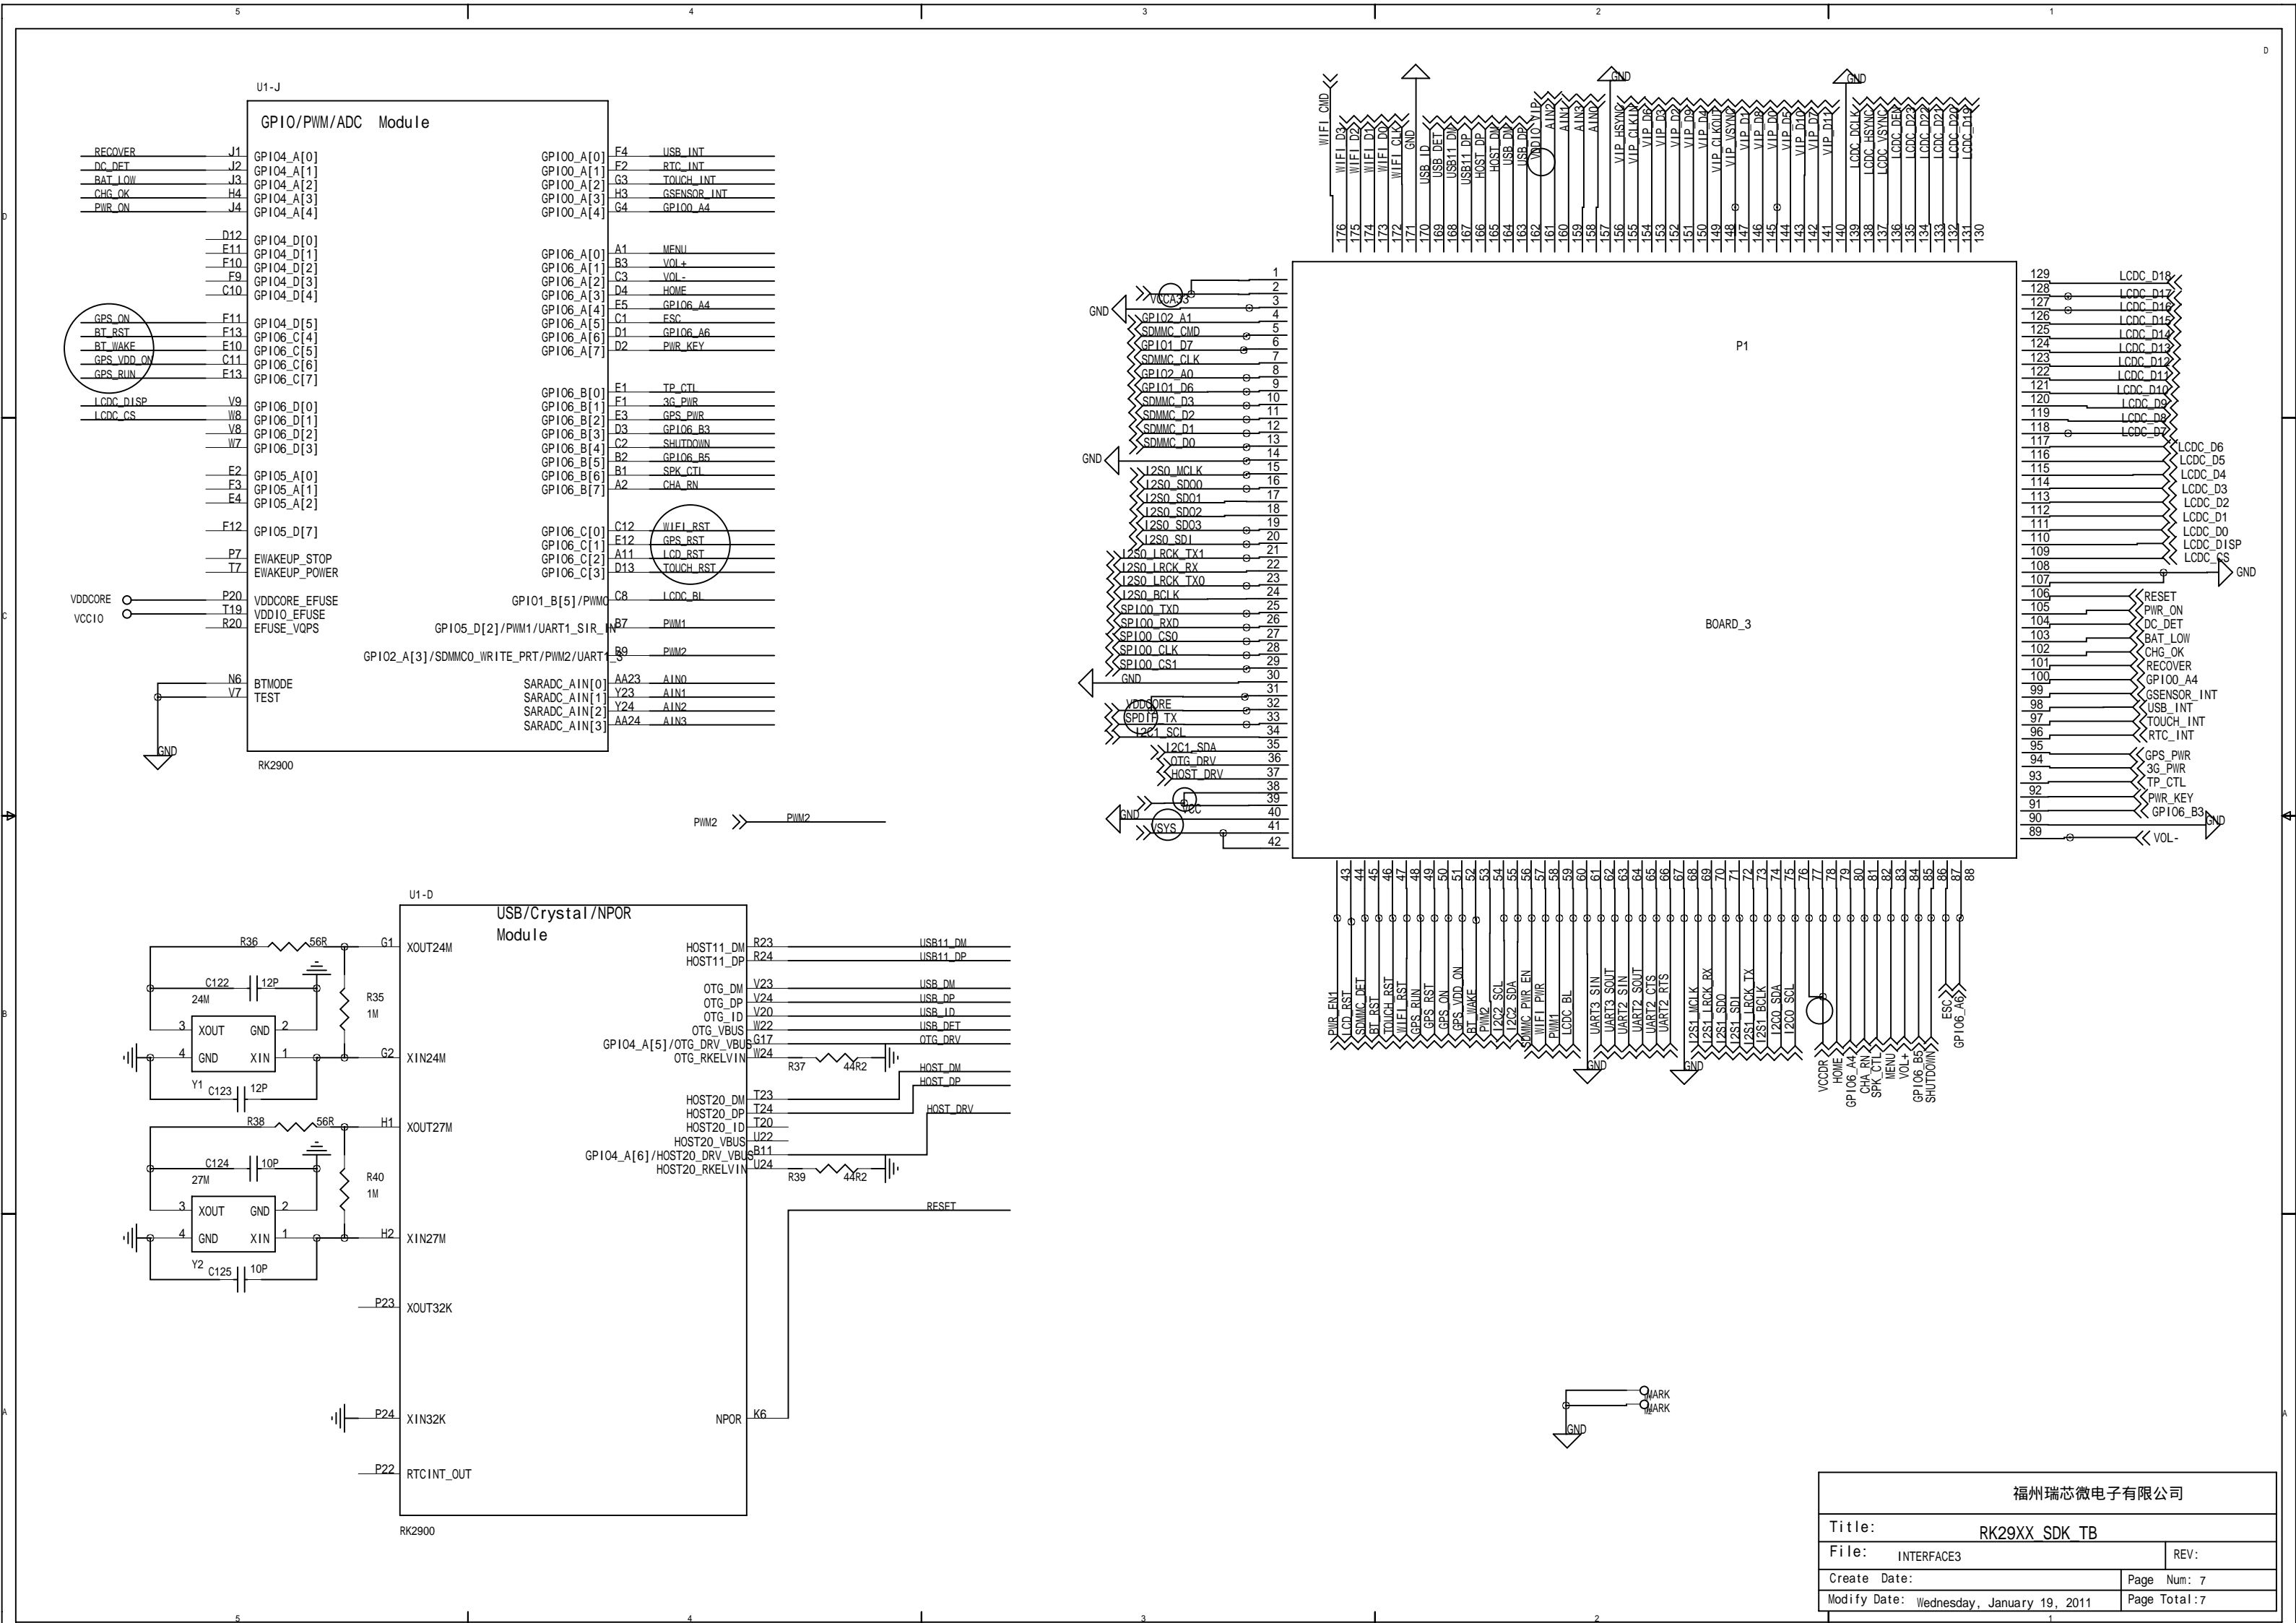


OTG

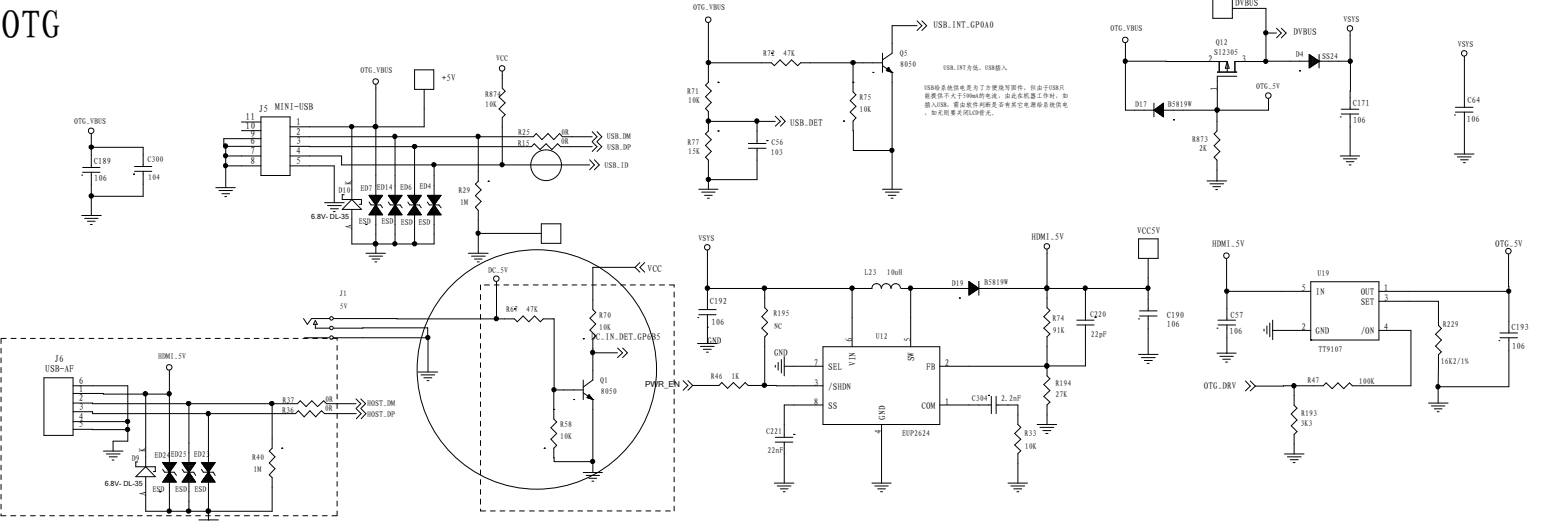


BAT

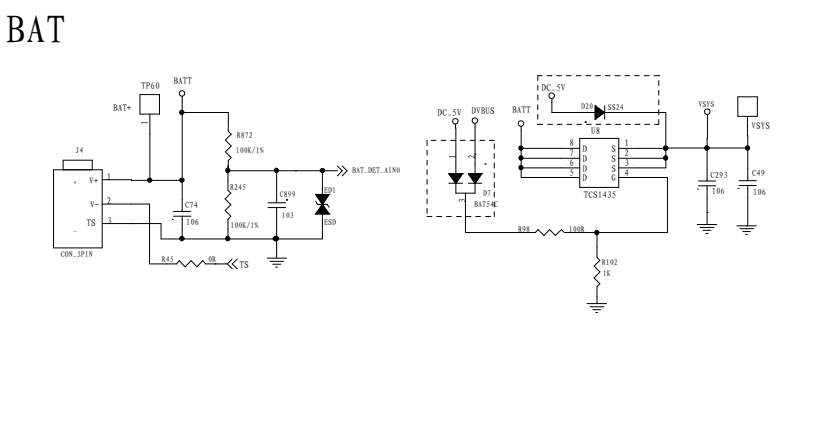

POWER CONTROL

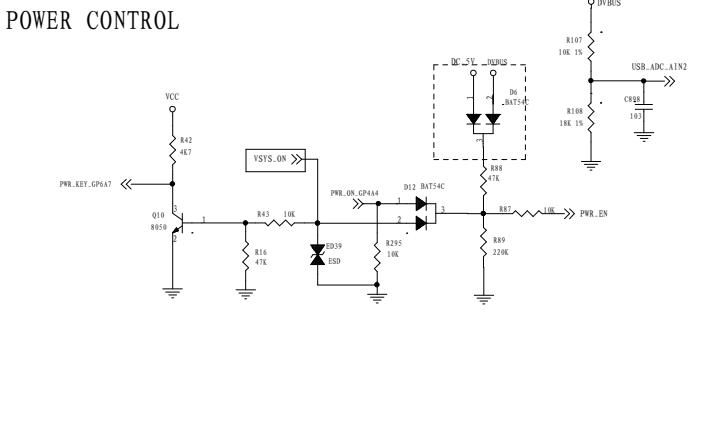

CHARGE


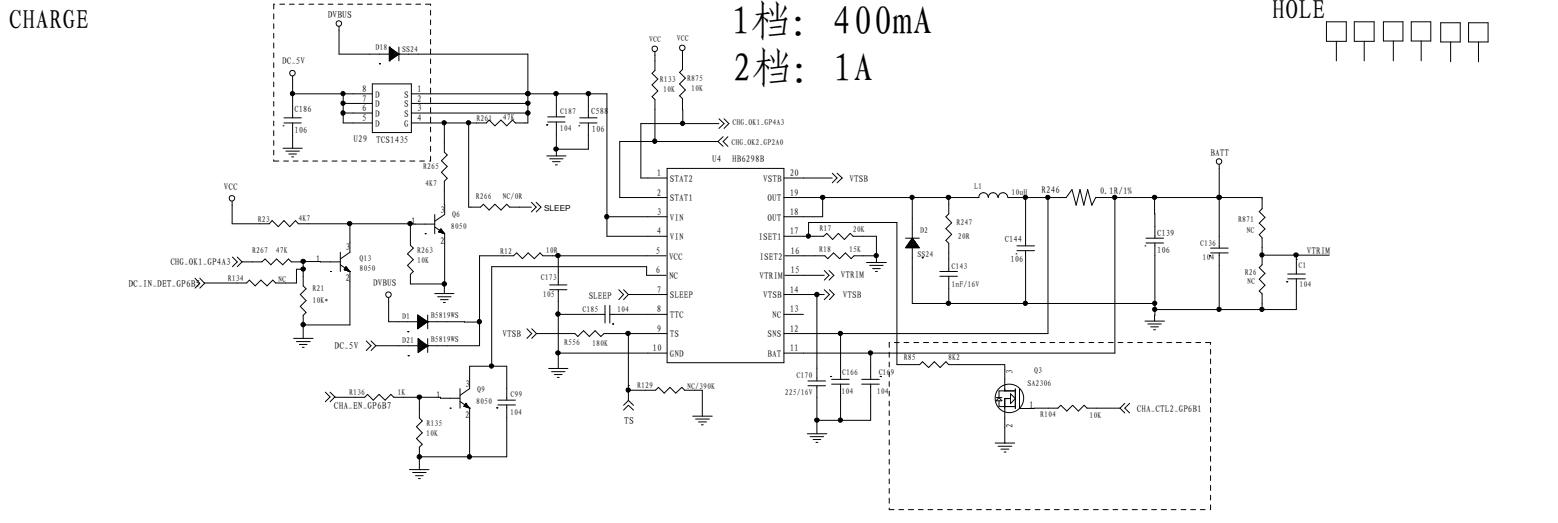


1档: 400mA
2档: 1A

HOLE


CORE

Core 0.9-1.36


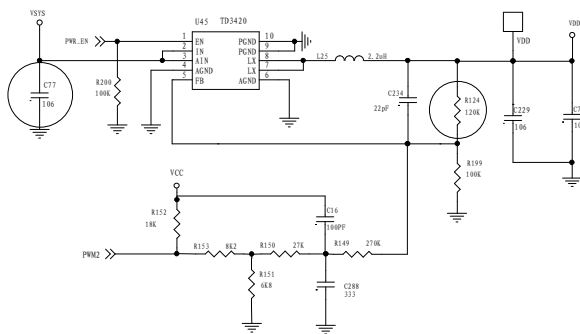
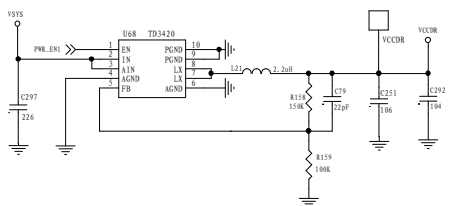
**DDRIII****DDRIII 1.5V**

SYSTEM IO

VCCIO 3.3V

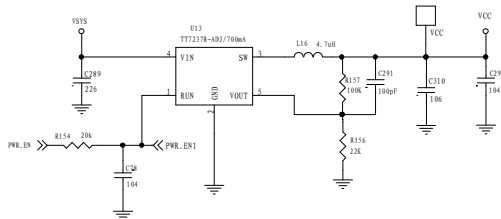


Audio Power

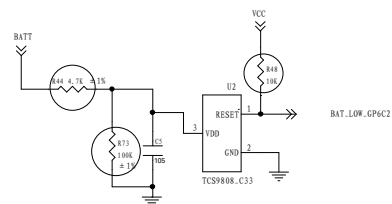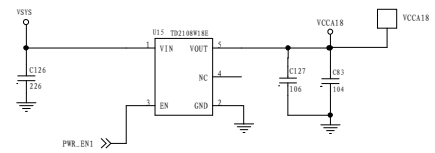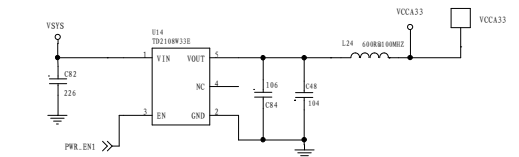


Title: M809-TV1. 0	
File: SYSTEM POWER	REV:
Create Date:	Page Sum: 4
Modify Date: Tuesday, November 23, 2010	Page Total: 15


SD CARD

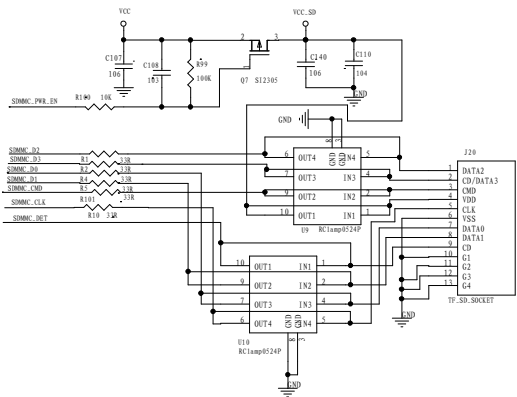


RTC

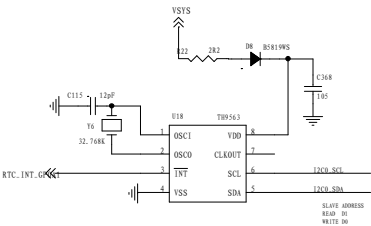

RESET

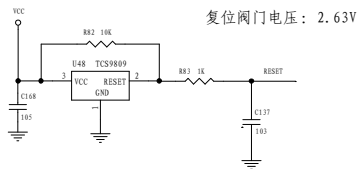


TOUCH_PANEL

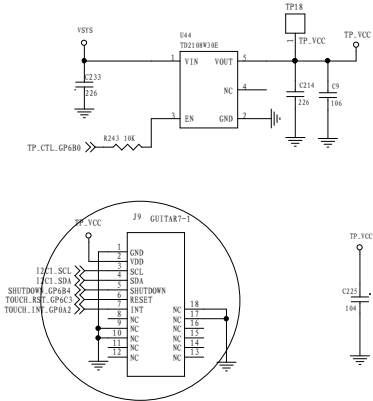

触摸模块封装焊盘作为测试点！



Title: M809-TV1.0		
File: USB_HOST/RTC/VIB		
Create Date:	Page: 1	REV:
Modify Date: Tuesday, November 21, 2018	Page: 1	Total: 15

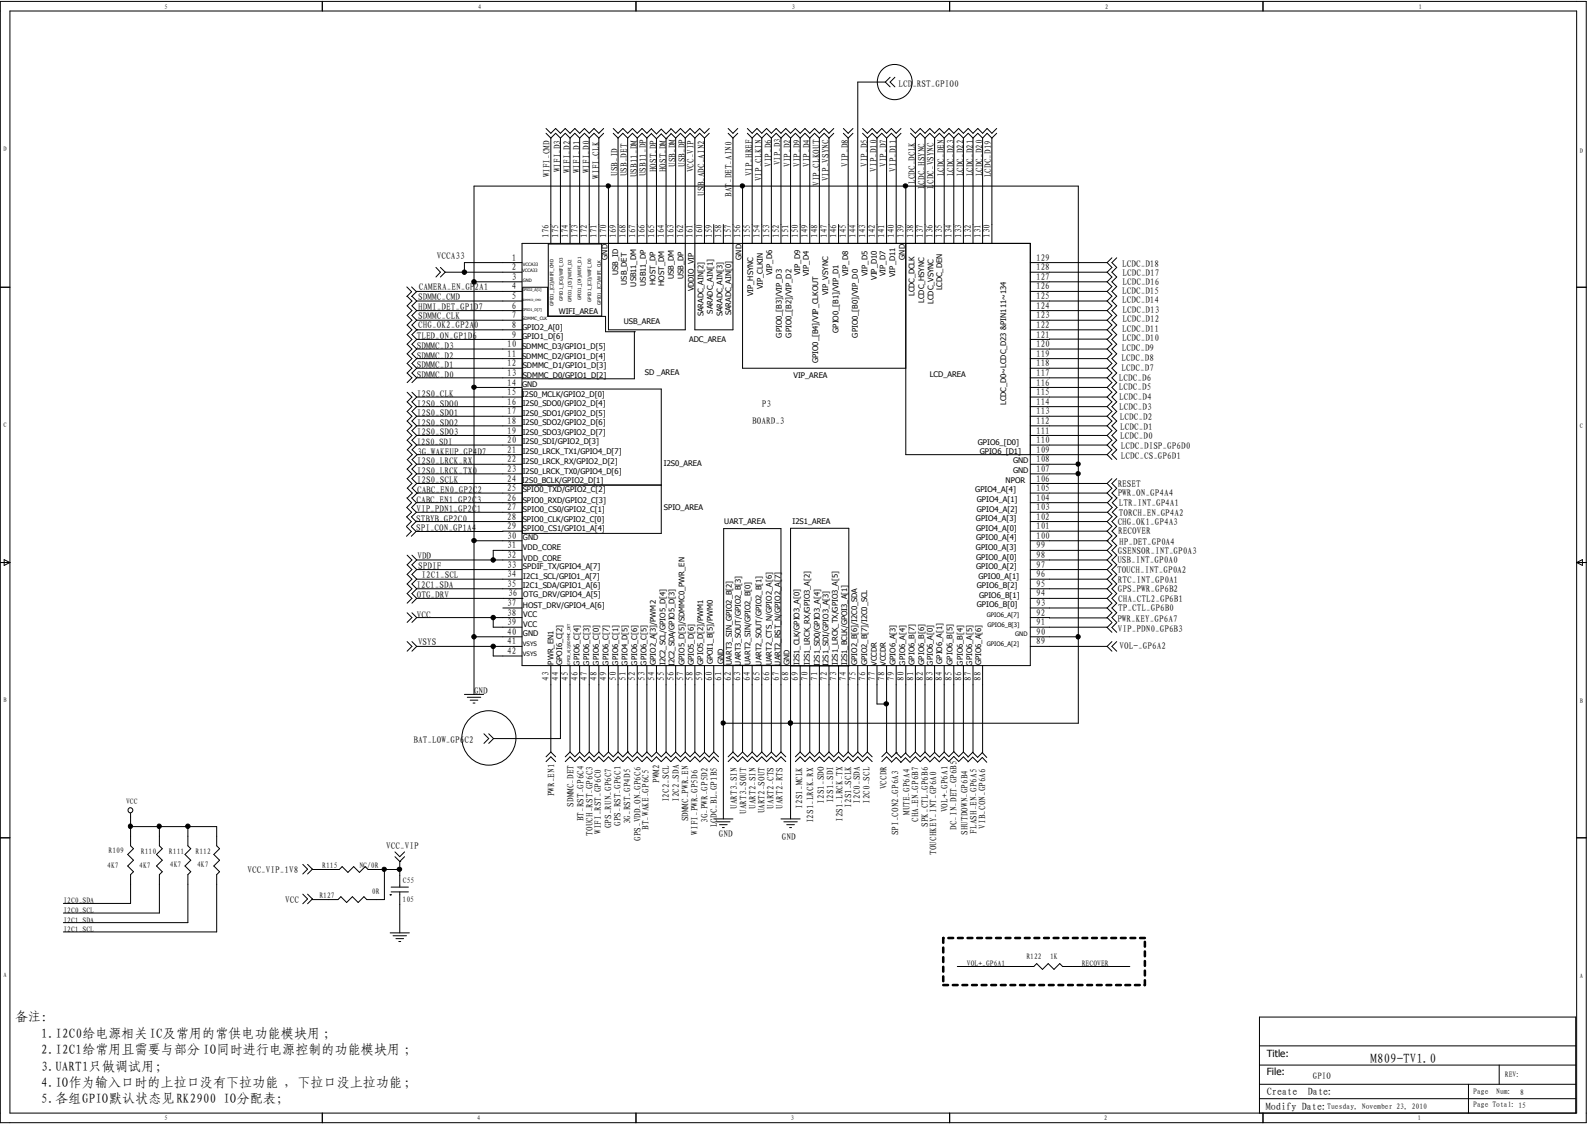



备注:

1. I2C0给电源相关IC及常用的常供电功能模块用;
2. I2C1给常用且需要与部分IO同时进行电源控制的功能模块用;
3. UART1只做调试用;
4. IO作为输入口时的上拉口没有下拉功能, 下拉口没上拉功能;
5. 各组GPIO默认状态见RK2900 IO分配表;


Title: M809-TV1.0	
File: GPIO	REV: 0
Create Date: Tuesday, November 23, 2019	Page Num: 0
Modify Date: Tuesday, November 23, 2019	Page Total: 11



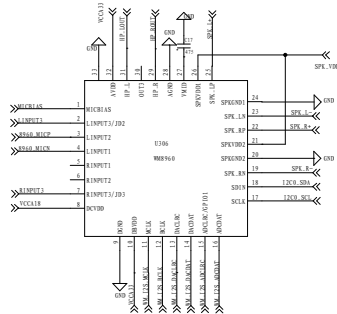


L	NC TO COM	8960 (MIC&FNO)	DEFAULT
H	NO TO COM	3G	

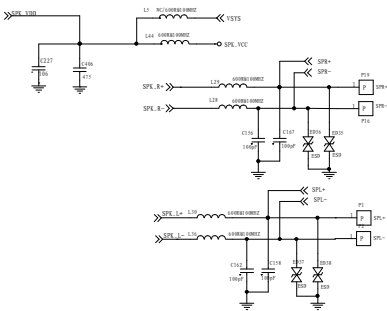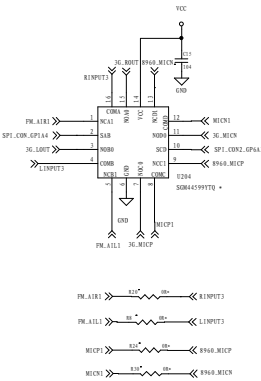


喇叭: DMSP1115KJ-04-G

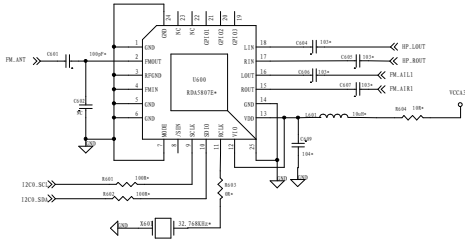


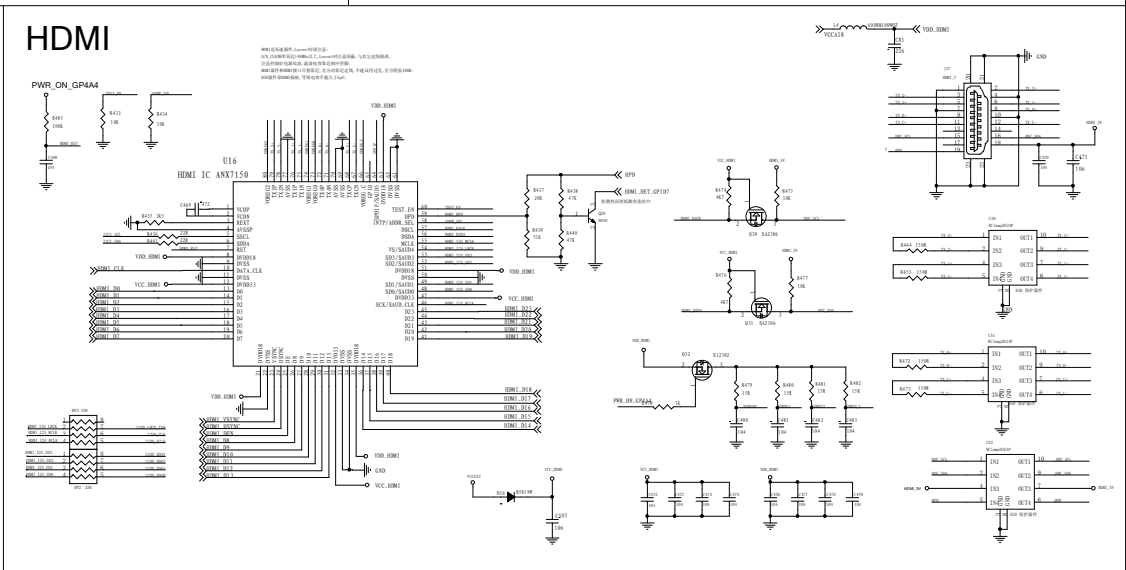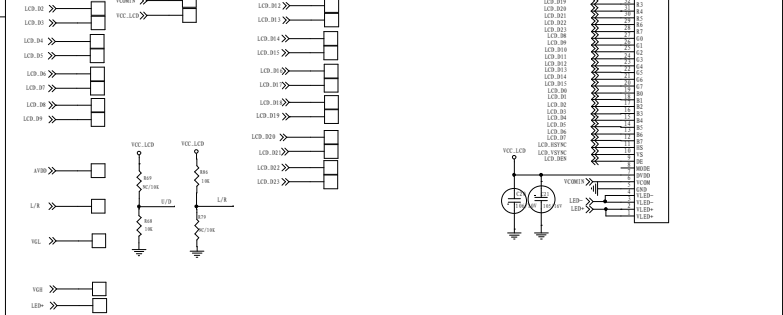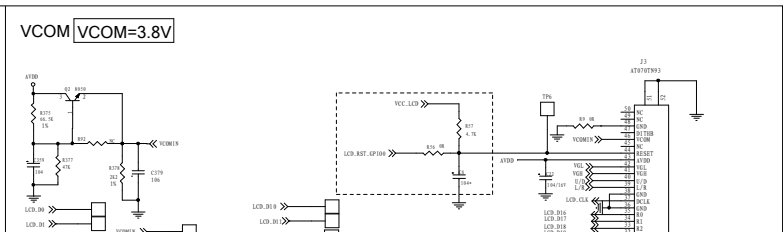


CAMERA

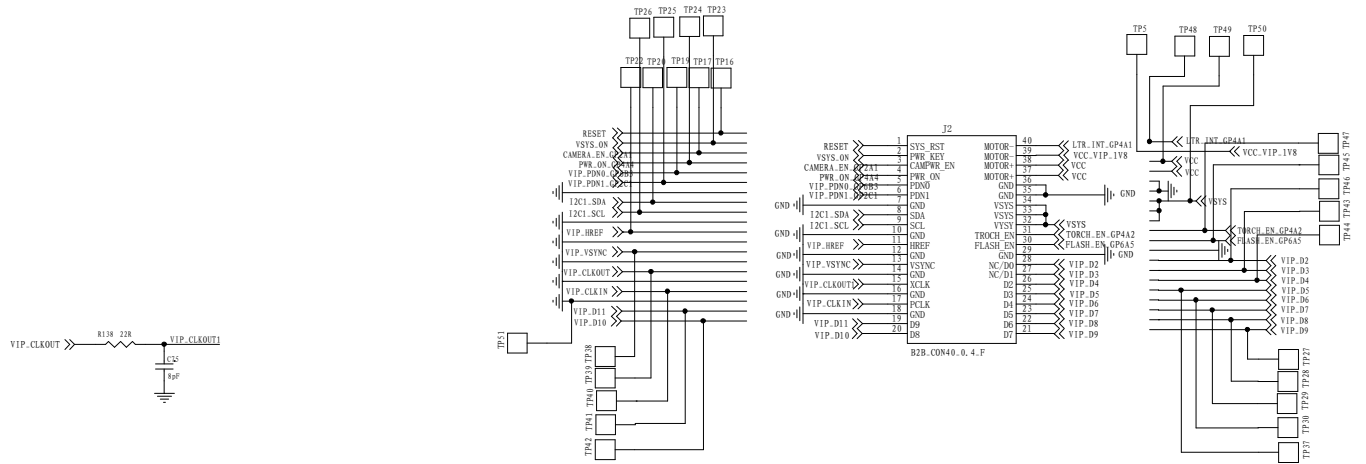

3D G-Sensor

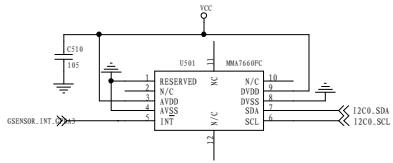

VIBRATION

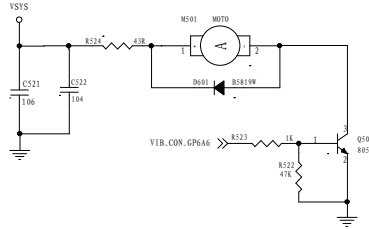

HSADC

KEY BAORD

