

1-4F, Huafeng Science Park, Xin'an Sixth Road, 82<sup>th</sup> District, Bao'an,

Shenzhen, China.

Telephone: +86-755-29451282,

Fax: +86-755-22639141

Report No.: EBO1411007-E201

Page 1 of 25

# **TEST REPORT**

**Applicant:** Shenzhen Firstview Electronic Co. Ltd.

Address of Applicant: 3-4/F, Block B, Huafeng 1st Technology Zone Baoan Main

Road, Baoan District, Shenzhen, China

**Equipment Under Test (EUT)** 

Product Name: 10.1 inch Tablet PC

Model No.: 2AA95V01105, V01099, M1045

**FCC ID:** YW52AA95V01105

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart B:2013

Date of sample receipt: November 3, 2014

**Date of Test:** November 3, 2014 To November 17, 2014

Date of report issue: November 17, 2014

Test Result : PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kevin Yu Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: EBO1411007-E201 Page 2 of 25

### 2 Version

Version No.	Date	Description
00	November 17, 2014	Original

Prepared By:	Jason	Date:	November 17, 2014
	Project Engineer		
Check By:	Canyo	Date:	November 17, 2014
	Reviewer		



Report No.: EBO1411007-E201 Page 3 of 25

### 3 Contents

			Page
1	COV	ER PAGE	1
2	VER	SION	2
3	CON	ITENTS	3
4	TES	T SUMMARY	4
5	GEN	ERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST MODE	5
	5.4	TEST FACILITY	6
	5.5	TEST LOCATION	
	5.6	DESCRIPTION OF SUPPORT UNITS	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6	TES	T INSTRUMENTS LIST	8
7	TES	T RESULTS AND MEASUREMENT DATA	10
	7.1	CONDUCTED EMISSIONS	10
	7.2	RADIATED EMISSION	13
8	TES	T SETUP PHOTO	19
9	EUT	CONSTRUCTIONAL DETAILS	21



Report No.: EBO1411007-E201

Page 4 of 25

# 4 Test Summary

Test Item	Section in CFR 47	Result	
Conducted Emission	Part15.107	PASS	
Radiated Emissions	Part15.109	PASS	

PASS: The EUT complies with the essential requirements in the standard.



Report No.: EBO1411007-E201

Page 5 of 25

### 5 General Information

### 5.1 Client Information

Applicant:	Shenzhen Firstview Electronic Co. Ltd.			
Address of Applicant:	3-4/F, Block B, Huafeng 1st Technology Zone Baoan Main Road,			
	Baoan District, Shenzhen, China			
Manufacturer:	Shenzhen Firstview Electronic Co., Ltd.			
Address of Manufacturer:	F3-6, Block B, Huafeng 1st Technology Zone, Baoan Main Road,			
	Baoan District, Shenzhen, P.R.China			

### 5.2 General Description of EUT

Product Name:	10.1 inch Tablet PC
Model No.:	2AA95V01105, V01099, M1045
Test Model No.:	2AA95V01105
Power supply:	Input: DC 5V, 2000mA from adapter
	Or
	DC 3.7V, 6000mAh Li-ion Battery

### 5.3 Test mode

Test mode:	
REC mode	Keep the EUT in REC mode
TF Card playing mode	Keep the EUT in TF Card playing mode
PC mode	Keep the EUT in data exchanging with PC mode
Test voltage:	
AC 120V/60Hz	



Report No.: EBO1411007-E201

Page 6 of 25

### 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

### • FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

### • Industry Canada (IC)

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

#### 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China



Report No.: EBO1411007-E201

Page 7 of 25

### 5.6 Description of Support Units

Manufacturer	Description	cription Model Serial Number		FCC Approval
HP	HP Printer		05257893	DoC
Apple	PC	A1278	C1MN99ERDTY3	DoC

#### 5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna. Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

#### 5.8 Abnormalities from Standard Conditions

None.

### 5.9 Other Information Requested by the Customer

None



Report No.: EBO1411007-E201

Page 8 of 25

### 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	Mar. 29 2014	Mar. 28 2015
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	July 01 2014	June 30 2015
4	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	July 01 2014	June 30 2015
5	Double -ridged waveguide horn	SCHWARZBECK	9120D	GTS208	June 27 2014	June 26 2015
6	RF Amplifier	HP	8347A	GTS204	July 01 2014	June 30 2015
7	Preamplifier	HP	8349B	GTS206	July 01 2014	June 30 2015
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial cable	GTS	N/A	GTS210	Mar. 29 2014	Mar. 28 2015
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014	Mar. 28 2015
11	Thermo meter	N/A	N/A	GTS256	Mar. 29 2014	Mar. 28 2015

Con	Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	July 01 2014	June 30 2015	
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015	
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015	
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015	
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015	
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015	
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	



Report No.: EBO1411007-E201

Page 9 of 25

Gen	General used equipment:						
Item Test Equipment Manufacturer Model No.					Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015	



Report No.: EBO1411007-E201

Page 10 of 25

### 7 Test Results and Measurement Data

#### 7.1 Conducted Emissions


Test Requirement:	FCC Part15 B Section 15.107			
Test Method:	ANSI C63.4:2003			
Test Frequency Range:	150KHz to 30MHz			
Class / Severity:	Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz, Sv	weep time=auto		
Limit:	Fraguency range (MHz)	Limit (c	dBuV)	
	Frequency range (MHz)	Average		
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm	n of the frequency.		
Test setup:	Reference Plane		_	
	AUX Equipment  Test table/Insulation plane  Remark  E.U.T. Equipment Under Test LISN Filter  AC power  EMI Receiver  LISN Line Impedence Stabilization Network Test table height=0.8m			
Test procedure:	<ol> <li>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 500hm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 500hm/50uH coupling impedance with 500hm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</li> </ol>			
Test Instruments:	Refer to section 6 for details			
Test mode:	Refer to section 5.3 for details. All of the mode were tested and found the "PC mode" is the worst case. Only the data of worst case was reported.			
Test results:	Pass			
 and the Commons of the Commons of	bioat to its Canaval Canditions of Canda			



Report No.: EBO1411007-E201

Page 11 of 25

#### **Measurement Data**

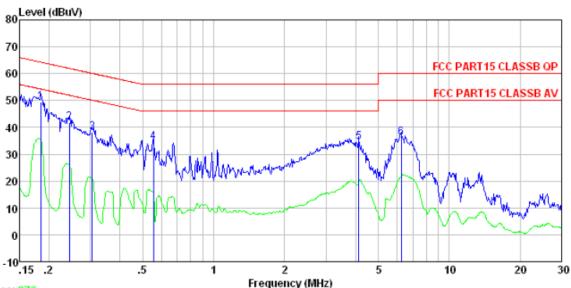

Trace: 276

Site

: Shielded room

Condition : FCC PART15 CLASSB QP LISN-2013 LINE

Test Engineer: Mike


	Freq	Read	LISN Factor				Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1 2 3 4 5 6	0.305 0.555 4.136	38. 06 34. 27 34. 04	0.12 0.11 0.13 0.20		41. 94 38. 27 34. 51 34. 39	61.95 60.10 56.00 56.00	-20.01 -21.83 -21.49 -21.61	QP QP QP QP



Report No.: EBO1411007-E201

Page 12 of 25



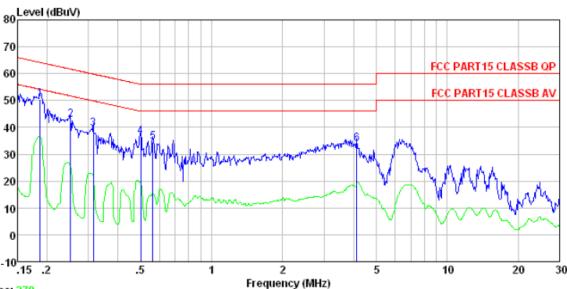

Trace: 278

Site : Shielded room

Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL

Test Engineer: Mike

	Freq		LISN Factor				Over Limit	Remark
	MHz	dBu∀	dB	dB	dBuV	dBuV	dB	
1 2 3 4 5 6	0.315 0.499 0.564	39. 41 36. 47	0.06 0.06 0.06 0.07		42. 92 39. 57 36. 64 34. 43	61.69 59.84 56.01 56.00	-20.27 -19.37 -21.57	QP QP QP QP

#### Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Report No.: EBO1411007-E201

Page 13 of 25


#### 7.2 Radiated Emission

Test Requirement:	FCC Part15 B Section 15.109							
Test Method:	ANSI C63.4:2003							
Test Frequency Range:	30MHz to 6GHz							
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver setup:	Frequency	Detector	RBW	VBW	Remark			
	30MHz- 1GHz	Quasi-peal		300kHz	Quasi-peak Value			
	Above 1GHz	Peak Peak	1MHz 1MHz	3MHz 10Hz	Peak Value Average Value			
Limit:								
Link	Freque	ency	Limit (dBuV	/m @3m)	Remark			
	30MHz-8	8MHz	40.0	0	Quasi-peak Value			
	88MHz-2	16MHz	43.5	0	Quasi-peak Value			
	216MHz-9	60MHz	46.0	0	Quasi-peak Value			
	960MHz-	·1GHz	54.0	0	Quasi-peak Value			
	Above 1	CH-	54.00		Average Value			
	Above	IGHZ	74.0	0	Peak Value			
Test Procedure:	ground at a 3 determine th 2. The EUT wa	3 meter camb e position of s set 3 meter	er. The table with the highest races away from the	was rotated diation. ne interfere	0.8 meters above the 1360 degrees to nce-receiving ble-height antenna			
	tower.	on was moun	ited on the top	or a variae	no noight amonna			
	ground to de	termine the ned to the desired	naximum value	e of the field	r meters above the d strength. Both are set to make the			
	4. For each suspected emission, the EUT was arranged to its wor and then the antenna was tuned to heights from 1 meter to 4 m and the rota table was turned from 0 degrees to 360 degrees to maximum reading.							
	5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.							
	limit specified	d, then testing	g could be stop	pped and th	10dB lower than the ne peak values of the hat did not have			



Report No.: EBO1411007-E201

Page 14 of 25

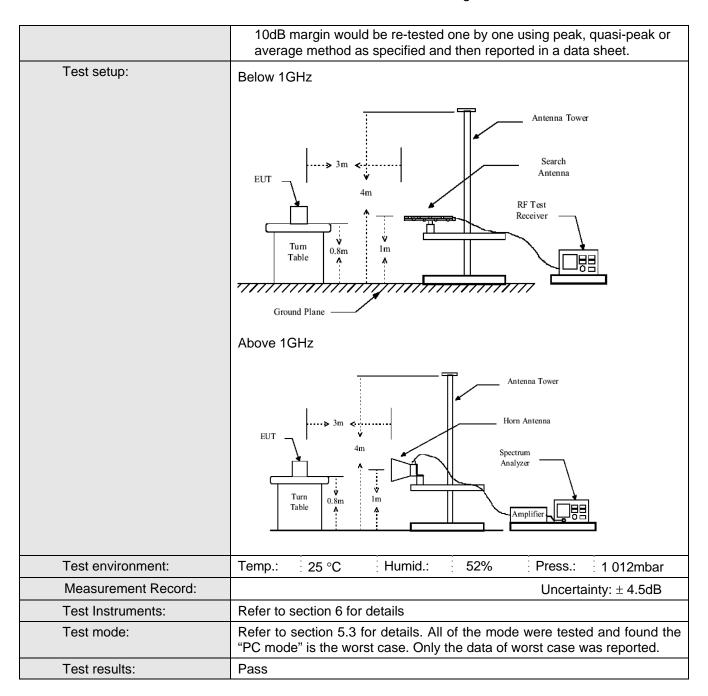

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

#### Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor




Report No.: EBO1411007-E201

Page 15 of 25

#### **Measurement Data**

Below 1GHz

Test mode: PC mode	Ant Pol. Horizontal
--------------------	---------------------

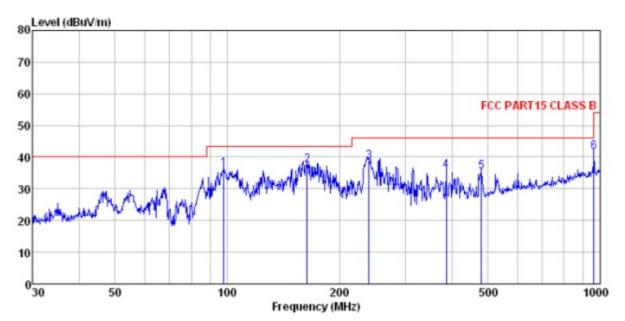

Site : 3m chamber

Condition : FCC PART15 CLASS B 3m VULB9163-2013M HORIZONTAL

Test Engineer: Yang


	ReadAntenna Cable Pream					Over Limit	Remark	
MHz	dBu₹	dB/m	₫B	₫B	dBuV/m	$\overline{dBuV/m}$	dB	
97.798								
962.162	44.31	23.49	5.09	31.22	41.67	54.00	-12.33	QP
	Freq MHz 97.798 163.755 239.987 386.634 480.528	Freq Level  MHz dBuV  97.798 51.83 163.755 57.23 239.987 54.81 386.634 48.01 480.528 45.87	ReadAntenna Freq Level Factor  MHz dBuV dB/m  97.798 51.83 15.03 163.755 57.23 10.77 239.987 54.81 14.09 386.634 48.01 16.78	ReadAntenna Cable Level Factor Loss  MHz dBuV dB/m dB  97.798 51.83 15.03 1.17 163.755 57.23 10.77 1.65 239.987 54.81 14.09 2.07 386.634 48.01 16.78 2.79 480.528 45.87 18.07 3.22	ReadAntenna Cable Preamp Freq Level Factor Loss Factor  MHz dBuV dB/m dB dB  97.798 51.83 15.03 1.17 31.75 163.755 57.23 10.77 1.65 32.03 239.987 54.81 14.09 2.07 32.16 386.634 48.01 16.78 2.79 31.92 480.528 45.87 18.07 3.22 31.62	ReadAntenna Cable Preamp Level Factor Loss Factor Level  MHz dBuV dB/m dB dB dBuV/m  97.798 51.83 15.03 1.17 31.75 36.28 163.755 57.23 10.77 1.65 32.03 37.62 239.987 54.81 14.09 2.07 32.16 38.81 386.634 48.01 16.78 2.79 31.92 35.66 480.528 45.87 18.07 3.22 31.62 35.54	ReadAntenna   Cable Preamp   Limit	ReadAntenna   Cable Preamp   Limit   Over



Report No.: EBO1411007-E201

Page 16 of 25



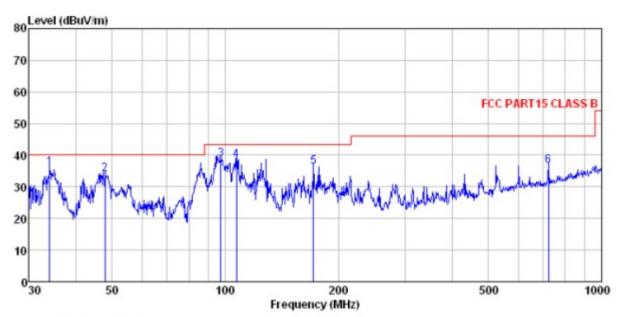

3m chamber

FCC PART15 CLASS B 3m VULB9163-2013M VERTICAL

Condition Test Engin

est	Engineer:	: lang								
		Readântenna Level Factor					Limit Line	Over Limit		
	MHz	dBu∜	dB/m	dB	−−−−dB	dBuV/m	dBuV/m	d₿		
1 2 3	34.156		14.31		32.06					
2	47.826	49.72	15.38	0.75	31.98	33.87	40.00	-6.13	QP	
3	97.115	54.35	14.97	1.17	31.75	38.74	43.50	-4.76	QP	
4	107.134	54.37	14.49	1.25	31.80	38.31	43.50	-5.19	QP	
5	171.393	55.75	11.03	1.69	32.06	36.41	43.50	-7.09	QP	
5	721.726						46.00			




Report No.: EBO1411007-E201

Page 17 of 25

#### Above 1GHz

Test mode: PC mode	Ant Pol. Horizontal
--------------------	---------------------

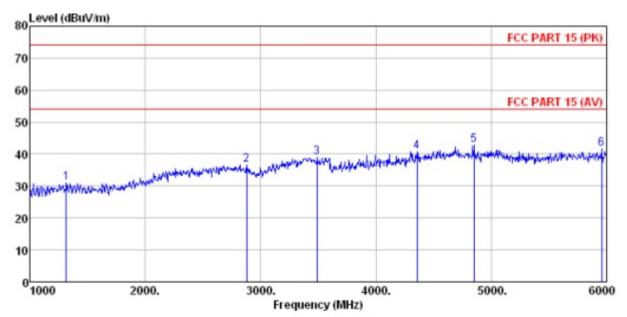

Site

: 3m chamber : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL Condition


lest	Engineer:								
		Read	Antenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBu∜	dB/m	dB	dB	dBuV/m	dBuV/n	dB	
1	1315.000	33.95	25.66	4.56	33.30	30.87	74.00	-43.13	Peak
2	2880.000	35.81	28.42	5.82	33.45	36.60	74.00	-37.40	Peak
2	3490.000	35.95	28.93	6.93	32.77	39.04	74.00	-34.96	Peak
4	4355.000	33.55	30.93	8.21	31.86	40.83	74.00	-33.17	Peak
5	4850.000	34.34	31.82	8.63	32.11	42.68	74.00	-31.32	Peak
6	5955.000	30.85	32.84	10.13	32.16	41.66	74.00	-32.34	Peak



Report No.: EBO1411007-E201

Page 18 of 25

Test mode: PC mode	Ant Pol. Vertical
--------------------	-------------------

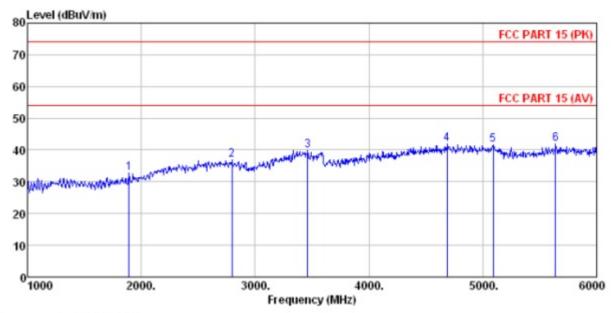

Site : 3m chamber

Condition : FCC PART 15 (PK) 3m BBHA9120D ANT (>1GHZ) VERTICAL

Test Engineer: Yang

est	Engineer:	1 ang								
	•	Read	Antenna Factor				Limit Line	Over Limit	Remark	
	MHz	dBu₹	dB/m	dB	dB	dBuV/m	dBuV/m	<u>d</u> B		
1	1895.000	36.51	25.72	4.91	34.29	32.85	74.00	-41.15	Peak	
2	2795.000	36.37	28.40	5.76	33.55	36.98	74.00	-37.02	Peak	
3	3460.000	36.98	28.84	6.88	32.79	39.91	74.00	-34.09	Peak	
4	4685.000	33.77	31.63	8.49	32.03	41.86	74.00	-32.14	Peak	
5	5090.000	33.03	32.03	8.90	32.23	41.73	74.00	-32.27	Peak	
6	5640.000	32.13	32.36	9.70	32.35	41.84	74.00	-32.16	Peak	





Report No.: EBO1411007-E201

Page 19 of 25

# 8 Test Setup Photo

Radiated Emission

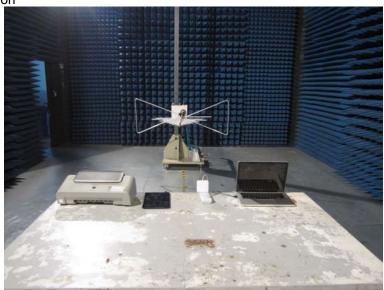

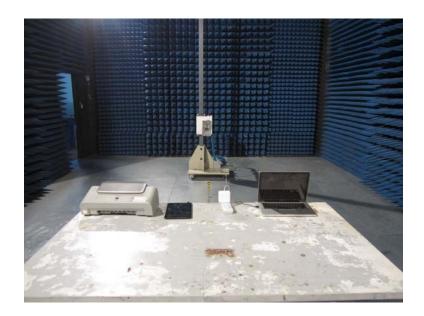



Report No.: EBO1411007-E201

Page 20 of 25

Conducted Emission





Report No.: EBO1411007-E201

Page 21 of 25

# 9 EUT Constructional Details








Report No.: EBO1411007-E201

Page 22 of 25

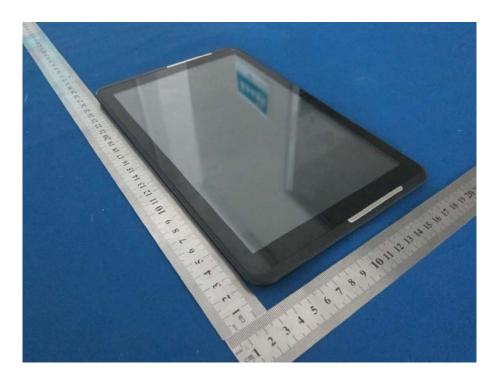





Report No.: EBO1411007-E201

Page 23 of 25








Report No.: EBO1411007-E201

Page 24 of 25




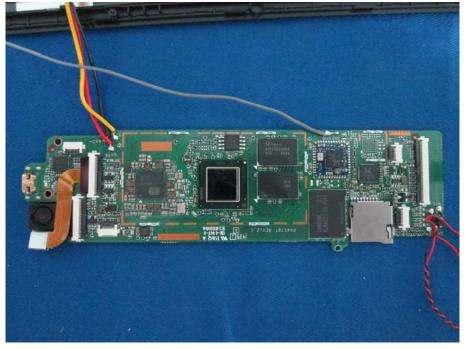



Report No.: EBO1411007-E201

Page 25 of 25

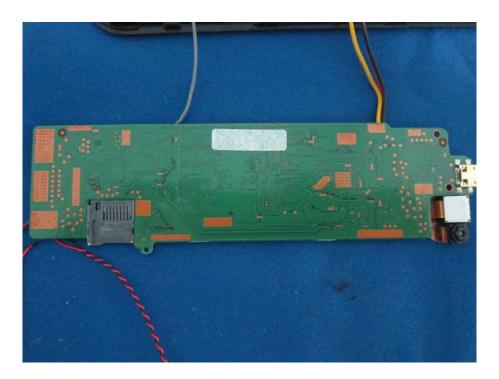



----- End-----