



No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen,
Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: sgs_internet_operations@sgs.com

Report No.: SZEM110800323201

Page : 1 of 49

FCC REPORT

Application No: SZEM1108003232IT
Applicant: Accessory Workshop LLC
Manufacturer: Huizhou Weide Electronics Co., Ltd.
Factory: Huizhou Weide Electronics Co., Ltd.
Product Name: Bluetooth keyboard
Operation Frequency: 2402MHz to 2480MHz
FCC ID: YX7-TY-109
Standards: FCC CFR Title 47 Part 15 Subpart C
Date of Receipt: 2011-08-24
Date of Test: 2011-08-26 to 2011-09-28
Date of Issue: 2011-10-18

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS.....	2
3 TEST SUMMARY	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION	4
4.2 GENERAL DESCRIPTION OF E.U.T.....	4
4.3 E.U.T OPERATION MODE	6
4.4 DESCRIPTION OF SUPPORT UNITS	6
4.5 TEST FACILITY	7
4.6 TEST LOCATION	7
4.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
4.8 TEST INSTRUMENTS LIST	8
5 TEST RESULTS AND MEASUREMENT DATA.....	10
5.1 ANTENNA REQUIREMENT:	10
5.2 CONDUCTED EMISSIONS	11
5.3 CONDUCTED PEAK OUTPUT POWER.....	14
5.4 20dB OCCUPY BANDWIDTH.....	17
5.5 CARRIER FREQUENCIES SEPARATION	20
5.6 HOPPING CHANNEL NUMBER	23
5.7 DWELL TIME	25
5.8 BAND EDGE	28
5.9 RF ANTENNA CONDUCTED SPURIOUS EMISSIONS	31
5.10 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	34
5.11 RADIATED EMISSION	35
5.11.1 Radiated emission below 1GHz.....	37
5.11.2 Transmitter emission above 1GHz.....	39
5.11.3 Band edge (Radiated Emission)	42-49



3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.



4 General Information

4.1 Client Information

Applicant:	Accessory Workshop LLC
Address of Applicant:	16 Arcadian Ave. Suite C7, Paramus, New Jersey United States 07652
Manufacturer:	Huizhou Weide Electronics Co., Ltd.
Address of Manufacturer:	Jimadi Industrial Area, Boluo County, Huizhou, Guangdong 516100, China
Factory:	Huizhou Weide Electronics Co., Ltd.
Address of Factory:	Jimadi Industrial Area, Boluo County, Huizhou, Guangdong 516100, China

4.2 General Description of E.U.T.

Product Name:	Bluetooth keyboard
Model No.:	TY-109A
Trade mark:	Typad
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK
Antenna Type:	PCB printing
Test software:	Bluetool (manufacturer declare)
Antenna gain:	0dBi
Battery:	502243 470mAh 3.7V
EUT power supply:	PC USB port supply (charge)
USB line:	<3M



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel for testing see below:

Channel	Frequency
Lowest channel	2402MHz
Middle channel	2441MHz
Highest channel	2480MHz



4.3 E.U.T Operation mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1001mbar
Test mode:	
PC charge + Bluetooth:	Keep the EUT communicate with other Bluetooth device, and PC charge to EUT.
Bluetooth:	Keep the EUT communicate with other Bluetooth device.
Transmitting:	Keep the EUT in transmitting mode at low channel, middle channel and high channel

4.4 Description of Support Units

The EUT was tested with associated equipment as below:

Description	Manufacturer	Model No.
PC	DELL	OPTIPLEX 755
LCD-displaying	DELL	E1909WF
KEYBOARD	DELL	SK-8115
MOUSE	DELL	MOC5110
PC	DELL	OPTIDLEX 330
LCD-displaying	DELL	SP2208WFPT
KEYBOARD	DELL	SK-8115
MOUSE	DELL	MOC5110
Coder	HengTong ELECTRON	HT4000
Printer	Canon	BJC-1000SP
Dongle	Provided by client	N/A



4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, March 16, 2011

Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

4.7 Other Information Requested by the Customer

None.

**4.8 Test Instruments list**

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2012-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2012-05-26
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2012-05-29
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2011-11-09
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2011-11-09
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2011-11-09
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2012-05-26
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2011-10-27
11	Band filter	Amindeon	82346	SEL0094	2012-05-26

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2012-06-10
2	Two-Line V-Network	ETS-LINDGREN	3816/2	SEL0021	2012-05-26
3	LISN	Rohde & Schwarz	ENV216	SEL0152	2011-10-27
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2012-05-26
5	Coaxial Cable	SGS	N/A	SEL0024	2012-05-29




RF conducted					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2011-10-27
2	Coaxial cable	SGS	N/A	SEL0028	2012-05-29

General used equipment					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2011-11-04
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-03-10
3	Barometer	ChangChun	DYM3	SEL0088	2012-05-18

5 Test results and Measurement Data

5.1 Antenna requirement:

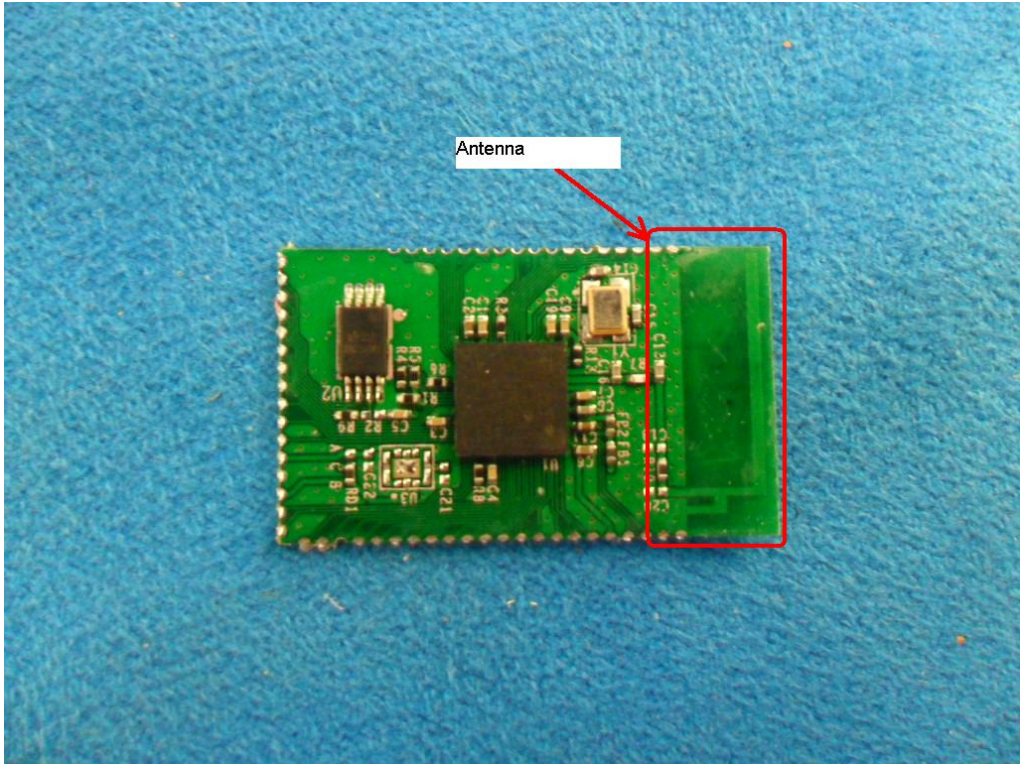Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p> <p>15.247(c) (1)(i) requirement: <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i></p>	
E.U.T Antenna:	
<p>The antenna is integrated on the main PCB and no consideration of replacement. The best gain of the antenna is 0dBi.</p>	
	



5.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150KHz to 30MHz			
Class / Severity:	Class B			
Limit:	Frequency range (MHz)	Limit (dBuV)		
		Quasi-peak	Average	
		0.15-0.5	66 to 56*	56 to 46*
		0.5-5	56	46
		5-30	60	50
* Decreases with the logarithm of the frequency.				
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.).The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.			
Test setup:	<div><div><div><div><div>Reference Plane</div><div>LISN</div><div>AUX Equipment</div><div>E.U.T</div><div>Test table/Insulation plane</div></div><div><div>40cm</div><div>80cm</div></div><div><div>LISN</div><div>Filter</div><div>AC power</div><div>EMI Receiver</div></div></div></div><div><div>Remark:</div><div>E.U.T: Equipment Under Test</div><div>LISN: Line Impedance Stabilization Network</div><div>Test table height=0.8m</div></div></div>			
Test Instruments:	Refer to section 4.8 for details			
Test mode:	PC charge + Bluetooth mode			
Test results:	Pass			

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

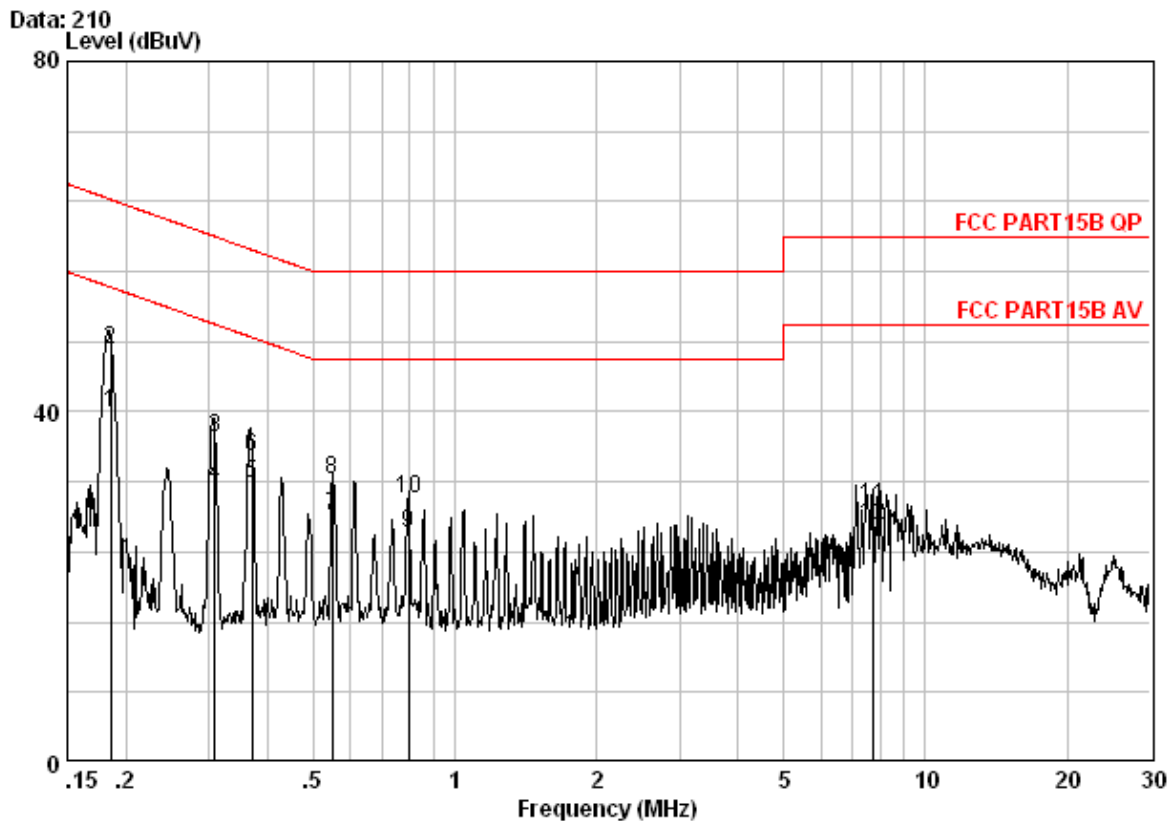


	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18541	0.04	9.60	30.25	39.89	54.24	-14.35	Average
2	0.18541	0.04	9.60	37.55	47.19	64.24	-17.05	QP
3	0.30834	0.05	9.60	27.42	37.07	60.02	-22.94	QP
4	0.30834	0.05	9.60	21.85	31.50	50.02	-18.51	Average
5	0.37117	0.05	9.60	22.14	31.79	48.47	-16.68	Average
6	0.37117	0.05	9.60	25.12	34.78	58.47	-23.70	QP
7	0.54934	0.06	9.63	18.52	28.21	46.00	-17.79	Average
8	0.54934	0.06	9.63	22.55	32.23	56.00	-23.77	QP
9	0.79600	0.07	9.70	16.38	26.15	46.00	-19.85	Average
10	0.79600	0.07	9.70	20.24	30.01	56.00	-25.99	QP
11	7.769	0.20	9.87	19.11	29.19	60.00	-30.81	QP
12	7.769	0.20	9.87	16.95	27.02	50.00	-22.98	Average

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Neutral line:

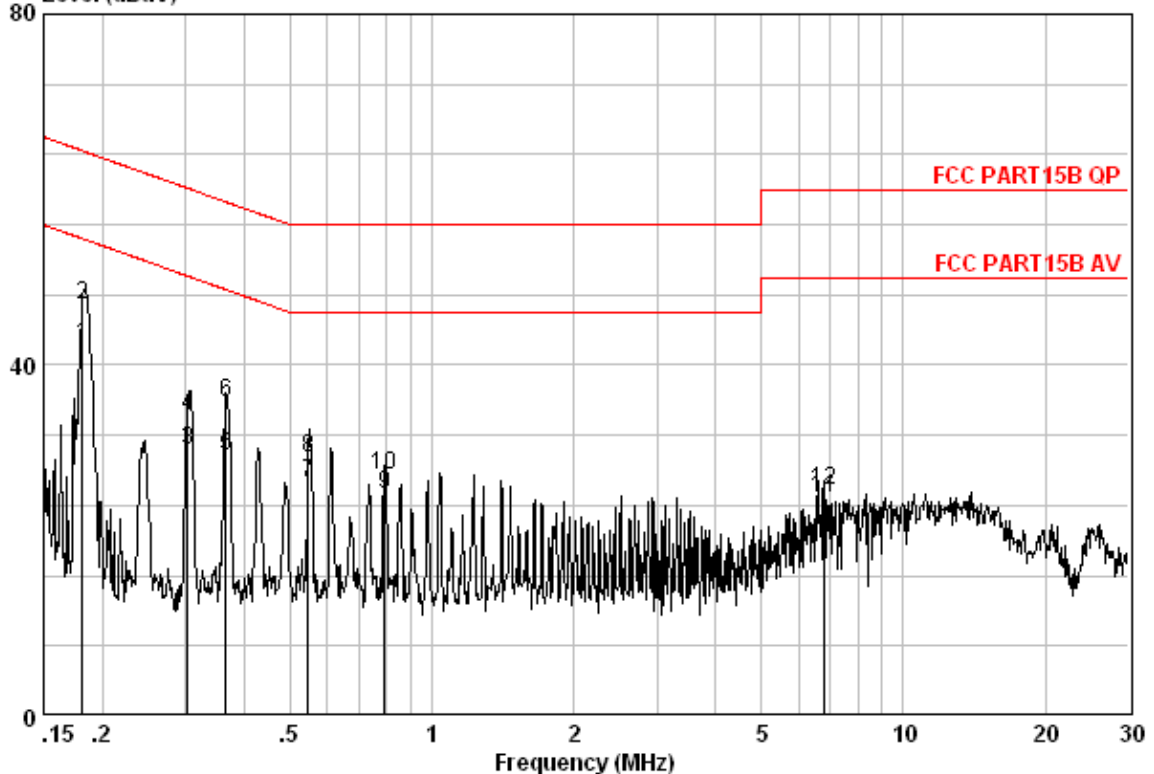
Data: 211
Level (dBuV)


	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18152	0.04	9.60	32.58	42.22	54.42	-12.20	Average
2	0.18152	0.04	9.60	37.25	46.89	64.42	-17.52	QP
3	0.30348	0.05	9.60	20.56	30.21	50.15	-19.94	Average
4	0.30348	0.05	9.60	24.47	34.12	60.15	-26.02	QP
5	0.36531	0.05	9.60	19.96	29.62	48.61	-18.99	Average
6	0.36531	0.05	9.60	26.09	35.74	58.61	-22.86	QP
7	0.54644	0.06	9.63	16.85	26.54	46.00	-19.46	Average
8	0.54644	0.06	9.63	19.73	29.42	56.00	-26.58	QP
9	0.79180	0.07	9.70	15.58	25.35	46.00	-20.65	Average
10	0.79180	0.07	9.70	17.70	27.47	56.00	-28.53	QP
11	6.805	0.19	9.80	14.85	24.84	50.00	-25.16	Average
12	6.805	0.19	9.80	15.72	25.71	60.00	-34.29	QP

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

5.3 Conducted Peak Output Power

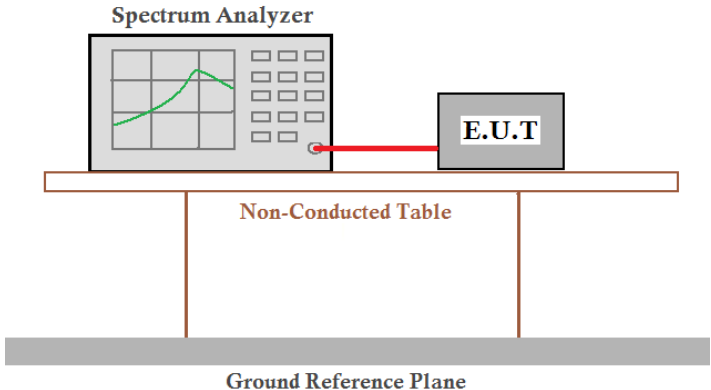Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2009
Limit:	30dBm
Test setup:	 <p><i>Remark:</i> Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p>
Test Instruments:	Refer to section 4.8 for details
Test state:	Non-hopping transmitting with all kinds of modulation.
Test results:	Pass


Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-0.60	30.00	Pass
Middle	-0.36	30.00	Pass
Highest	-0.32	30.00	Pass




Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

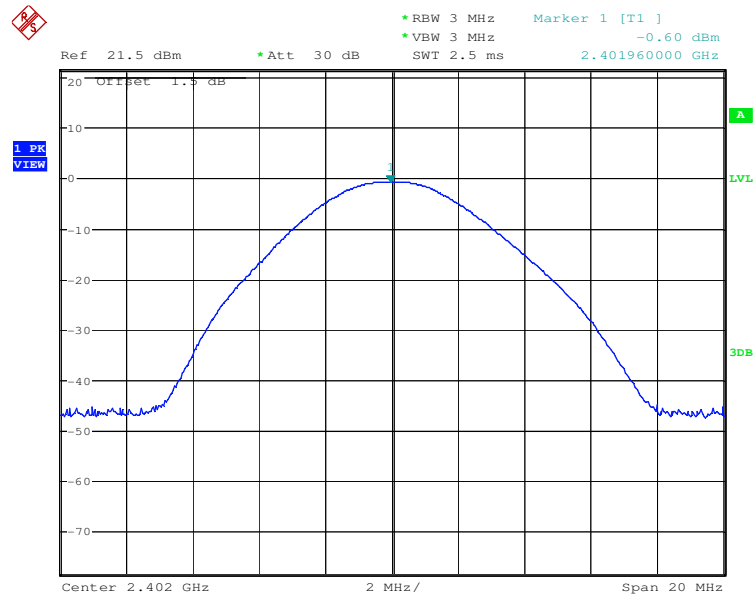

Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

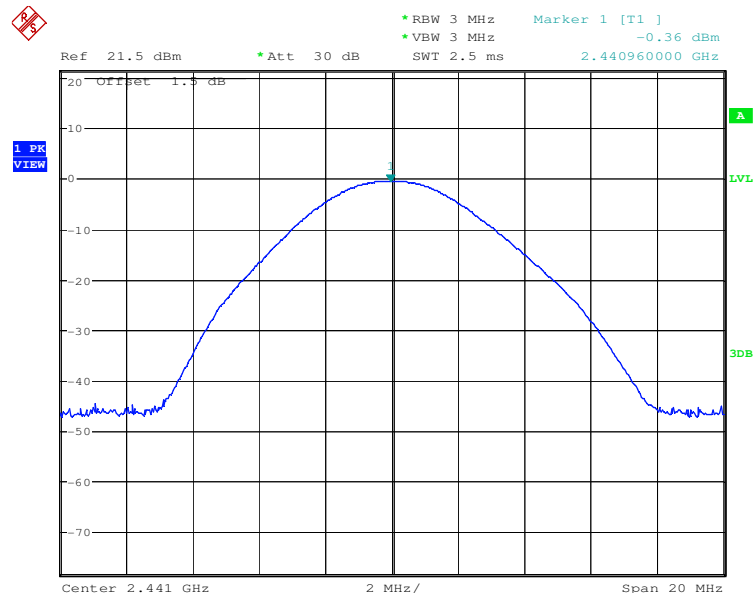




SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201


Page : 16 of 49

Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

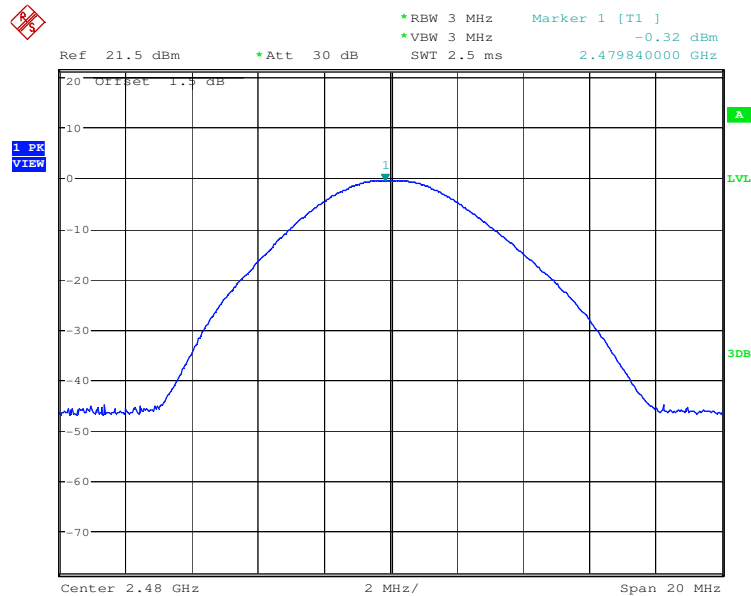

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.4 20dB Occupy Bandwidth

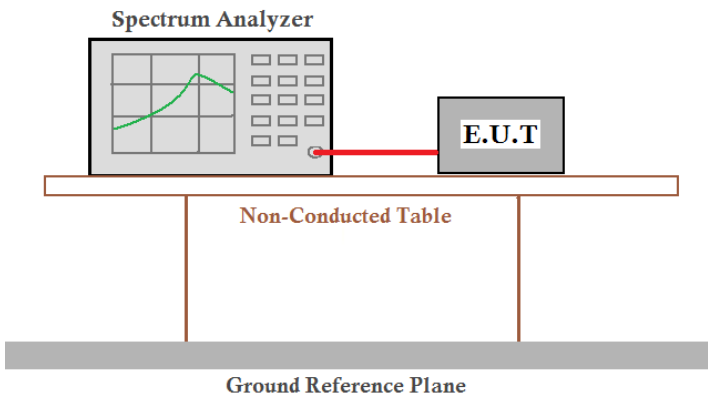Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Limit:	NA
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Test state:	Non-hopping transmitting with all kind of modulation.
Test results:	Pass

Measurement Data

Test channel	20dB Occupy Bandwidth (KHz)
	GFSK
Lowest	1146
Middle	1140
Highest	1146




SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201


Page : 18 of 49

Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

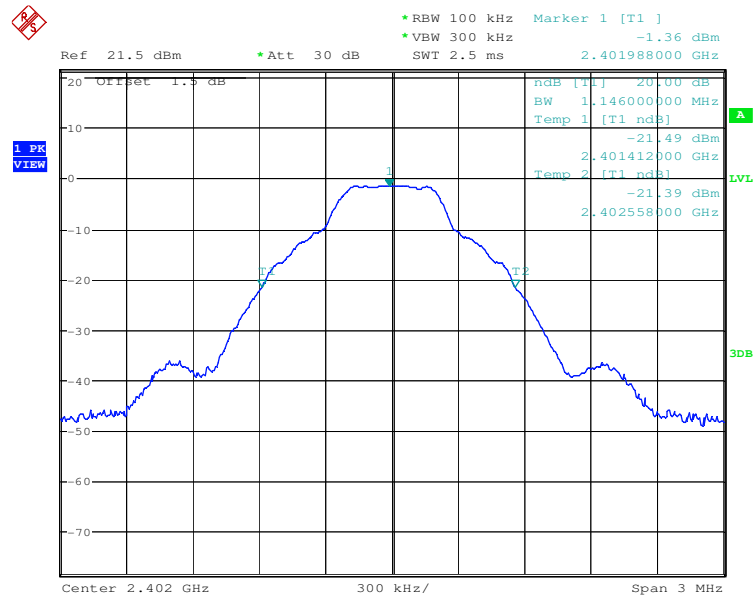

Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

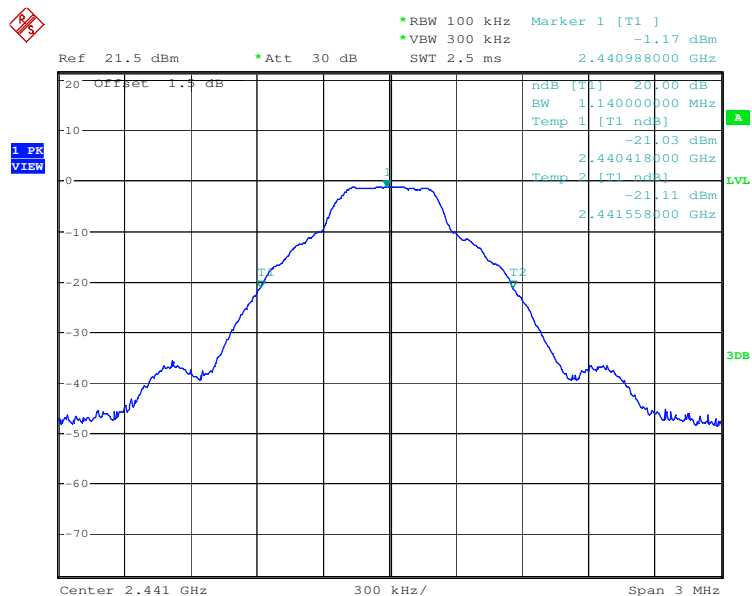

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201


Page : 19 of 49

Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

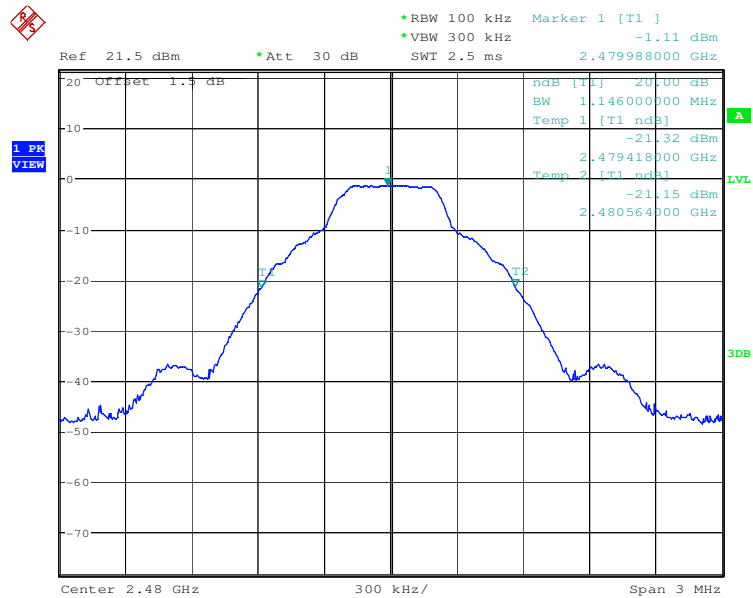

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.5 Carrier Frequencies Separation

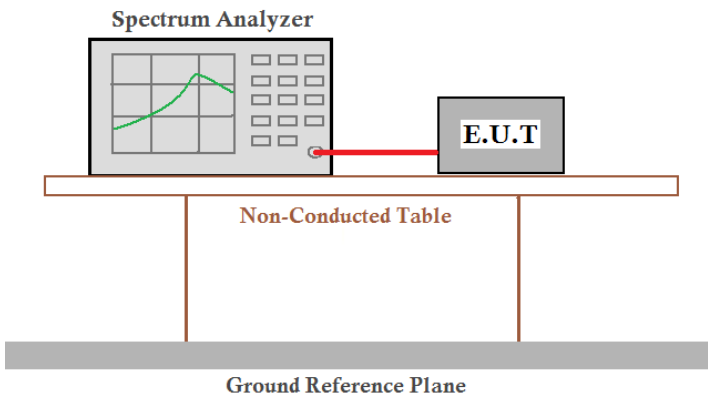Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Test state:	Hopping transmitting with all kind of modulation.
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test results:	Pass

Measurement Data

GFSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1005	≥ 764.0	Pass
Middle	1000	≥ 764.0	Pass
Highest	1000	≥ 764.0	Pass

Note: According to section 5.4,

Mode	20dB bandwidth (KHz) (worse case)	Limit (KHz) (Carrier Frequencies Separation)
GFSK	1146	764.0






SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201


Page : 22 of 49

Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

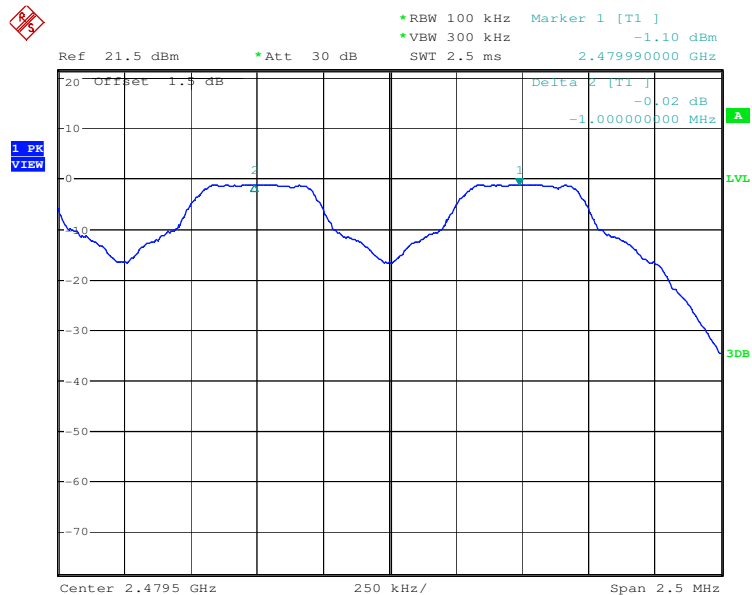

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.6 Hopping Channel Number

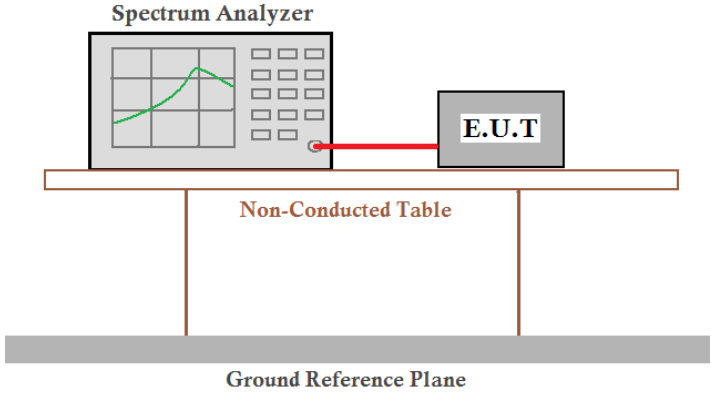Test Requirement:	FCC Part15 C Section 15.247 (b)
Test Method:	ANSI C63.10:2009
Requirement:	≥ 75 channels
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Test state:	Hopping transmitting with all kind of modulation.
Test results:	Pass


Measurement Data

Mode	Hopping channel	Requirement
GFSK	79	≥ 75




Test plot as follows

Test mode:	GFSK	
------------	------	--

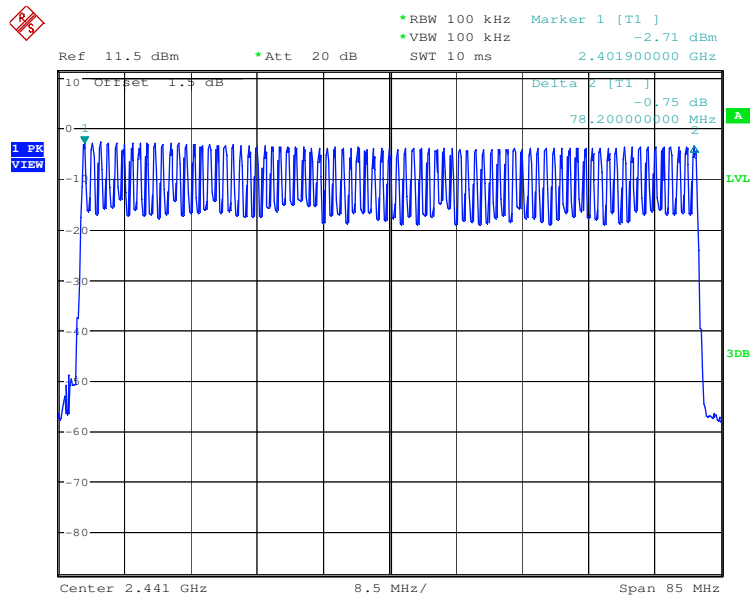

5.7 Dwell Time

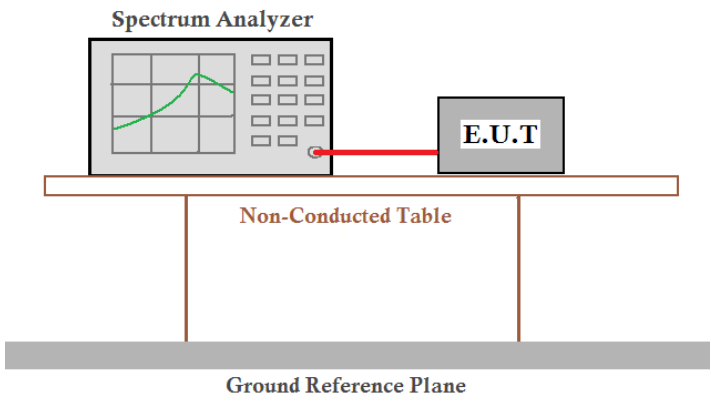Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Limit:	≤ 0.4 Second
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Test state:	Hopping transmitting with all kind of modulation.
Test results:	Pass

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.1584	≤ 0.4
	DH3	0.2808	≤ 0.4
	DH5	0.3198	≤ 0.4

Test Result:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as blow

DH1 time slot = $0.495(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 158.4 \text{ ms}$

DH3 time slot = $1.755(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 280.8 \text{ ms}$

DH5 time slot = $3.000(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 319.8 \text{ ms}$




SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201


Page : 27 of 49

Test mode:	GFSK	Test Packet:	DH5
------------	------	--------------	-----

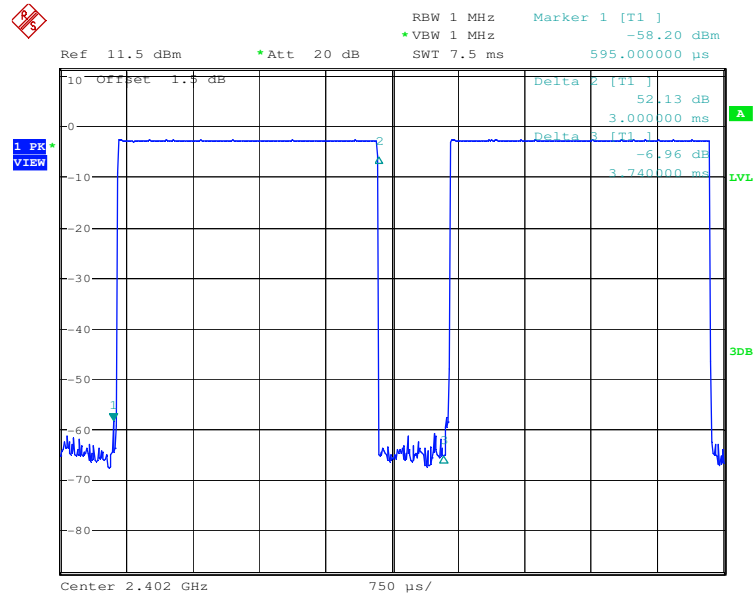

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.8 Band Edge

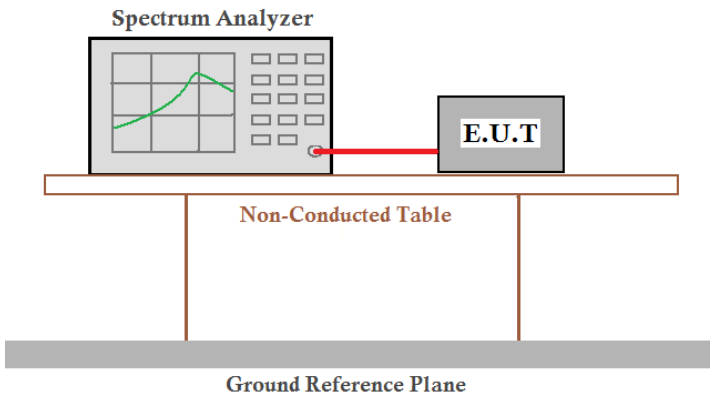Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p><i>Remark:</i> Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p>
Test Instruments:	Refer to section 4.8 for details
Test state:	Hopping transmitting with all kinds of modulation.
Test results:	Pass





SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201

Page : 29 of 49

Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

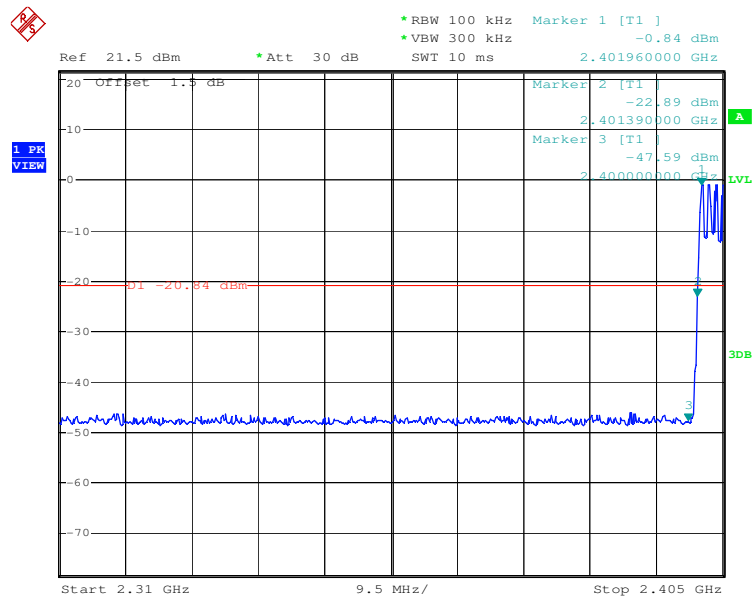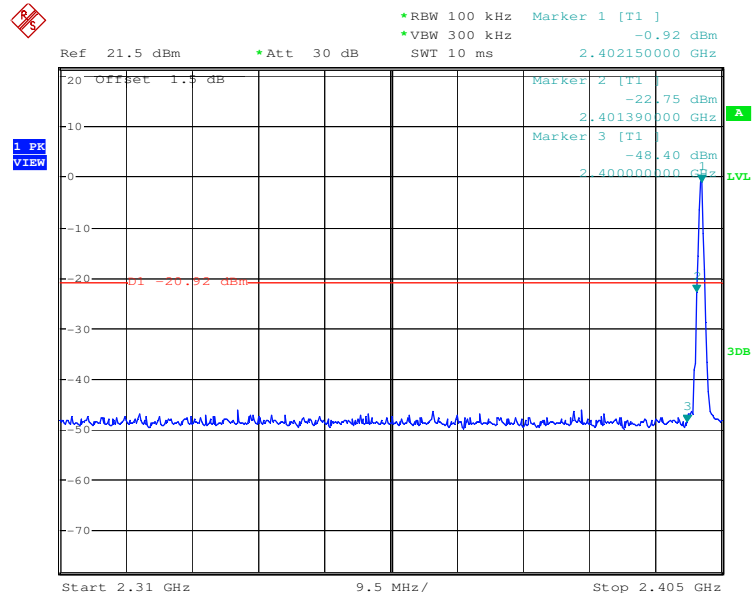

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201


Page : 30 of 49

Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

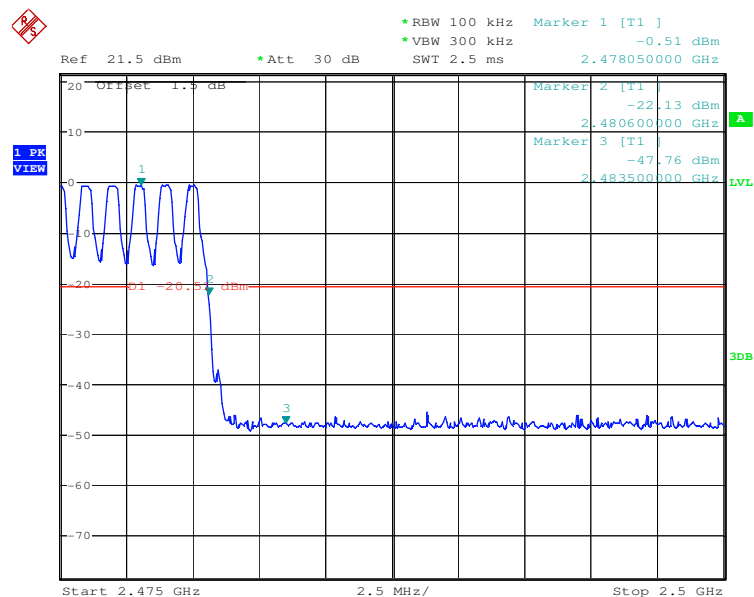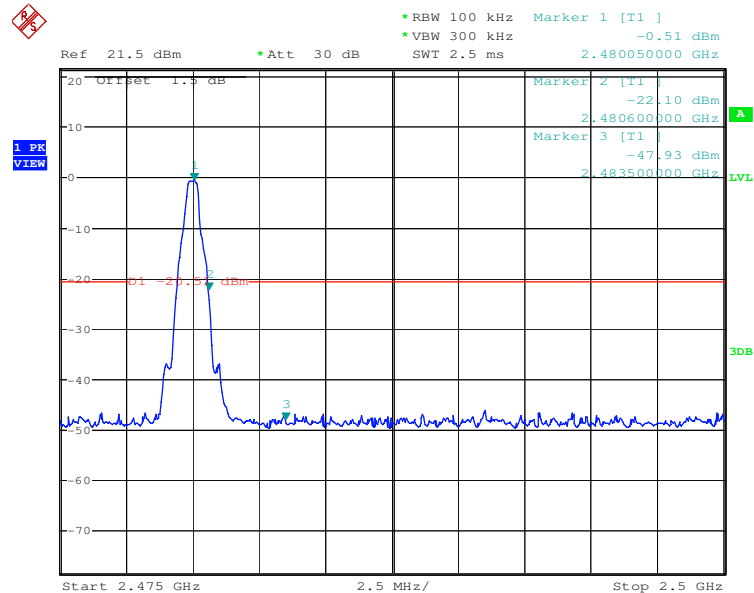

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.9 RF Antenna Conducted spurious emissions

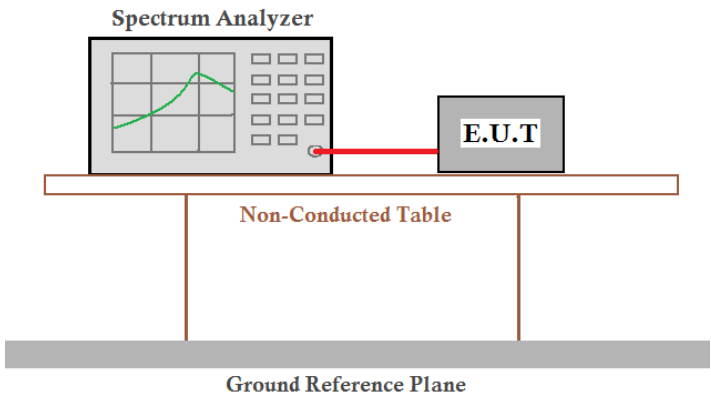Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p><i>Remark:</i> Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p>
Test Instruments:	Refer to section 4.8 for details
Test results:	Pass




SGS-CSTC Standards Technical Services Ltd.


Report No.: SZEM110800323201

Page : 32 of 49

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

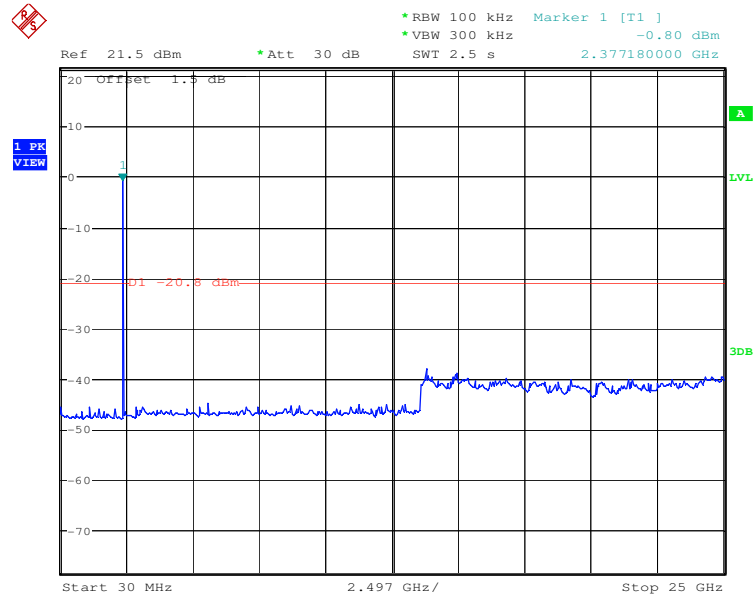

Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

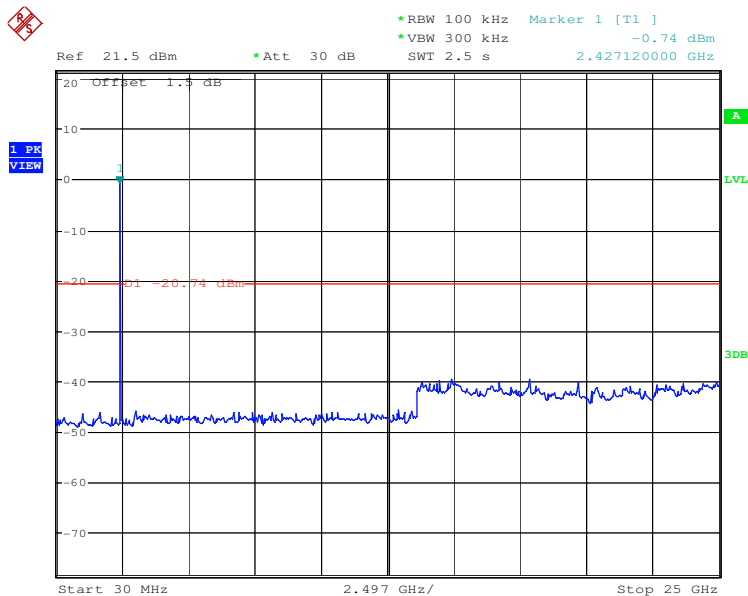

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201



Page : 33 of 49

Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

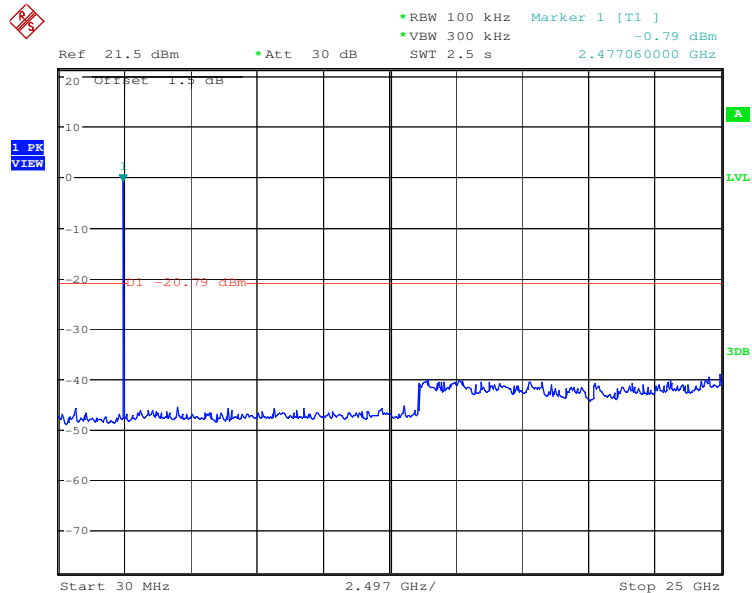

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


5.10 Pseudorandom Frequency Hopping Sequence

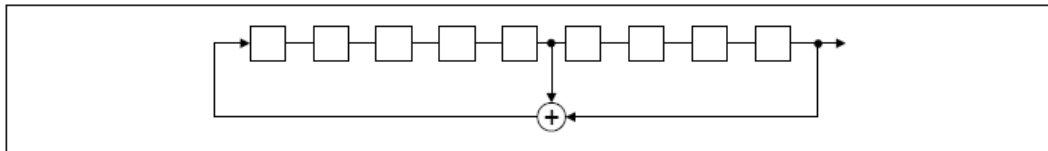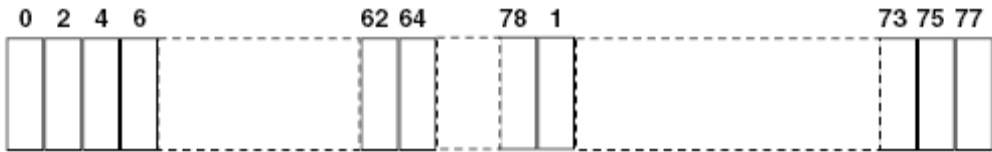Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="300 996 1353 1146" data-label="Diagram">  </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="277 1249 1273 1400" data-label="Diagram">  </div> <p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	



5.11 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2009				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:					
	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:					
	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
74.0			Peak Value		
Test Procedure:	1. The EUT is placed on a turntable, which is 0.8m above ground plane. 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. 3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance. 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. 6. Repeat above procedures until the measurements for all frequencies are complete. 7. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.				
Test Instruments:	Refer to section 4.8 for details				
Test mode:	Bluetooth mode and PC charge + Bluetooth mode Pre-scan was performed on the EUT on above modes, and then found The worst case mode is Bluetooth mode. Only the worst case data was displayed.				
Test results:	Pass				

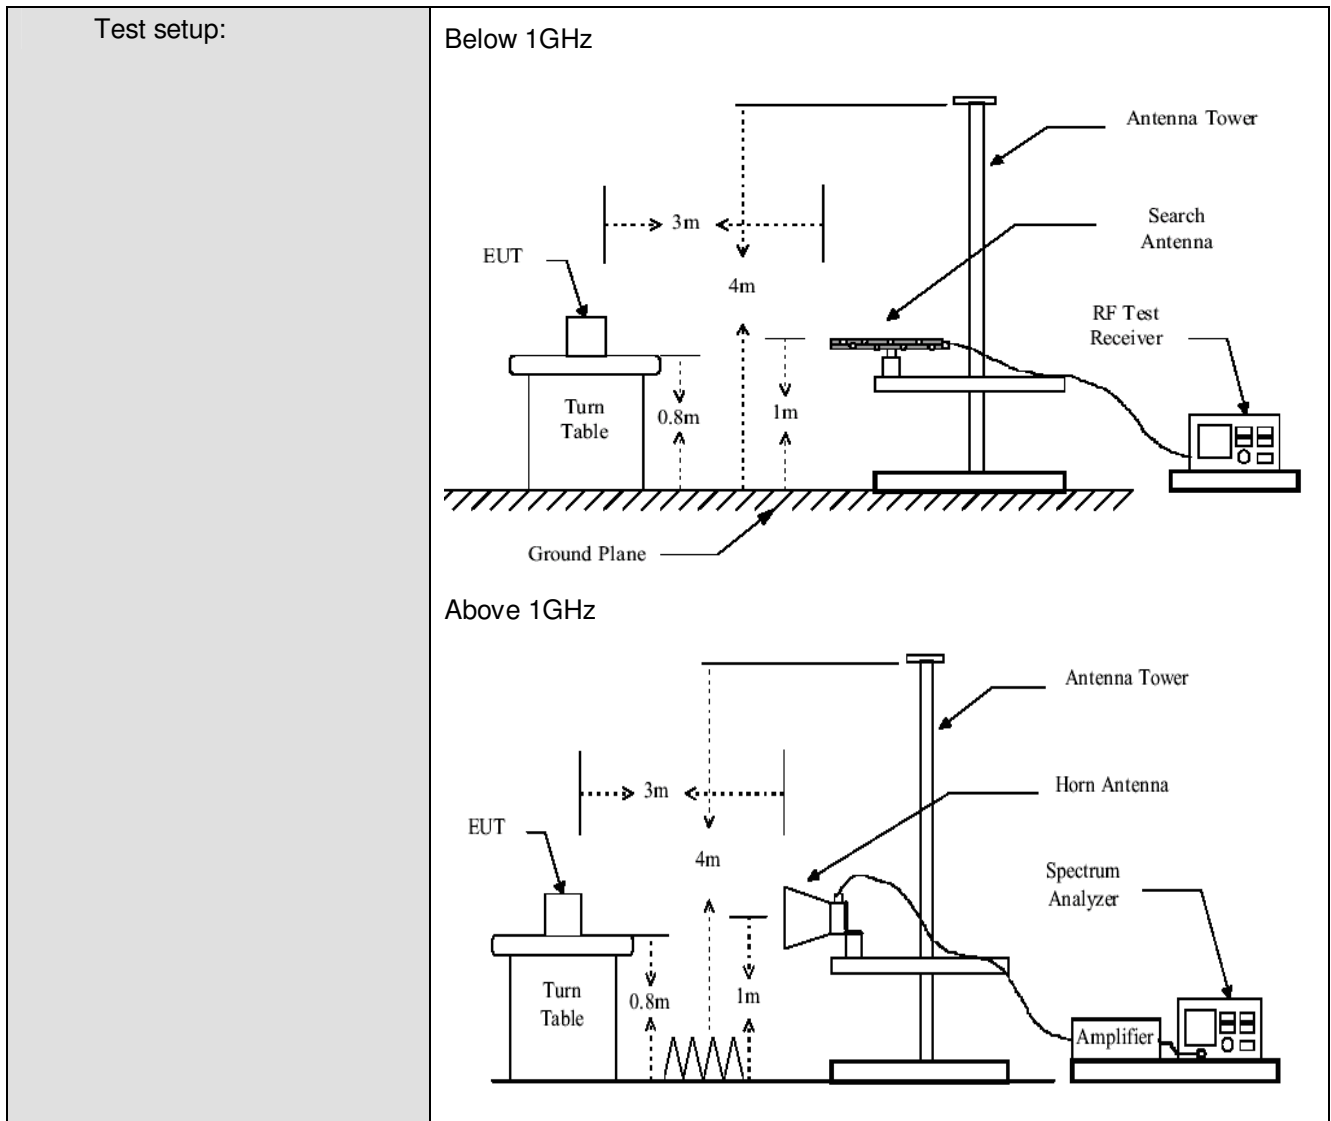


Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$

5.11.1 Radiated emission below 1GHz

Vertical

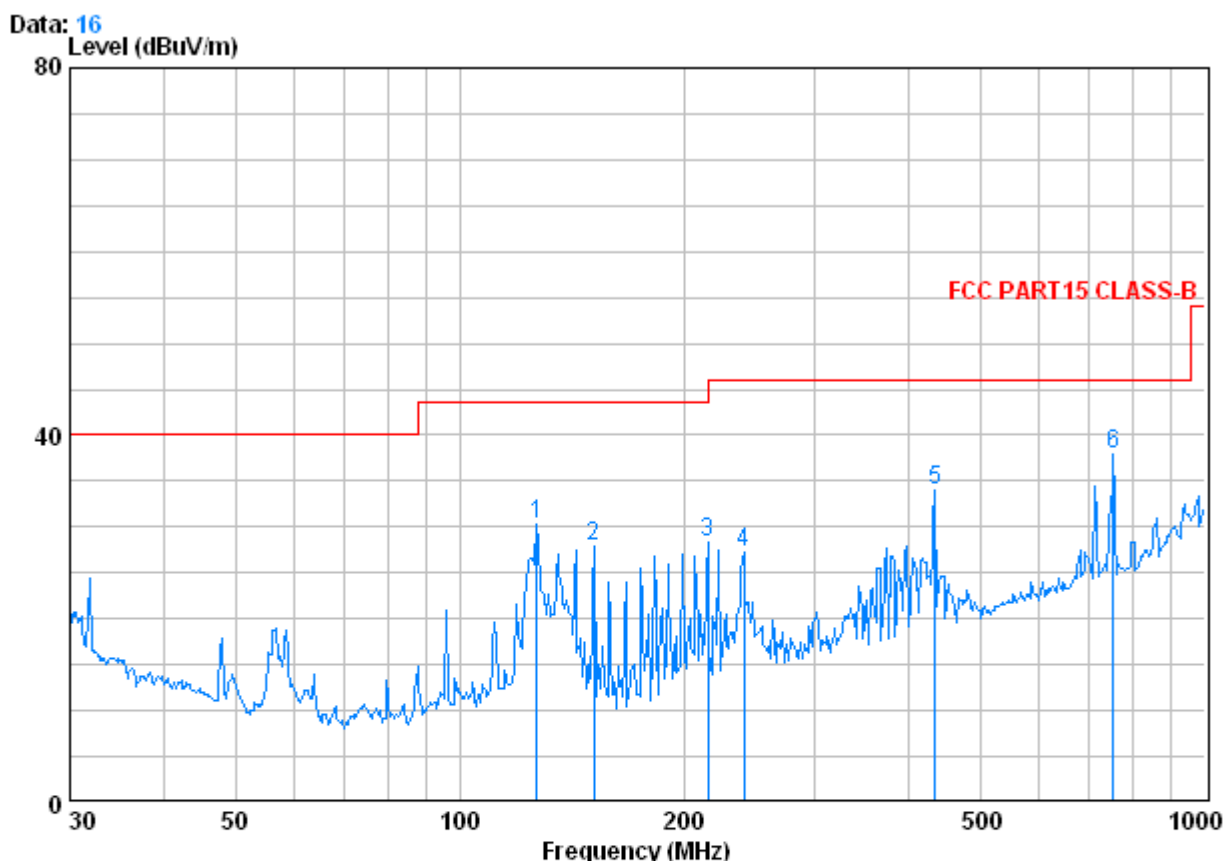


		CableAntenna Preamp			Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	126.772	1.27	7.76	27.03	48.40	30.41	40.00	-9.59
2	151.597	1.32	9.11	26.90	44.36	27.89	40.00	-12.11
3	215.268	1.49	11.01	26.65	42.39	28.25	40.00	-11.75
4	240.830	1.63	12.01	26.56	40.09	27.17	47.00	-19.83
5	434.065	2.35	16.59	27.35	42.33	33.90	47.00	-13.10
6	752.743	3.07	21.73	27.35	40.39	37.84	47.00	-9.16



Horizontal

Data: 15
Level (dBuV/m)

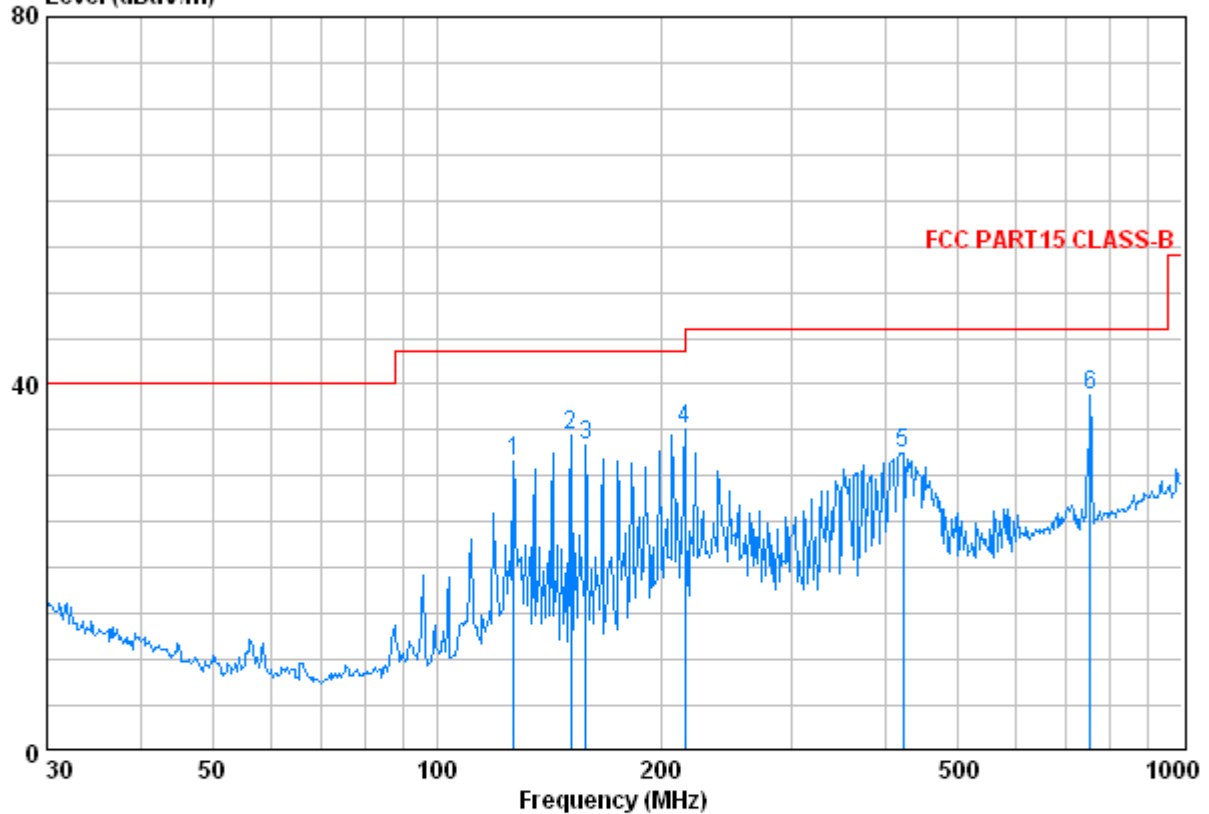

		Cable	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	126.772	1.27	7.76	27.03	49.69	31.69	40.00	-8.31
2	151.597	1.32	9.11	26.90	50.89	34.42	40.00	-5.58
3	158.668	1.33	9.53	26.86	49.45	33.45	40.00	-6.55
4	215.268	1.49	11.01	26.65	49.16	35.02	40.00	-4.98
5	422.058	2.30	16.39	27.27	41.13	32.54	47.00	-14.46
6	752.743	3.07	21.73	27.35	41.39	38.84	47.00	-8.16



5.11.2 Transmitter emission above 1GHz

Test mode:		GFSK		Test channel:		Lowest		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Antenna polarization	
4803.910	4.69	34.70	41.63	52.18	49.94	74.00	-24.06	Vertical	
6334.500	5.21	36.10	40.63	50.79	51.47	74.00	-22.53	Vertical	
7205.960	5.77	35.88	39.87	50.50	52.28	74.00	-21.72	Vertical	
8837.250	6.16	36.47	38.47	48.04	52.20	74.00	-21.80	Vertical	
10670.250	6.14	38.37	37.73	46.09	52.87	74.00	-21.13	Vertical	
12174.250	6.51	39.07	38.35	47.31	54.54	74.00	-19.46	Vertical	
4804.030	4.69	34.70	41.63	55.20	52.96	74.00	-21.04	Horizontal	
6475.500	5.25	36.26	40.51	51.14	52.14	74.00	-21.86	Horizontal	
7206.040	5.77	35.88	39.87	51.43	53.21	74.00	-20.79	Horizontal	
10059.250	5.99	37.78	37.47	47.51	53.81	74.00	-20.19	Horizontal	
11316.500	6.30	38.44	37.99	47.15	53.90	74.00	-20.10	Horizontal	
12538.500	6.61	39.42	38.50	47.93	55.46	74.00	-18.54	Horizontal	

Test mode:		GFSK		Test channel:		Lowest		Remark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamplifier factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Antenna polarization	
4803.910	4.69	34.70	41.63	45.84	43.60	54.00	-10.40	Vertical	
6334.500	5.21	36.10	40.63	36.78	37.46	54.00	-16.54	Vertical	
7205.960	5.77	35.88	39.87	37.46	39.24	54.00	-14.76	Vertical	
8837.250	6.16	36.47	38.47	34.28	38.44	54.00	-15.56	Vertical	
10670.250	6.14	38.37	37.73	32.87	39.65	54.00	-14.35	Vertical	
12174.250	6.51	39.07	38.35	34.44	41.67	54.00	-12.33	Vertical	
4804.030	4.69	34.70	41.63	49.09	46.85	54.00	-7.15	Horizontal	
6475.500	5.25	36.26	40.51	37.13	38.13	54.00	-15.87	Horizontal	
7206.040	5.77	35.88	39.87	41.77	43.55	54.00	-10.45	Horizontal	
10059.250	5.99	37.78	37.47	33.17	39.47	54.00	-14.53	Horizontal	
11316.500	6.30	38.44	37.99	33.14	39.89	54.00	-14.11	Horizontal	
12538.500	6.61	39.42	38.50	34.26	41.79	54.00	-12.21	Horizontal	



SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201

Page : 40 of 49

Test mode:		GFSK		Test channel:		Middle		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
4881.990	4.72	34.59	41.68	52.29	49.92	74.00	-24.08	Vertical	
6769.250	5.33	36.04	40.25	51.26	52.38	74.00	-21.62	Vertical	
7322.850	5.92	35.93	39.77	50.46	52.54	74.00	-21.46	Vertical	
9718.500	5.98	37.42	37.70	46.76	52.46	74.00	-21.54	Vertical	
10999.250	6.22	38.50	37.86	46.95	53.81	74.00	-20.19	Vertical	
12597.250	6.62	39.44	38.52	47.81	55.35	74.00	-18.65	Vertical	
4882.030	4.72	34.59	41.68	52.08	49.71	74.00	-24.29	Horizontal	
6017.250	5.13	35.72	40.91	51.25	51.19	74.00	-22.81	Horizontal	
7322.760	5.92	35.93	39.77	50.21	52.29	74.00	-21.71	Horizontal	
9060.500	6.14	36.66	38.27	47.94	52.47	74.00	-21.53	Horizontal	
10435.250	6.08	38.22	37.63	46.38	53.05	74.00	-20.95	Horizontal	
11927.500	6.45	38.83	38.24	47.49	54.53	74.00	-19.47	Horizontal	

Test mode:		GFSK		Test channel:		Middle		Remark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
4881.990	4.72	34.59	41.68	45.37	43.00	54.00	-11.00	Vertical	
6769.250	5.33	36.04	40.25	36.63	37.75	54.00	-16.25	Vertical	
7322.850	5.92	35.93	39.77	38.19	40.27	54.00	-13.73	Vertical	
9718.500	5.98	37.42	37.70	33.29	38.99	54.00	-15.01	Vertical	
10999.250	6.22	38.50	37.86	32.73	39.59	54.00	-14.41	Vertical	
12597.250	6.62	39.44	38.52	34.42	41.96	54.00	-12.04	Vertical	
4882.030	4.72	34.59	41.68	46.26	43.89	54.00	-10.11	Horizontal	
6017.250	5.13	35.72	40.91	37.19	37.13	54.00	-16.87	Horizontal	
7322.760	5.92	35.93	39.77	42.15	44.23	54.00	-9.77	Horizontal	
9060.500	6.14	36.66	38.27	33.75	38.28	54.00	-15.72	Horizontal	
10435.250	6.08	38.22	37.63	32.47	39.14	54.00	-14.86	Horizontal	
11927.500	6.45	38.83	38.24	34.01	41.05	54.00	-12.95	Horizontal	



"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201

Page : 41 of 49

Test mode:		GFSK		Test channel:		Highest		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
4960.220	4.76	34.46	41.74	51.54	49.02	74.00	-24.98	Vertical	
7439.760	6.04	35.98	39.67	49.47	51.82	74.00	-22.18	Vertical	
8367.250	6.19	36.14	38.87	48.43	51.89	74.00	-22.11	Vertical	
9718.500	5.98	37.42	37.70	46.49	52.19	74.00	-21.81	Vertical	
10940.500	6.21	38.48	37.84	46.08	52.93	74.00	-21.07	Vertical	
12115.500	6.50	39.02	38.32	47.31	54.51	74.00	-19.49	Vertical	
4960.120	4.76	34.46	41.74	52.85	50.33	74.00	-23.67	Horizontal	
6616.500	5.29	36.20	40.38	51.35	52.46	74.00	-21.54	Horizontal	
7439.920	6.04	35.98	39.67	49.63	51.98	74.00	-22.02	Horizontal	
8449.500	6.18	36.18	38.80	49.33	52.89	74.00	-21.11	Horizontal	
10200.250	6.02	37.94	37.53	46.22	52.65	74.00	-21.35	Horizontal	
11598.500	6.37	38.49	38.11	47.88	54.63	74.00	-19.37	Horizontal	

Test mode:		GFSK		Test channel:		Highest		Remark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
4960.220	4.76	34.46	41.74	44.46	41.94	54.00	-12.06	Vertical	
7439.760	6.04	35.98	39.67	37.20	39.55	54.00	-14.45	Vertical	
8367.250	6.19	36.14	38.87	35.20	38.66	54.00	-15.34	Vertical	
9718.500	5.98	37.42	37.70	33.23	38.93	54.00	-15.07	Vertical	
10940.500	6.21	38.48	37.84	32.76	39.61	54.00	-14.39	Vertical	
12115.500	6.50	39.02	38.32	34.03	41.23	54.00	-12.77	Vertical	
4960.120	4.76	34.46	41.74	47.25	44.73	54.00	-9.27	Horizontal	
6616.500	5.29	36.20	40.38	36.53	37.64	54.00	-16.36	Horizontal	
7439.920	6.04	35.98	39.67	40.37	42.72	54.00	-11.28	Horizontal	
8449.500	6.18	36.18	38.80	35.03	38.59	54.00	-15.41	Horizontal	
10200.250	6.02	37.94	37.53	32.79	39.22	54.00	-14.78	Horizontal	
11598.500	6.37	38.49	38.11	33.05	39.80	54.00	-14.20	Horizontal	

Remark: The disturbance above 13GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



5.11.3 Band edge (Radiated Emission)

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Vertical
------------	--------------	---------------	--------	---------	------	----------

Data: 2
Level (dBuV/m)

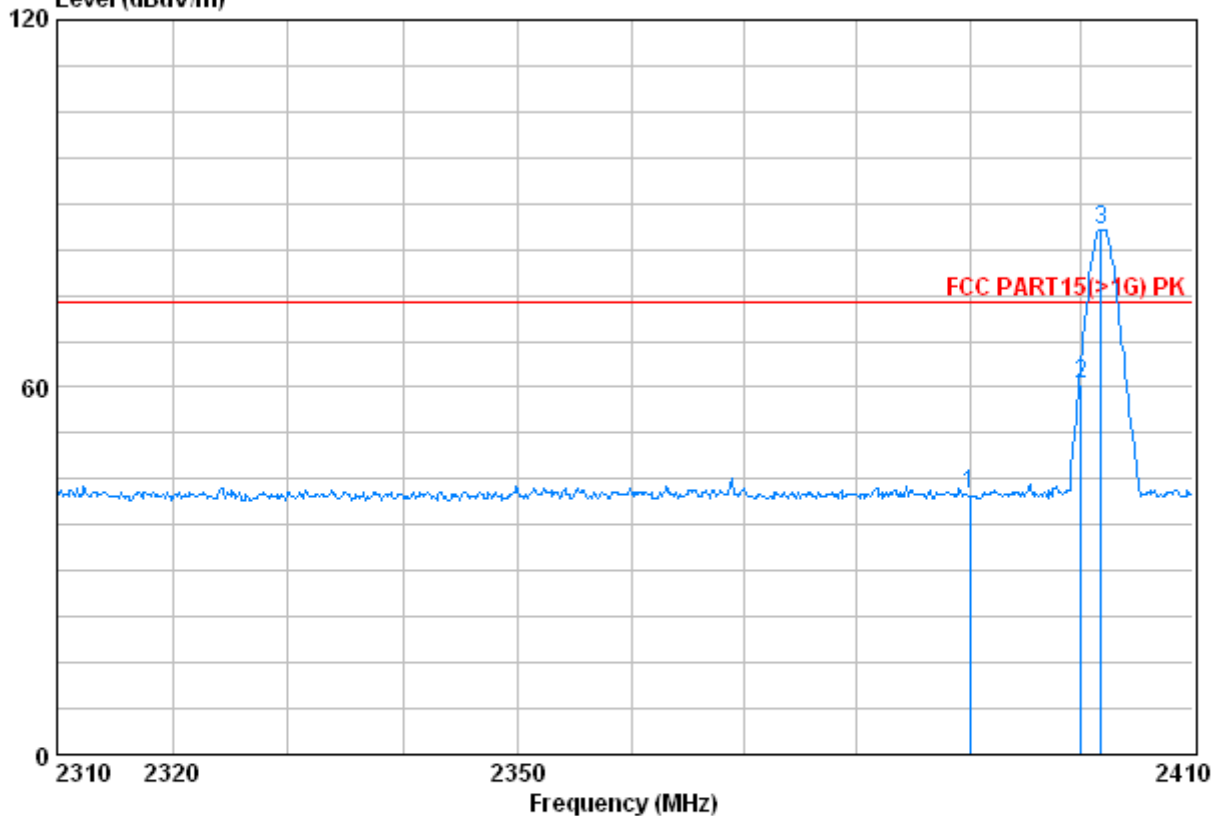

	Freq	Cable Loss	Antenna Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	2.98	32.51	39.85	46.76	42.41	74.00	-31.59	Peak
2	2400.000	2.98	32.51	39.86	64.76	60.39	74.00	-13.61	Peak
3 X	2401.800	2.98	32.51	39.86	89.99	85.62	74.00	11.62	Peak




SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201

Page : 43 of 49

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Horizontal
------------	--------------	---------------	--------	---------	------	------------

Data: 1
Level (dBuV/m)

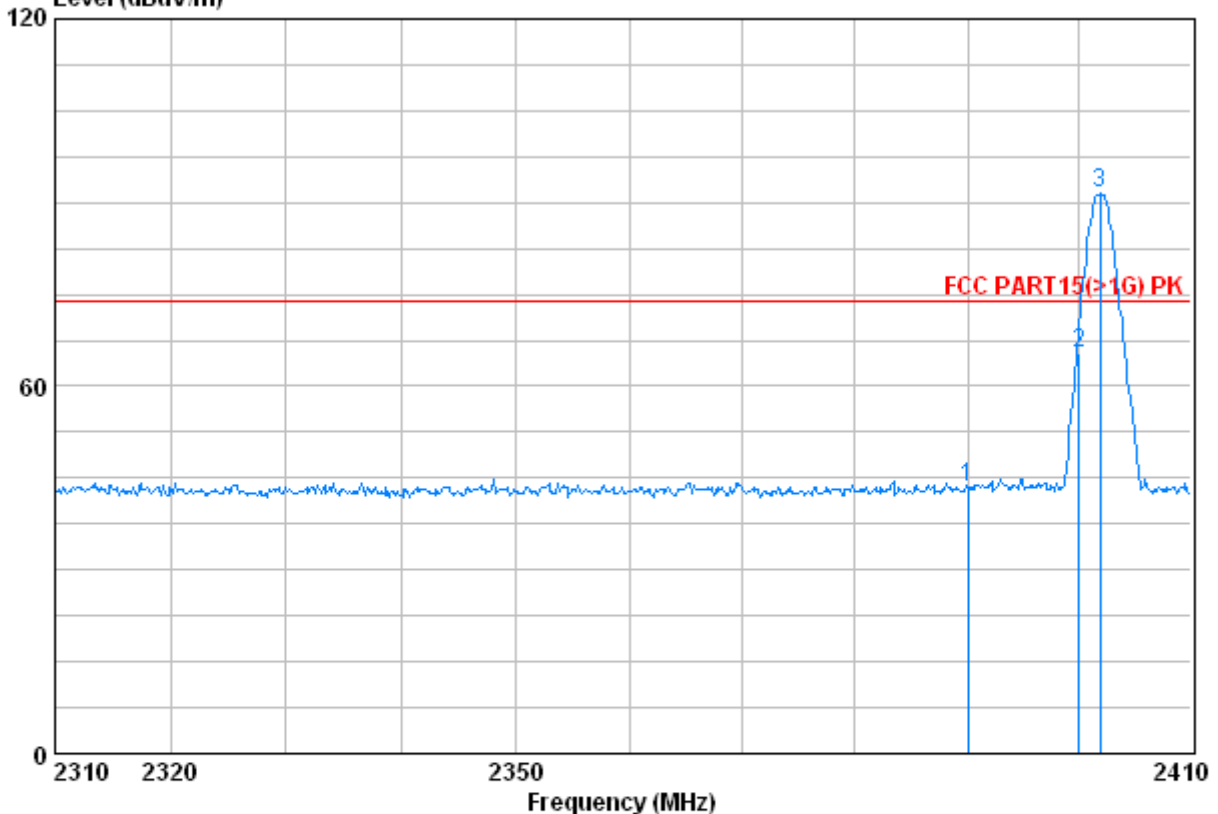

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	2.98	32.51	39.85	47.96	43.61	74.00	-30.39	Peak
2	2400.000	2.98	32.51	39.86	69.89	65.52	74.00	-8.48	Peak
3 X	2401.900	2.98	32.51	39.86	95.79	91.42	74.00	17.42	Peak

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201
Page : 44 of 49

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Average	Vertical
------------	--------------	---------------	--------	---------	---------	----------

Data: 4

Level (dBuV/m)

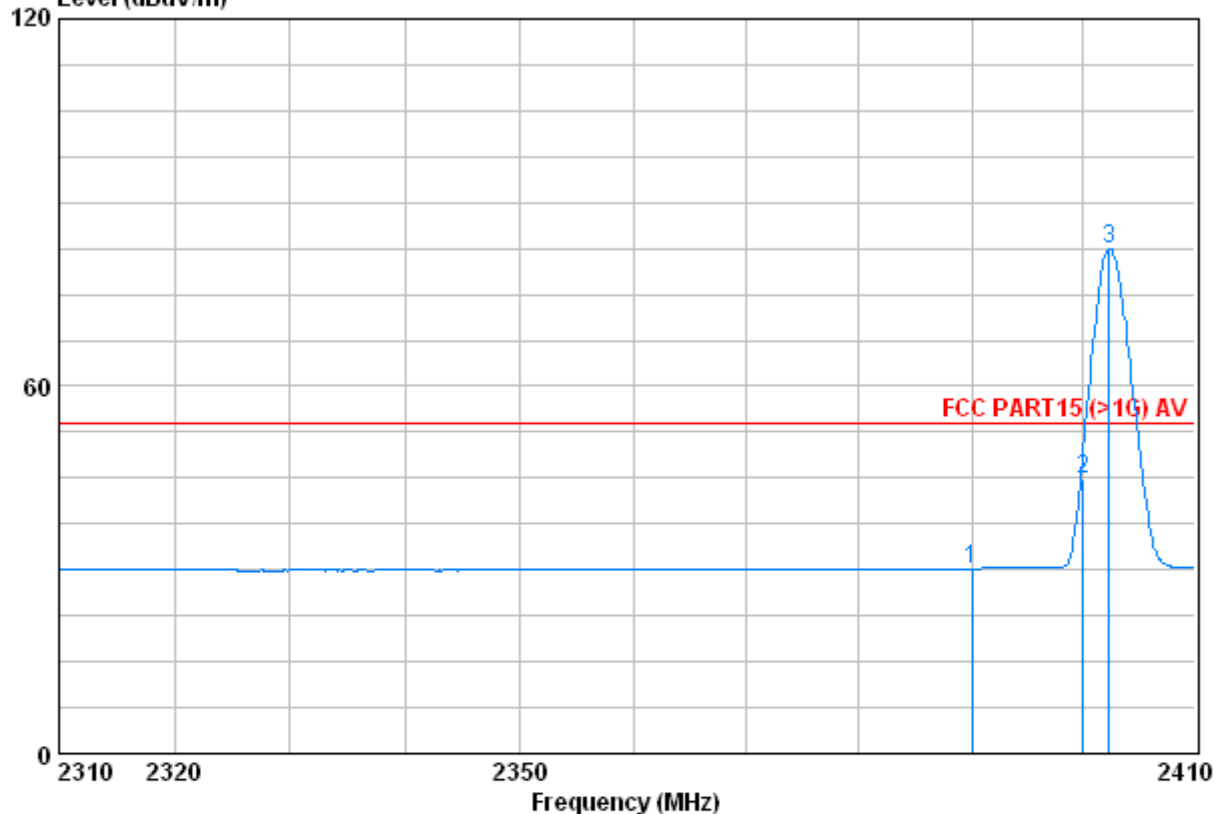

	Freq	CableAntenna Loss	Preamplifier Factor	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dBuV	dBuV/m	dB	
1	2390.000	2.98	32.51	39.85	34.59	54.00	-23.76 Average
2	2400.000	2.98	32.51	39.86	49.20	54.00	-9.17 Average
3 X	2402.300	2.98	32.51	39.86	86.78	54.00	28.42 Average


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201
Page : 45 of 49

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Average	Horizontal
------------	--------------	---------------	--------	---------	---------	------------

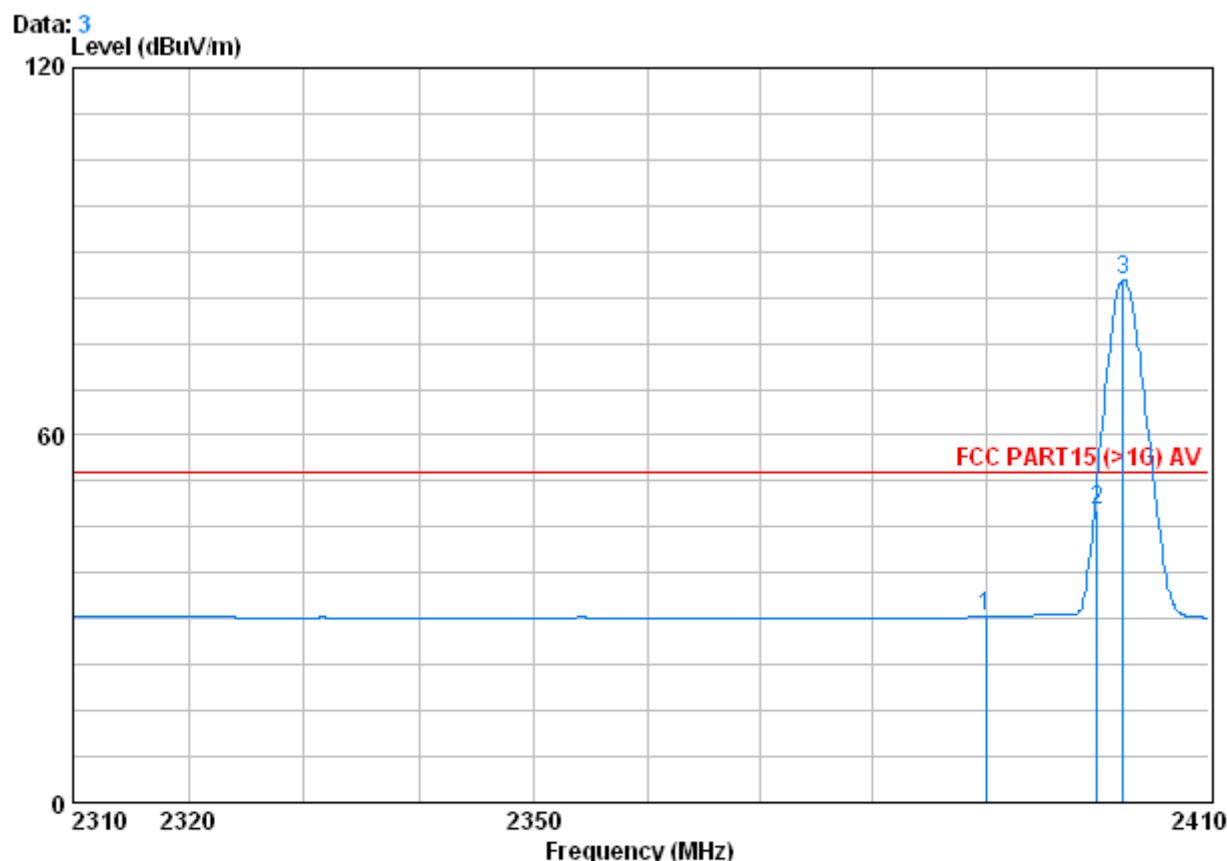

	Freq	Cable Loss	Antenna Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	2.98	32.51	39.85	34.77	30.42	54.00	-23.58	Average
2	2400.000	2.98	32.51	39.86	52.23	47.86	54.00	-6.14	Average
3	2402.300	2.98	32.51	39.86	89.80	85.43	54.00	31.43	Average

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201
Page : 46 of 49

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	Vertical
------------	--------------	---------------	---------	---------	------	----------

Data: 6

Level (dBuV/m)

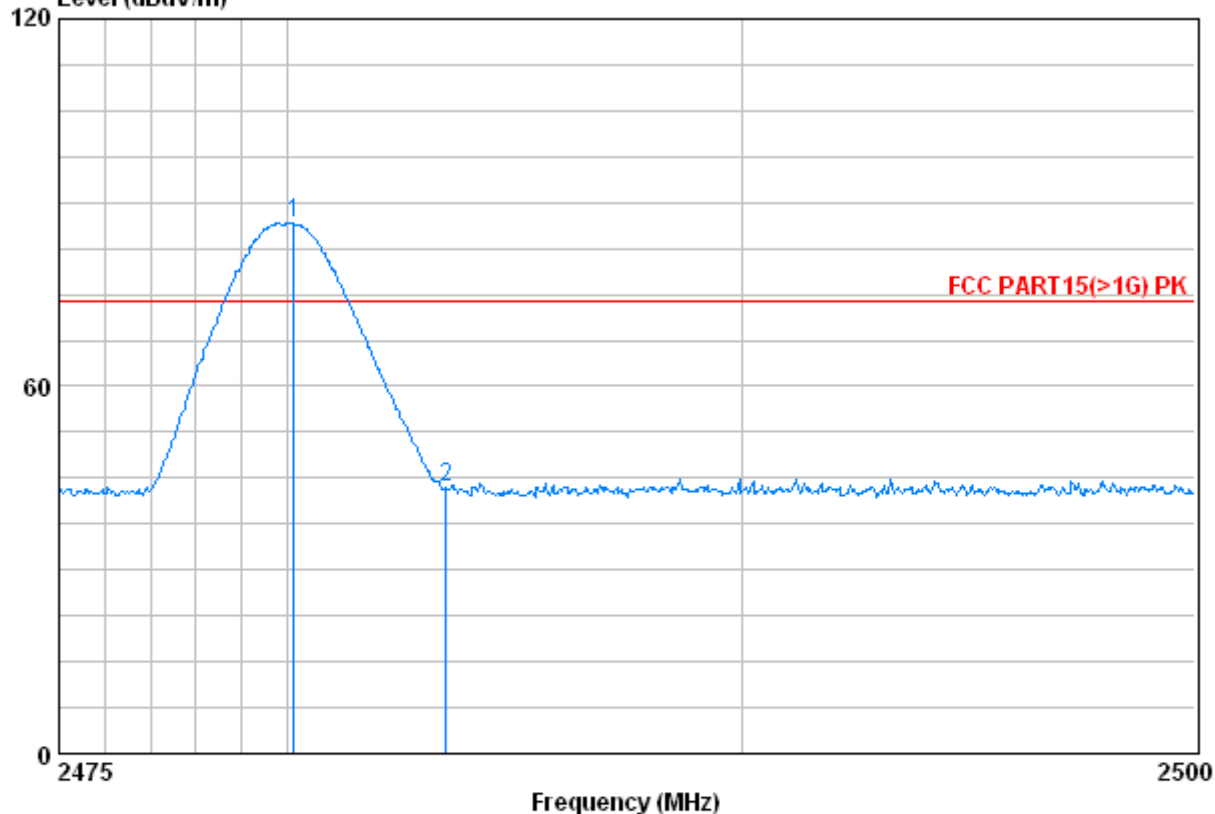

		Cable	Antenna	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 X	2480.150	3.03	32.67	39.92	90.75	86.53	74.00	12.53	Peak
2	2483.500	3.03	32.67	39.92	47.59	43.37	74.00	-30.63	Peak

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201

Page : 48 of 49

Test mode:	Transmitting	Test channel:	Highest	Remark:	Average	Vertical
------------	--------------	---------------	---------	---------	---------	----------

Data: 8

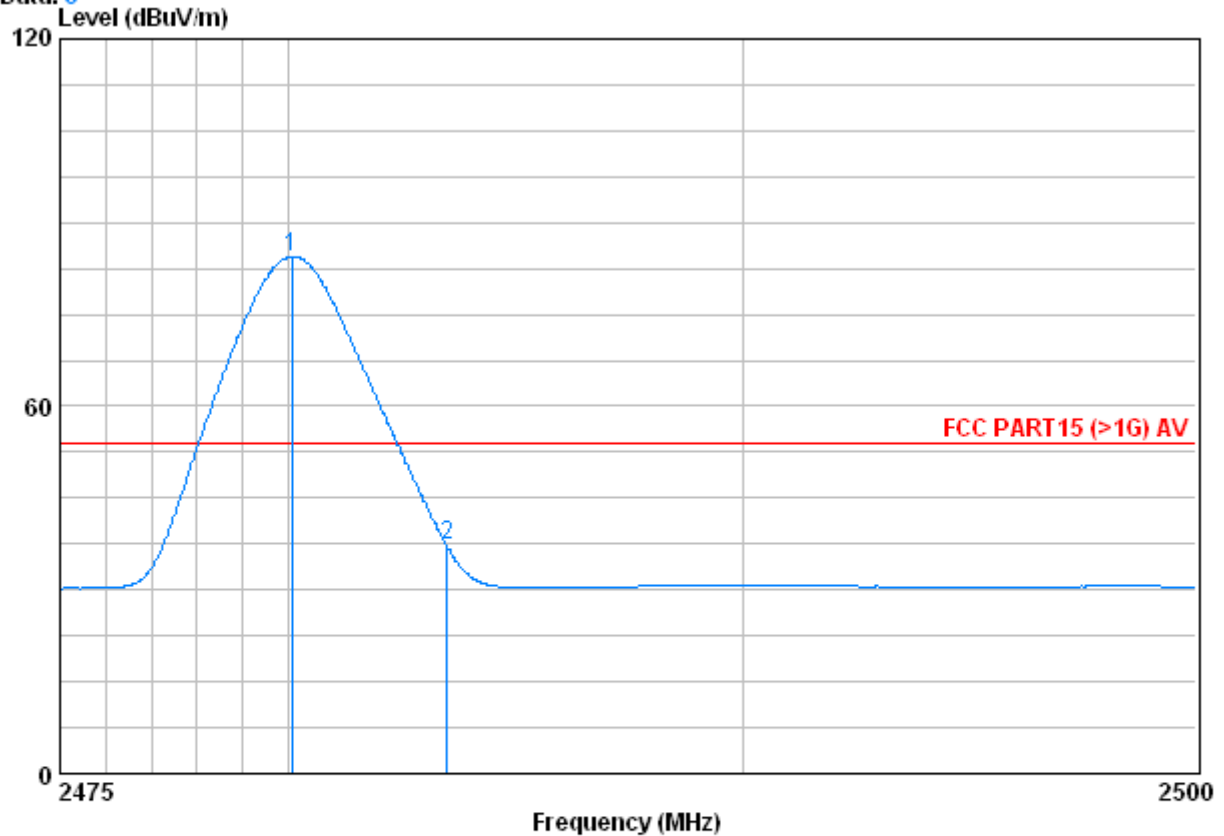

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 @	2480.075	3.03	32.67	39.92	88.71	84.49	54.00	30.49	Average
2	2483.500	3.03	32.67	39.92	41.44	37.22	54.00	-16.78	Average

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800323201
Page : 49 of 49

Test mode:	Transmitting	Test channel:	Highest	Remark:	Average	Horizontal
------------	--------------	---------------	---------	---------	---------	------------

Data: 7

Level (dBuV/m)

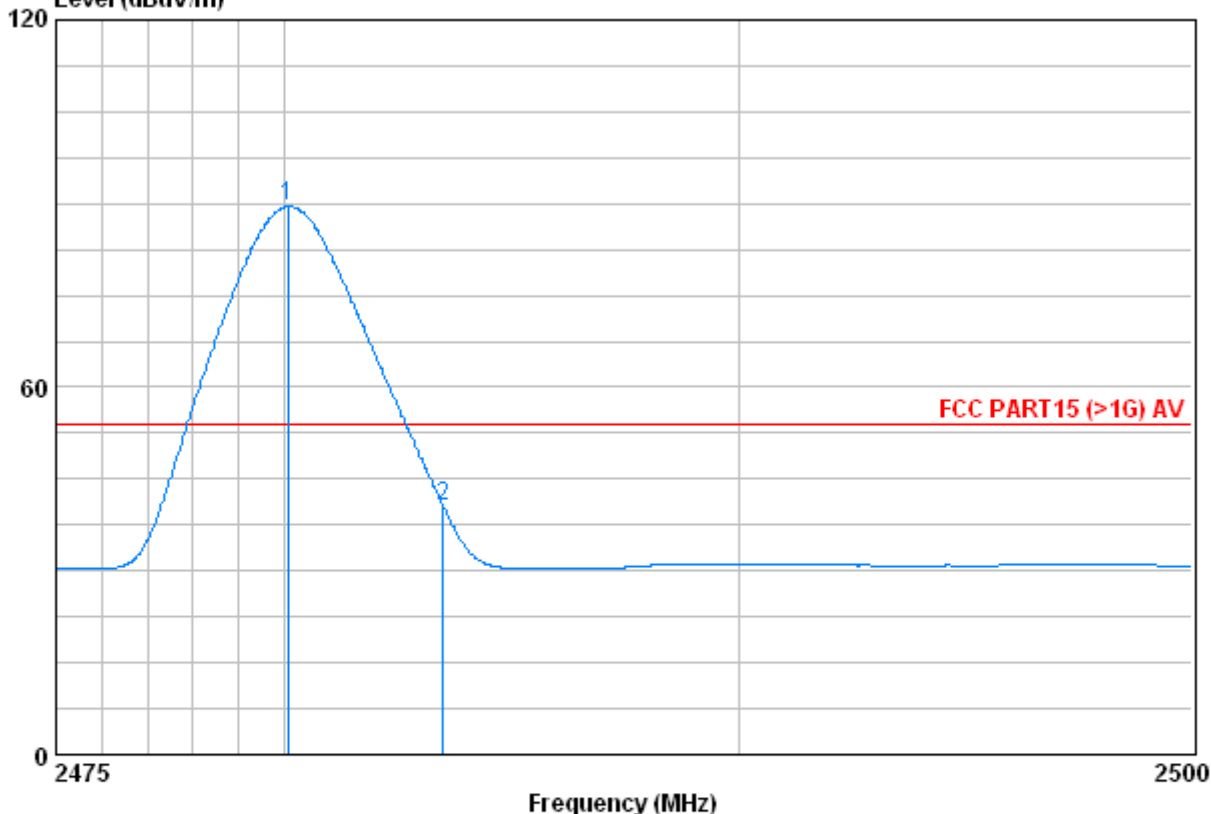

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
	MHz	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 @	2480.075	3.03	32.67	39.92	93.73	89.51	54.00	35.51 Average
2	2483.500	3.03	32.67	39.92	44.88	40.66	54.00	-13.34 Average

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."