

TEST REPORT

**ACCORDING TO: FCC 47 CFR PART 15 subpart C, section 15.249; subpart B and
RSS-210 issue 8 Annex 2; CES-003 Issue 5:2012**

FOR:

Essence Security International Ltd.

Z-Wave Controller

Model: ES800ZWD

FCC ID:YXG-ES800ZWD

IC:11061A-ES800ZWD

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Ports and lines	5
6.3	Support and test equipment	5
6.4	Changes made in EUT	5
6.5	Test configuration	5
6.6	EUT test positions	6
6.7	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements	8
7.1	Field strength of emissions	8
7.2	Band edge emission	20
7.3	Conducted emissions	24
7.4	Antenna requirements	27
7.5	Occupied bandwidth test	28
8	Unintentional emissions	31
8.1	Conducted emissions	31
8.2	Radiated emission measurements	35
9	APPENDIX A Test equipment and ancillaries used for tests	41
10	APPENDIX B Measurement uncertainties	42
11	APPENDIX C Test laboratory description	43
12	APPENDIX D Specification references	43
13	APPENDIX E Test equipment correction factors	44
14	APPENDIX F Abbreviations and acronyms	52

1 Applicant information

Client name: Essence Security International Ltd.
Address: 12 Abba Eban avenue, Ackerstein Tower Bldg. D, P.O.Box 2073, Herzliya 4612001, Israel
Telephone: +972 7324 47735
Fax: +972 9772 9962
E-mail: ilyafe@essence-grp.com
Contact name: Mr. Ilya Feldman

2 Equipment under test attributes

Product name: Z-Wave Controller
Product type: Transceiver
Model(s): ES800ZWD
Serial number: 00001B2A
Hardware version: V2
Software release: 01.01.02
Receipt date 7/15/2013

3 Manufacturer information

Manufacturer name: Essence Security International Ltd.
Address: 12 Abba Eban avenue, Ackerstein Tower Bldg. D, P.O.Box 2073, Herzliya 4612001, Israel
Telephone: +972 7324 47735
Fax: +972 9772 9962
E-Mail: ilyafe@essence-grp.com
Contact name: Mr. Ilya Feldman

4 Test details




Project ID: 24589
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 7/15/2013
Test completed: 7/25/2013
Test specification(s): FCC 47 CFR Part 15, subpart C, §15.249; subpart B
RSS-210 issue 8 Annex 2; RSS-Gen issue 3, ICES-003 issue 5:2012

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	Pass
Section 15.249(d)/RSS-210, section A2.9, Band edge emissions	Pass
Section 15.207(a) / RSS-Gen, section 7.2.4, Conducted emission	Pass
Section 15.203 / RSS-Gen, Section 7.1.2, Antenna requirement	Pass
Section 15.215(c) / RSS-Gen, Section 4.6, Occupied bandwidth	Pass
Unintentional emissions	
FCC Part 15, Section 107 /CES-003, Section 6.1 class B, Conducted emission at AC power port	Pass
FCC Part 15, Section 109 / RSS-Gen, Section 6.1, ICES-003, Section 6.2 class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer	July 25, 2013	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	August 4, 2013	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	August 8, 2013	

6 EUT description

6.1 General information

The EUT, Z-Wave controller, comprises radio and allows incorporation of 3rd party Z-Wave® compatible devices (smart home applications) with Essence security system.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	DC	AC/DC adapter	EUT	1	Unshielded	1.5
Power	AC	AC mains	AC/DC adapter		Unshielded	1.5
Signal	Signal	EUT	Control panel	1	Unshielded	0.2


6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
Control panel	Essence Home	ES700BAT_VF	p/n ESBTO2877
AC/DC adapter	PHIHONG	PSA05E-050	P104601371A2

6.4 Changes made in EUT

No changes were implemented in the EUT during the testing.

6.5 Test configuration

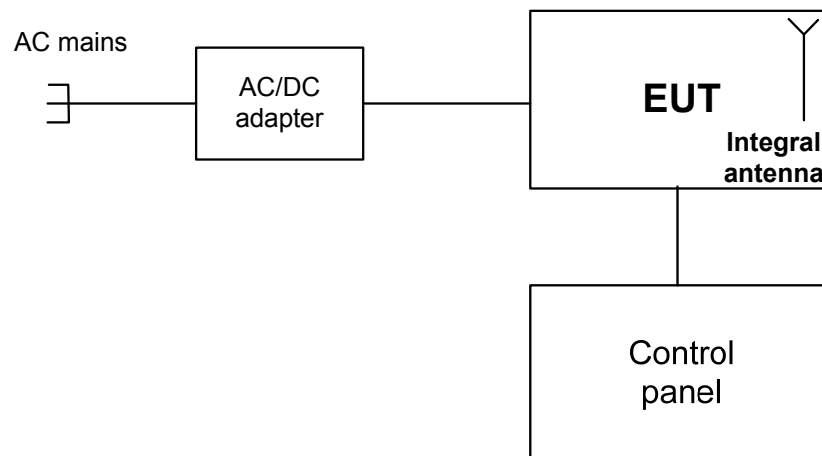

6.6 EUT test positions

Photograph 6.6.1 EUT in X-axis orthogonal position



Photograph 6.6.2 EUT in Y-axis orthogonal position



Photograph 6.6.3 EUT in Z-axis orthogonal position



6.7 Transmitter characteristics

Type of equipment								
X	Stand-alone (Equipment with or without its own control provisions)							
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)							
	Plug-in card (Equipment intended for a variety of host systems)							
Operating frequency		908.42 MHz						
Maximum rated output power		At transmitter 50 Ω RF output connector				dBm		
		Field strength at 3 m distance				83 dB(μ V/m)		
Is transmitter output power variable?		X	No					
			Yes	continuous variable				
				stepped variable with stepsize				dB
		minimum RF power				dBm		
		maximum RF power				dBm		
Antenna connection								
	unique coupling		standard connector	X	integral		with temporary RF connector	
						X	without temporary RF connector	
Type of modulation		FSK						
Transmitter aggregate data rate/s		40 kbps						
Transmitter power source								
	Battery	Nominal rated voltage		VDC				
	DC	Nominal rated voltage		VDC				
X	AC mains	Nominal rated voltage		120 VAC via AC/5VDC adapter		Frequency 60 Hz		
Common power source for transmitter and receiver				X	yes		no	



Test specification:		FCC Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: hPa	Relative Humidity: 33 %	Power Supply: 120 VAC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements

7.1 Field strength of emissions

7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.1.1, Table 7.1.2, Table 7.1.3.

Table 7.1.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)
	Quasi-Peak
902 – 928	94

Table 7.1.2 Harmonics limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
902 – 928	74.0	54.0

Table 7.1.3 Radiated spurious emissions limits (other than harmonics)

Frequency, MHz	Field strength at 3 m, dB(μV/m)*			
	Peak	Quasi Peak	Average	Attenuation below carrier
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	50 dBc (whichever is the less stringent)
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
Above 1000	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

Note: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency but not exceeding 40 GHz for intentional radiators operated below 10 GHz and up to the fifth harmonic of the highest fundamental frequency but not exceeding 100 GHz for intentional radiators operated above 10 GHz.

Test specification:		FCC Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: hPa	Relative Humidity: 33 %	Power Supply: 120 VAC
Remarks:			

7.1.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The measurements were performed in three EUT orthogonal positions.

7.1.2.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.1.2.4 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots.

7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz


7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.

7.1.3.2 The measurements were performed in three EUT orthogonal positions.

7.1.3.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.


7.1.3.4 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots.

Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz

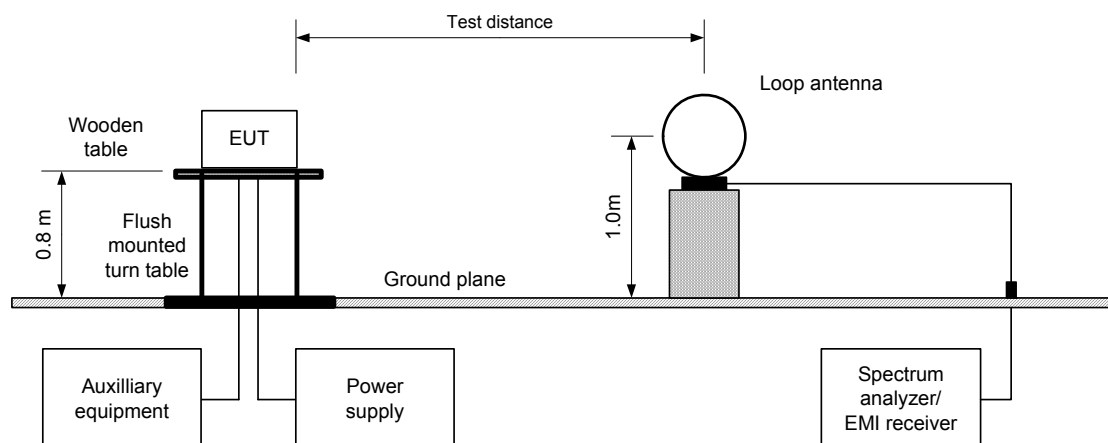

Test specification: FCC Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions			
Test procedure: ANSI C63.4, Section 13.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 7/15/2013			
Temperature: 24 °C	Air Pressure: hPa	Relative Humidity: 33 %	Power Supply: 120 VAC
Remarks:			

Figure 7.1.2 Setup for spurious emission field strength measurements above 30 MHz

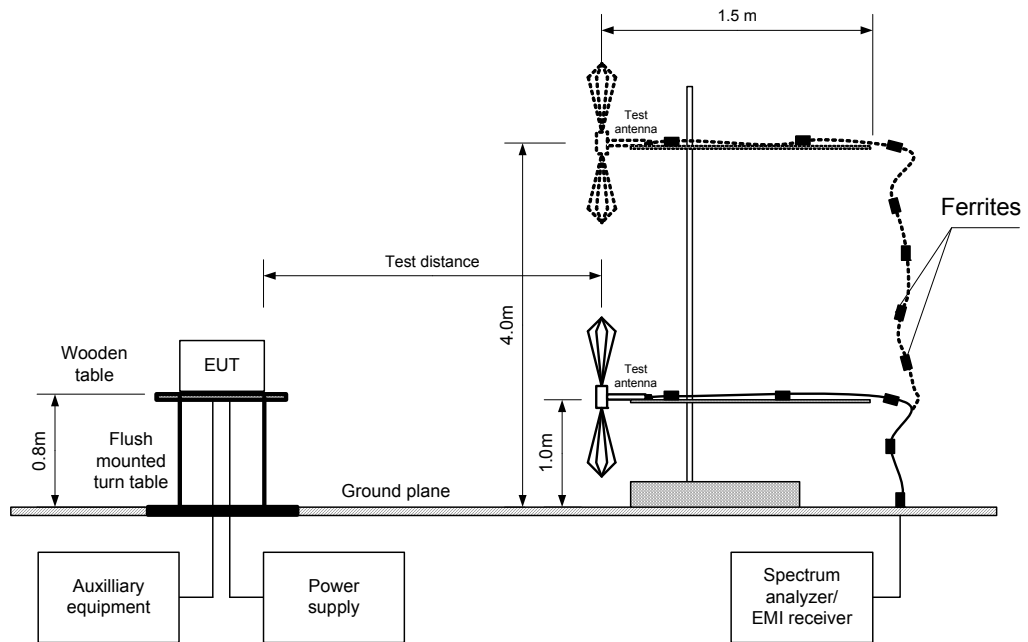



Test specification:		FCC Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: hPa	Relative Humidity: 33 %	Power Supply: 120 VAC
Remarks:			

Table 7.1.4 Field strength of fundamental emission and spurious emissions

TEST DISTANCE:	3 m
EUT POSITION:	3 orthogonal X / Y / Z
MODULATION:	FSK
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 9200 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Log periodic (200 MHz – 1000 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

Fundamental emission

Frequency, MHz	Antenna		Azimuth, degrees*	Peak emission, dB(μV/m)	Quasi-peak			Verdict
	Pol.	Height, m			Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
908.42	H	1.0	15	83.0	83.0	94.0	-11.0	Pass

Spurious emissions

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Avr factor, dB	Average field strength			Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
2725.2	V	1.5	90	46.64	74	-27.36	NA	42.24	54	-11.76	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB = Measured (calculated) value, dB(μV/m) - Limit, dB(μV/m).

*** Max value was obtained in Y-axis orthogonal position

Table 7.1.5 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
30.75	NA	NA	NA	NA	NA

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used


HL 0415	HL 0446	HL 0569	HL 0604	HL 0812	HL 1984	HL 2871	HL 2909
HL 3818	HL 4160	HL 4353					

Full description is given in Appendix A.

Test specification:		FCC Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: hPa	Relative Humidity: 33 %	Power Supply: 120 VAC
Remarks:			


Plot 7.1.1 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis

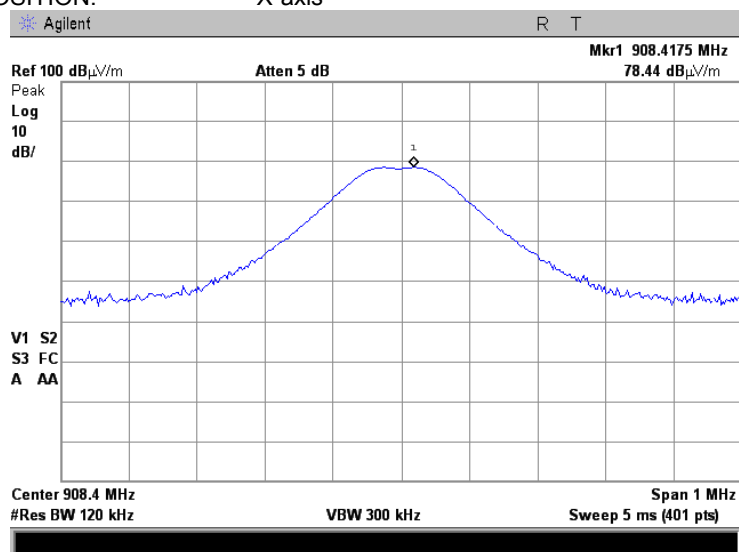

Plot 7.1.2 Radiated emission measurements at the fundamental frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-axis

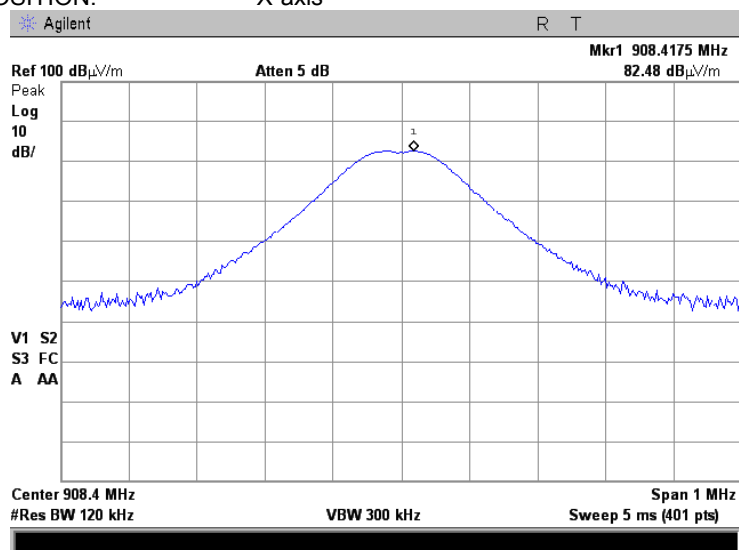

Test specification:		FCC Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: hPa	Relative Humidity: 33 %	Power Supply: 120 VAC
Remarks:			


Plot 7.1.3 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Y-axis

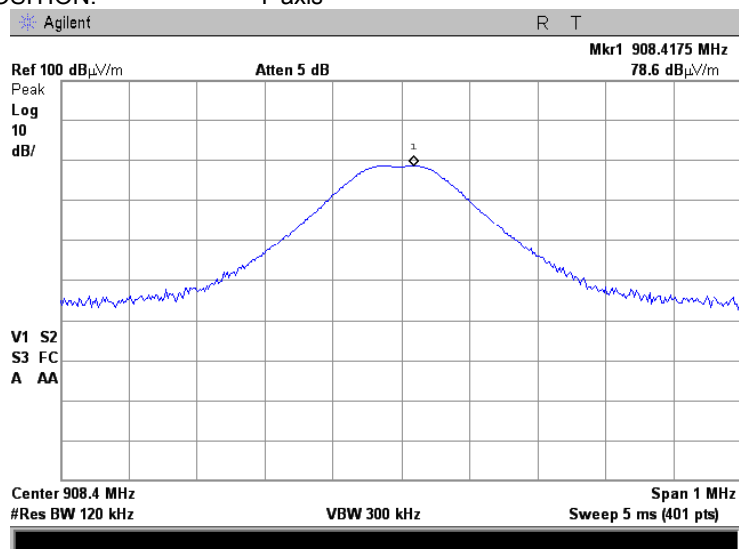

Plot 7.1.4 Radiated emission measurements at the fundamental frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Y-axis

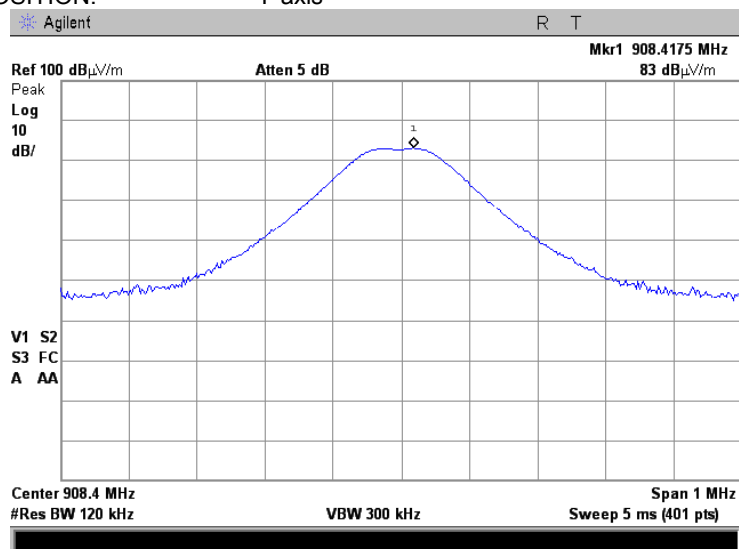

Test specification:		FCC Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: hPa	Relative Humidity: 33 %	Power Supply: 120 VAC
Remarks:			


Plot 7.1.5 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

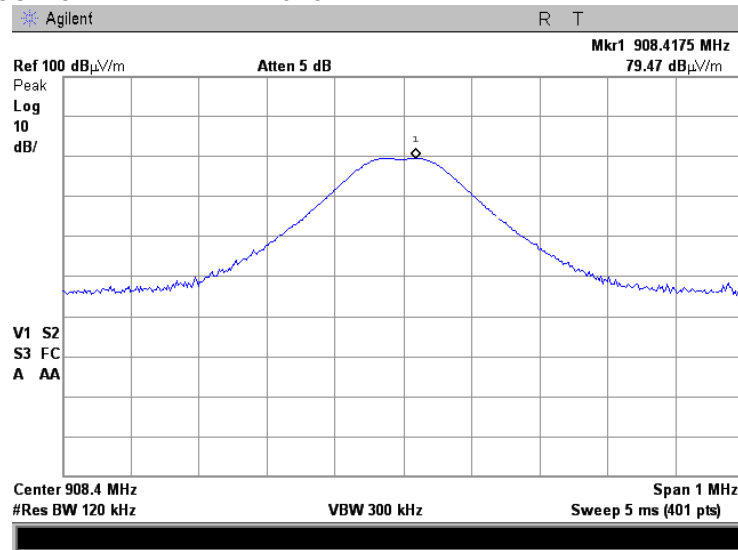

Plot 7.1.6 Radiated emission measurements at the fundamental frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

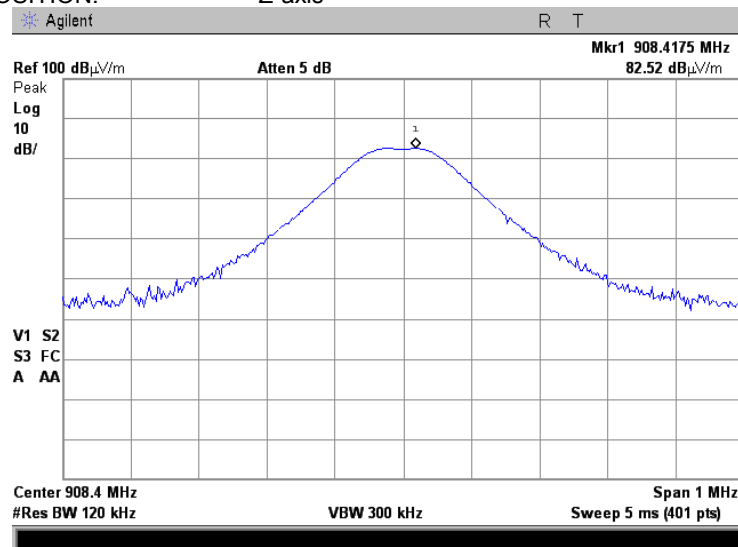

Test specification:		FCC Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: hPa	Relative Humidity: 33 %	Power Supply: 120 VAC
Remarks:			



Plot 7.1.7 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Y-axis

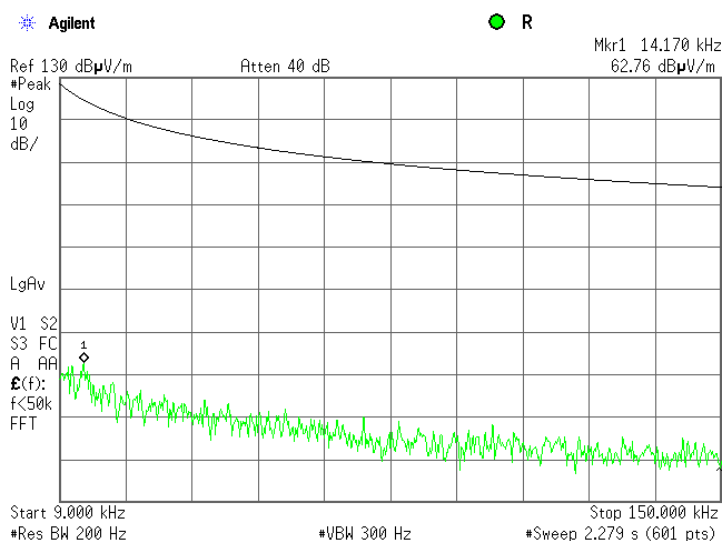

Plot 7.1.8 Radiated emission measurements from 0.15 to 30 MHz


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Y-axis

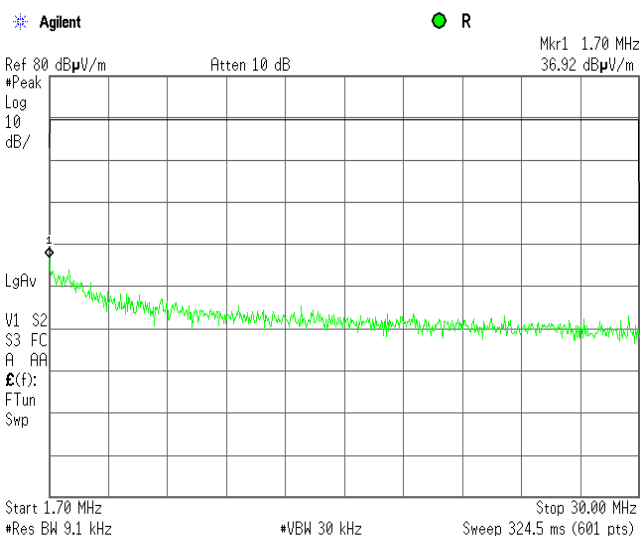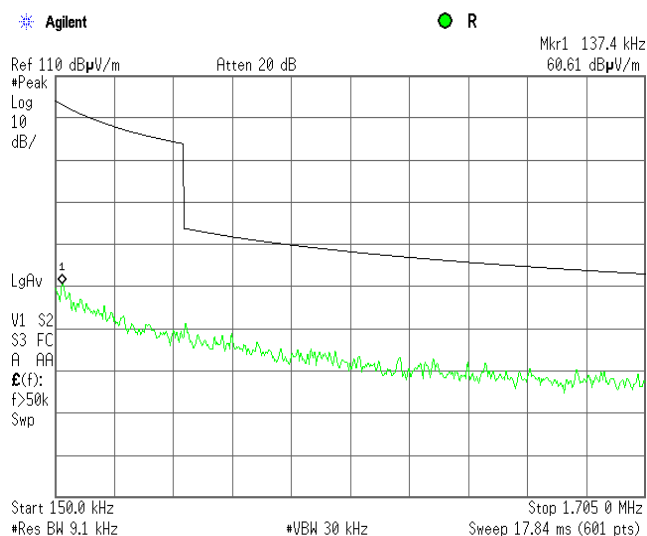

Test specification:		FCC Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Verdict: PASS	
Date(s):			
Temperature: 24 °C		Air Pressure: hPa	
		Relative Humidity: 33 %	Power Supply: 120 VAC
Remarks:			


Plot 7.1.9 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Y-axis

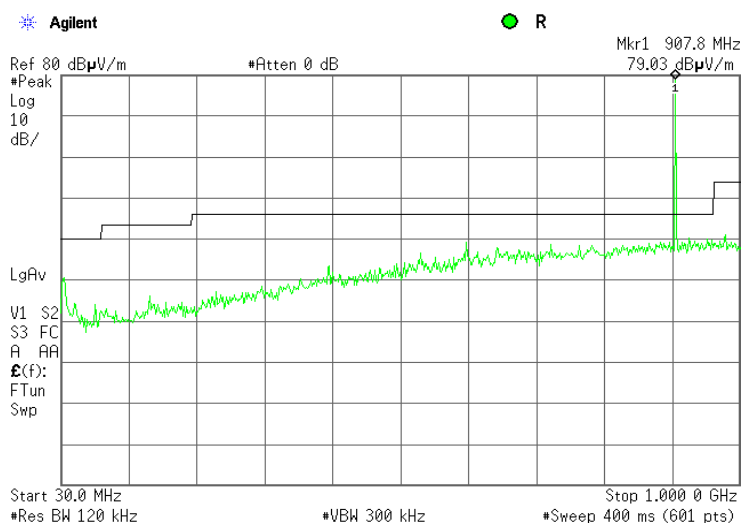

Plot 7.1.10 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Y-axis

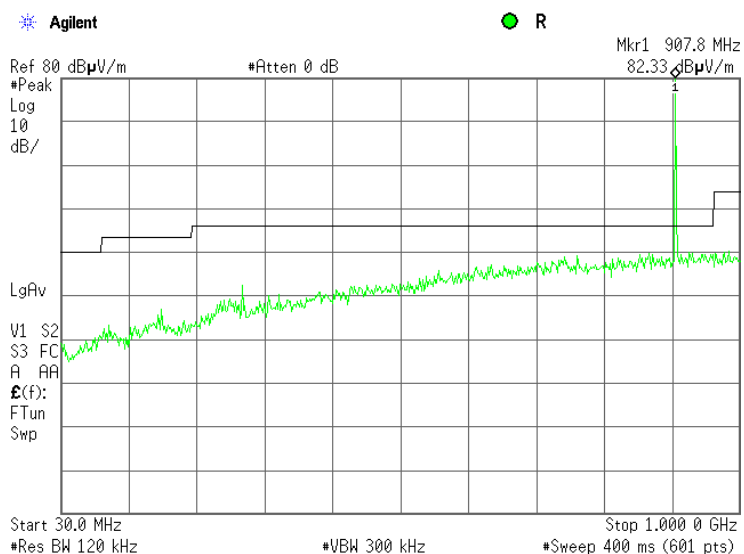





HERMON LABORATORIES

Test specification:		FCC Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: hPa	Relative Humidity: 33 %	Power Supply: 120 VAC
Remarks:			

Plot 7.1.11 Radiated emission measurements from 1.0 to 9.1GHz



TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis

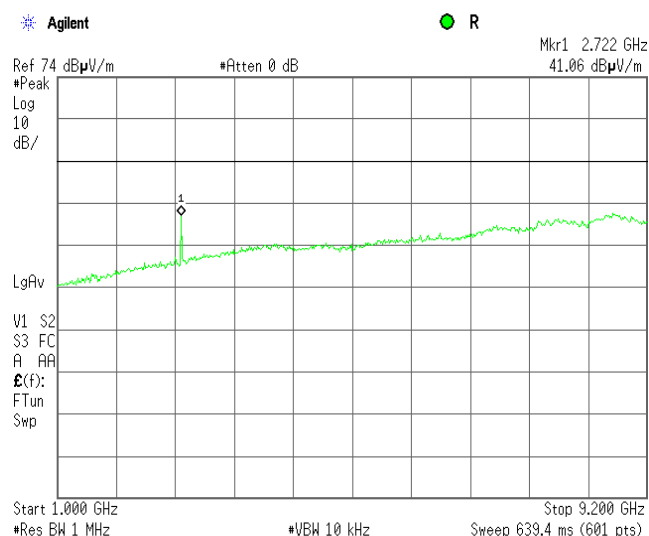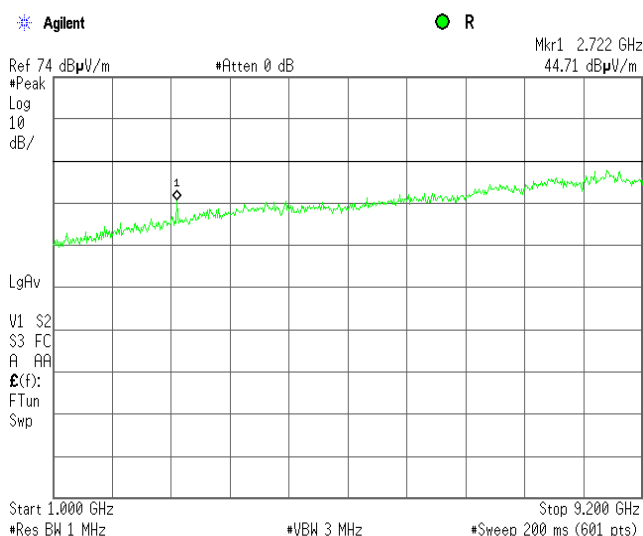

Test specification:		FCC Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: hPa	Relative Humidity: 33 %	Power Supply: 120 VAC
Remarks:			



Plot 7.1.12 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Y-axis

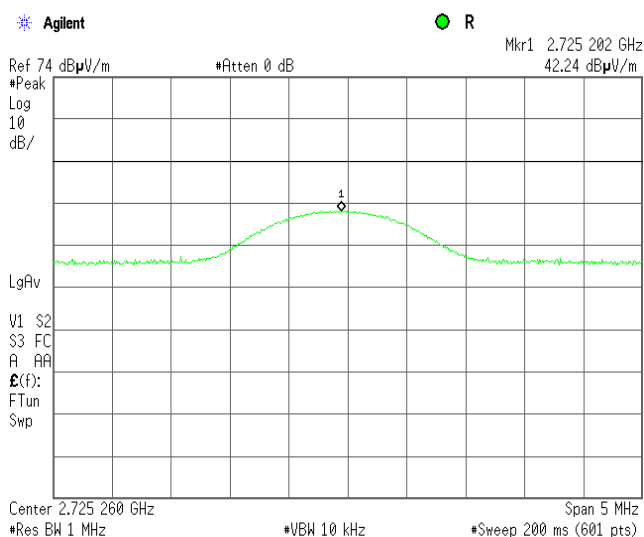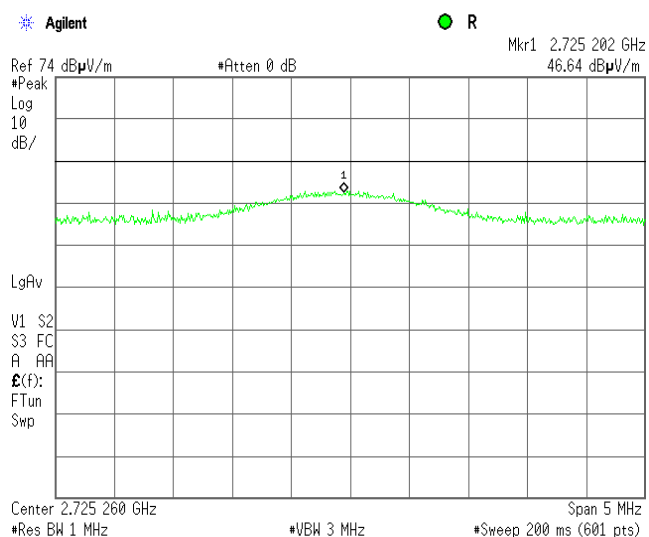

Plot 7.1.13 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Y-axis

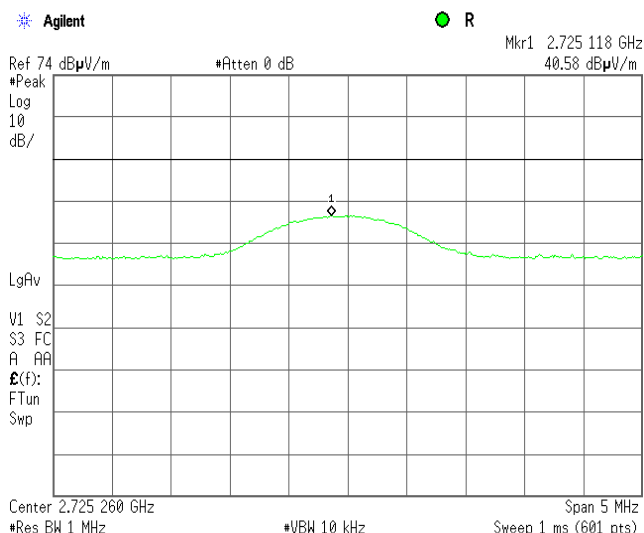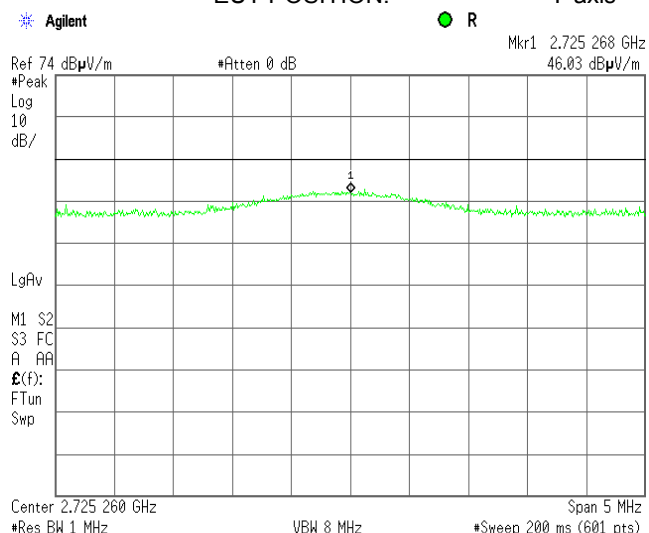




HERMON LABORATORIES

Test specification:		FCC Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: hPa	Relative Humidity: 33 %	Power Supply: 120 VAC
Remarks:			

Plot 7.1.14 Transmission pulse duration

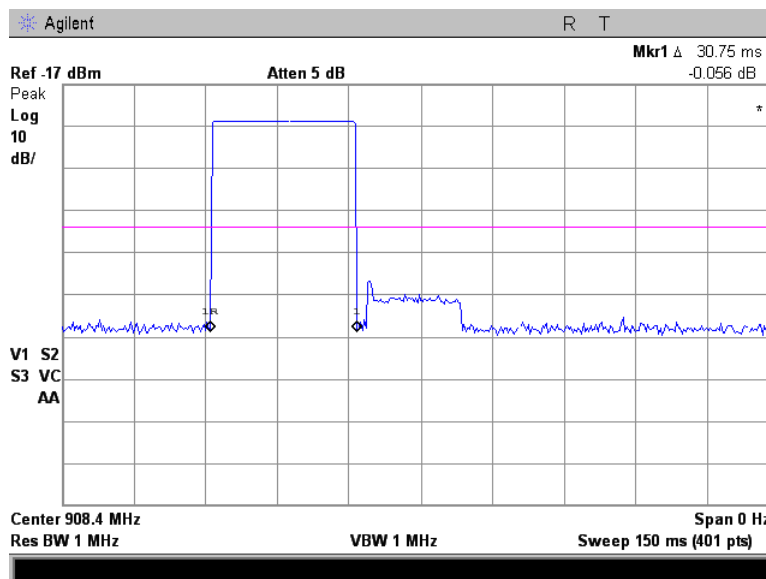



Test specification:		FCC Section 15.249(d)/RSS-210, section A2.9, Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/18/2013	
Temperature: 24 °C	Air Pressure: 1007 hPa	Relative Humidity: 46 %	Power Supply: 120 VAC
Remarks:			

7.2 Band edge emission

7.2.1 General

This test was performed to verify the EUT band edge emission including all associated side bands was attenuated at least 50 dB below the unmodulated carrier level or below the general spurious emission limit. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Band edge emission limits

Frequency band, MHz	Field strength limit at 3 m, dBμV/m		Attenuation below carrier, dBc
	Peak	QP	
902.000 - 928.000	NA	46.0	50

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.


7.2.2.2 The spectrum analyzer frequency span was set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.

7.2.2.3 The frequency of modulation envelope points beyond which power level drops below the band edge emission limit was measured.

7.2.2.4 The test results were recorded in Table 7.2.2 and shown in the associated plots.

Test specification: FCC Section 15.249(d)/RSS-210, section A2.9, Band edge emissions			
Test procedure: ANSI C63.4, Section 13.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 7/18/2013			
Temperature: 24 °C	Air Pressure: 1007 hPa	Relative Humidity: 46 %	Power Supply: 120 VAC
Remarks:			

Figure 7.2.1 Band edge emission measurement set up

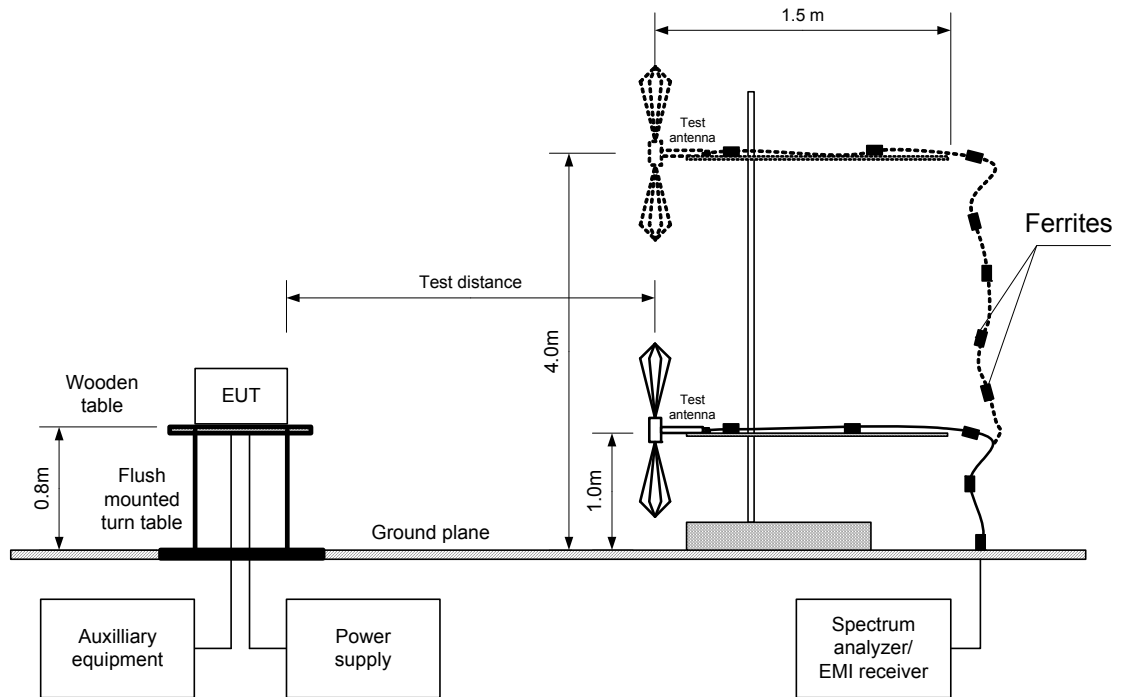



HERMON LABORATORIES

Test specification:		FCC Section 15.249(d)/RSS-210, section A2.9, Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/18/2013	
Temperature: 24 °C	Air Pressure: 1007 hPa	Relative Humidity: 46 %	Power Supply: 120 VAC
Remarks:			

Table 7.2.2 Band edge emission test results

OPERATING FREQUENCY RANGE: 902.42 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 120 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATION: FSK
 BIT RATE: 40 kbps

Modulation envelope		Measured peak emission, dBµV/m	Measured QP emission, dBµV/m	QP limit, dBµV/m	Margin, dB *	Verdict
Edge	Frequency, MHz					
Low	902	37.38	33.2	46	-12.8	Pass
High	928	38.26	36.3	46	-9.7	Pass

* - Margin = measured value– limit

Modulation envelope		Band edge limit, MHz	Margin, MHz***	Verdict
Edge	Frequency, MHz*			
Low	908.070	902	6.070	Pass
High	908.733	928	19.267	Pass

* - Measured frequency beyond which the emission dropped 50 dB below the carrier emission or below the field strength limit whichever was a less stringent

** - Margin = Band edge limit – Band edge frequency

Reference numbers of test equipment used


HL 0604	HL 2871	HL 3818	HL 4353				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

Test specification: FCC Section 15.249(d)/RSS-210, section A2.9, Band edge emissions	
Test procedure: ANSI C63.4, Section 13.1.4	
Test mode: Compliance	Verdict: PASS
Date(s): 7/18/2013	
Temperature: 24 °C	Air Pressure: 1007 hPa
	Relative Humidity: 46 %
	Power Supply: 120 VAC
Remarks:	


Plot 7.2.1 Band edge emission test result

TEST SITE: Semi Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

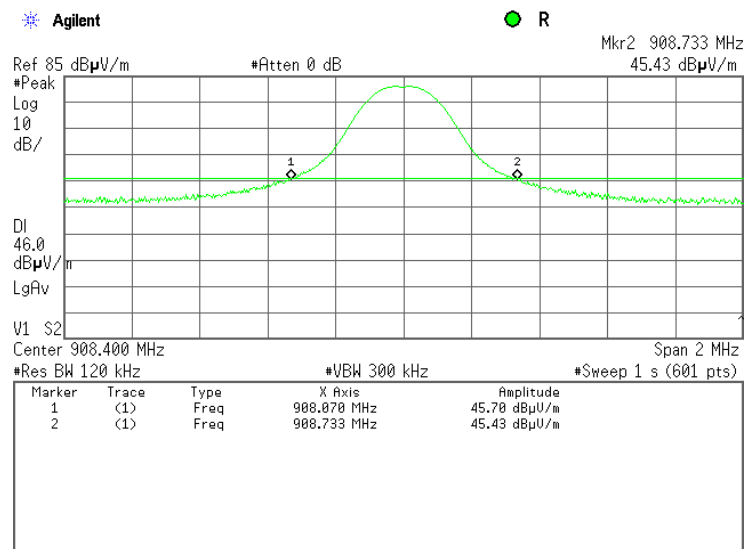

Plot 7.2.2 Band edge emission test result

TEST SITE: Semi Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

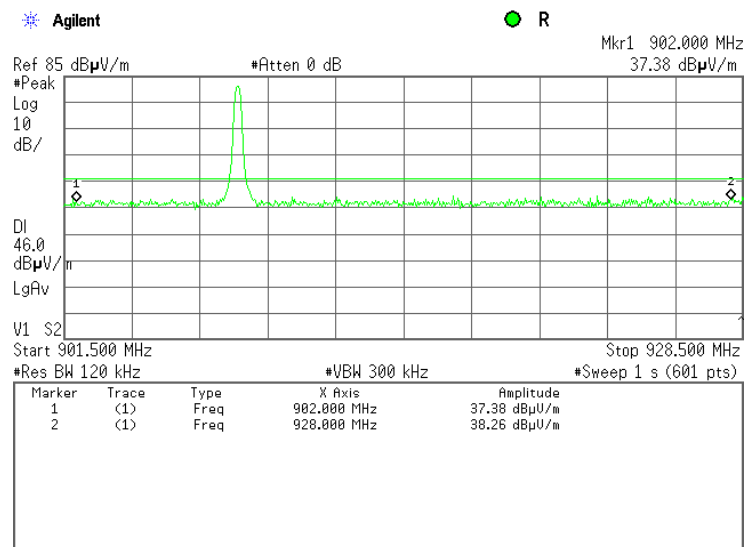

Test specification:	FCC Section 15.207(a)/RSS-Gen, Section 7.2.4, Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict: PASS	
Date(s):	7/15/2013		
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 40 %	Power Supply: 120 VAC
Remarks:			

7.3 Conducted emissions

7.3.1 General

This test was performed to measure common mode conducted emissions at the mains power port. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μ V)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* - The limit decreases linearly with the logarithm of frequency.

7.3.2 Test procedure


7.3.2.1 The EUT was set up as shown in Figure 7.3.1 and associated photographs, energized and the performance check was conducted.

7.3.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.3.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.

7.3.2.3 The position of the device cables was varied to determine maximum emission level.

7.3.2.4 The worst test results (the lowest margins) were recorded in Table 7.3.2 and shown in the associated plots.

Figure 7.3.1 Setup for conducted emission measurements, table-top equipment

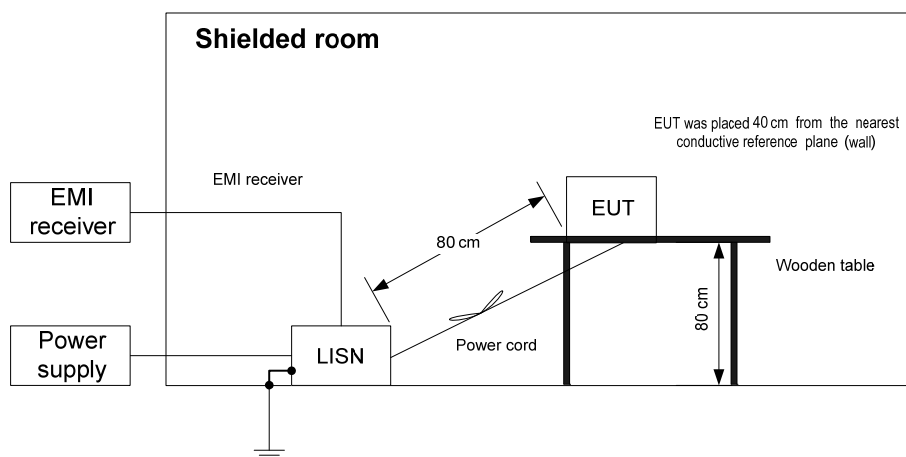



HERMON LABORATORIES

Test specification:		FCC Section 15.207(a)/RSS-Gen, Section 7.2.4, Conducted emission	
Test procedure:		ANSI C63.4, Section 13.1.3	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 40 %	Power Supply: 120 VAC
Remarks:			

Table 7.3.2 Conducted emission test results

LINE: AC mains
 LIMIT: Class B
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(μV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*		
0.195000	42.18	40.32	63.85	-23.53	31.05	53.85	-22.80	L1	Pass
0.257650	40.34	38.22	61.56	-23.34	30.41	51.56	-21.15		
0.321275	38.11	35.41	59.71	-24.30	27.90	49.71	-21.81		
0.384000	35.07	31.30	58.21	-26.91	23.20	48.21	-25.01		
0.513835	43.98	41.00	56.00	-15.00	35.85	46.00	-10.15		
13.495033	35.98	26.39	60.00	-33.61	18.21	50.00	-31.79	L2	Pass
0.196695	42.26	39.81	63.78	-23.97	32.85	53.78	-20.93		
0.260075	42.18	40.13	61.48	-21.35	34.29	51.48	-17.19		
0.321580	40.28	37.67	59.70	-22.03	31.05	49.70	-18.65		
0.385335	36.95	33.52	58.18	-24.66	26.62	48.18	-21.56		
0.515205	47.42	43.83	56.00	-12.17	38.82	46.00	-7.18		
14.477875	39.82	35.22	60.00	-24.78	24.24	50.00	-25.76		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0447	HL 0787	HL 1425	HL 1513	HL3612			
---------	---------	---------	---------	--------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:		FCC Section 15.207(a)/RSS-Gen, Section 7.2.4, Conducted emission	
Test procedure:		ANSI C63.4, Section 13.1.3	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 40 %	Power Supply: 120 VAC
Remarks:			

Plot 7.3.1 Conducted emission measurements

LINE: L1
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 520 kHz
43.38 dBμV/m

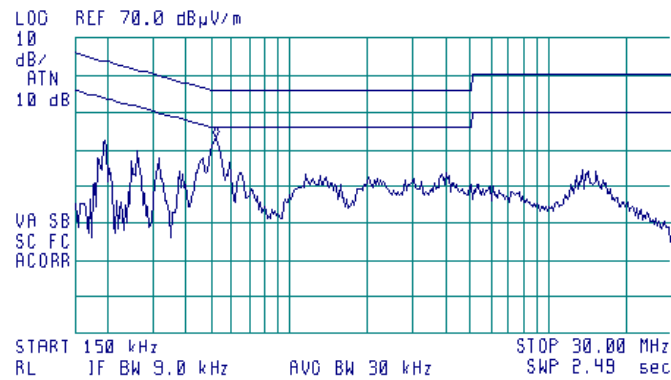


Plot 7.3.2 Conducted emission measurements

LINE: L2
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 510 kHz
45.52 dBμV/m

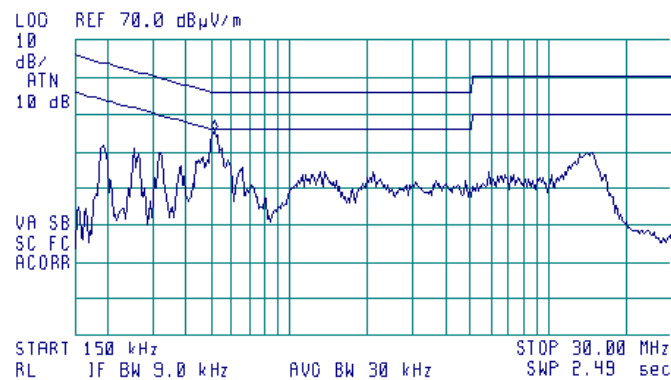

Test specification:		FCC Section 15.203/RSS-Gen, Section 7.1.2, Antenna requirement	
Test procedure:		Visual inspection / supplier declaration	
Test mode:	Compliance	Verdict:	PASS
Date(s):	7/25/2013		
Temperature: 24 °C	Air Pressure: hPa	Relative Humidity: 40 %	Power Supply: 120 VAC
Remarks:			

7.4 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.4.1 Antenna assembly

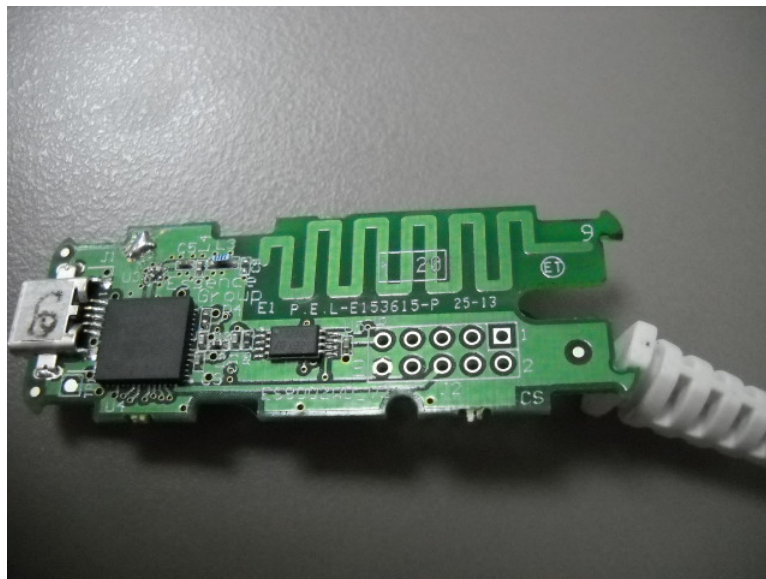

Test specification:		FCC Section 15.215(c)/RSS-Gen, Section 4.6, Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/18/2013	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 45 %	Power Supply: 120 VAC
Remarks:			

7.5 Occupied bandwidth test

7.5.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc
902 - 928	20.0
2400 – 2483.5	
5725 – 5875	
24000 – 24250	

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.5.2 Test procedure

- 7.5.2.1** The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2** The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.
- 7.5.2.3** The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.5.2 and associated plot.
- 7.5.2.4** Modulation bandwidth was calculated by adding of the negative frequency drift to the lower measured frequency and the positive frequency drift to the higher measured frequency. The obtained modulation bandwidth was verified to be within the allowed frequency range.

Figure 7.5.1 Occupied bandwidth test setup





HERMON LABORATORIES

Test specification:		FCC Section 15.215(c)/RSS-Gen, Section 4.6, Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/18/2013	
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 45 %	Power Supply: 120 VAC
Remarks:			

Table 7.5.2 Occupied bandwidth test results

ASSIGNED FREQUENCY BAND 902-928 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 10 kHz
 VIDEO BANDWIDTH: 30 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: FSK
 MODULATING SIGNAL: enable

Band edge	Cross point frequency, MHz	Frequency drift, kHz		Modulation band edge, MHz	Assigned band edge, MHz	Verdict
		Negative	Positive			
Low	908.3484	NA	NA	908.3484	902	Pass
High	908.4460	NA	NA	908.4460	928	Pass

99% power OBW: 91.03 kHz


Reference numbers of test equipment used

HL 0604	HL 2871	HL 3818	HL 4353					
---------	---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.

Test specification: FCC Section 15.215(c)/RSS-Gen, Section 4.6, Occupied bandwidth	
Test procedure: ANSI C63.4, Section 13.1.7	
Test mode: Compliance	Verdict: PASS
Date(s): 7/18/2013	
Temperature: 24 °C	Air Pressure: 1008 hPa
Relative Humidity: 45 %	
Power Supply: 120 VAC	
Remarks:	

Plot 7.5.1 Occupied bandwidth test result

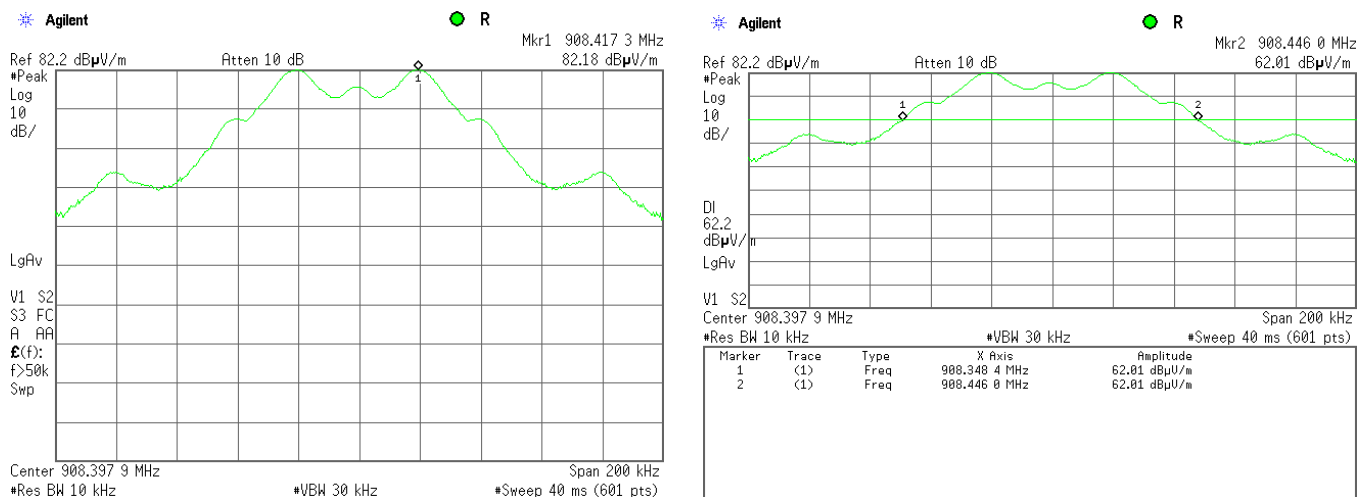

Plot 7.5.2 Occupied bandwidth test result

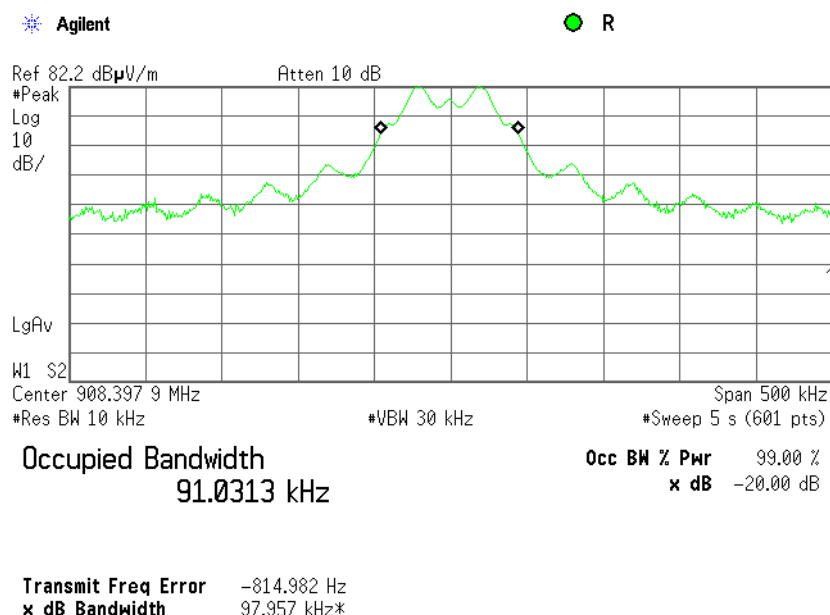



Test specification:	FCC Section 15.107/ICES-003,Section 6.1 class B, Conducted emission at AC power port		
Test procedure:	ANSI C63.4, Sections 11.5 and 12.1.3		
Test mode:	Compliance	Verdict: PASS	
Date(s):	7/15/2013		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

8 Unintentional emissions

8.1 Conducted emissions

8.1.1 General

This test was performed to measure common mode conducted emissions at the mains power port. Specification test limits are given in Table 7.3.1.

Table 8.1.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μ V)		Class A limit, dB(μ V)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60


* The limit decreases linearly with the logarithm of frequency.

8.1.2 Test procedure

- 8.1.2.1 The EUT was set up as shown in Figure 7.3.1 and associated photographs, energized and the performance check was conducted.
- 8.1.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.3.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.
- 8.1.2.3 The position of the device cables was varied to determine maximum emission level.
- 8.1.2.4 The worst test results (the lowest margins) were recorded in Table 7.3.2 and shown in the associated plots.

Test specification:		FCC Section 15.107/ICES-003,Section 6.1 class B, Conducted emission at AC power port	
Test procedure:		ANSI C63.4, Sections 11.5 and 12.1.3	
Test mode:		Compliance	Verdict: PASS
Date(s):		7/15/2013	
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Figure 8.1.1 Setup for conducted emission measurements, table-top equipment

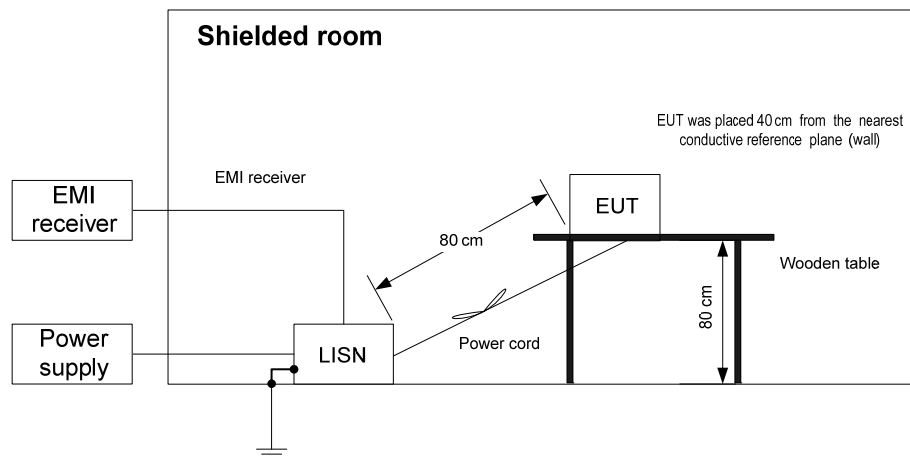

Photograph 8.1.1 Setup for conducted emission measurements





HERMON LABORATORIES

Test specification:		FCC Section 15.107/ICES-003,Section 6.1 class B, Conducted emission at AC power port	
Test procedure:		ANSI C63.4, Sections 11.5 and 12.1.3	
Test mode:	Compliance	Verdict:	PASS
Date(s):	7/15/2013		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Table 8.1.2 Conducted emission test results

LINE: AC mains
 LIMIT: Class B
 EUT OPERATING MODE: Receive
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(μV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*		
0.199000	40.94	36.88	63.69	-26.81	25.43	53.69	-28.26	L1	Pass
0.253825	39.55	35.12	61.67	-26.55	25.36	51.67	-26.31		
0.319390	38.33	34.72	59.75	-25.03	27.01	49.75	-22.74		
0.519290	46.63	42.77	56.00	-13.23	38.18	46.00	-7.82		
0.660645	36.88	32.20	56.00	-23.80	25.31	46.00	-20.69		
14.187905	36.77	28.50	60.00	-31.50	19.77	50.00	-30.23	L2	Pass
0.193788	40.88	39.07	63.89	-24.82	33.20	53.89	-20.69		
0.262005	41.68	39.33	61.42	-22.09	33.17	51.42	-18.25		
0.317200	40.70	35.71	59.80	-24.09	27.31	49.80	-22.49		
0.526550	48.92	44.73	56.00	-11.27	38.82	46.00	-7.18		
1.332320	36.67	32.37	56.00	-23.63	27.49	46.00	-18.51		
14.099243	41.49	36.83	60.00	-23.17	25.76	50.00	-24.24		

Reference numbers of test equipment used

HL 0447	HL 0787	HL 1425	HL 1513	HL 3612			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	FCC Section 15.107/ICES-003,Section 6.1 class B, Conducted emission at AC power port		
Test procedure:	ANSI C63.4, Sections 11.5 and 12.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	7/15/2013		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 8.1.1 Conducted emission measurements

LINE: L1
LIMIT: Class B
EUT OPERATING MODE: Receive
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 520 kHz
44.42 dBμV/m

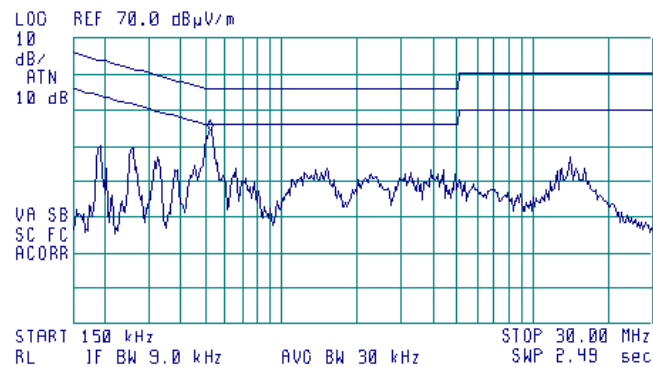


Plot 8.1.2 Conducted emission measurements

LINE: L2
LIMIT: Class B
EUT OPERATING MODE: Receive
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 510 kHz
47.19 dBμV/m

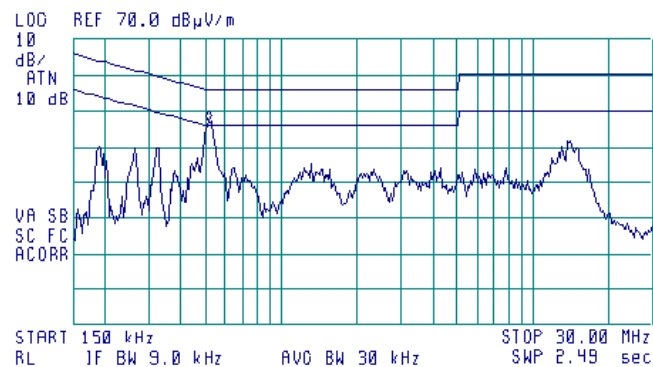

Test specification:		Section 15.109/RSS-Gen, section 6.1, ICES-003 Section 6.2 class B, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:	Compliance	Verdict:	PASS
Date(s):	7/18/2013		
Temperature: 25 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

8.2 Radiated emission measurements

8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.2.1, in Table 8.2.2.

Table 8.2.1 Radiated emission test limits according to FCC Part 15, Section 109 and ICES-003, Section 6.2

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log(S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

Table 8.2.2 Radiated emission limits according to RSS-Gen, Section 6.1

Frequency, MHz	Field strength limit at 3 m test distance, dB(μV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 3 rd harmonic**	54.0

** - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

8.2.2 Test procedure


8.2.2.1 The EUT was set up as shown in Figure 8.2.1 and associated photograph/s, energized and the performance check was conducted.

8.2.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.2.2.3 The worst test results (the lowest margins) were recorded in Table 8.2.3 and shown in the associated plots.

Test specification:		Section 15.109/RSS-Gen, section 6.1, ICES-003 Section 6.2 class B, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:	Compliance	Verdict:	PASS
Date(s):	7/18/2013		
Temperature: 25 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

Figure 8.2.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

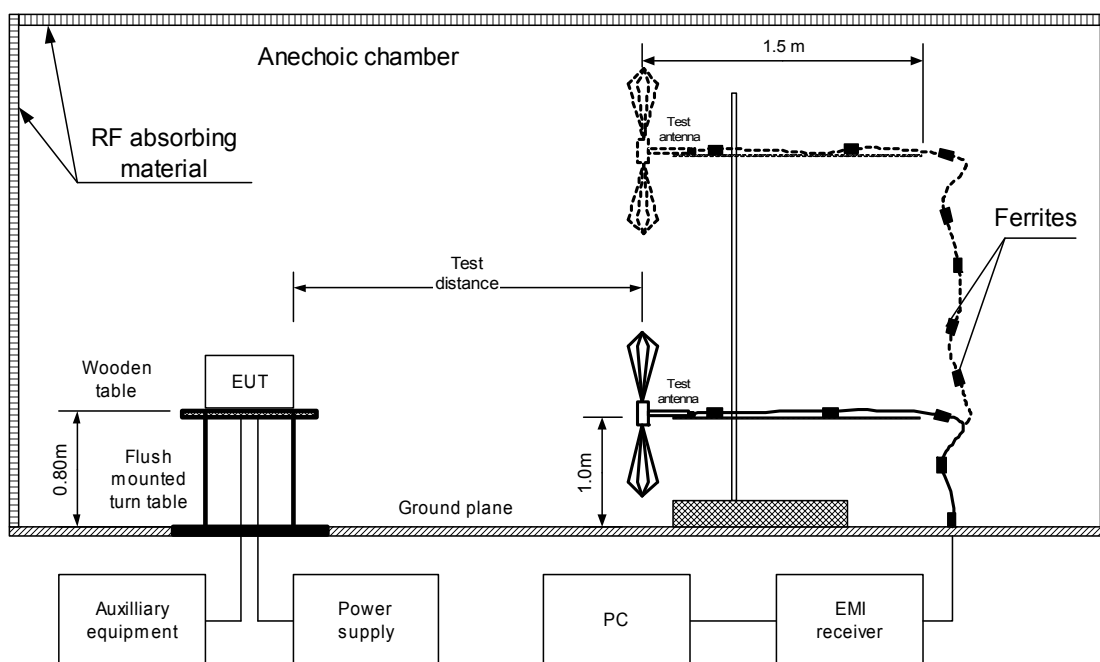

Test specification:	Section 15.109/RSS-Gen, section 6.1, ICES-003 Section 6.2 class B, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	7/18/2013		
Temperature: 25 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

Photograph 8.2.1 Setup for radiated emission measurements



Photograph 8.2.2 Setup for final radiated emission measurements, EUT cabling





HERMON LABORATORIES

Test specification:	Section 15.109/RSS-Gen, section 6.1, ICES-003 Section 6.2 class B, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	7/18/2013		
Temperature: 25 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

Table 8.2.3 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
34	32	29.2	40.0	-10.8	V	1.0	90	Pass
158	27.7	26.8	43.5	-16.7	V	1.0	83	
288	23.3	22.2	46.0	-23.8	H	1.0	280	
608	32.9	31.5	46.0	-14.5	V	1.0	76	
734	31.3	29.8	46.0	-16.2	V	1.0	100	
768	29.5	28.8	46.0	-17.2	H	1.0	350	

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 9200 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Peak				Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
Frequency, MHz	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No signals were found										Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 0604	HL 1984	HL 2871	HL 3818	HL 4160	HL 4353		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.

Test specification:	Section 15.109/RSS-Gen, section 6.1, ICES-003 Section 6.2 class B, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	7/18/2013		
Temperature: 25 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			


Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

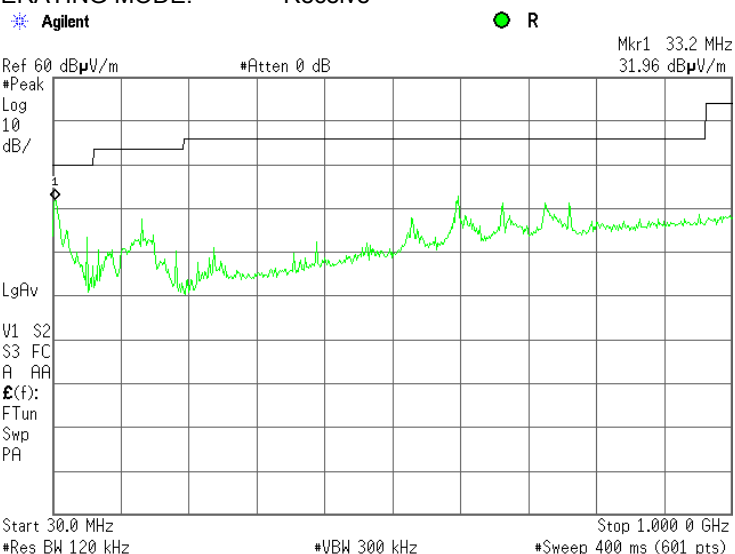

Plot 8.2.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization


TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

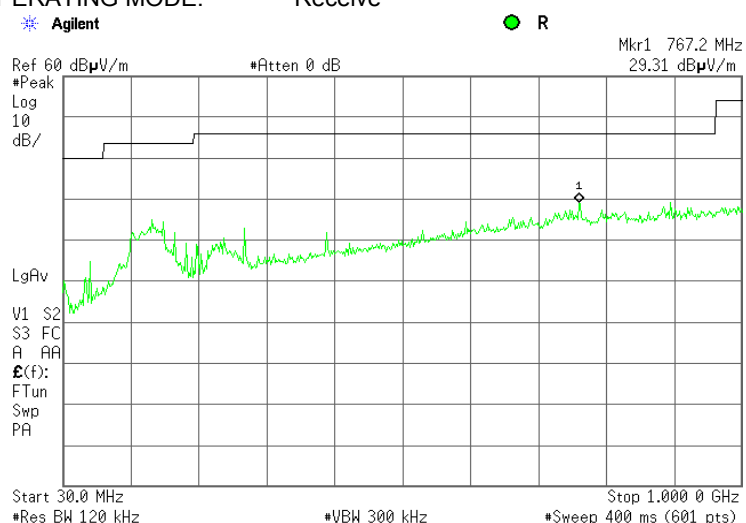

Test specification:		Section 15.109/RSS-Gen, section 6.1, ICES-003 Section 6.2 class B, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:	Compliance	Verdict:	PASS
Date(s):	7/18/2013		
Temperature: 25 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			


Plot 8.2.3 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive
VBW: 3 MHz

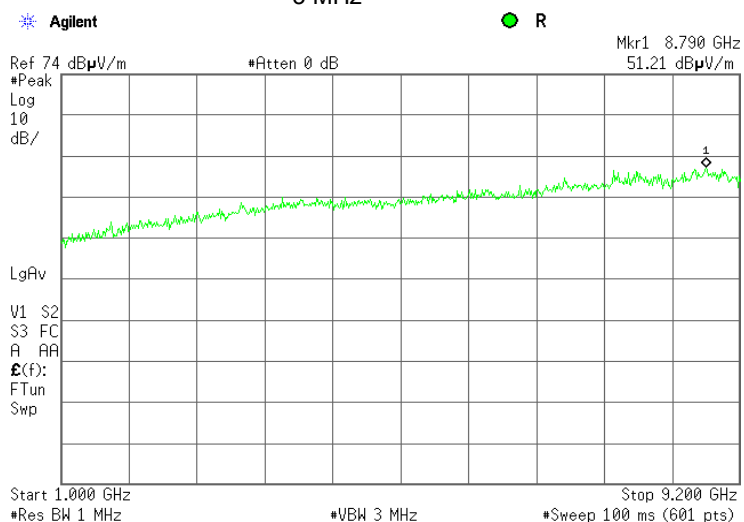

Plot 8.2.4 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive
VBW: 10 kHz

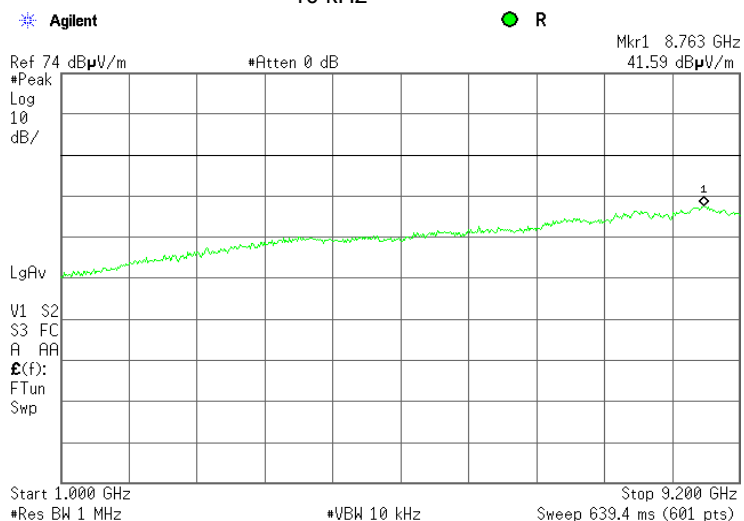

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0415	Cable, Coax, RF, RG-214, 12.3 m	Hermon Laboratories	CC-3	056	02-Dec-12	02-Dec-13
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	03-Jul-12	03-Jul-14
0447	LISN, 16/2, 300V RMS, 50 Ohm/50 uH + 5 Ohm, STD CISPR 16-1	Hermon Laboratories	LISN 16 - 1	066	18-Oct-12	18-Oct-13
0569	Antenna, Log Periodic, 200 - 1000 MHz	Electro-Metrics	LPA 25/30	1953	26-Apr-13	26-Apr-14
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	04-Jun-13	04-Jun-14
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	15-Oct-12	15-Oct-13
0812	Cable Coax, RG-214, 11.5 m, N-type connectors	Hermon Laboratories	C214-11	148	02-Dec-12	02-Dec-13
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	26-Aug-12	26-Aug-13
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	02-Sep-12	02-Sep-13
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	07-Dec-12	07-Dec-13
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	04-Dec-12	04-Dec-13
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	20-Dec-12	20-Dec-13
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	24-Apr-13	24-Apr-14
4160	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out.	Agilent Technologies	87405C	MY470105 94	08-Aug-12	08-Aug-13
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	06-Mar-13	06-Mar-14

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

FCC 47CFR part 15: 2012	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment
ICES-003 issue 5:2012	Information Technology Equipment (ITE) – Limits and methods of measurement

13 APPENDIX E Test equipment correction factors

Correction factor
Line impedance stabilization network
Model LISN 16 - 1
Hermon Laboratories, HL 0447

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Log periodic antenna
Electro-Metrics, model LPA-25/30
Ser.No.1953, HL 0569

Frequency MHz	Antenna Factor dB(1/m)	Frequency MHz	Antenna Factor dB(1/m)
200	15.2	625	25.2
225	15.1	650	25.8
250	16.3	675	27.2
275	17.2	700	27.6
300	19.6	725	27.6
325	18.4	750	27.6
350	19.0	775	28.0
375	20.0	800	28.2
400	20.9	825	29.4
425	21.3	850	29.9
450	22.1	875	30.0
475	22.7	900	30.4
500	23.2	925	30.6
525	23.9	950	30.8
550	24.2	975	31.6
575	24.6	1000	32.1
600	24.7		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Cable loss
Cable coax, RG-214, 12.3 m, s/n 056, HL 0415

No.	Frequency, MHz	Cable loss, dB	Measured uncertainty, dB
1	10	0.23	±0.12
2	30	0.44	±0.12
3	50	0.60	±0.12
4	100	0.89	±0.12
5	150	1.11	±0.13
6	200	1.30	±0.13
7	250	1.45	±0.13
8	300	1.61	±0.13
9	400	1.94	±0.13
10	500	2.18	±0.13
11	600	2.45	±0.14
12	700	2.67	±0.14
13	800	2.94	±0.14
14	900	3.16	±0.14
15	1000	3.38	±0.14

Cable loss
Cable Coaxial, RG-214, 11.5 m, s/n 148, HL 0812

No.	Frequency, MHz	Cable loss, dB	Measured uncertainty, dB
1	10	0.23	±0.12
2	30	0.44	±0.12
3	50	0.60	±0.12
4	100	0.90	±0.12
5	150	1.13	±0.13
6	200	1.34	±0.13
7	250	1.51	±0.13
8	300	1.68	±0.13
9	400	2.01	±0.13
10	500	2.28	±0.13
11	600	2.56	±0.14
12	700	2.80	±0.14
13	800	3.07	±0.14
14	900	3.33	±0.14
15	1000	3.53	±0.14



Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT