

TEST REPORT

Test report no.: 1-2672-01-02/10

Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited test laboratory:

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025
DAkkS registration number: D-PL-12076-01-01

Area of Testing: Radio/Satellite Communications

Applicant

FMS Force Measuring Systems AG
Aspstrasse 6
8154 Oberglatt / SWITZERLAND
Phone: +41-44-852 80 0
Fax: +41-44-850 60 06
Contact: Thomas Lammer
e-mail: thomas.lammer@fms-ag.ch
Phone: +41-44-852 80 80

Manufacturer

FMS Force Measuring Systems AG
Aspstrasse 6
8154 Oberglatt / SWITZERLAND

Test standard/s

47 CFR Part 15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test item

Kind of test item:	Radio Transmitted Tension Monitoring System (Transmission Unit)
Model name:	EMGZ482T
FCC ID:	YXYEMGZ482T
IC:	9377A-EMGZ482T
Frequency:	2412 – 2462 MHz
Power supply:	3.70 V DC by Li-ion Battery (PA-L33.R001)
Temperature range:	26°C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test performed:

Jakob Reschke

Test report authorised:

Stefan Bös

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes	3
2.2	Application details	3
3	Test standard/s	3
4	Test environment	3
5	Test item	4
6	Test laboratories sub-contracted	4
7	Summary of measurement results	5
8	RF measurements	6
8.1	Description of test setup	6
8.1.1	Radiated measurements	6
8.1.2	Conducted measurements	7
8.2	Additional comments	7
8.3	RSP100 test report cover sheet / performance test data	8
9	Measurement results	9
9.1	Maximum output power	9
9.2	Antenna gain	12
9.3	Power spectral density	13
9.4	Spectrum bandwidth – 6 dB bandwidth	16
9.5	Spectrum bandwidth – 99% bandwidth	19
9.6	Band edge compliance conducted	22
9.7	Band edge compliance radiated	24
9.8	TX spurious emissions conducted	27
9.9	TX spurious emissions radiated	31
9.10	RX spurious emissions radiated	40
9.11	TX spurious emissions radiated < 30 MHz	44
9.12	TX spurious emissions conducted < 30 MHz	46
10	Test equipment and ancillaries used for tests	49
Annex A	Photographs of the test setup	51
Annex B	External photographs of the EUT	53
Annex C	Internal photographs of the EUT	57
Annex D	Document history	60
Annex E	Further information	60

2 General information

2.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2011-03-07
Date of receipt of test item:	2011-04-26
Start of test:	2011-04-26
End of test:	2011-05-27
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Version	Test standard description
47 CFR Part 15	2009-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

4 Test environment

Temperature:	T_{nom}	26	°C during room temperature tests
	T_{max}	-/-	°C during high temperature test
	T_{min}	-/-	°C during low temperature test
Relative humidity content:		41	%
Air pressure:		not relevant for this kind of testing	
Power supply:	V_{nom}	3.70 V	DC by Li-ion Battery (PA-L33.R001)
	V_{max}	-/-	V
	V_{min}	-/-	V

5 Test item

Kind of test item	:	Radio Transmitted Tension Monitoring System (Transmission Unit)
Type identification	:	EMGZ482T
S/N serial number	:	1089540
HW hardware status	:	V1.021
SW software status	:	Not defined
Frequency band [MHz]	:	2400.00 – 2483.50 MHz
Type of modulation	:	GFSK
Number of channels	:	11 (5 MHz Steps)
Antenna	:	External antenna with SMA connector
Power supply	:	3.70 V DC by Li-ion Battery (PA-L33.R001)
Temperature range	:	26°C

6 Test laboratories sub-contracted

None

7 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 8	Passed	2011-06-08	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Pass	Fail	NA	NP	Results (max.)
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e) RSS 210 / A8.2(b)	Power spectral density	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth 6dB bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth 99% bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(3) RSS-210 / A8.4(4)	Maximum output power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	Band edge compliance conducted	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.205 RSS-210 / A8.5	Band edge compliance radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions conducted	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109 RSS-Gen.	RX spurious emissions radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a)	Conducted emissions < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements


8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

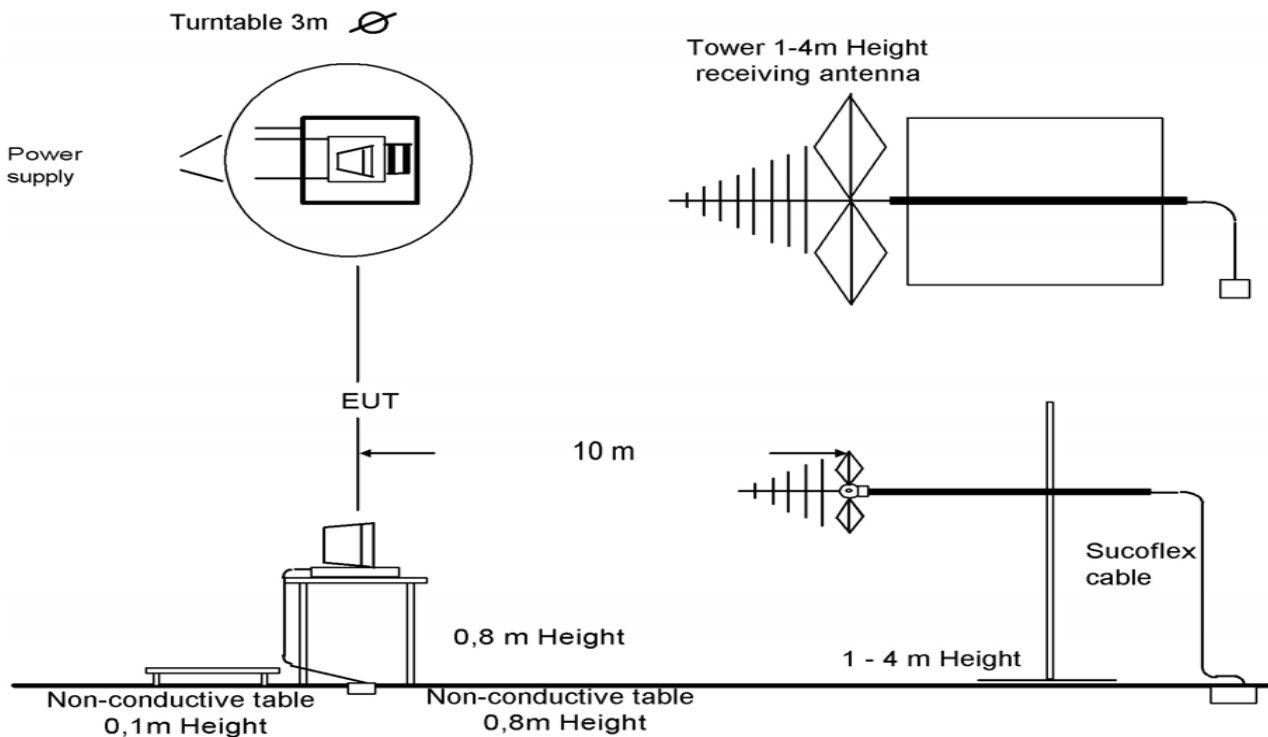


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

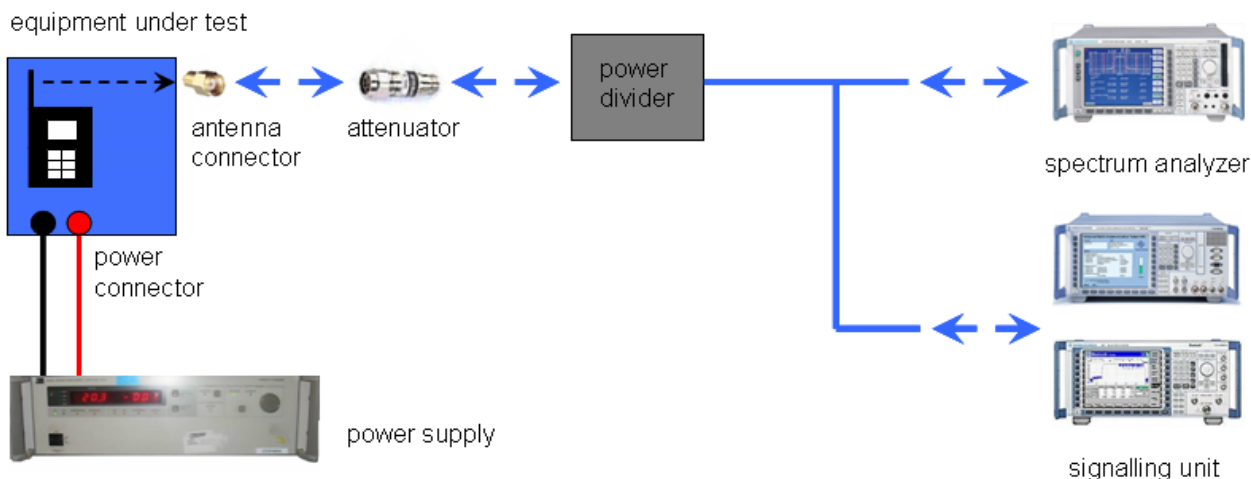

Picture 2: Diagram conducted measurements

8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode: ☐ No test mode available.
☒ EUT is transmitting pseudo random data by itself

8.3 RSP100 test report cover sheet / performance test data

Test report number	:	1-2672-01-02/10
Equipment model number	:	EMGZ482T
Certification number	:	9377A-EMGZ482T
Manufacturer (complete address)	:	FMS Force Measuring Systems AG Aspstrasse 6 8154 Oberglatt / SWITZERLAND
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 8
Open area test site IC No.	:	IC 3462C-1
Frequency range	:	2412 MHz - 2462 MHz
RF-power (max.)	:	cond.: 2.74 mW EIRP: 7.82 mW
Occupied bandwidth (99%-BW) [kHz]	:	1891
Type of modulation	:	GFSK
Emission designator (TRC-43)	:	1M89FXD
Antenna information	:	External dipole antenna with SMA connector RN-SMA-4
Transmitter spurious (worst case) [µV/m @ 3m] :		55 µV/m @ 4823.25 MHz
Receiver spurious (worst case) [µV/m @ 3m] :		107 µV/m (noise floor)

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory manager:

2011-06-08

Jakob Reschke

Date

Name

Signature

9 Measurement results

9.1 Maximum output power

Description:

Measurement of the maximum output power conducted and radiated

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	30 MHz
Resolution bandwidth:	50 MHz
Span:	50 MHz
Trace-Mode:	Max Hold

Result:


Modulation Channel	Maximum output power conducted [dBm]		
	Lowest	Middle	Highest
GFSK	4.36	4.38	3.97
Measurement uncertainty	± 1 dB		

Modulation Channel	Maximum output power radiated - EIRP [dBm]		
	Lowest	Middle	Highest
GFSK	8.93	8.52	8.89
Measurement uncertainty	± 3 dB		

Result: The result of the measurement is passed.


Plots:

Plot 1: lowest channel

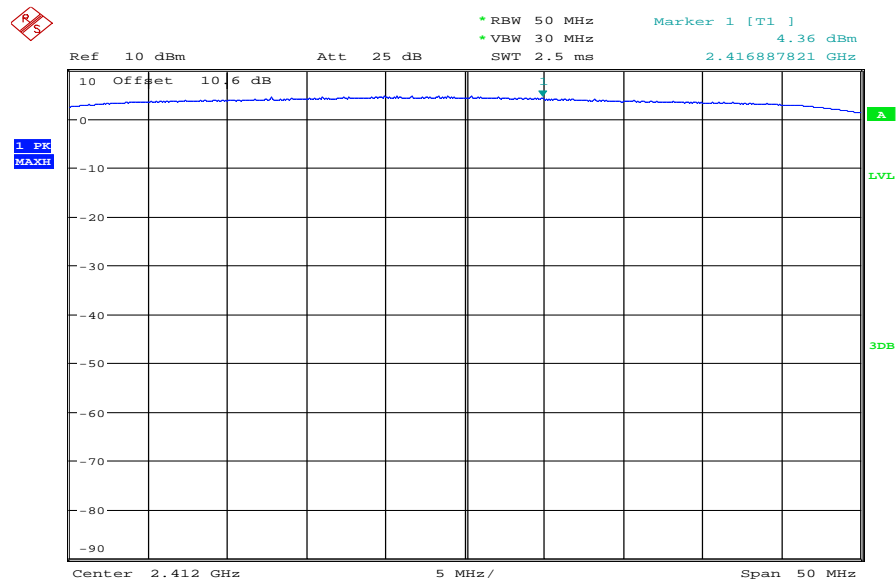


Date: 26.APR.2011 11:16:50

Plot 2: middle channel

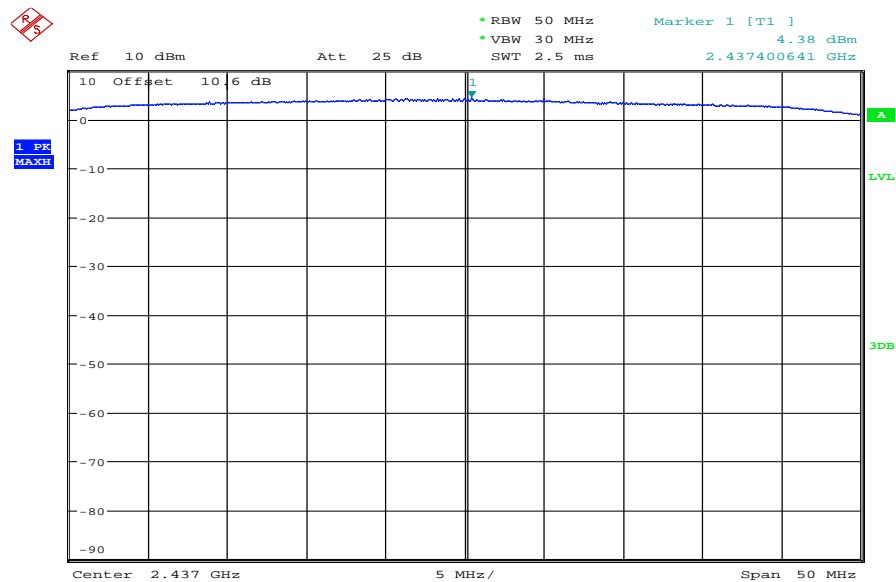

Date: 26.APR.2011 11:23:29

Plot 3: highest channel

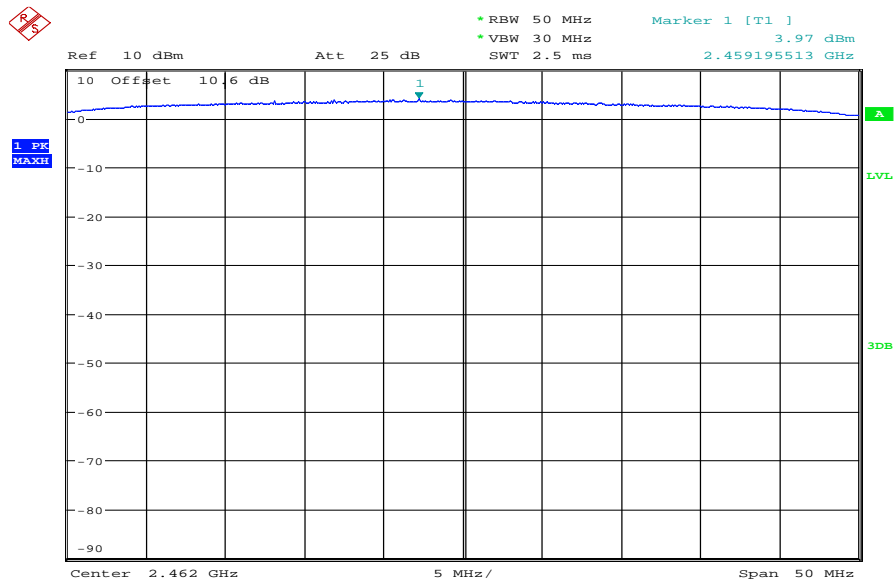

Date: 26.APR.2011 11:24:27

9.2 Antenna gain

Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	3 MHz
Resolution bandwidth:	3 MHz
Span:	3 MHz
Trace-Mode:	Max hold

Limits:

FCC	IC
CFR Part 15.247 (b)(4)	RSS 210, Issue 8, A 8.4(2)
Antenna Gain	
6 dBi	

Results:

T_{nom}	V_{nom}	lowest channel	middle channel	highest channel
Conducted power [dBm] Measured		4.36	4.38	3.97
Radiated power [dBm] Measured		8.93	8.52	8.89
Gain [dBi] Calculated		4.57	4.14	4.92

Result: The result of the measurement is passed.

9.3 Power spectral density

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	500 s
Video bandwidth:	3 kHz
Resolution bandwidth:	3 kHz
Span:	1.5 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (e)	RSS 210, Issue 8, A 8.2(b)
Power Spectral Density	
The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.	


Results:

Modulation Channel	Power Spectral density [dBm/3kHz]		
	Lowest	Middle	Highest
GFSK	-5.00	-5.54	-4.76
Measurement uncertainty	± 1.5 dB		

Result: The result of the measurement is passed.


Plots:

Plot 1: lowest channel

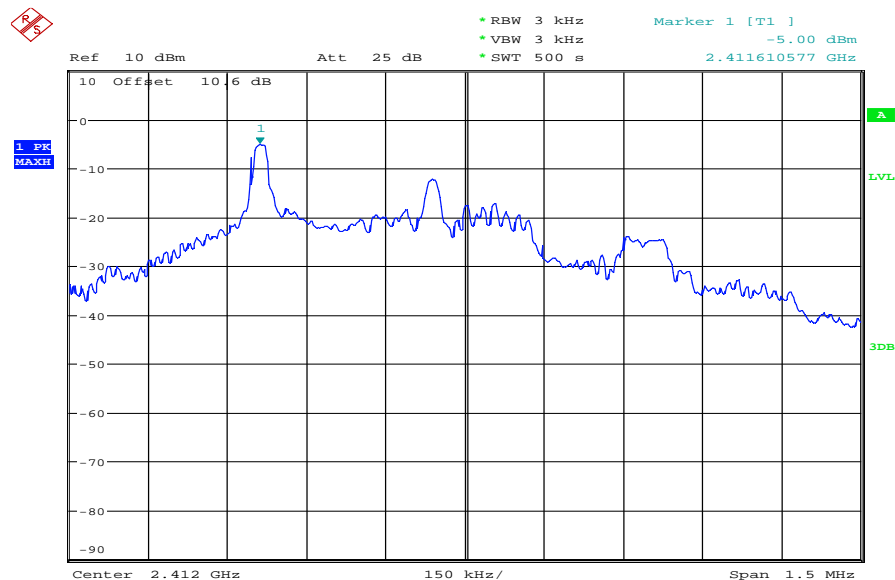


Date: 26.APR.2011 14:03:24

Plot 2: middle channel

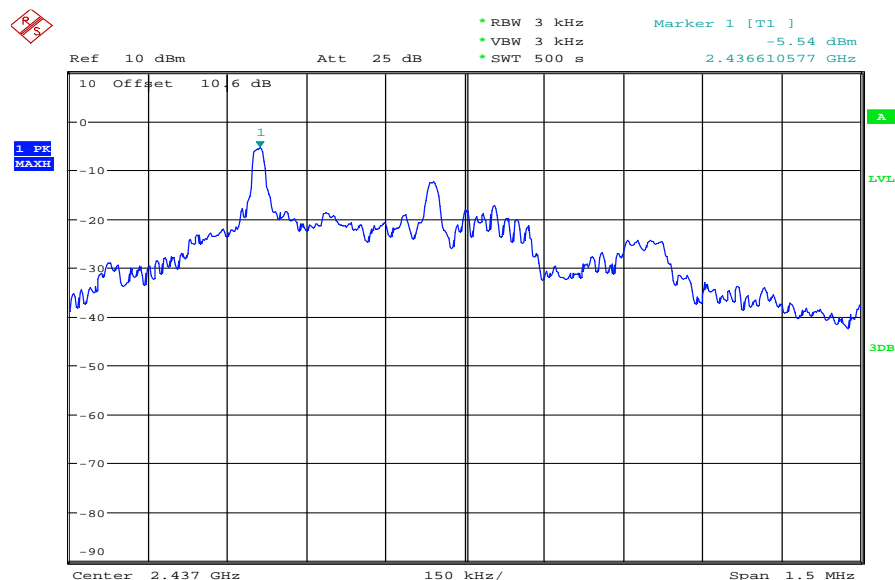

Date: 26.APR.2011 14:13:06

Plot 3: highest channel

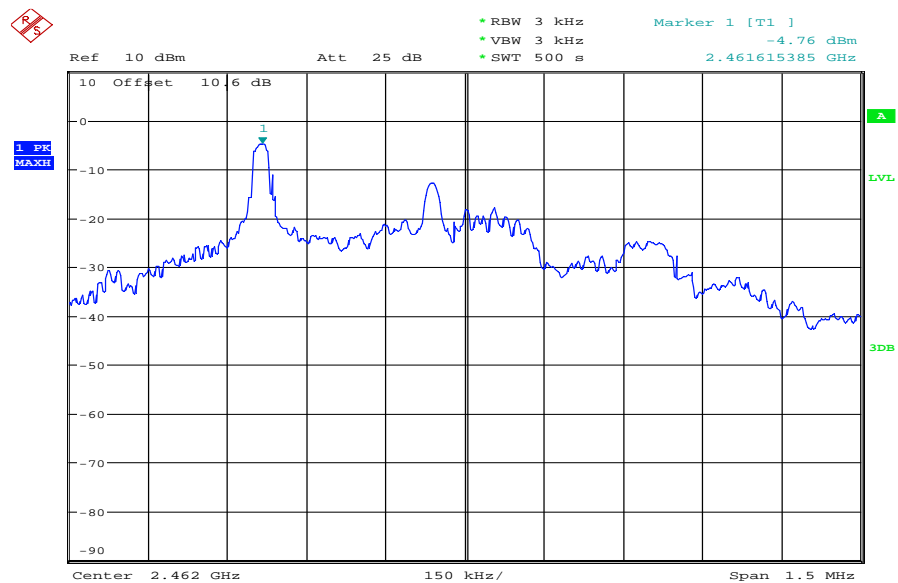

Date: 26.APR.2011 14:53:32

9.4 Spectrum bandwidth – 6 dB bandwidth

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	See plots
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (a)(2)	RSS 210, Issue 8, A 8.2(a)
Spectrum Bandwidth – 6 dB Bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


Results:

Modulation Channel	6 dB BANDWIDTH [kHz]		
	Lowest	Middle	Highest
GFSK	865	865	874
Measurement uncertainty	± 100 kHz		

Result: The result of the measurement is passed.


Plots:

Plot 1: lowest channel

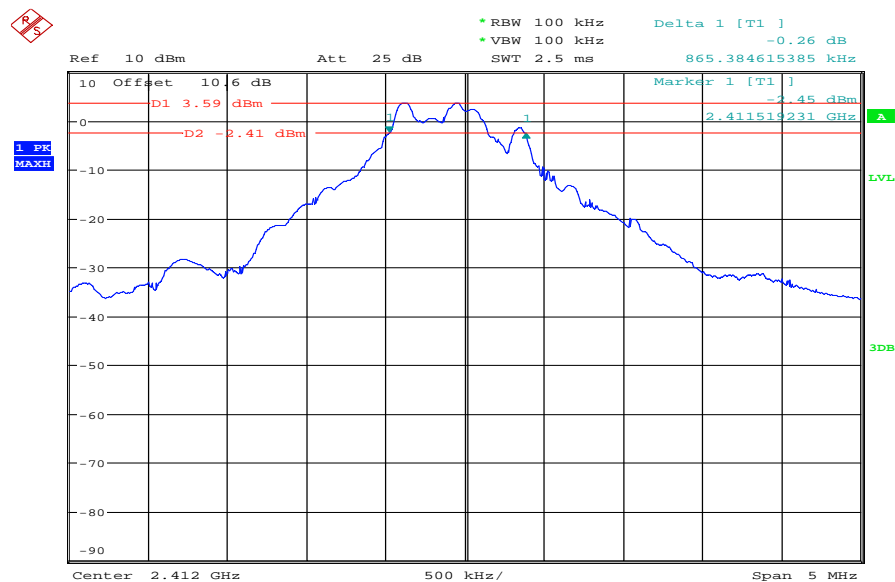


Date: 27.APR.2011 07:13:36

Plot 2: middle channel

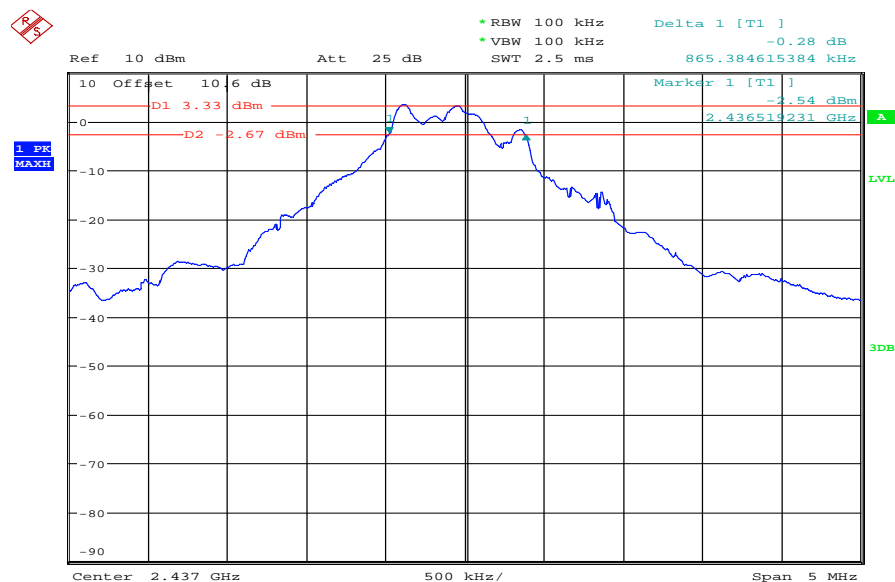

Date: 27.APR.2011 07:08:48

Plot 3: highest channel

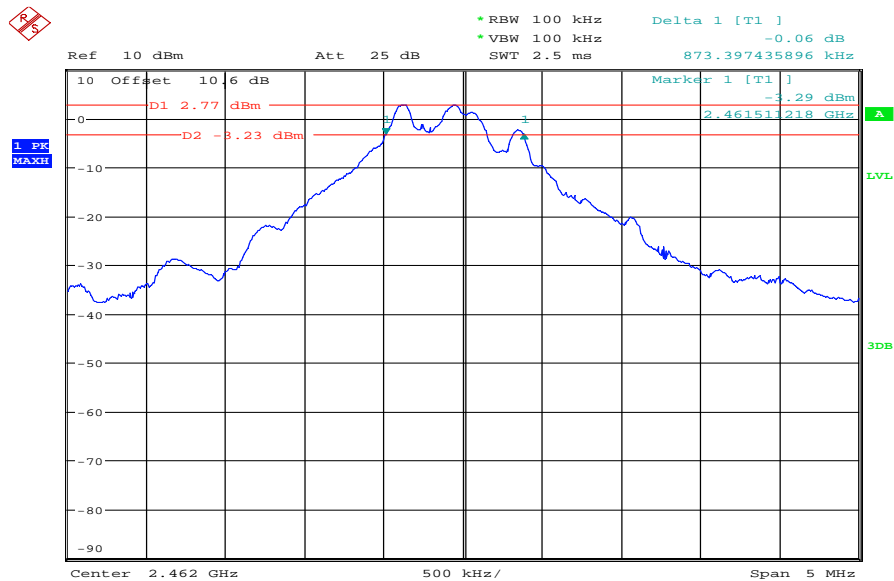

Date: 26.APR.2011 15:10:33

9.5 Spectrum bandwidth – 99% bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	8 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
	RSS GEN 4.6
Spectrum Bandwidth – 99% Bandwidth	


Results:

Modulation Channel	20 dB BANDWIDTH [kHz]		
	Lowest	Middle	Highest
GFSK	1763	1891	1811
Measurement uncertainty	± 100 kHz		

Result: The result of the measurement is passed.


Plots:

Plot 1: lowest channel

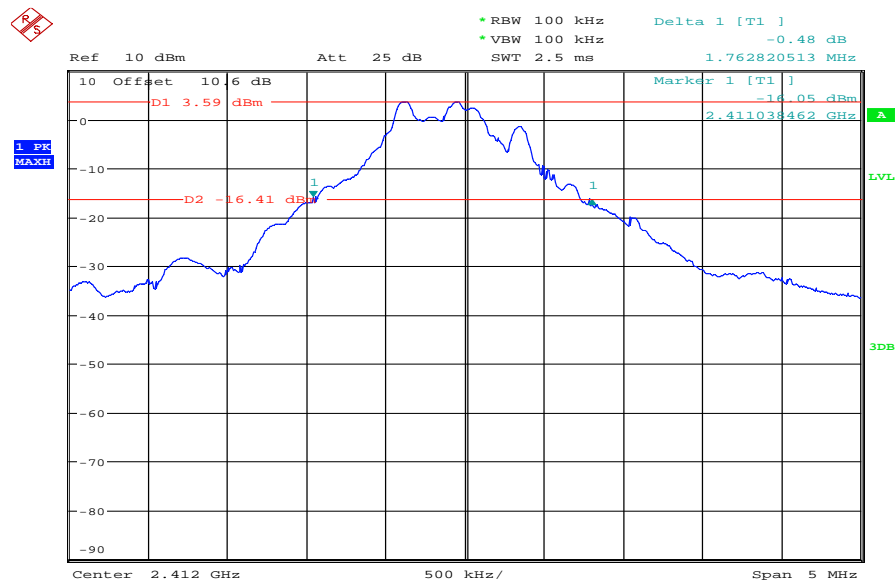


Date: 27.APR.2011 07:14:09

Plot 2: middle channel

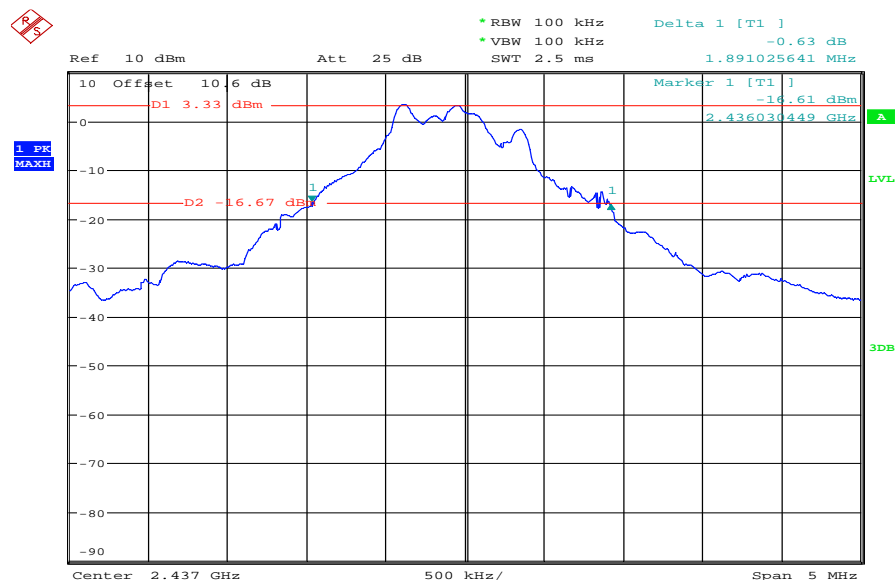

Date: 27.APR.2011 07:09:21

Plot 3: highest channel

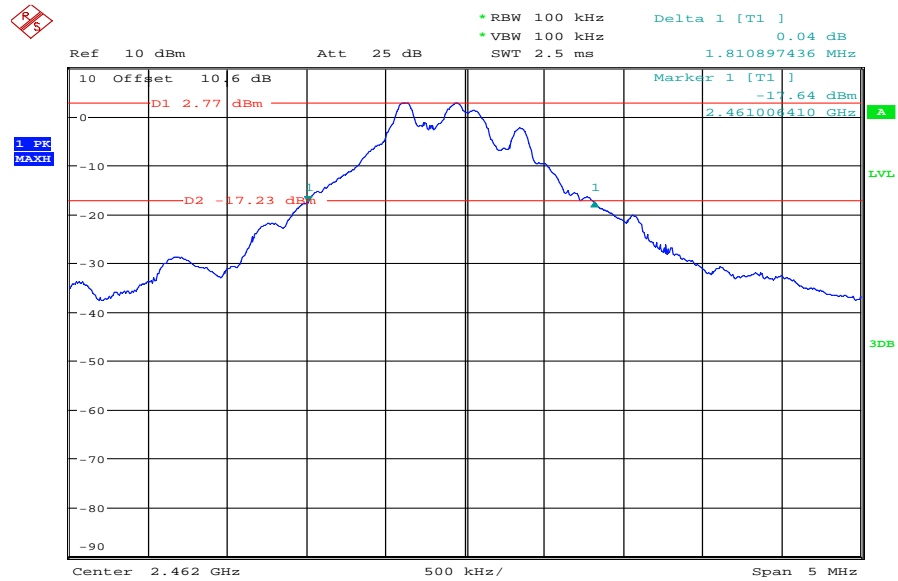

Date: 26.APR.2011 15:16:02

9.6 Band edge compliance conducted

Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	See plots
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (d)	RSS 210, Issue 8, A 8.5
Band Edge Compliance Conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.	


Result:

Szenario	Band Edge Compliance Conducted [dB]
Lower Band Edge	> 20 dB (see plot 1)
Upper Band Edge	> 20 dB (see plot 2)
Measurement uncertainty	± 1.5 dB

Result: The result of the measurement is passed.


Plots:

Plot 1: lowest channel

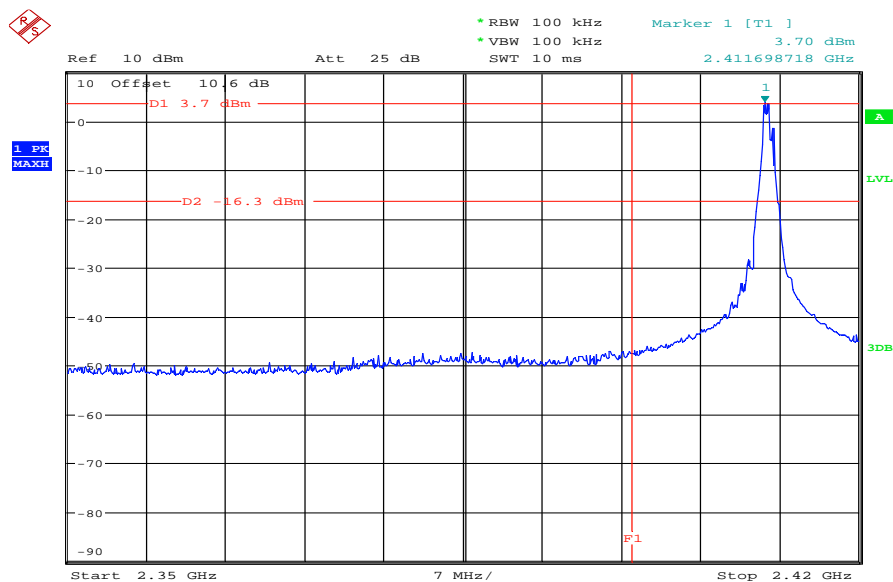

Date: 27.APR.2011 09:05:47

Plot 2: highest channel

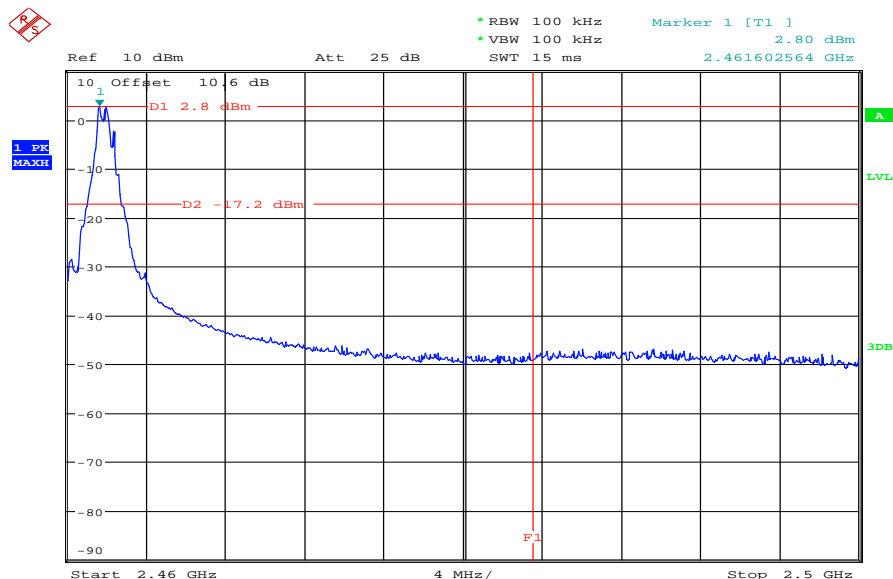

Date: 27.APR.2011 08:48:52

9.7 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 00 for the lower restricted band and to channel 78 for the upper restricted band. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	10 Hz
Resolution bandwidth:	1 MHz
Span:	Lower Band: 2300 – 2400 MHz Higher Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold

Limits:


FCC	IC
CFR Part 15.205	RSS 210, Issue 8, A 8.5
Band Edge Compliance Radiated	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).	
54 dB μ V/m AVG	

Result:


Szenario	Band Edge Compliance Radiated [dB μ V/m]
Lower Band Edge	< 54 dB μ V/m (see plots 1/3)
Upper Band Edge	< 54 dB μ V/m (see plot 2/4)
Measurement uncertainty	\pm 3 dB

Plots:


Plot 1: lower band edge, horizontal polarization

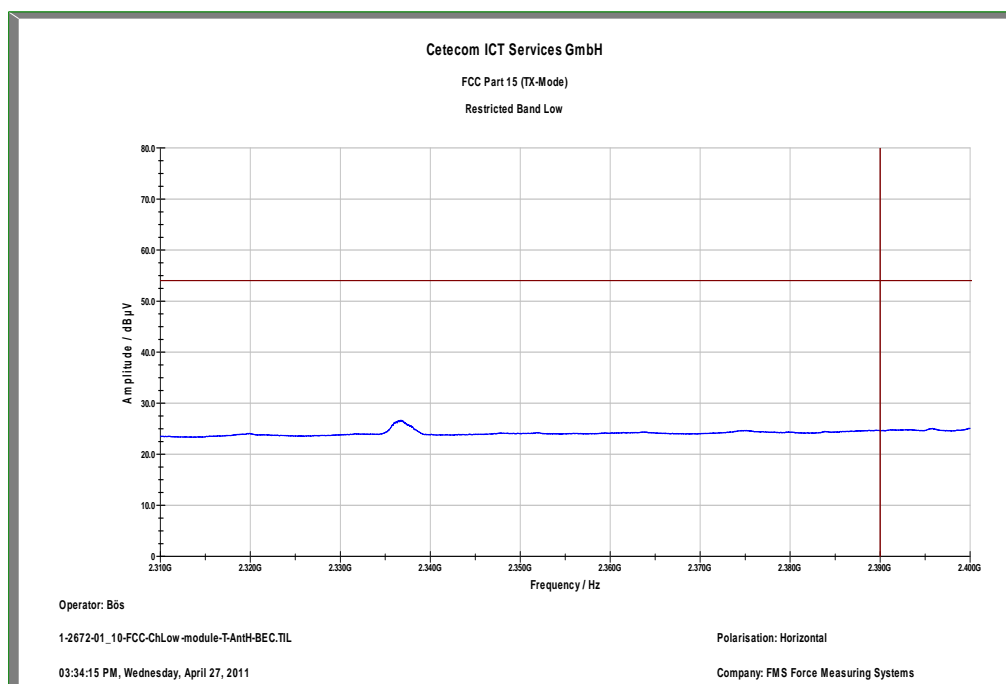


Plot 2: upper band edge, horizontal polarization

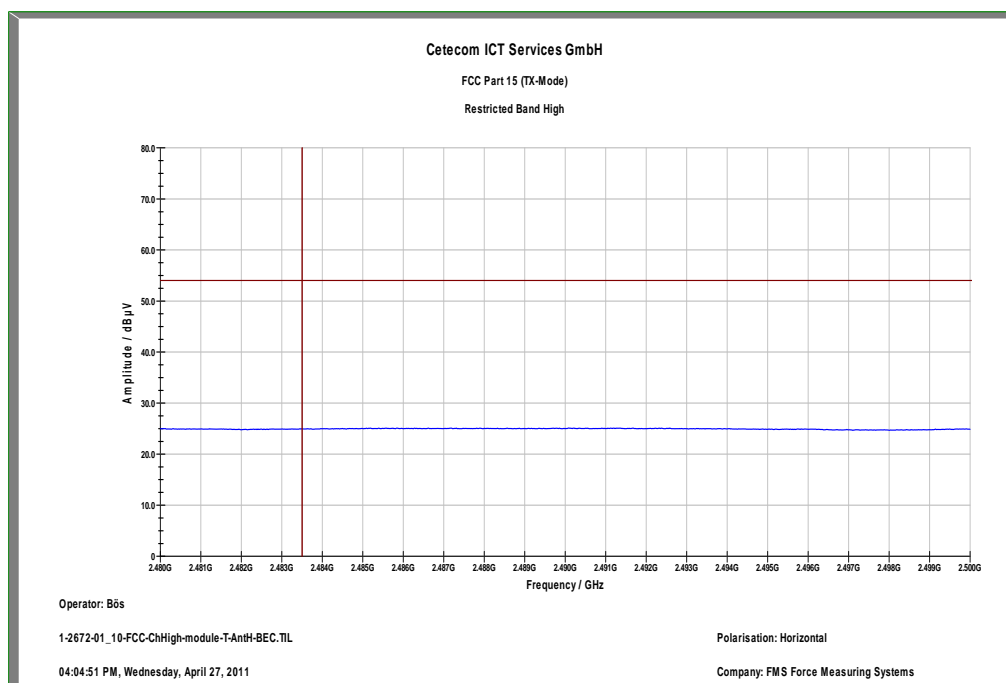

Plot 3: lower band edge, vertical polarization

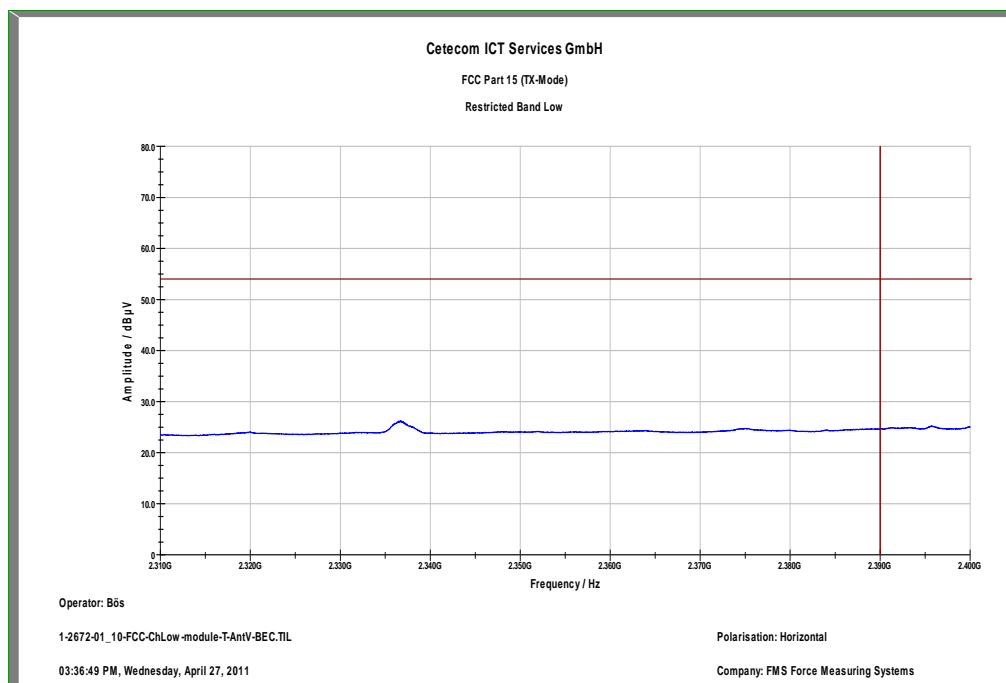

Plot 4: upper band edge, vertical polarization

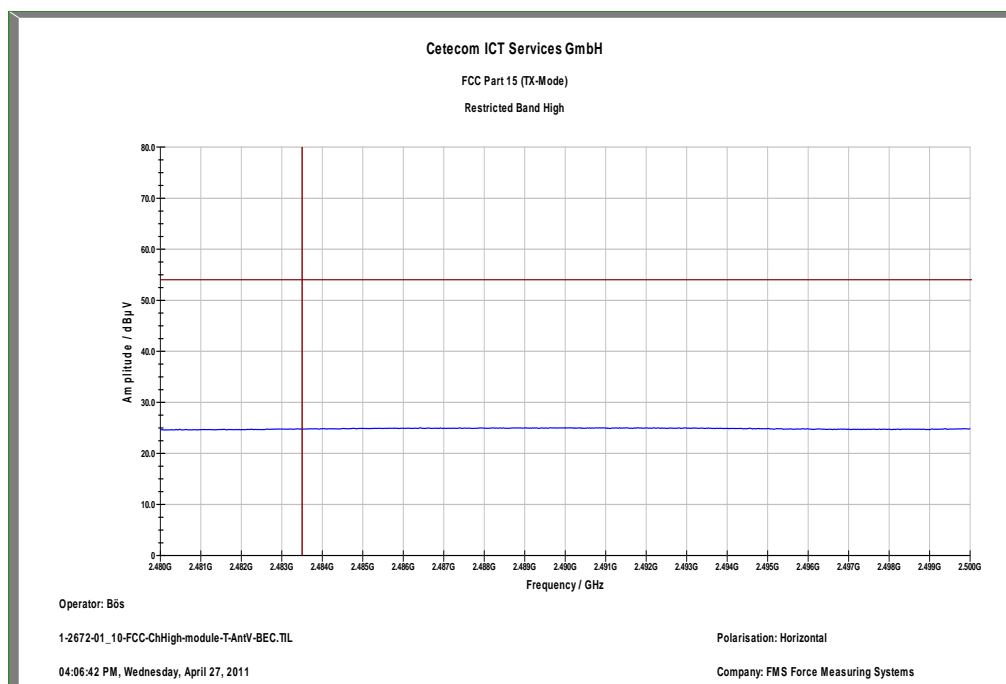

Result: The result of the measurement is passed.

9.8 TX spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at lowest, middle and highest channel.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Span:	9 kHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247(d)	RSS 210, Issue 8, A 8.5
TX Spurious Emissions Conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	


Results:

TX Spurious Emissions Conducted					
Channel		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest		3.93	30 dBm		Operating frequency
No critical peaks found			-20 dBc		complies
Middle		3.31	30 dBm		Operating frequency
No critical peaks found			-20 dBc		complies
Highest		3.10	30 dBm		Operating frequency
No critical peaks found			-20 dBc		complies
Measurement uncertainty		± 3 dB			

Result: The result of the measurement is passed.


Plots:

Plot 1: lowest channel

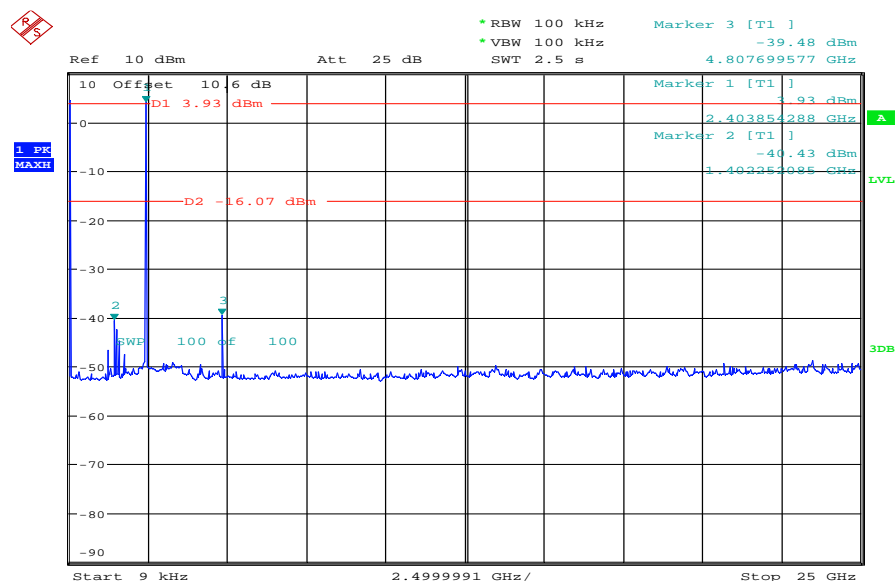


Date: 27.APR.2011 10:50:13

Plot 2: middle channel

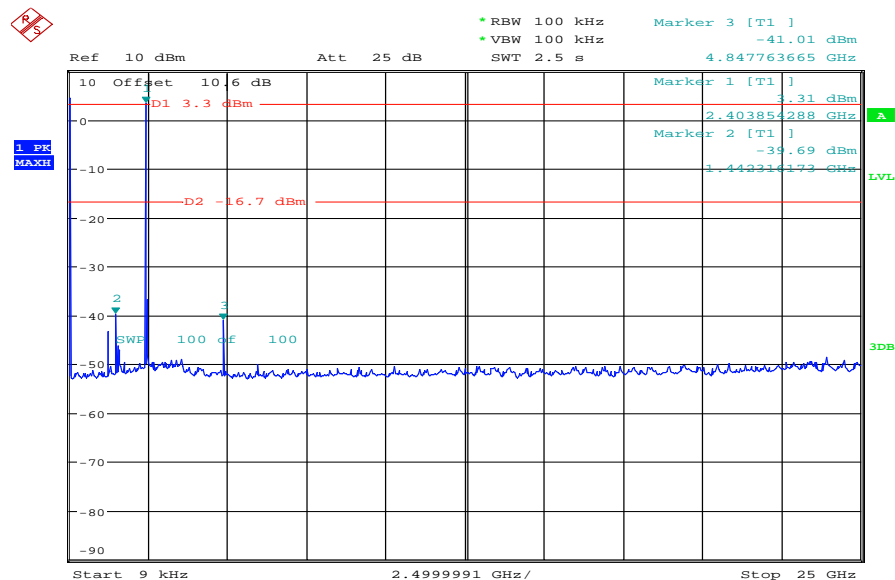

Date: 27.APR.2011 11:02:00

Plot 3: highest channel

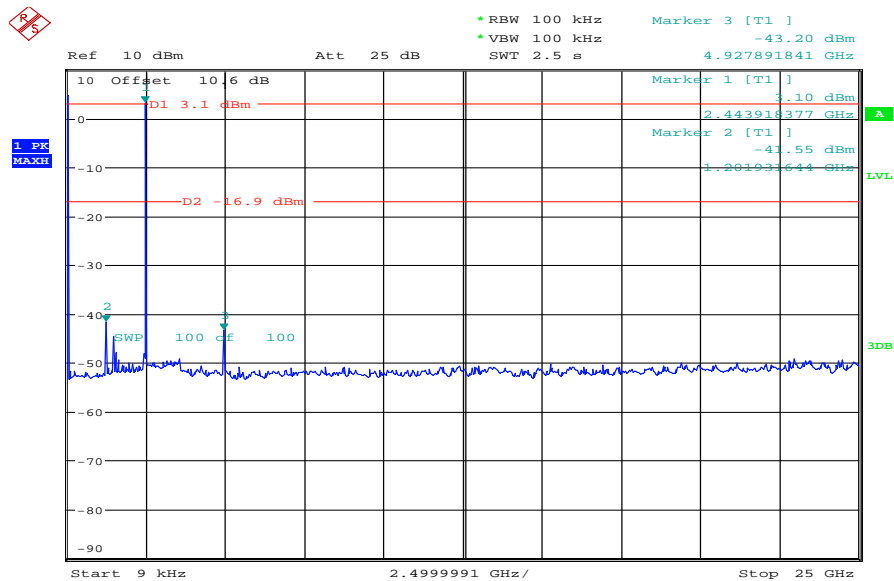

Date: 27.APR.2011 10:27:24

9.9 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at lowest, middle and highest channel.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
CFR Part 15.247(d)		RSS 210, Issue 8, A 8.5	
TX Spurious Emissions Radiated			
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).			
§15.209			
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance	
30 - 88	30.0	10	
88 – 216	33.5	10	
216 – 960	36.0	10	
Above 960	54.0	3	

Results:

TX Spurious Emissions Radiated [dB μ V/m]								
Lowest			Middle			Highest		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
1582.74	AV	25.10	1600.00	AV	25.15	1615.00	AV	26.30
4823.25	AV	34.79	4872.00	AV	22.11	4924.00	AV	30.00
Measurement uncertainty			± 3 dB					

Result: The result of the measurement is passed.

Plots:

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: EMGZ482 Transmitter
 Serial Number: 1089541
 Test Description: FCC Part 15
 Operating Conditions: TX channel 1
 Operator Name: Kraus
 Comment: bat powered, connected to ground, with 2 sensors

Scan Setup: STAN_Fin [EMI radiated]


Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 2 GHz	QuasiPeak	120 kHz	15 s	Receiver

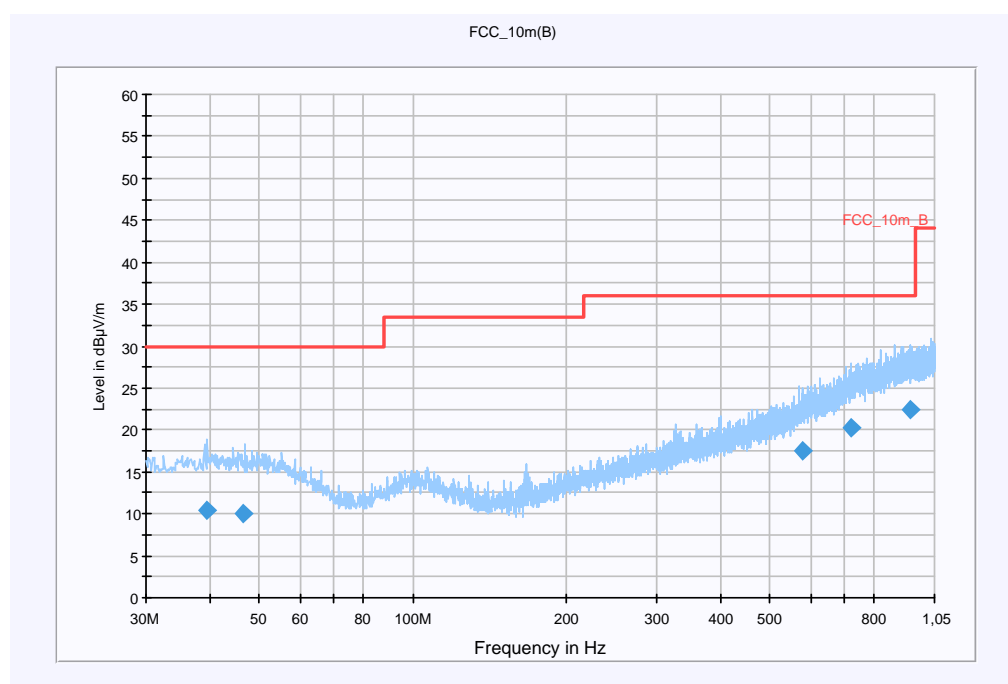
**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
39.480750	10.4	15000.000	120.000	188.0	H	133.0	13.4	19.6	30.0	
46.612350	10.1	15000.000	120.000	200.0	H	259.0	13.3	19.9	30.0	
580.600050	17.6	15000.000	120.000	248.0	H	-7.0	20.3	18.4	36.0	
718.680600	20.4	15000.000	120.000	400.0	V	324.0	22.9	15.6	36.0	
938.607300	22.5	15000.000	120.000	343.0	V	29.0	25.3	13.5	36.0	


Plot 2: 1 GHz to 12.75 GHz, vertical polarization

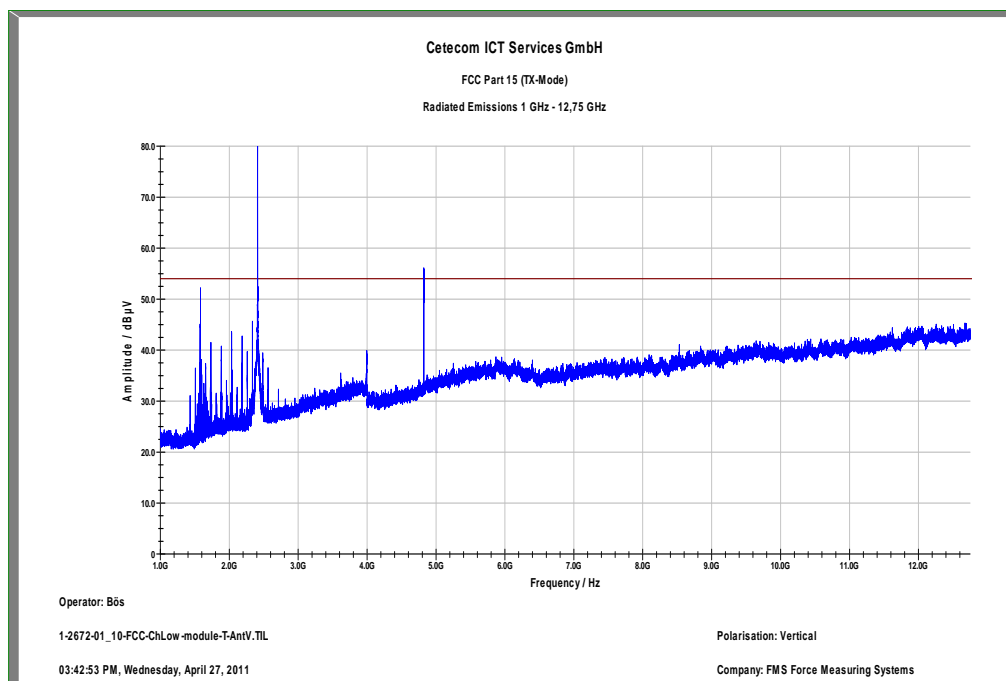

Plot 3: Lowest channel, 1 GHz to 12.75 GHz, horizontal polarization

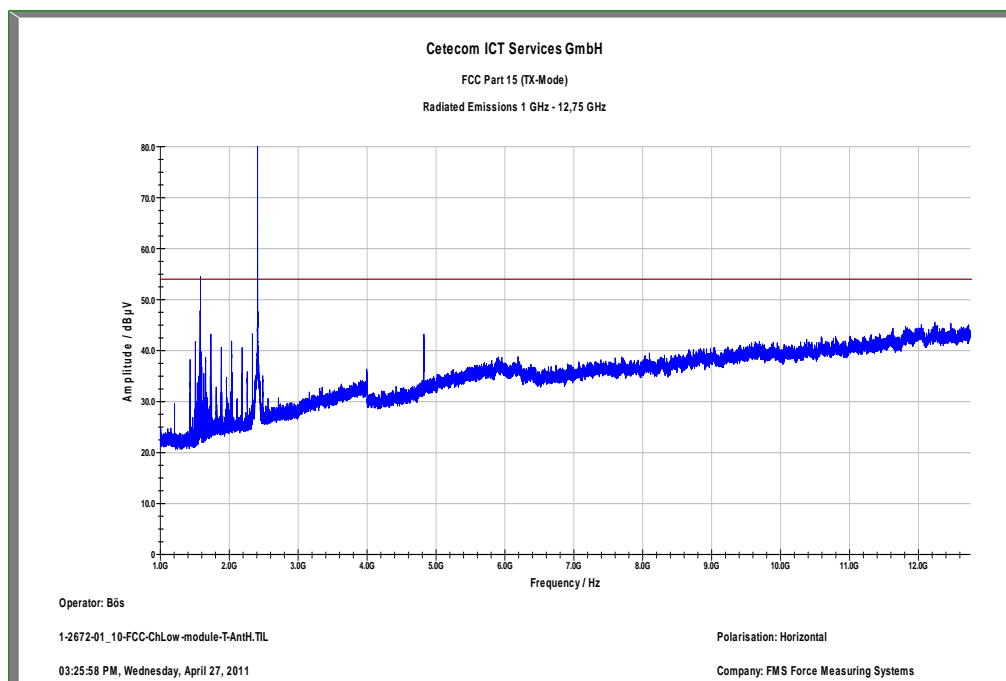

Plot 4: Lowest channel, 12 GHz to 25 GHz (valid for all channels)

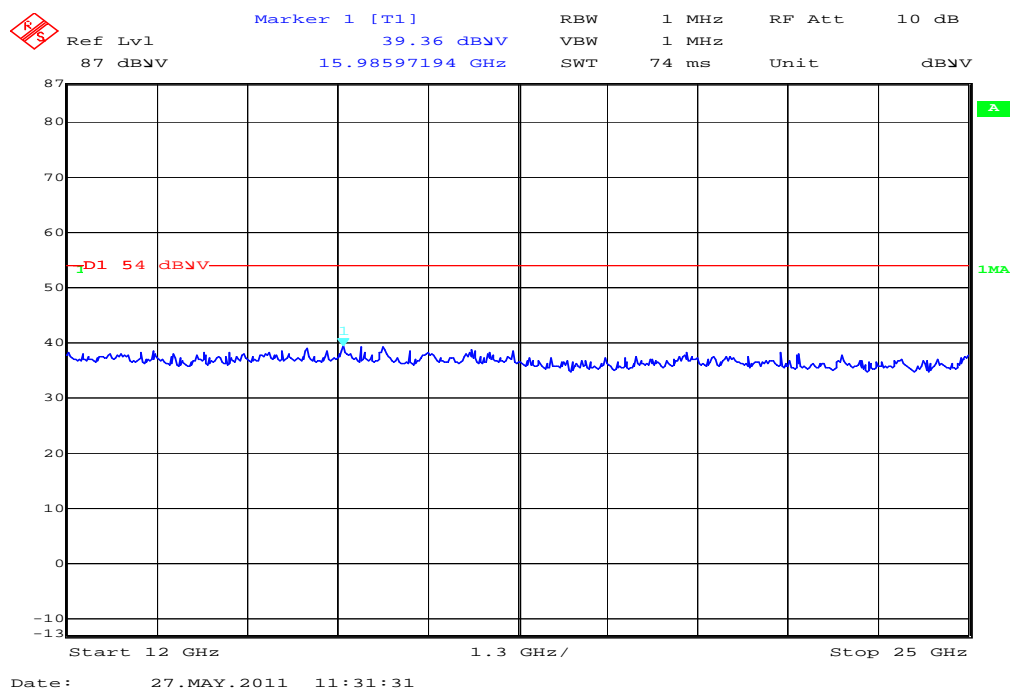


Plot 5: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization**Common Information**

EUT: EMGZ482 Transmitter
 Serial Number: 1089541
 Test Description: FCC Part 15
 Operating Conditions: TX channel 6
 Operator Name: Kraus
 Comment: bat powered, connected to ground, with 2 sensors

Scan Setup: STAN_Fin [EMI radiated]


Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 2 GHz	QuasiPeak	120 kHz	15 s	Receiver

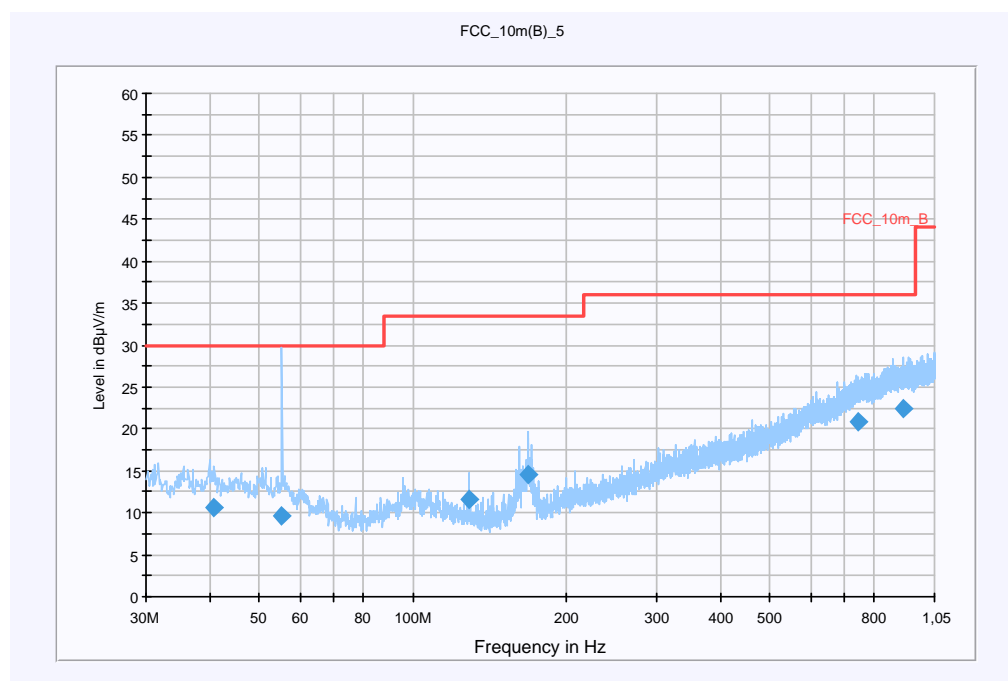**Final Result 1**


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
40.800000	10.6	15000.000	120.000	270.0	H	-2.0	13.4	19.4	30.0	
55.440000	9.7	15000.000	120.000	270.0	H	-2.0	12.8	20.3	30.0	
129.000000	11.5	15000.000	120.000	167.0	V	286.0	9.5	22.0	33.5	
167.520000	14.6	15000.000	120.000	106.0	V	61.0	9.7	18.9	33.5	
742.080000	20.9	15000.000	120.000	135.0	V	15.0	23.5	15.1	36.0	
909.120000	22.4	15000.000	120.000	120.0	H	320.0	25.2	13.6	36.0	

Plot 6: Middle channel, 1 GHz to 12.75 GHz, vertical polarization

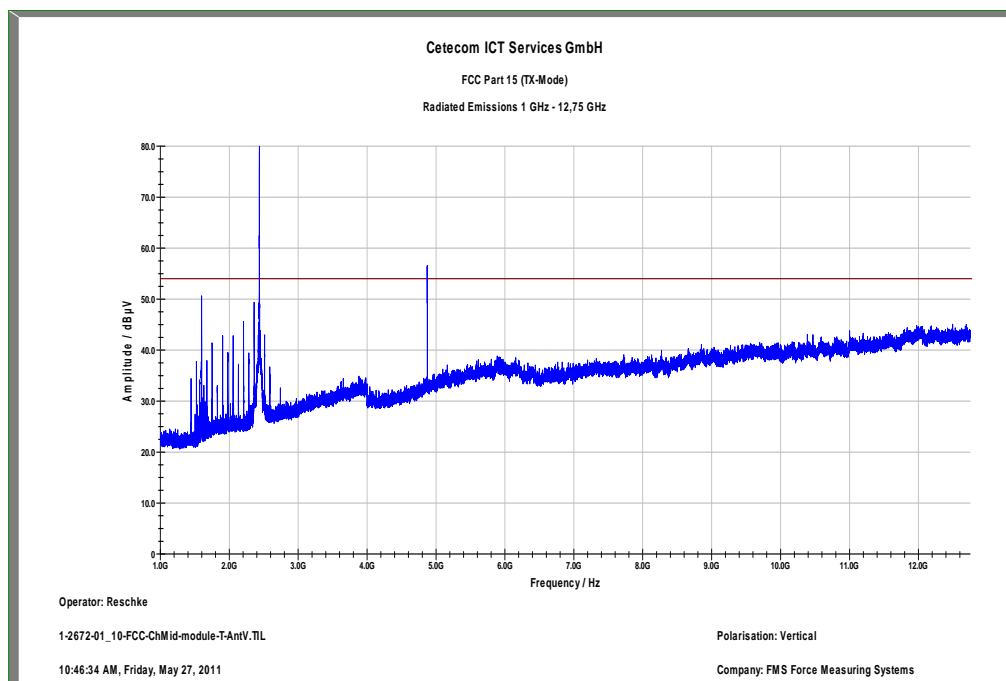

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: Middle channel, 1 GHz to 12.75 GHz, horizontal polarization

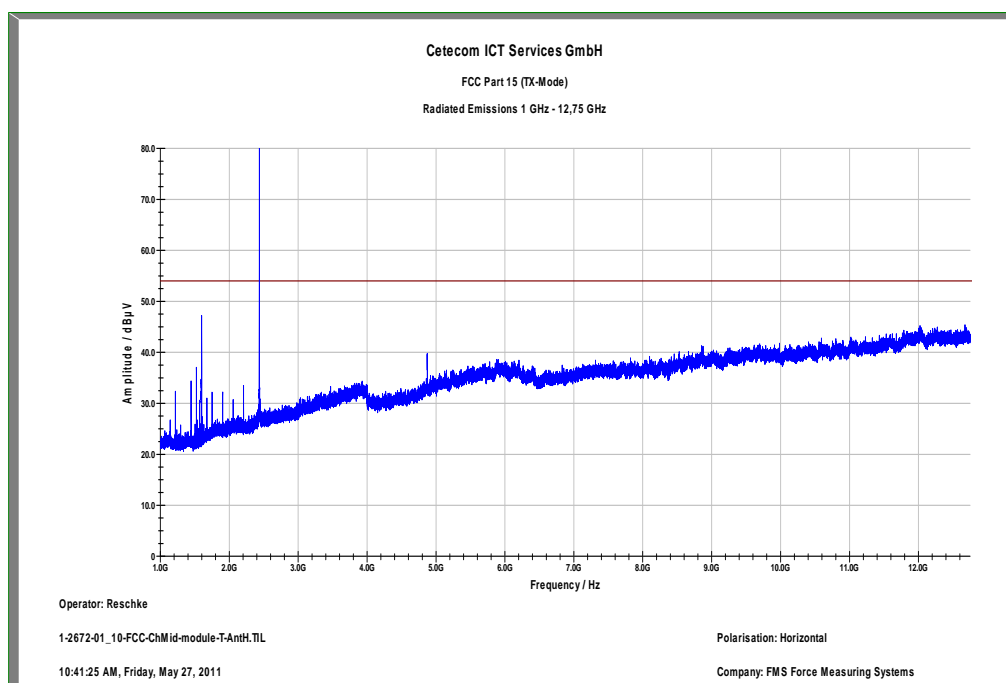

The carrier signal is notched with a 2.4 GHz band rejection filter.


Plot 8: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization**Common Information**

EUT: EMGZ482 Transmitter
 Serial Number: 1089541
 Test Description: FCC Part 15
 Operating Conditions: TX channel 11
 Operator Name: Kraus
 Comment: bat powered, connected to ground, with 2 sensors

Scan Setup: STAN_Fin [EMI radiated]


Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 2 GHz	QuasiPeak	120 kHz	15 s	Receiver

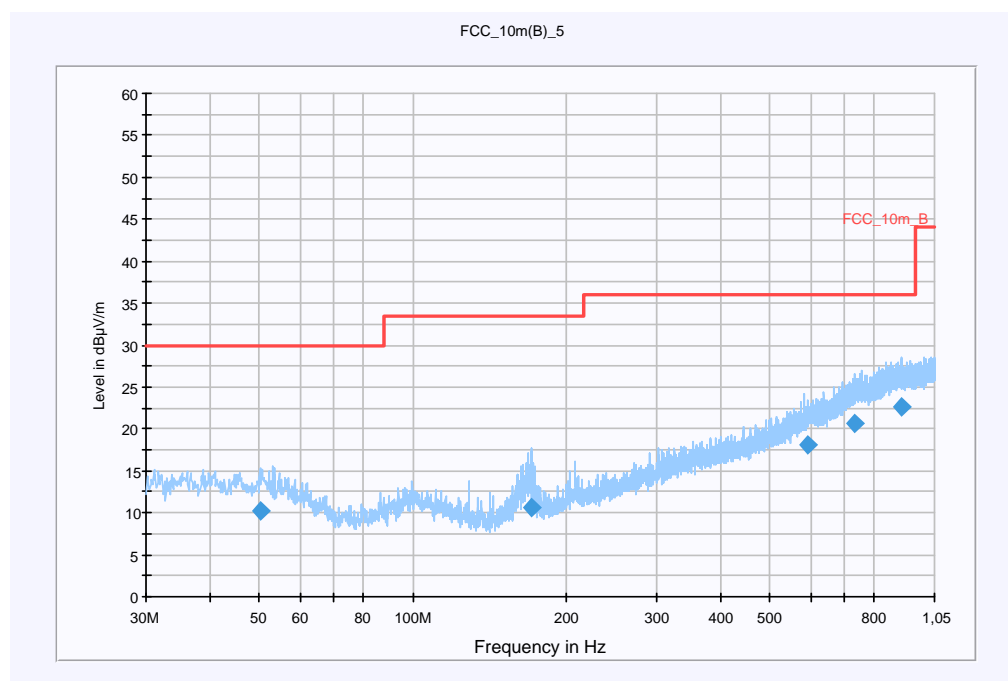
**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
50.160000	10.3	15000.000	120.000	270.0	V	238.0	13.4	19.7	30.0	
170.760000	10.7	15000.000	120.000	127.0	V	343.0	9.9	22.8	33.5	
593.520000	18.0	15000.000	120.000	221.0	H	177.0	20.6	18.0	36.0	
732.840000	20.7	15000.000	120.000	120.0	V	314.0	23.3	15.3	36.0	
902.040000	22.5	15000.000	120.000	98.0	H	314.0	25.2	13.5	36.0	

Plot 9: Highest channel, 1 GHz to 12.75 GHz, vertical polarization

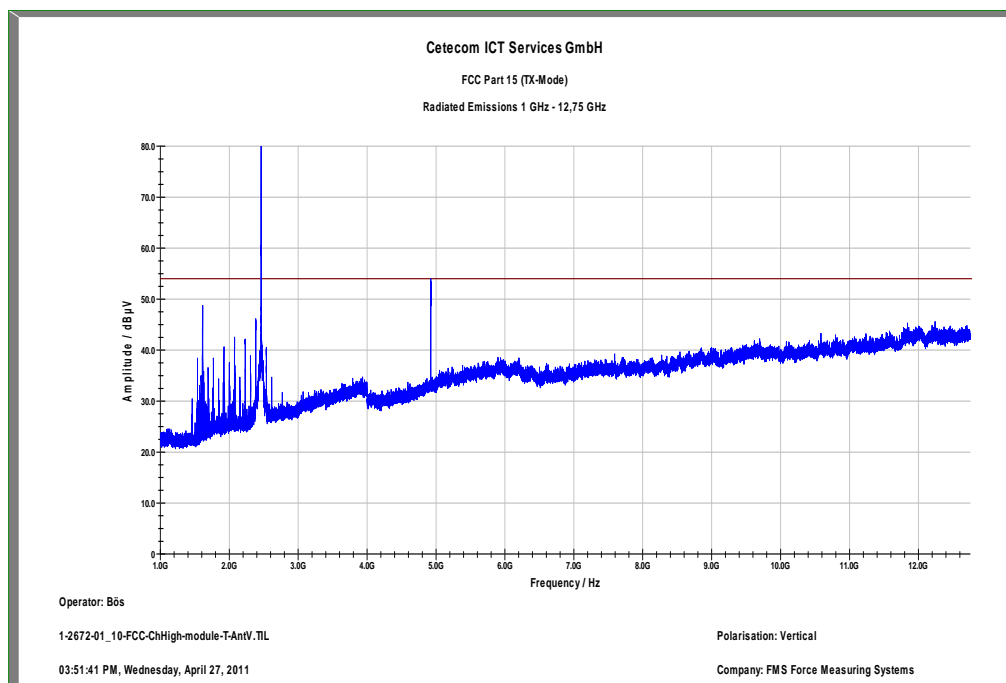

Plot 10: Highest channel, 1 GHz to 12.75 GHz, horizontal polarization

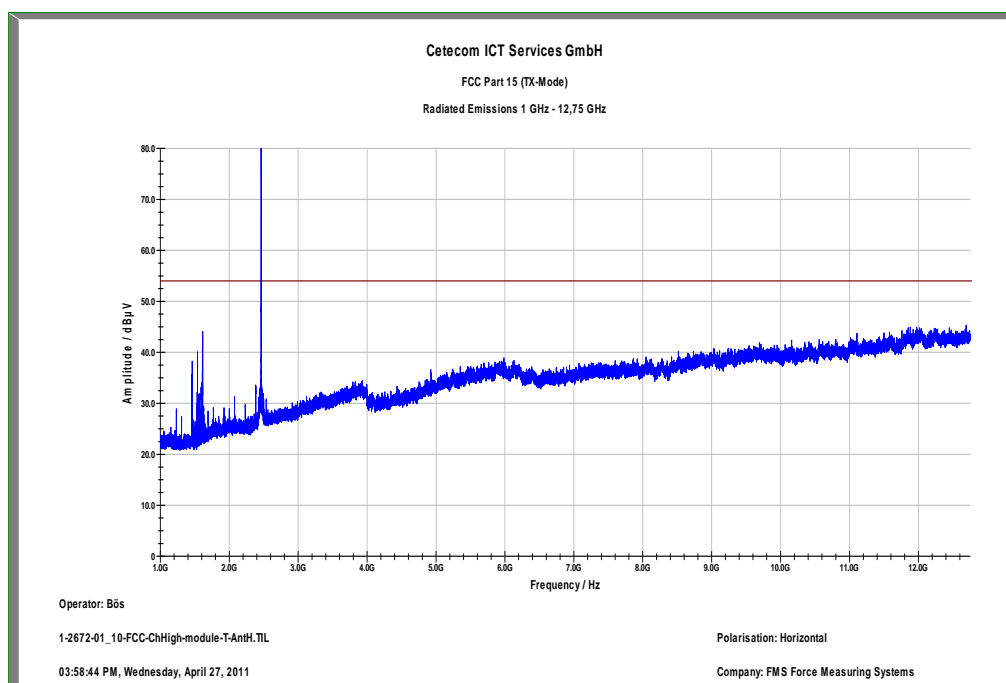

9.10 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
CFR Part 15.109		RSS Gen, Issue 2, 4.10
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:

RX Spurious Emissions Radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
No critical peaks found		
Measurement uncertainty	± 3 dB	

Result: The result of the measurement is passed.


Plots: RX / Idle – mode**Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization****Common Information**

EUT: EMGZ482 Transmitter
 Serial Number: 1089541
 Test Description: FCC Part 15
 Operating Conditions: RX
 Operator Name: Kraus
 Comment: bat powered, connected to ground, with 2 sensors

Scan Setup: STAN_Fin [EMI radiated]


Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 2 GHz	QuasiPeak	120 kHz	15 s	Receiver

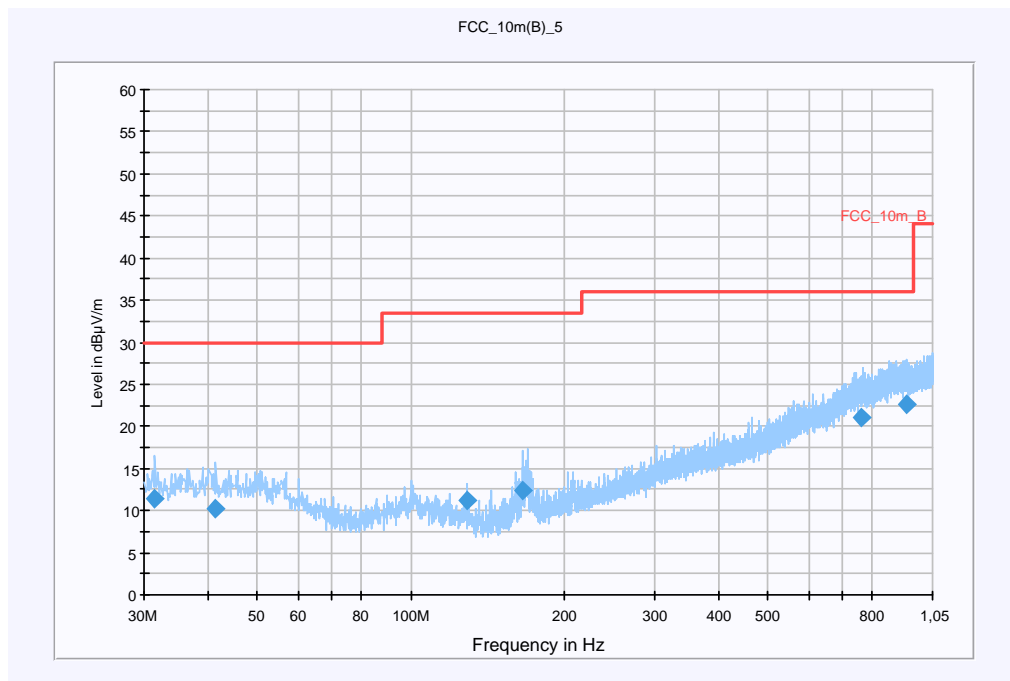
**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
31.560000	11.3	15000.000	120.000	210.0	V	84.0	12.7	18.7	30.0	
41.520000	10.3	15000.000	120.000	170.0	V	334.0	13.4	19.7	30.0	
129.000000	11.2	15000.000	120.000	170.0	V	279.0	9.5	22.3	33.5	
165.840000	12.4	15000.000	120.000	98.0	V	17.0	9.6	21.1	33.5	
763.440000	21.0	15000.000	120.000	270.0	V	201.0	23.7	15.0	36.0	
933.720000	22.5	15000.000	120.000	270.0	H	106.0	25.3	13.5	36.0	


Plot 2: 1 GHz to 12.75 GHz, vertical polarization

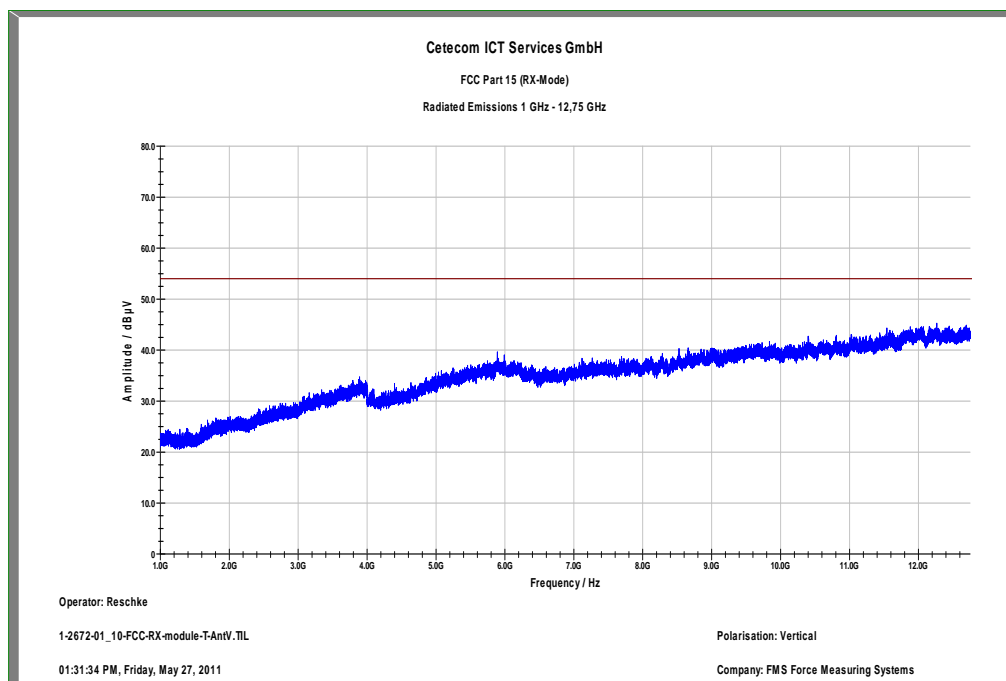

Plot 3: 1 GHz to 12.75 GHz, horizontal polarization

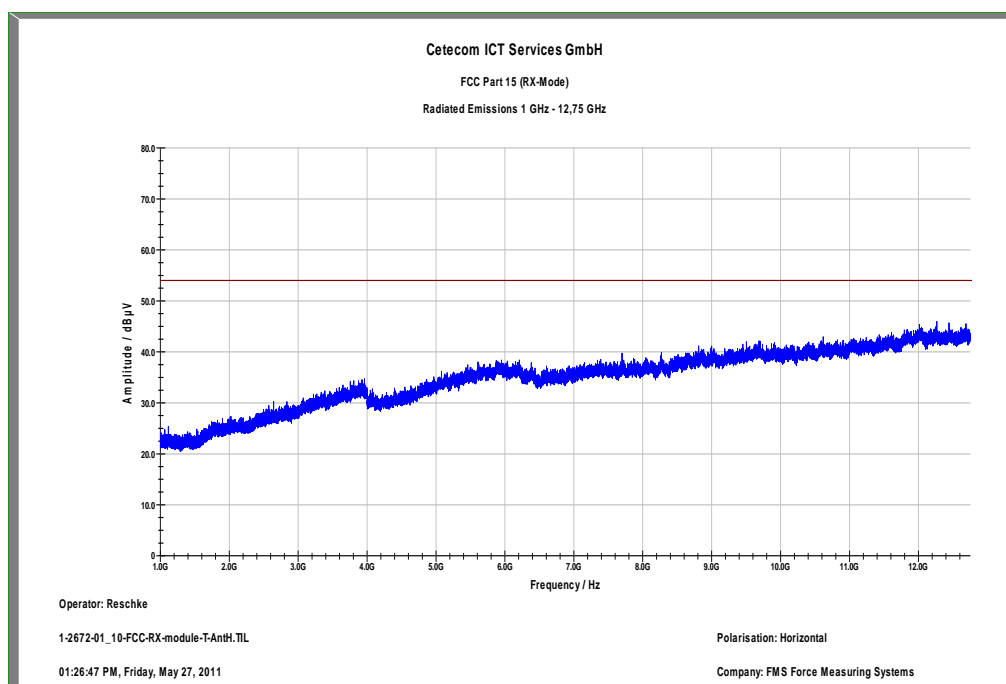

Plot 4: 12 GHz to 25 GHz

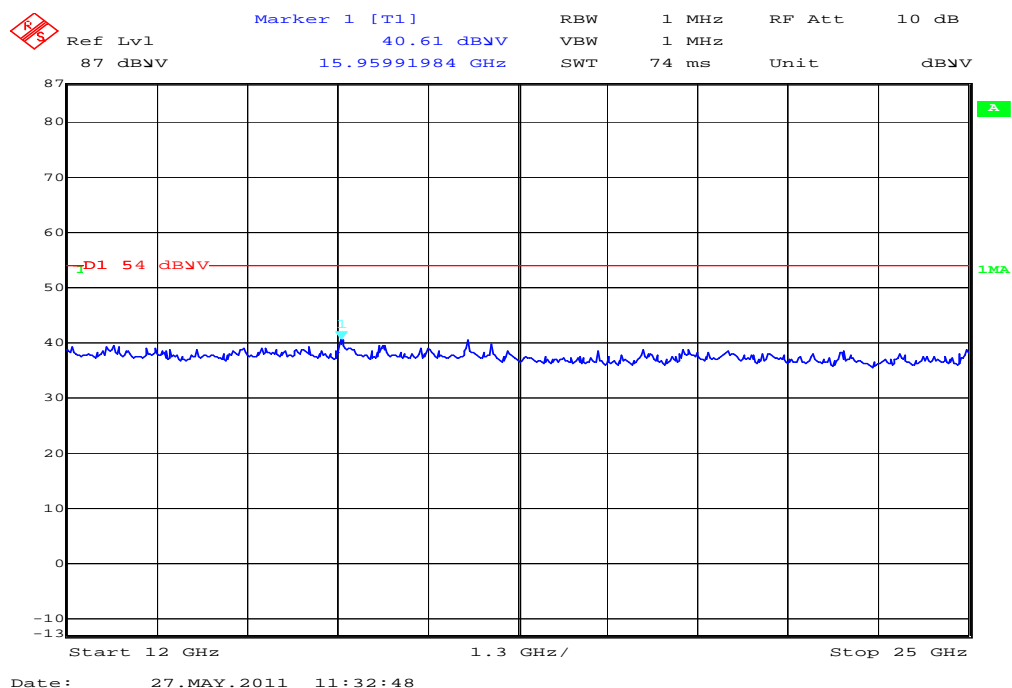

9.11 TX spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 39. This measurement is representative for all channels and modes. If critical peaks are found channel 00 and channel 78 will be measured too. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
CFR Part 15.209(a)		RSS –Gen
TX Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dBμV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30


Results:

TX Spurious Emissions Radiated < 30 MHz [dBμV/m]		
F [MHz]	Detector	Level [dBμV/m]
No critical peaks found		
Measurement uncertainty	± 3 dB	

Result: The result of the measurement is passed.

Plots:

Plot 1: 9 kHz to 30 MHz / channel 39 (valid for all channels)

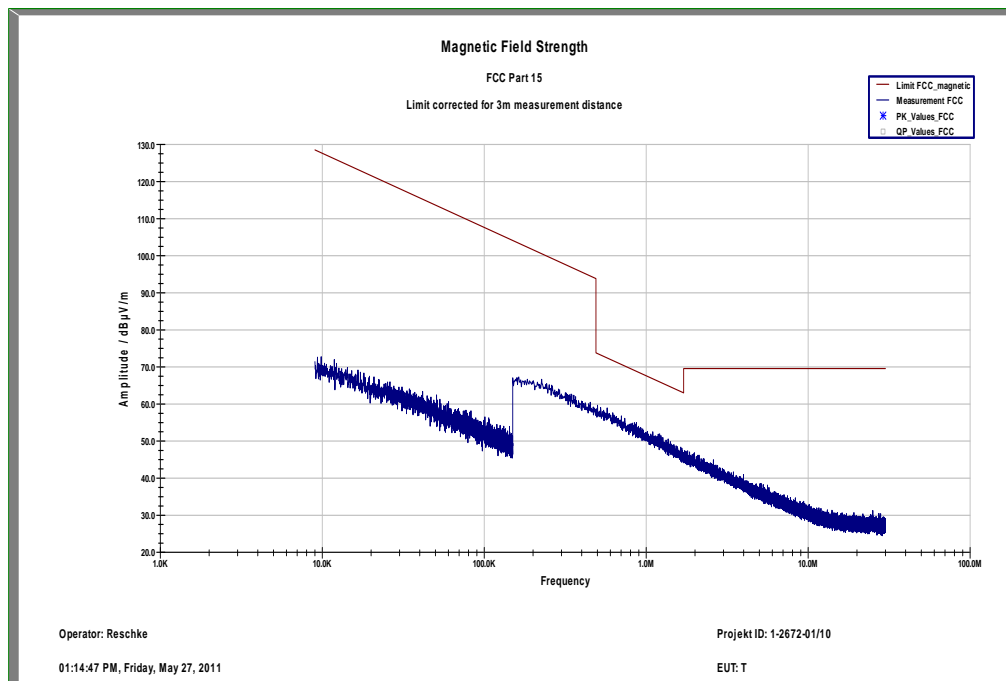

9.12 TX spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold
Additional comment:	110V / 60 Hz

Limits:

FCC		IC
CFR Part 15.107(a)		ICES-003, Issue 4
TX Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dB μ V/m)	Average (dB μ V/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50


*Decreases with the logarithm of the frequency

Results:


TX Spurious Emissions Conducted < 30 MHz [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
No critical peaks found		
Measurement uncertainty	± 3 dB	

Result: The result of the measurement is passed.


Plot 1: 9 kHz to 30 MHz / phase Line, TX mode

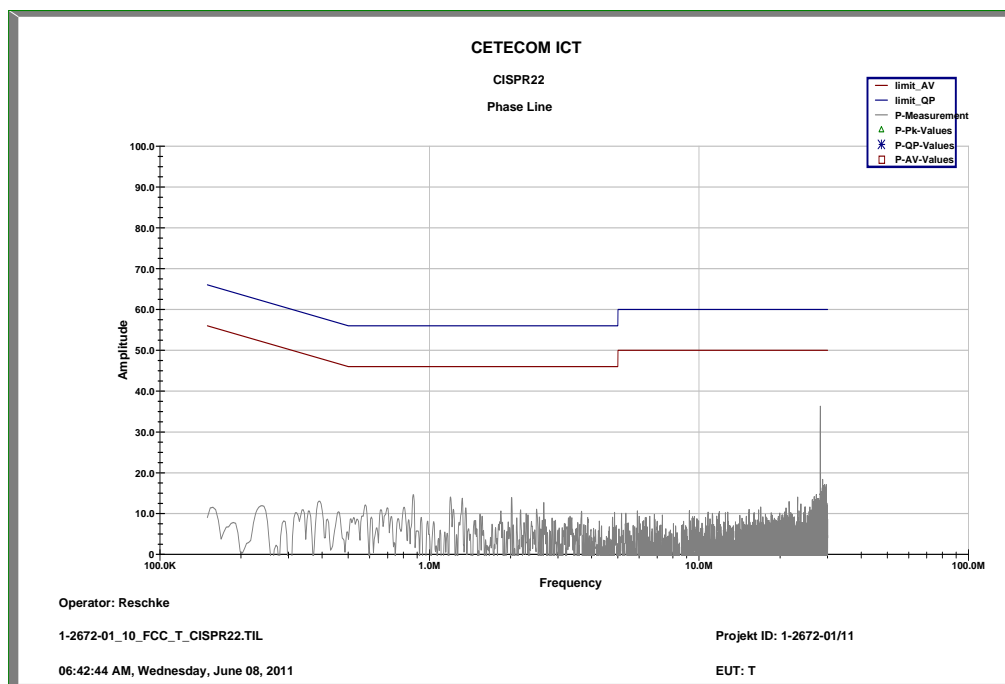


Plot 2: 9 kHz to 30 MHz / neutral Line, TX mode

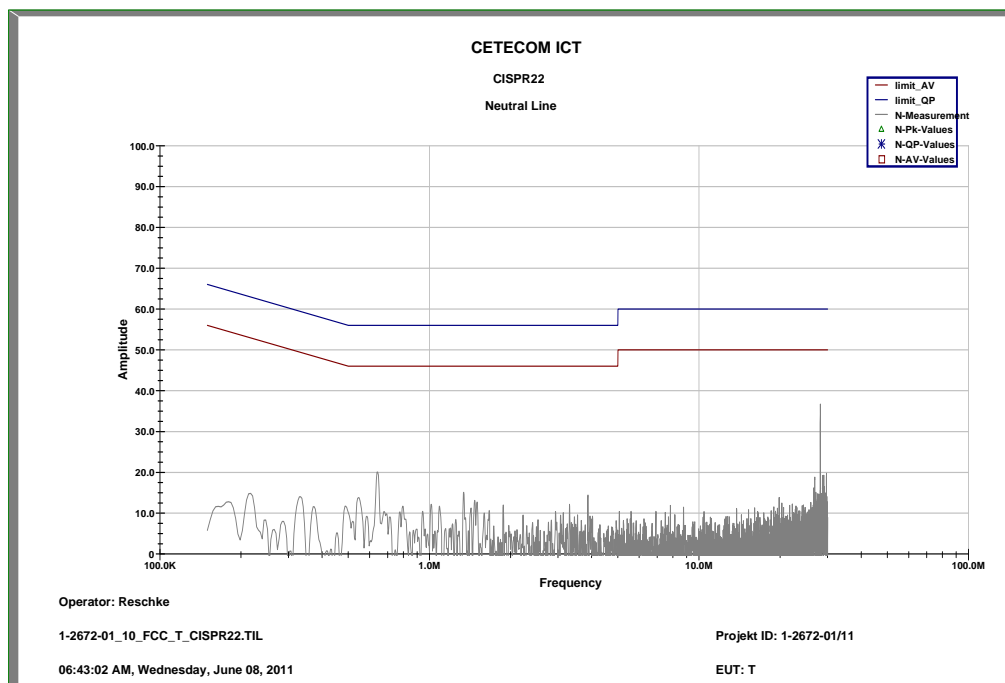

Plot 3: 9 kHz to 30 MHz / phase Line, RX mode

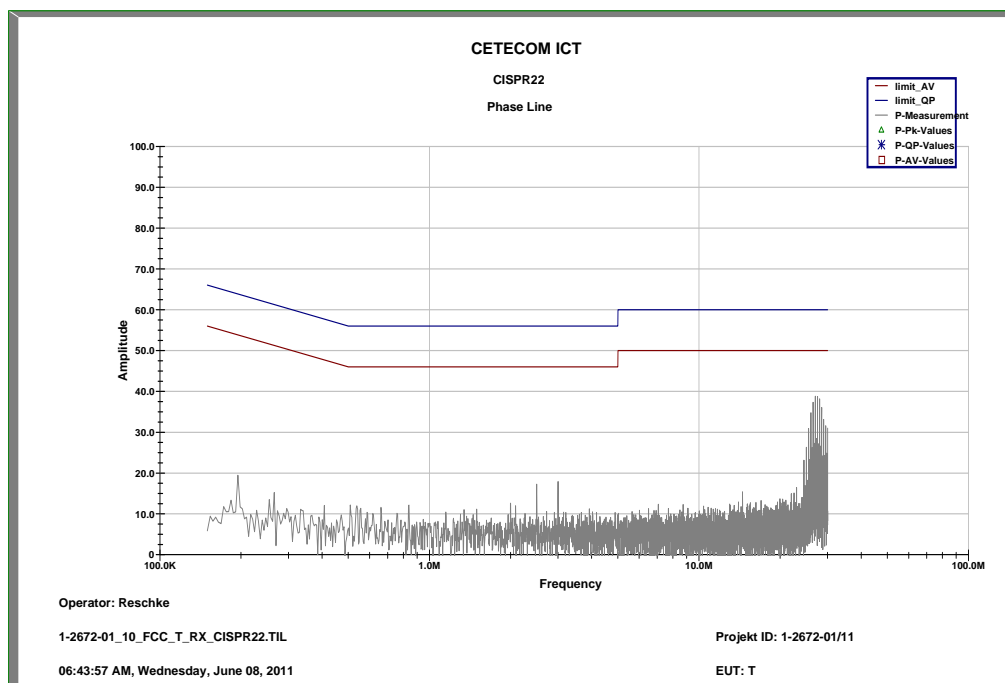

Plot 4: 9 kHz to 30 MHz / neutral Line, RX mode

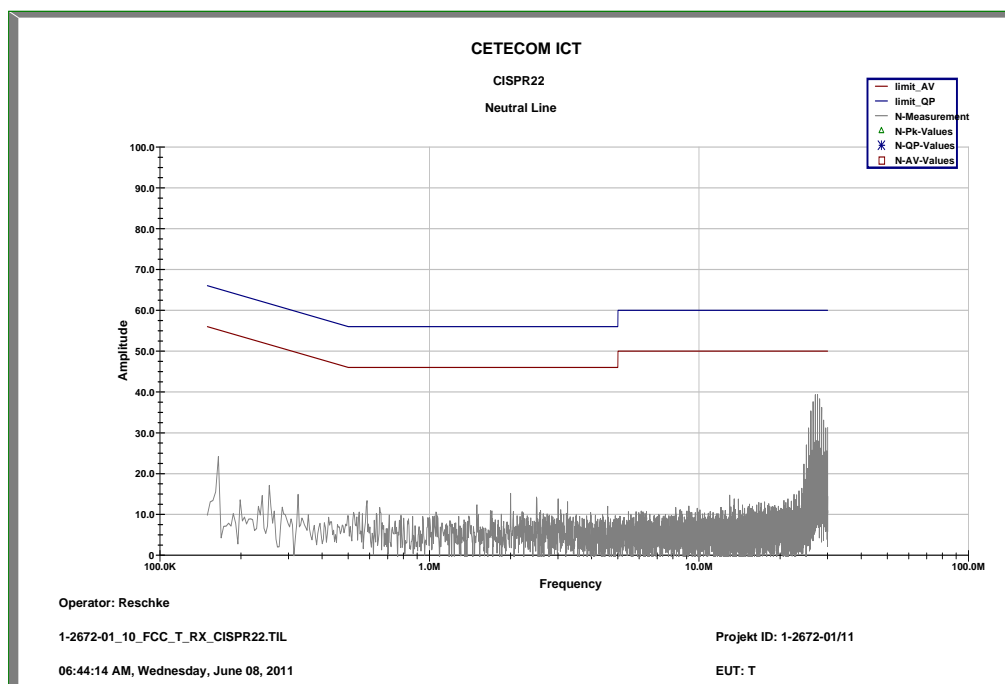

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
2	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081;B5979	300000210	ne		
3	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	05.01.2011	05.01.2013
4	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
5	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
6	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
7	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
8	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	01.04.2010	01.04.2012
9	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	10.01.2011	10.01.2013
10	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
11	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A03450	300001040	Ve	08.01.2009	08.01.2012
12	n. a.	Coaxial Attenuator 30dB/500W	8325	Bird	1530	300001595	ev		
13	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vlKI!	05.03.2009	05.09.2011
14	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
15	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
16	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
17	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
18	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
19	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
20	n. a.	Band Reject filter	WRCG1855/1910-1835/1925-40/8SS	Wainwright	7	300003350	ev		
21	n. a.	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
22	n. a.	TILE-Software Emission	Quantum Change, Modell TILE-ICS/FULL	EMCO	none	300003451	ne		
23	n. a.	Highpass Filter	WHKX2.9/18G-12SS	Wainwright	1	300003492	ev		
24	n. a.	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev		
25	n. a.	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne		

26	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
27	n. a.	MXG Microwave Analog Signal Generator	N5183A	Agilent Technologies	MY47420220	300003813	k	13.09.2010	13.09.2012
28	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	vlKI!	08.09.2010	08.09.2012
29	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
30	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
31	Spec.A. 2_2e	System rack for EMI measurement solution	85900	HP I.V.	*	300000222	ne		
32	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2010	06.01.2012
33	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vlKI!	17.12.2008	17.12.2011
34	n. a.	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	ve	01.07.2010	01.07.2012

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 vlKI! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress


Annex A Photographs of the test setup

Photo documentation

Photo 1:



Photo 2:

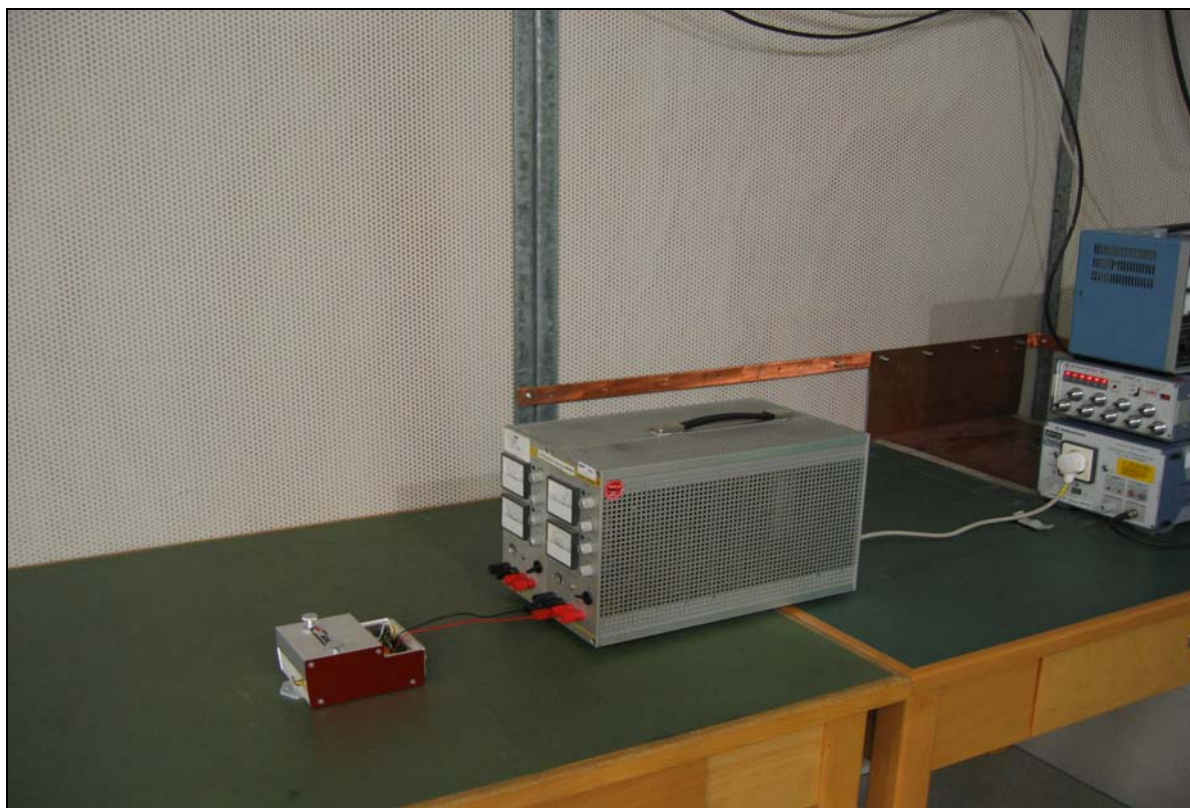

Annex B External photographs of the EUT

Photo documentation

Photo 3:



Photo 4:

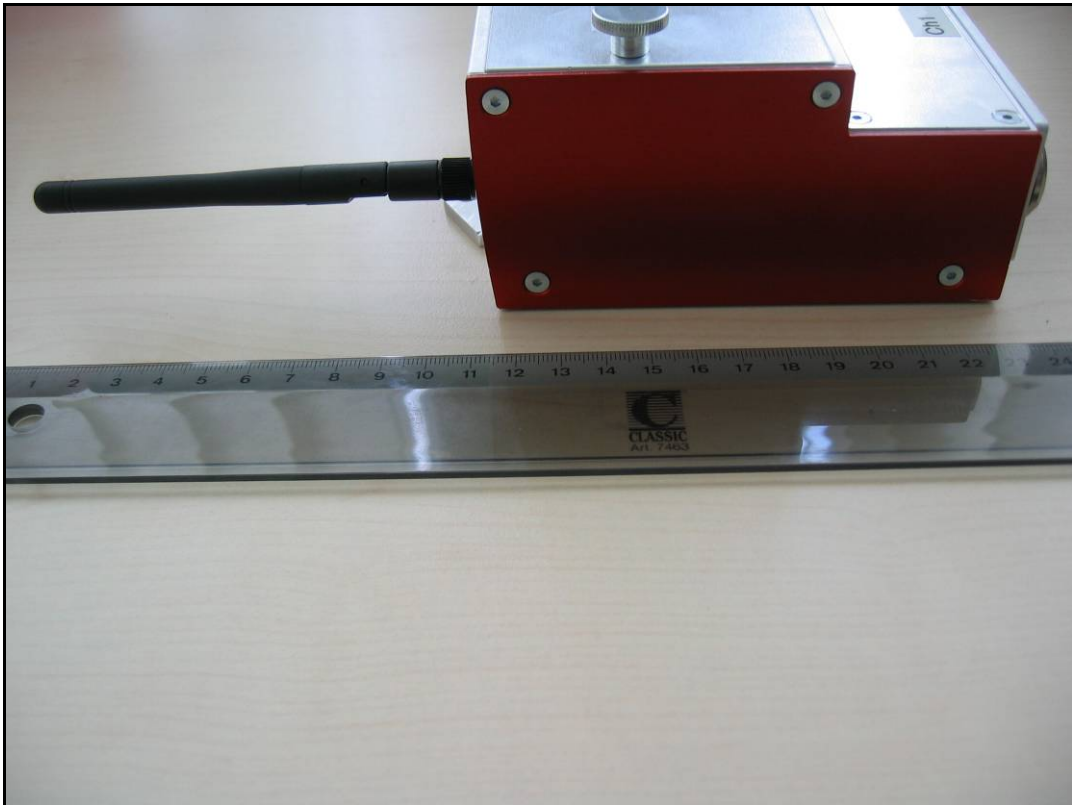


Photo 5:

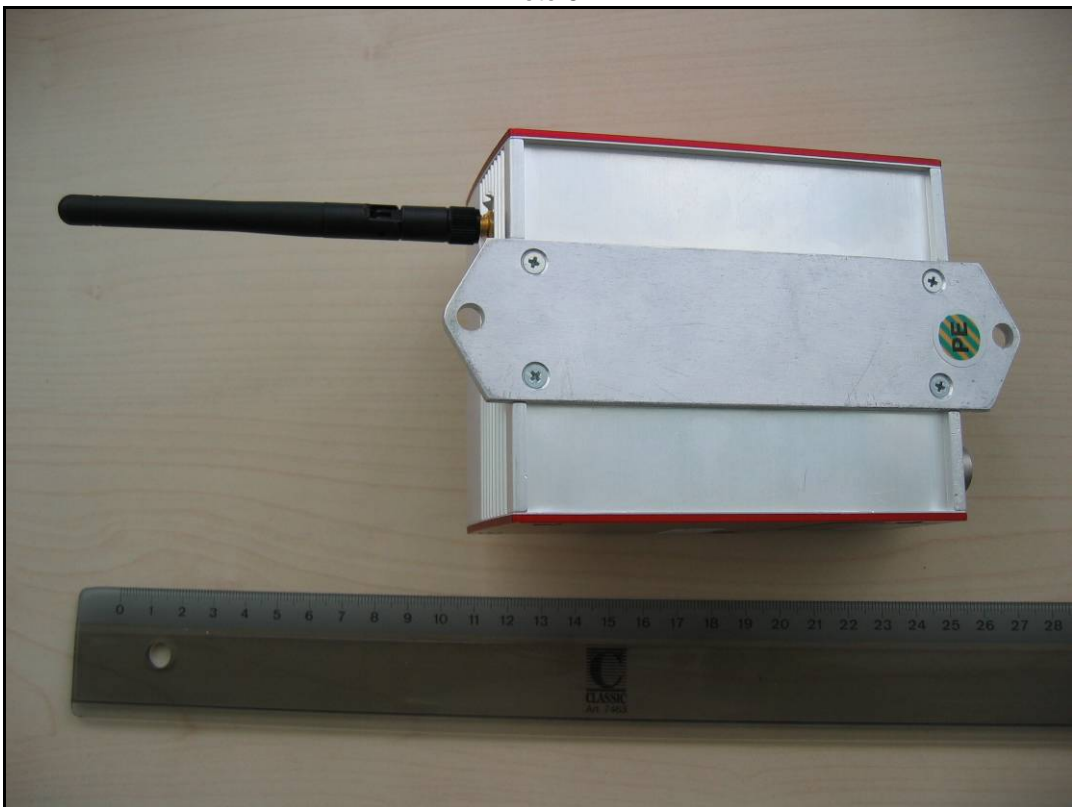


Photo 6:

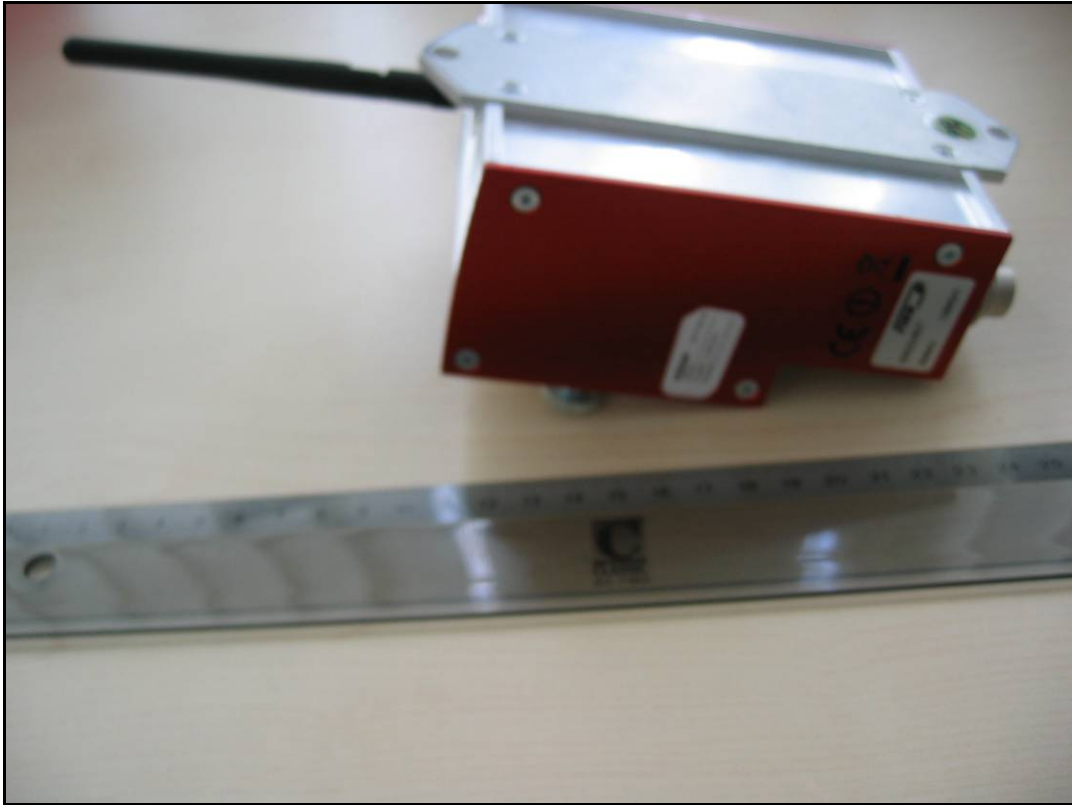


Photo 7:


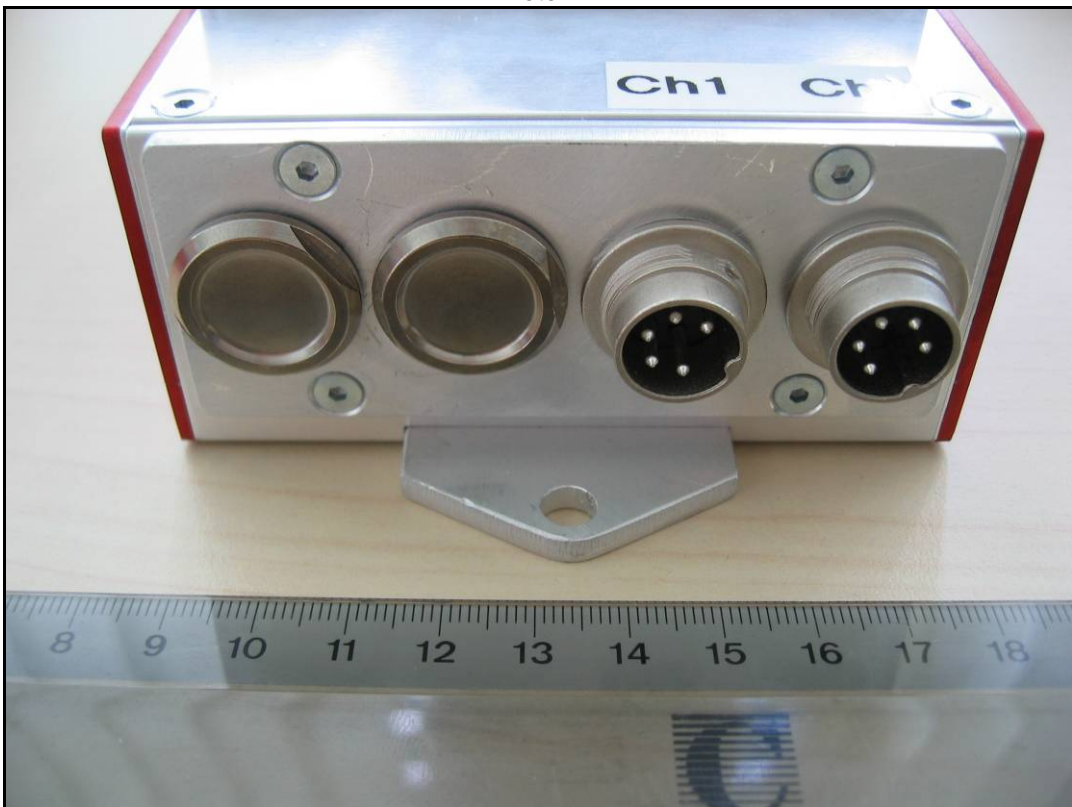


Photo 8:

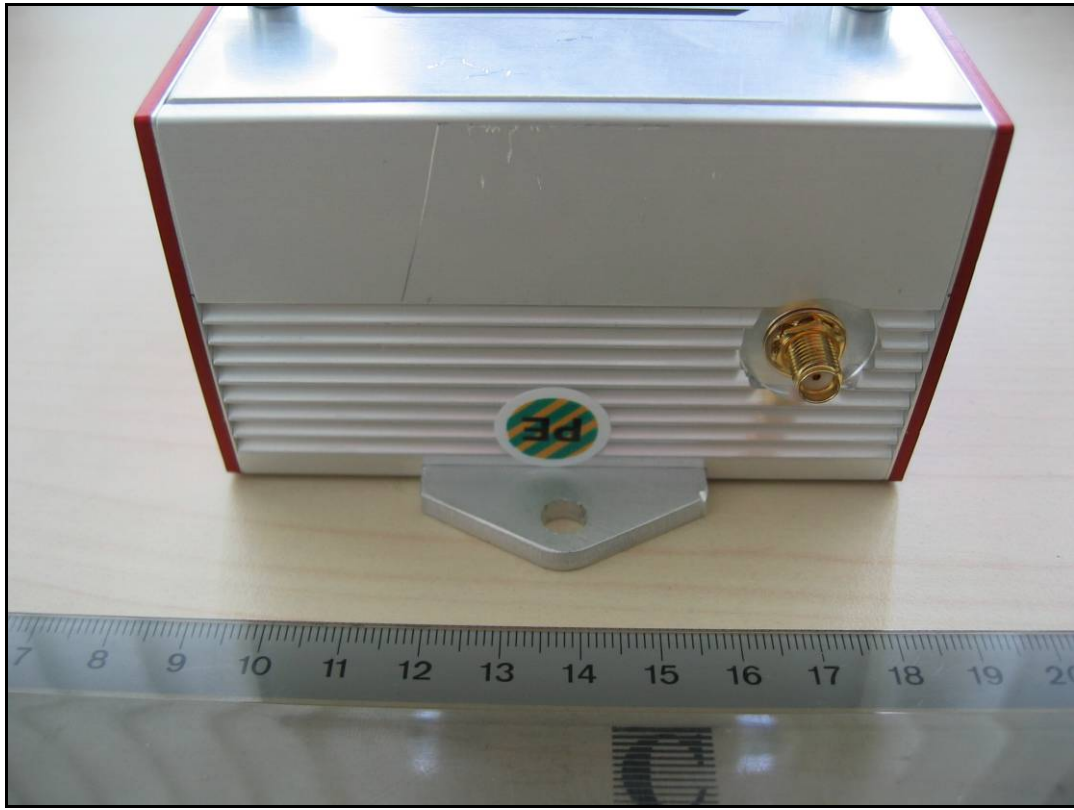

Annex C Internal photographs of the EUT

Photo documentation

Photo 9:



Photo 10:



Photo 11:

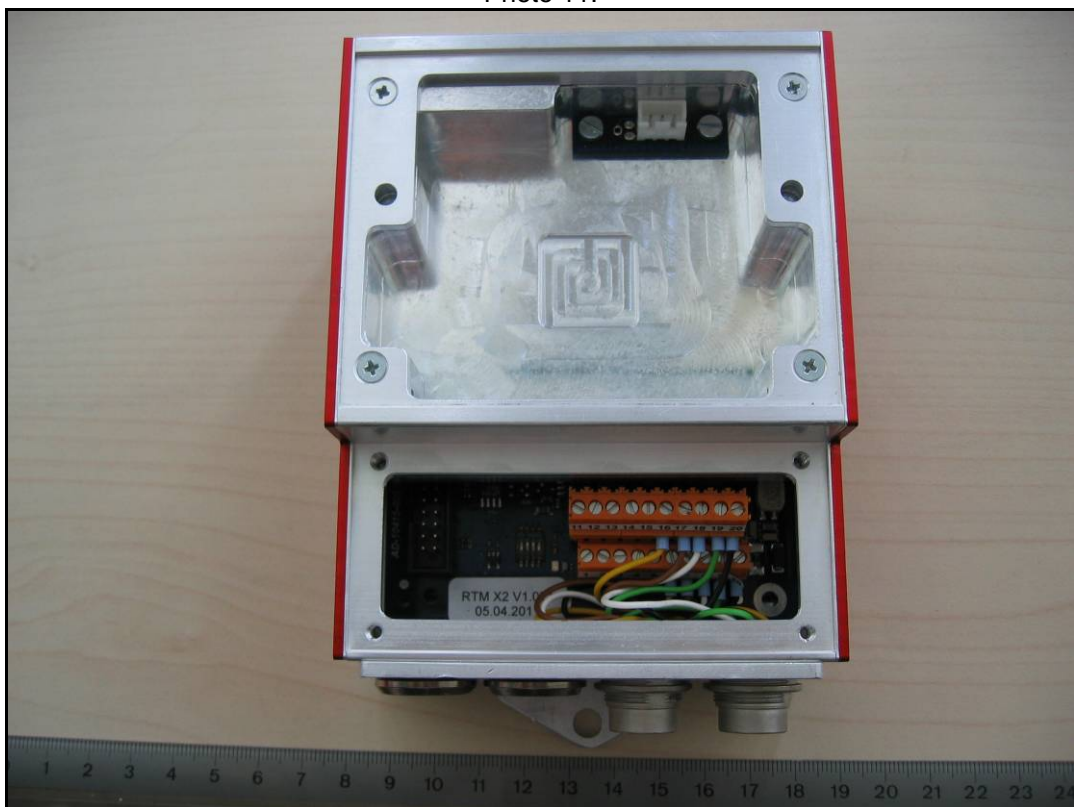


Photo 12:


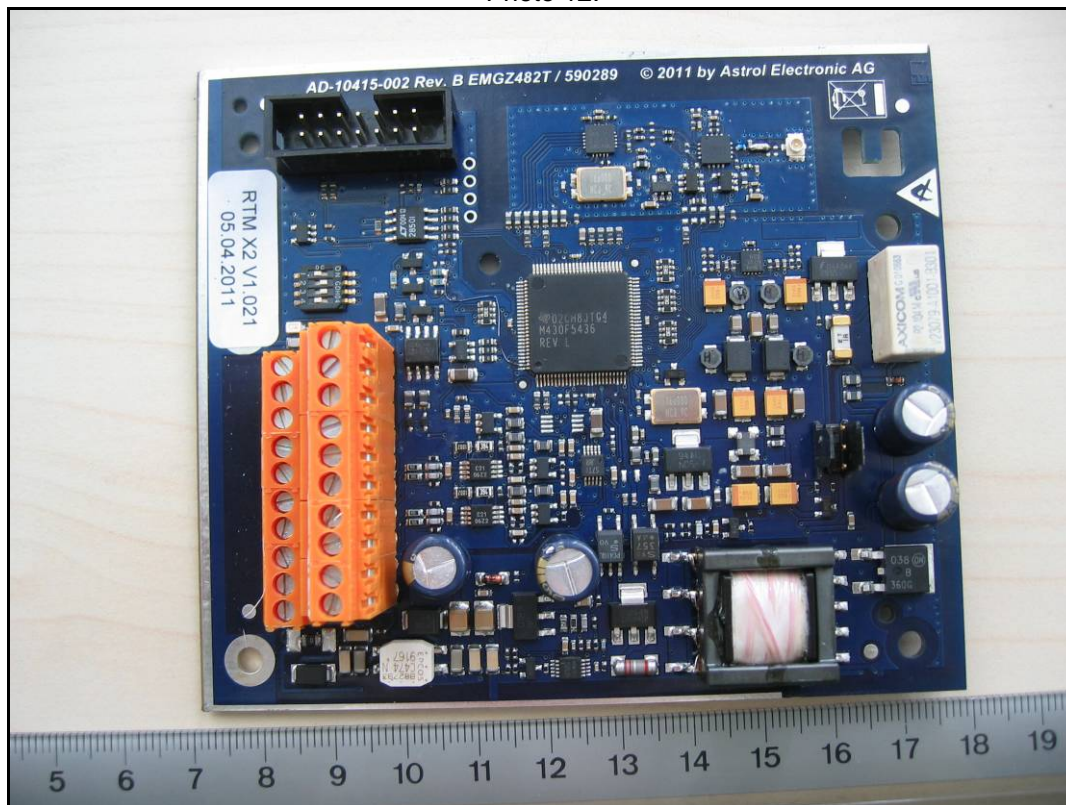


Photo 13:

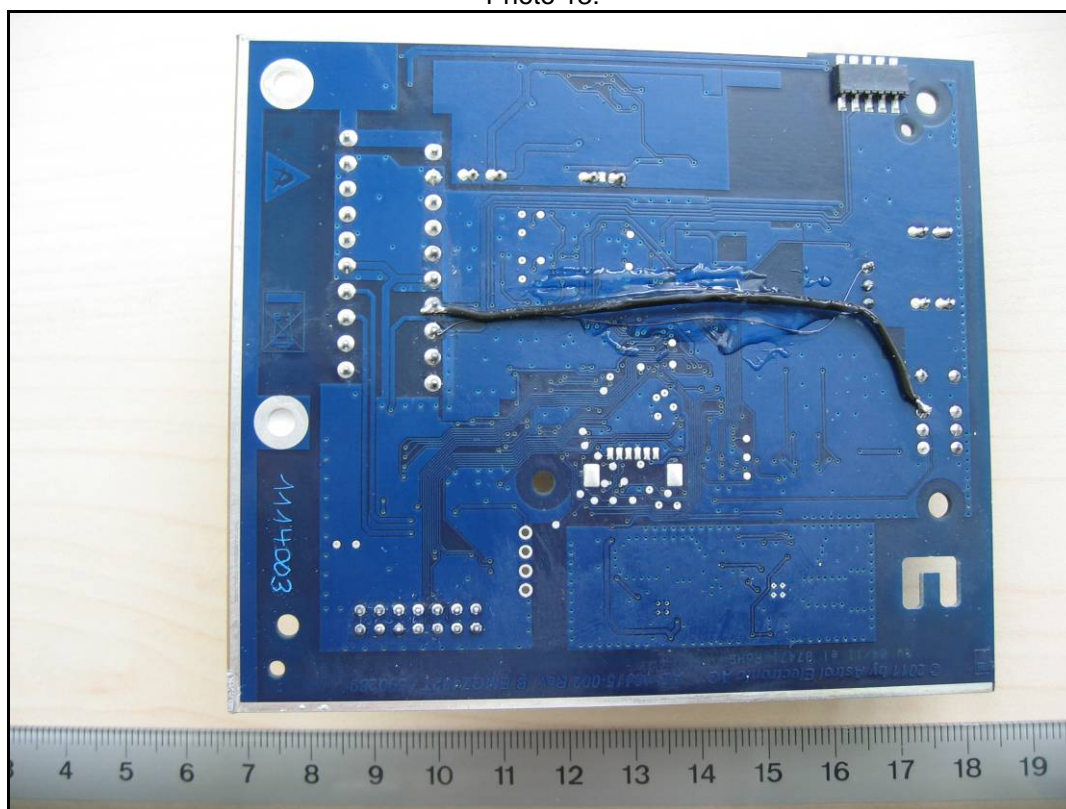

Annex D Document history

Version	Applied changes	Date of release
1.0	Initial release	2011-06-08

Annex E Further information**Glossary**

DUT	-	Device under Test
EMC	-	Electromagnetic Compatibility
EUT	-	Equipment under Test
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	not applicable
S/N	-	Serial Number
SW	-	Software