



47 CFR PART 22 SUBPART H & 24 SUBPART E

TEST REPORT

of

Odin

Model Name: MG758/MG75X/MG75875075X
/MG752/E750
Brand Name: UniStrong
Report No.: SH10110004R01
FCC ID: YYEMG75875075X

prepared for

Beijing UniStrong Science & Technology Co., Ltd
6F East, A2 Building, #9 Jiuxianqiao East Road, Chaoyang District,
Beijing 100015, China



Shenzhen Electronic Product Quality Testing Center
Morlab Laboratory

3/F, Electronic Testing Building, Shahe Road, Xili,
Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 86130398

Fax: +86 755 86130218



Bluetooth®

CTIA Authorized Test Lab

LAB CODE 20081223-00

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.

TABLE OF CONTENT

1.	TEST CERTIFICATION.....	4
2.	GENERAL INFORMATION	5
2.1	EUT Description	5
2.2	Test Standards and Results	7
2.3	Facilities and Accreditations	8
2.3.1	Facilities	8
2.3.2	Test Environment Conditions.....	8
3.	47 CFR PART 2, PART 22H &24E REQUIREMENTS	9
3.1	Frequencies.....	9
3.1.1	Requirement	9
3.1.2	Test Description	9
3.1.3	Test Result.....	10
3.2	Conducted RF Output Power	17
3.2.1	Requirement	17
3.2.2	Test Description	17
3.2.3	Test Result.....	17
3.3	20dB Occupied Bandwidth	27
3.3.1	Definition	27
3.3.2	Test Description	27
3.3.3	Test Verdict.....	27
3.4	Frequency Stability	47
3.4.1	Requirement	47
3.4.2	Test Description	47
3.4.3	Test Verdict.....	47
3.5	Conducted Out of Band Emissions	50
3.5.1	Requirement	50
3.5.2	Test Description	50
3.5.3	Test Result.....	50
3.6	Band Edge	61
3.6.1	Requirement	61

3.6.2	Test Description	61
3.6.3	Test Result.....	61
3.7	Transmitter Radiated Power (EIRP/ERP)	68
3.7.1	Requirement	68
3.7.2	Test Description	68
3.7.3	Test Result.....	70
3.8	Radiated Out of Band Emissions	81
3.8.1	Requirement	81
3.8.2	Test Description	81
3.8.3	Test Procedure.....	81
3.8.4	Test Result.....	82



1. TEST CERTIFICATION

Equipment under Test: Odin

Brand Name: UniStrong

Model Name: MG758/MG75X/MG75875075X/MG752/E750

FCC ID: YYEMG75875075X

Applicant: Beijing UniStrong Science & Technology Co., Ltd

6F East, A2 Building, #9 Jiuxianqiao East Road, Chaoyang District, Beijing 100015, China

Manufacturer: Beijing UniStrong Science & Technology Co., Ltd

6F East, A2 Building, #9 Jiuxianqiao East Road, Chaoyang District, Beijing 100015, China

Test Standards: 47 CFR Part 2

47 CFR Part 22 Subpart H

47 CFR Part 24 Subpart E

Test Date(s): Nov. 11, 2010 – Dec. 14, 2010

Test Result: PASS

* We Hereby Certify That:

The equipment under test was tested by Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related FCC rules.

The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by:

Gao Hongning
Gao Hongning

Dated:

2010.12.14

Reviewed by:

Zhang Jun
Zhang Jun

Dated:

2010.12.14

Approved by:

Wei Bei
Wei Bei

Dated:

2010.12.14



2. GENERAL INFORMATION

2.1 EUT Description

EUT Type: Odin
Model Name: MG758/MG75X/MG75875075X/MG752/E750
Frequency Range.....: GSM 850MHz:
Tx: 824.20 - 848.80MHz (at intervals of 200kHz);
Rx: 869.20 - 893.80MHz (at intervals of 200kHz)
GSM 1900MHz:
Tx: 1850.20 - 1909.80MHz (at intervals of 200kHz);
Rx: 1930.20 - 1989.80MHz (at intervals of 200kHz)
Modulation Type.....: GMSK,8-PSK
Power Supply: Battery
Brand name: DBK
Mode Name.: MG-4LH
Capacitance: 3000mAh
Rated voltage: 3.7V
Charge limited: 4.2V
Manufacturer: SHENZHEN DBK ELECTRONICS CO., LTD
DBK Ind. Park, the north of longguan Rd.
Hualian community,Longhua Town, Baoan District, Shenzhen
Ancillary Equipments.....: AC Adapter (Charger for Battery)
Brand name: PHIHONG
Mode Name.: PSAI05R-050Q
Rated Input: AC 100~240V, 300mA, 50/60Hz
Rated Output: DC 5V, 1000mA
Manufacturer: PHIHONG TECHNOLOGY CO.,LTD
Yinhu Industry park ,Qingxi district,Dongguan City,Guangdong Province

Note 1: The transmitter (Tx) frequency arrangement of the GSM 850MHz band used by the EUT can be represented with the formula $F(n)=824.2+0.2*(n-128)$, $128 \leq n \leq 251$; the lowest, middle, highest channel numbers (ARFCHs) used and tested in this report are separately 128 (824.2MHz), 190 (836.6MHz) and 251 (848.8MHz).

Note 2: The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula $F(n)=1850.2+0.2*(n-512)$, $512 \leq n \leq 810$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-05 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-05 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-05 Edition)	Personal Communications Services
4	ANSI/TIA/EIA-603-C (2004)	Land Mobile FM or PM - Communications Equipment - Measurement and Performance Standards
5	ANSI C63.4-2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	2.106 22.905 24.229	Frequencies	PASS
2	2.1046	Conducted RF Output Power	PASS
3	2.1049	20dB Occupied Bandwidth	PASS
4	2.1055 22.355 24.235	Frequency Stability	PASS
5	2.1051 2.1057 22.917 24.238	Conducted Out of Band Emissions	PASS
6	2.1051 2.1057 22.917 24.238	Band Edge	PASS
7	22.913 24.232	Transmitter Radiated Power (EIPR/ERP)	PASS
8	2.1053 2.1057 22.917 24.238	Radiated Out of Band Emissions	PASS

2.3 Facilities and Accreditations

2.3.1 Facilities

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

All measurement facilities used to collect the measurement data are located at Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen 518055 CHINA. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

2.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	20 - 25
Relative Humidity (%):	40 - 60
Atmospheric Pressure (kPa):	96

3. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS

3.1 Frequencies

3.1.1 Requirement

According to FCC section 22.905, the frequency blocks assignment for the cellular radiotelephone service is listed as below:


- (a) Channel Block A:
Mobile 824 - 835MHz, Base 869 - 880MHz;
Mobile 845 - 846.5MHz, Base 890 - 891.5MHz
- (b) Channel Block B:
Mobile 835 - 845 MHz, Base 880 - 890MHz;
Mobile 846.5 - 849 MHz, Base 891.5 - 894MHz

According to FCC section 24.229, the frequencies available in the Broadband PCS services are listed as below, in accordance with the frequency allocations table of FCC section 2.106.

- (a) The following frequency blocks are available for assignment on an MTA basis:
Block A: 1850 - 1865MHz paired with 1930 - 1945MHz;
Block B: 1870 - 1885MHz paired with 1950 - 1965MHz.
- (b) The following frequency blocks are available for assignment on a BTA basis:
Block C: 1895 - 1910 MHz paired with 1975 - 1990MHz;
Block D: 1865 - 1870 MHz paired with 1945 - 1950MHz;
Block E: 1885 - 1890 MHz paired with 1965 - 1970MHz;
Block F: 1890 - 1895 MHz paired with 1970 - 1975MHz.

3.1.2 Test Description

1. Test Setup:

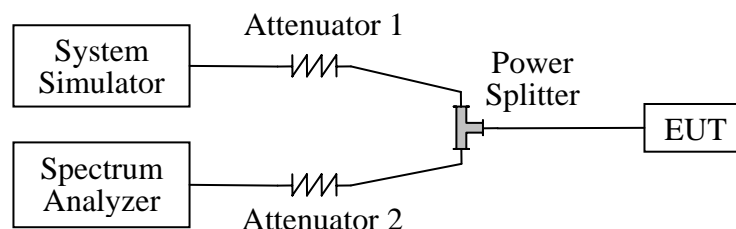

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna

terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
SS	Agilent	E5515C	GB46040102	2010.9	1year
Spectrum Analyzer	R&S	FSP30	101020	2010.9	1year
Spectrum Analyzer	Agilent	E4440A	MY46187763	2010.9	1year
Spectrum Analyzer	Rohde Schwarz	FSU26	200880	2010.10	1year
Power Splitter	HP	11667B	00164	(n.a.)	(n.a.)
Power Splitter	Mini-Circuits	ZFRSC-183-S+	765001016	(n.a.)	(n.a.)
Attenuator 1	Mini-Circuits	10dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	10dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	10dB	(n.a.)	(n.a.)	(n.a.)

3.1.3 Test Result


The Tx frequency arrangement of the GSM 850MHz band employed by the EUT should be from 824.2MHz to 848.8MHz (the corresponding frequency block is from 824MHz to 849MHz), and Tx frequency arrangement of the PCS 1900MHz band employed by the EUT should be from 1850.2MHz to 1909.8MHz (the corresponding frequency block is from 1850MHz to 1910MHz). Here the lowest and highest channels are tested to verify the EUT's using the frequency block required.

1. Test Verdict:

The required frequency block is employed legally, the verdict is PASS.


Band	Channel	Frequency (MHz)	Measured Carrier (MHz)	Refer to Plot
GSM 850MHz	128	824.2	824.20	Plot A1
	251	848.8	848.74	Plot B1
GSM 1900MHz	512	1850.2	1850.20	Plot C1
	810	1909.8	1909.80	Plot D1
GPRS 850MHz	128	824.2	824.20	Plot E1
	251	848.8	848.86	Plot F1
GPRS 1900MHz	512	1850.2	1850.20	Plot G1
	810	1909.8	1909.86	Plot H1
EGPRS 850MHz	128	824.2	824.26	Plot I1
	251	848.8	848.80	Plot J1
EGPRS 1900MHz	512	1850.2	1850.33	Plot K1
	810	1909.8	1909.86	Plot L1

2. Test Plot:

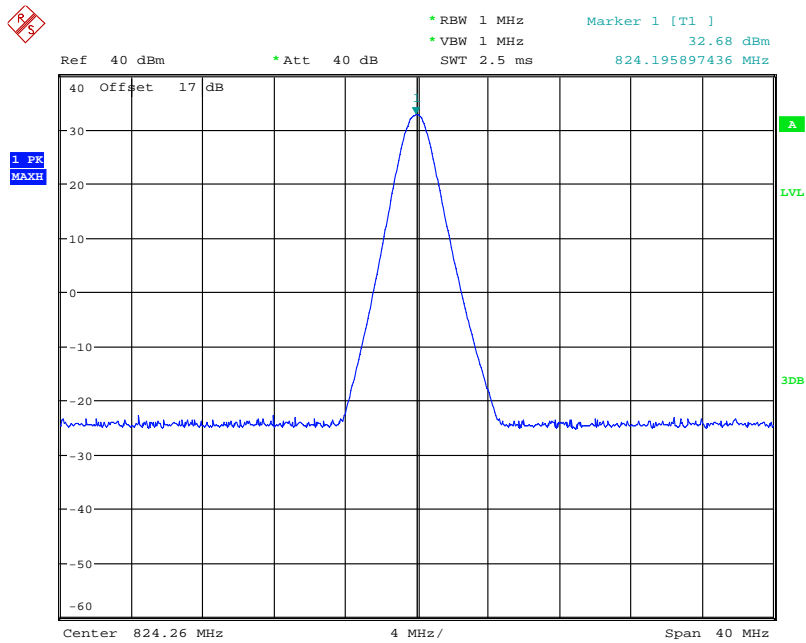


Date: 11.NOV.2010 08:22:08

(Plot A1: GSM 850MHz Channel = 128)

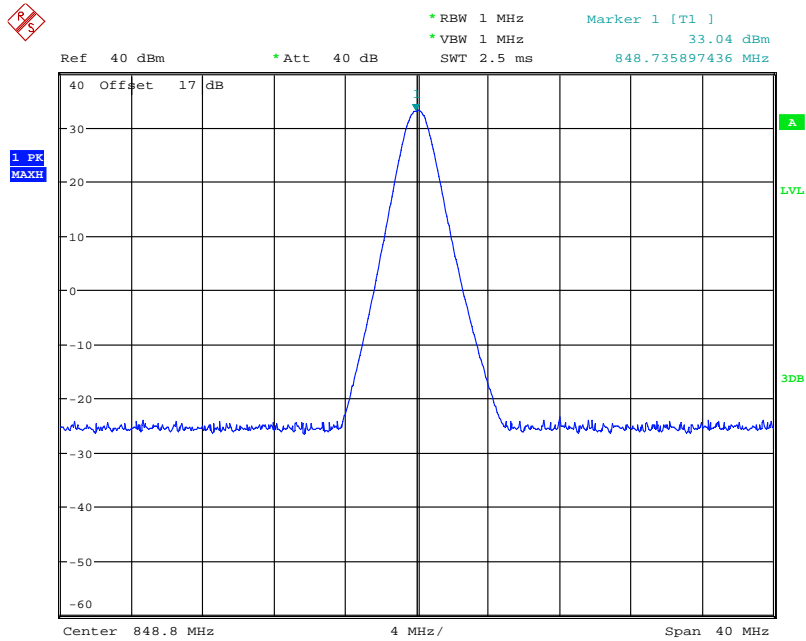


Date: 11.NOV.2010 08:26:10

(Plot B1: GSM 850MHz Channel = 251)

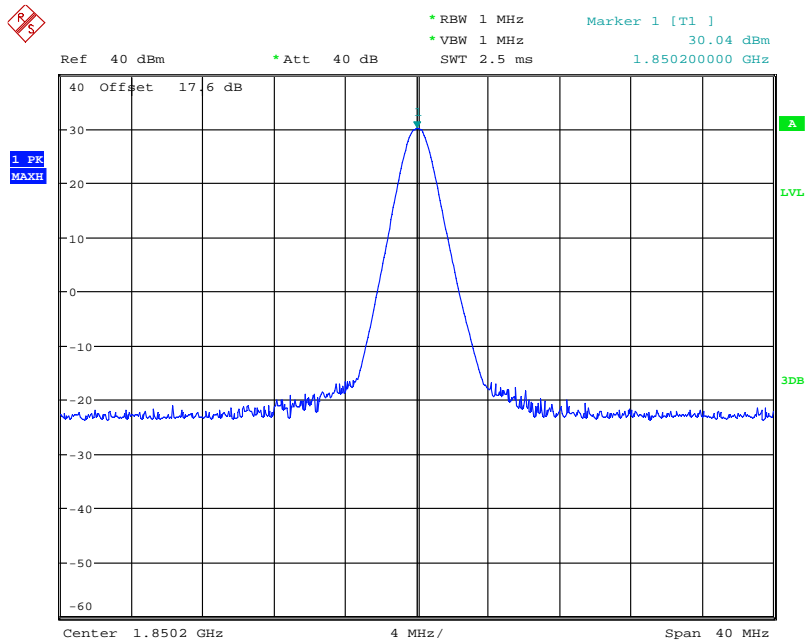


Date: 11.NOV.2010 10:44:44

(Plot C1: GSM 1900MHz Channel = 512)

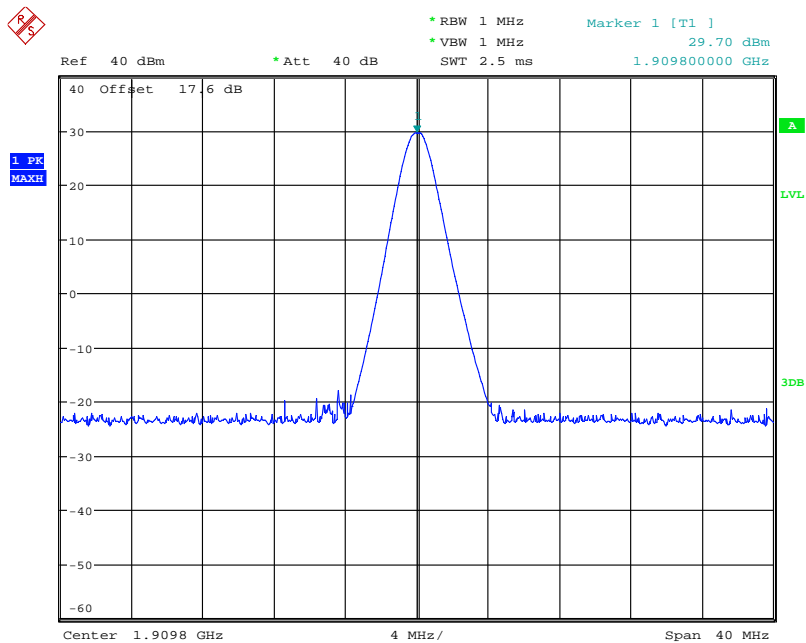


Date: 11.NOV.2010 10:46:57

(Plot D1: GSM 1900MHz Channel = 810)

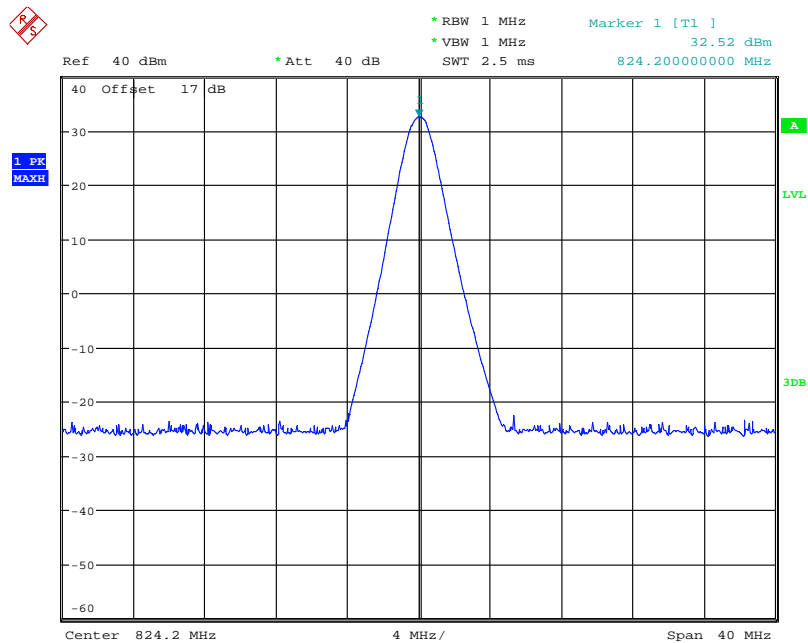


Date: 11.NOV.2010 11:47:05

(Plot E1: GPRS 850MHz Channel = 128)

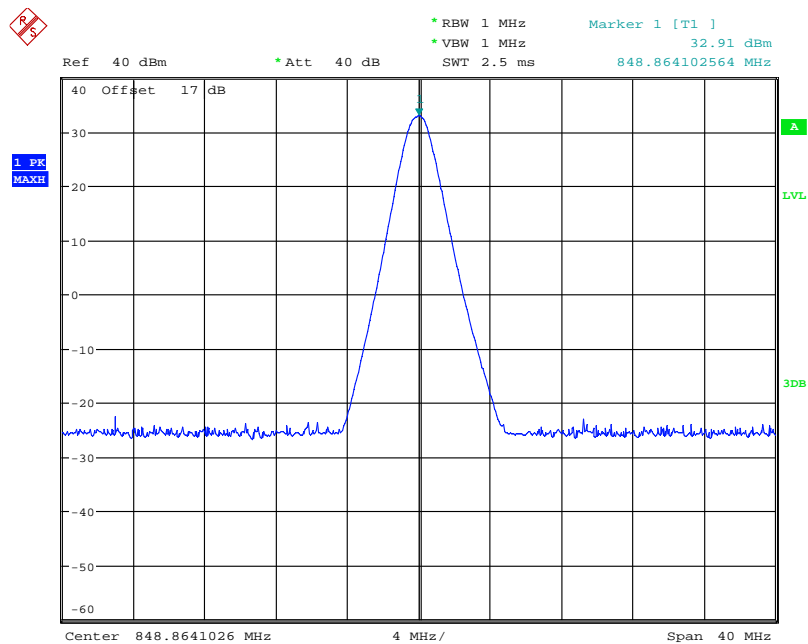


Date: 11.NOV.2010 11:48:17

(Plot F1: GPRS 850MHz Channel = 251)

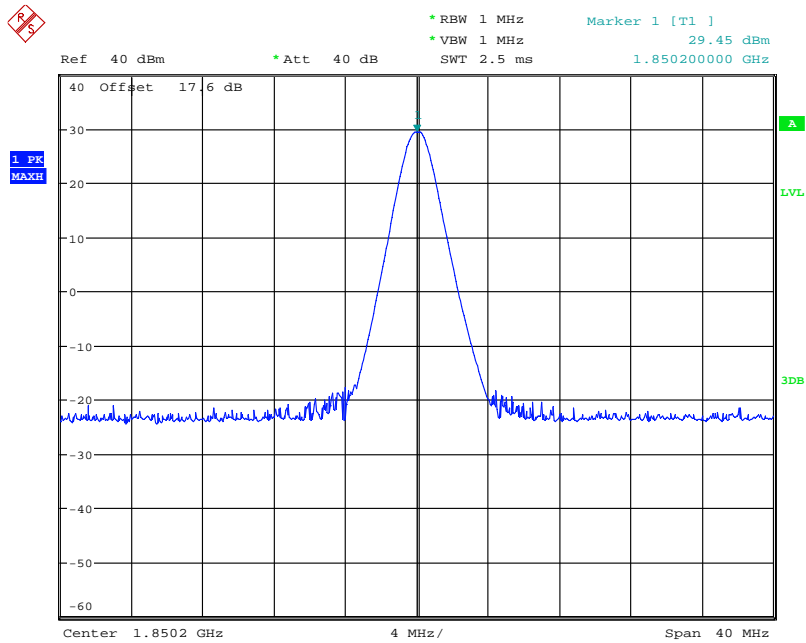


Date: 11.NOV.2010 12:07:10

(Plot G1: GPRS 1900MHz Channel = 512)

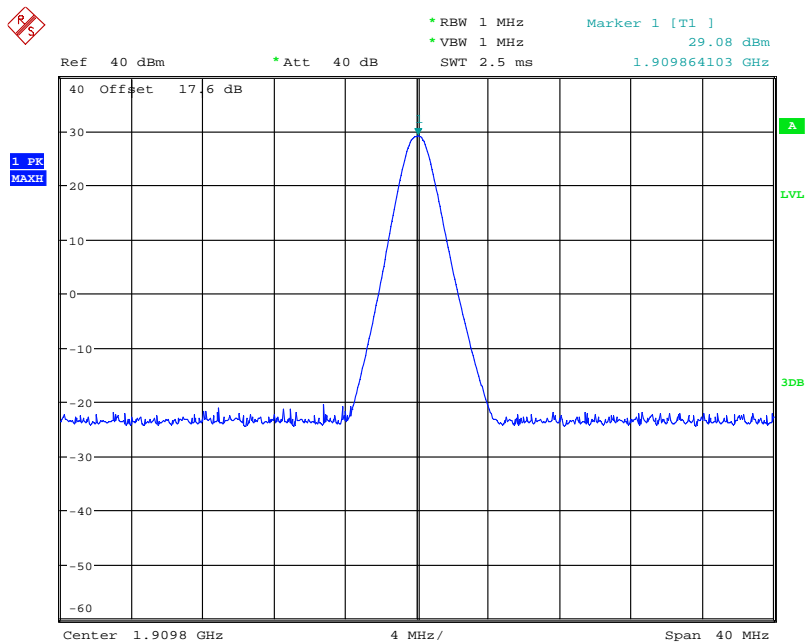


Date: 11.NOV.2010 12:08:51

(Plot H1: GPRS 1900MHz Channel = 810)

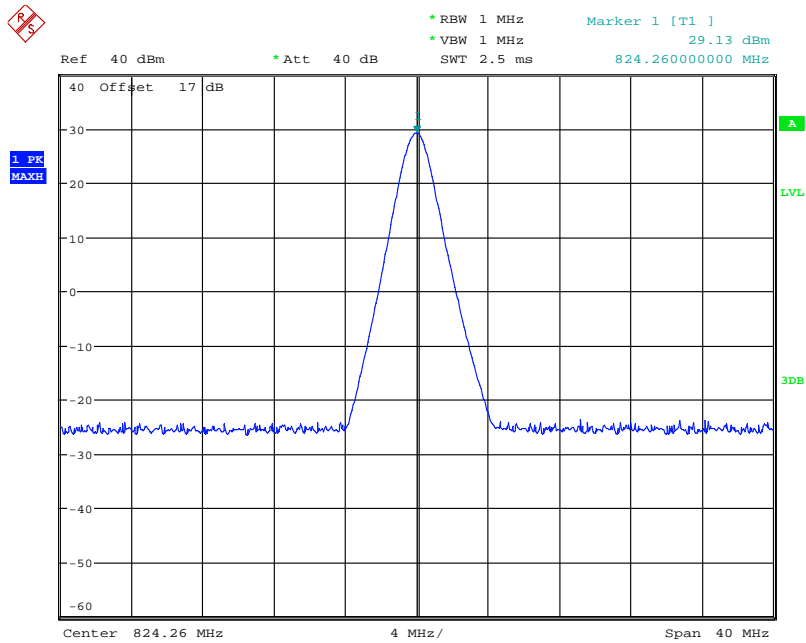


Date: 11.NOV.2010 11:42:39

(Plot I1: EGPRS 850MHz Channel = 128)

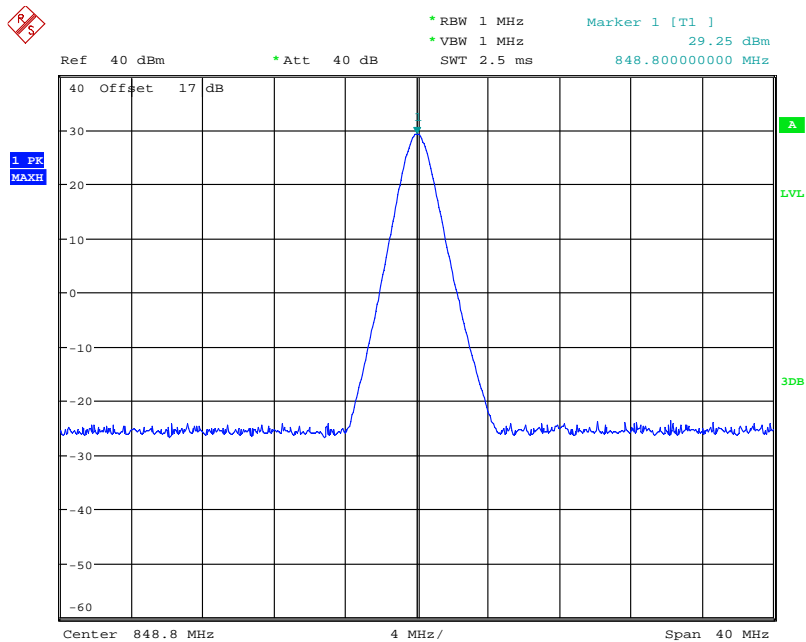


Date: 11.NOV.2010 11:44:15

(Plot J1: EGPRS 850MHz Channel = 251)

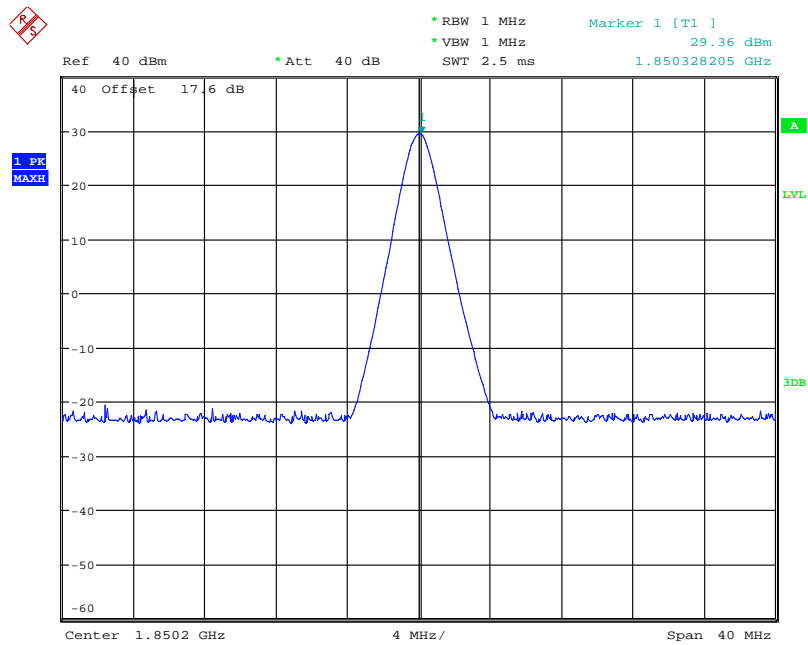

Date: 11.NOV.2010 11:38:03

(Plot K1: EGPRS 1900MHz Channel = 512)

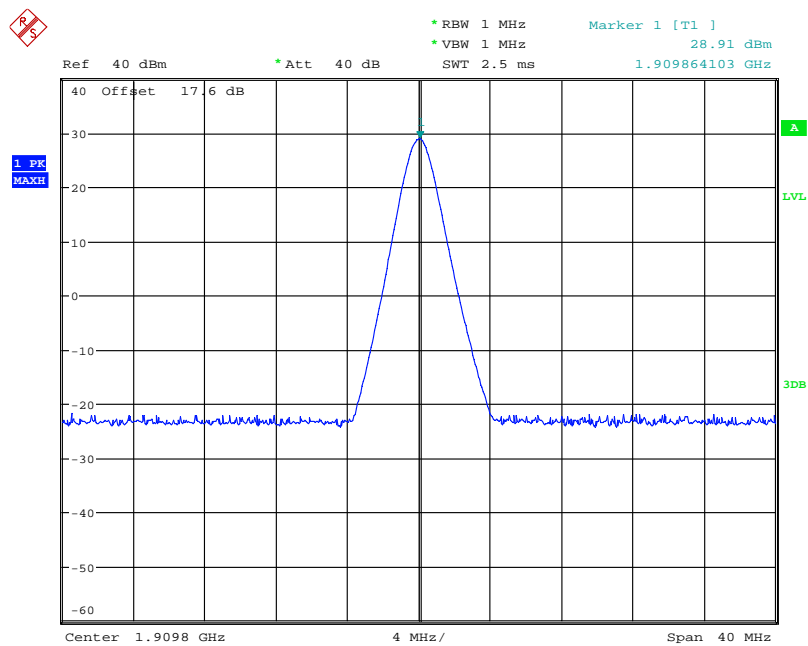

Date: 11.NOV.2010 11:39:53

(Plot L1: EGPRS 1900MHz Channel = 810)

3.2 Conducted RF Output Power

3.2.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

3.2.2 Test Description

See section 3.1.2 of this report.


3.2.3 Test Result

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted output power of the EUT.

1. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Output Power	
			dBm	Refer to Plot
GSM 850MHz	128	824.2	32.68	Plot A2
	190	836.6	32.88	Plot B2
	251	848.8	33.04	Plot C2
GSM 1900MHz	512	1850.2	30.04	Plot D2
	661	1880.0	29.76	Plot E2
	810	1909.8	29.70	Plot F2
GPRS 850MHz	128	824.2	32.52	Plot G2
	190	836.6	32.68	Plot H2
	251	848.8	32.91	Plot I2
GPRS 1900MHz	512	1850.2	29.45	Plot J2
	661	1880.0	29.31	Plot K2
	810	1909.8	29.08	Plot L2
EGPRS 850MHz	128	824.2	29.13	Plot M2
	190	836.6	29.17	Plot N2
	251	848.8	29.25	Plot O2
EGPRS 1900MHz	512	1850.2	29.36	Plot P2
	661	1880.0	29.36	Plot Q2
	810	1909.8	28.91	Plot R2

2. Test Plot:

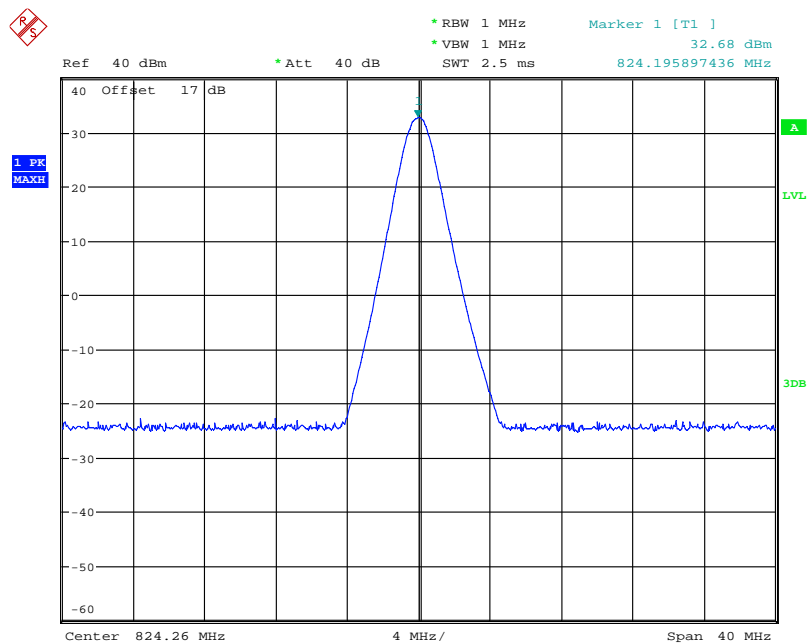


Date: 11.NOV.2010 08:22:08

(Plot A2: GSM 850MHz Channel = 128)

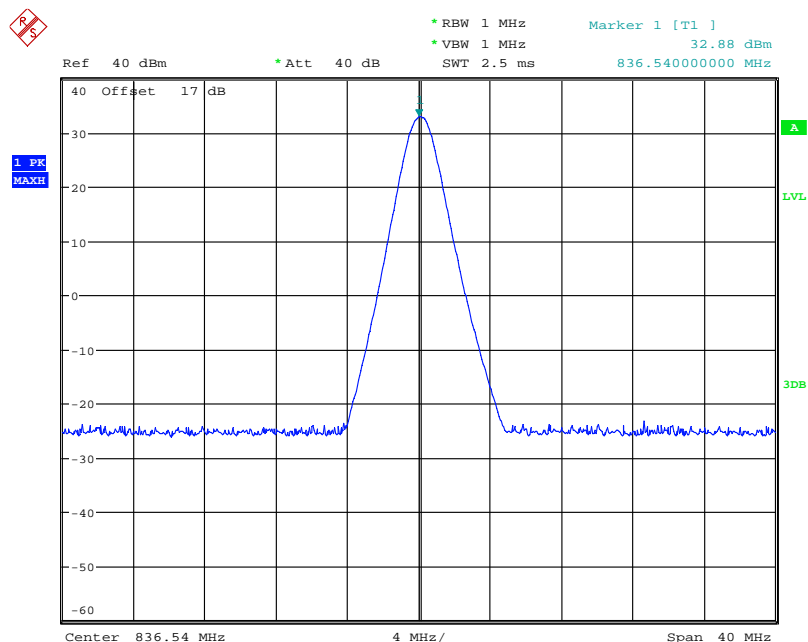


Date: 11.NOV.2010 08:25:10

(Plot B2: GSM 850MHz Channel = 190)

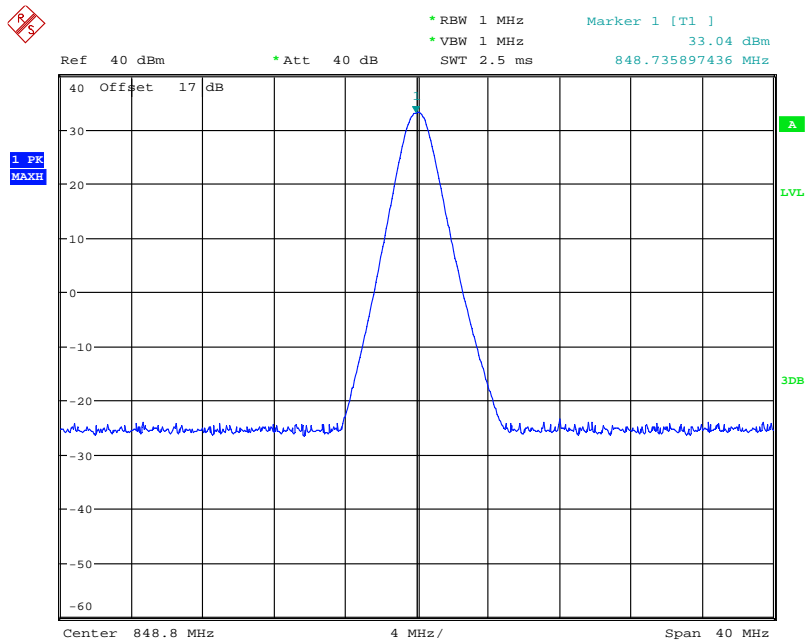


Date: 11.NOV.2010 08:26:10

(Plot C2: GSM 850MHz Channel = 251)

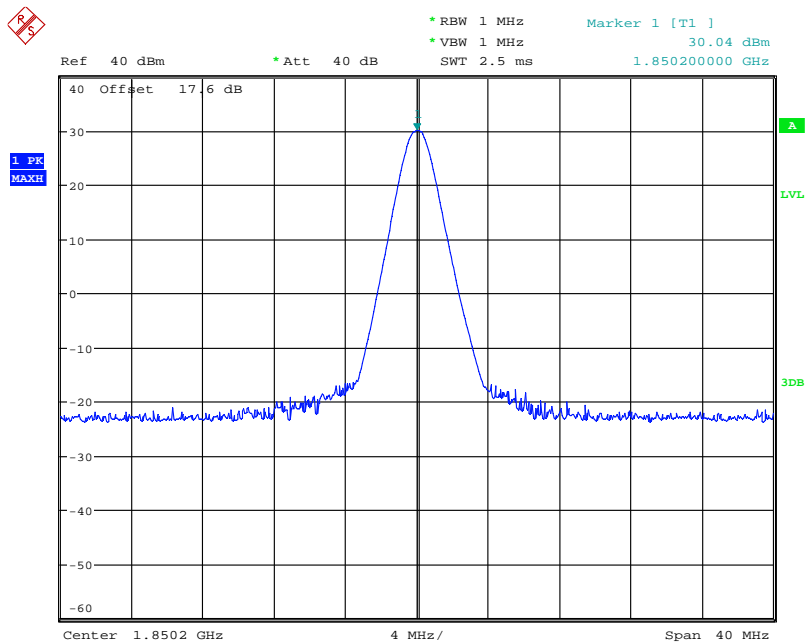


Date: 11.NOV.2010 10:44:44

(Plot D2: GSM 1900MHz Channel = 512)

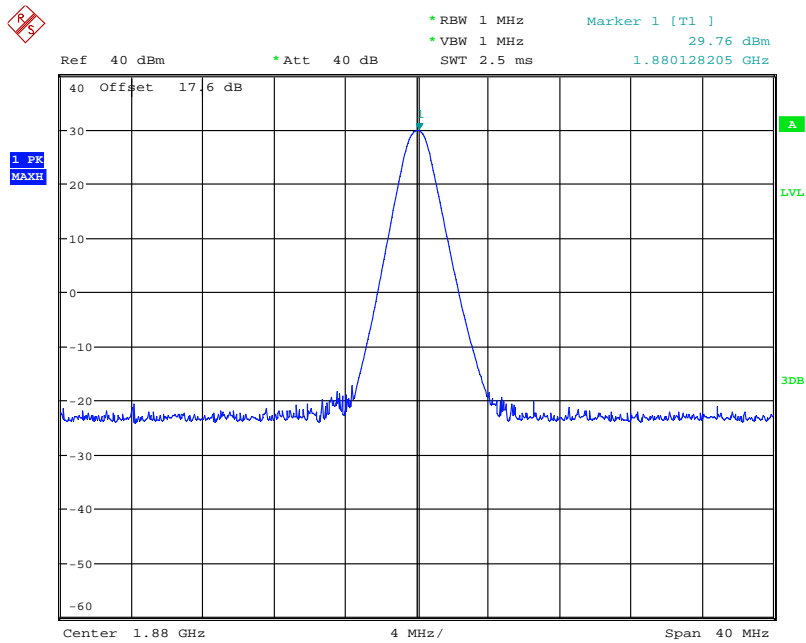


Date: 11.NOV.2010 10:46:04

(Plot E2: GSM 1900MHz Channel = 661)

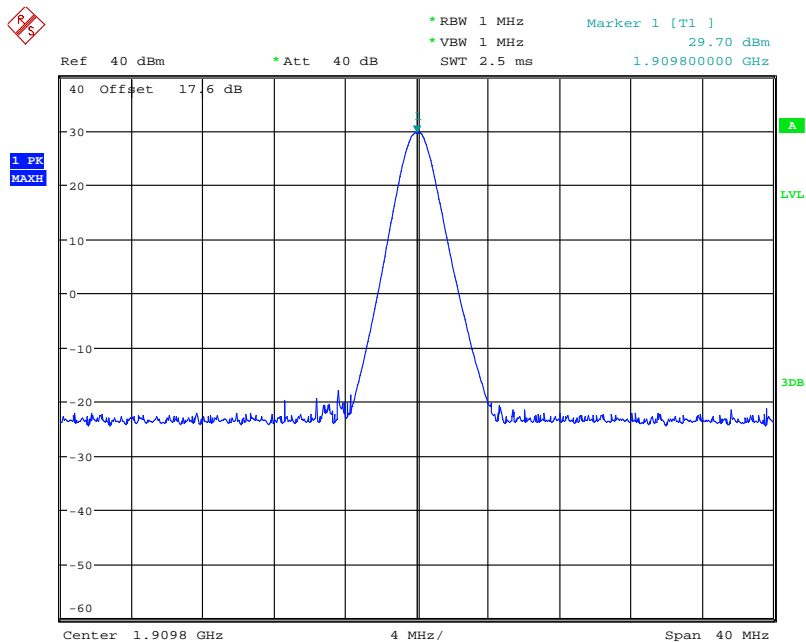


Date: 11.NOV.2010 10:46:57

(Plot F2: GSM 1900MHz Channel = 810)

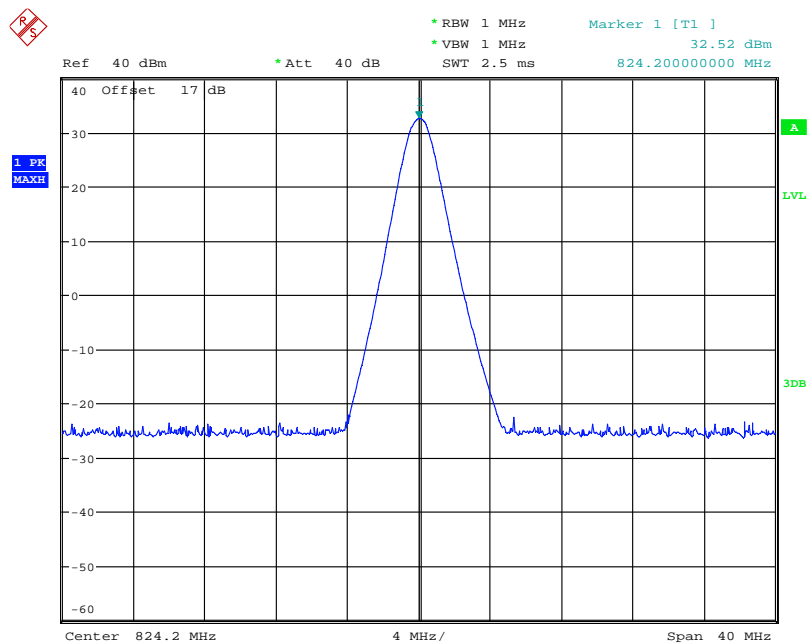


Date: 11.NOV.2010 11:47:05

(Plot G2:GPRS 850MHz Channel = 128)

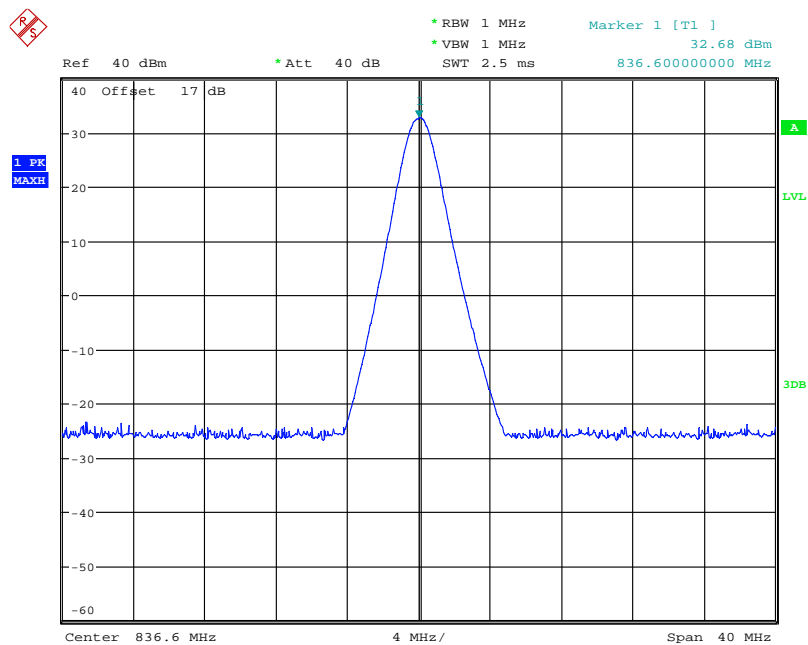


Date: 11.NOV.2010 11:47:39

(Plot H2: GPRS 850MHz Channel = 190)

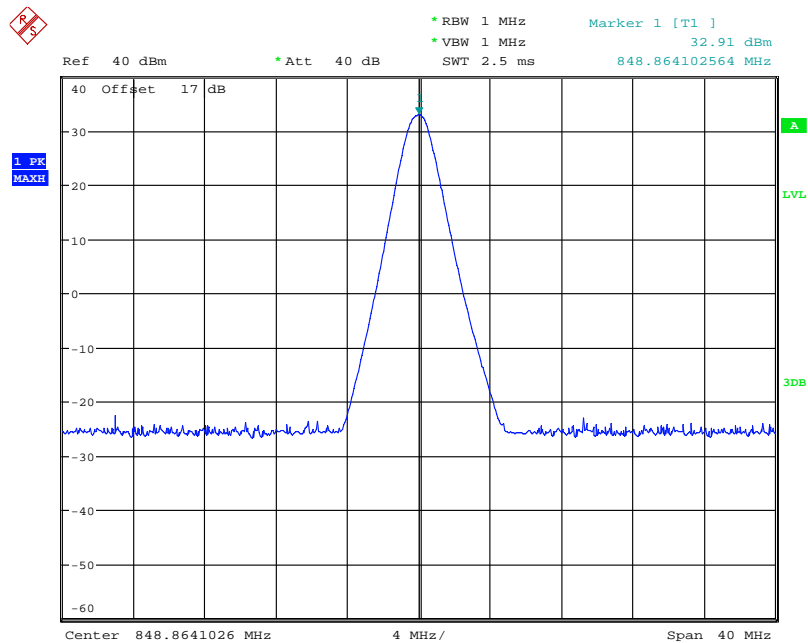


Date: 11.NOV.2010 11:48:17

(Plot I2: GPRS 850MHz Channel = 251)

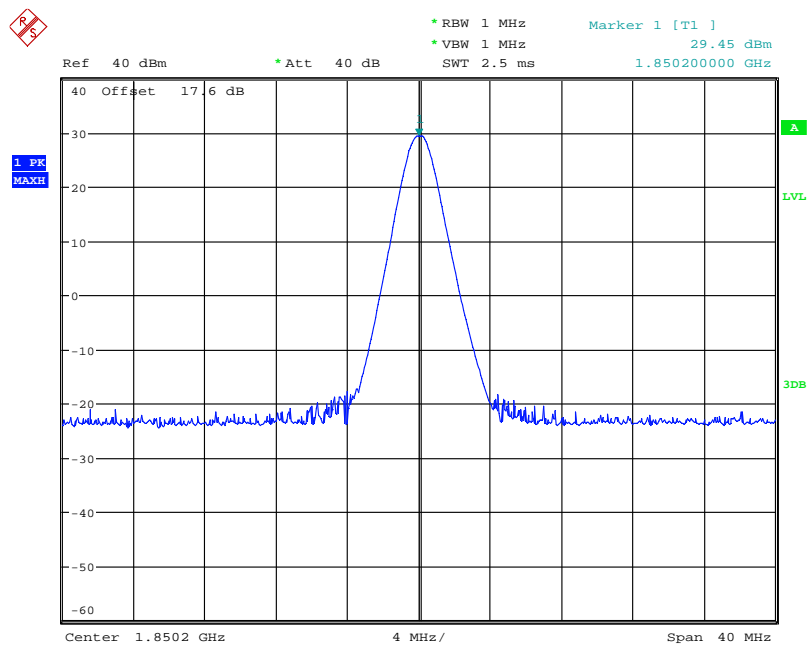


Date: 11.NOV.2010 12:07:10

(Plot J2: GPRS 1900MHz Channel = 512)

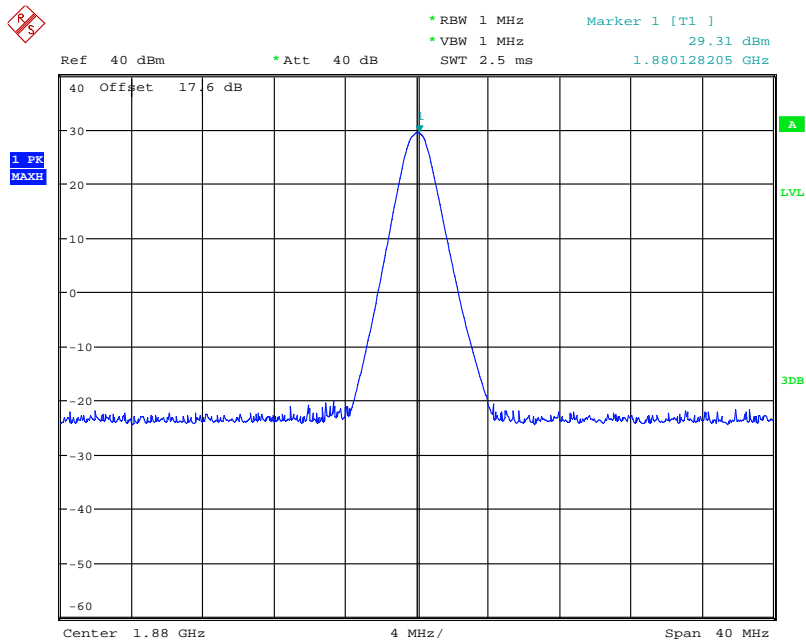


Date: 11.NOV.2010 12:08:17

(Plot K2: GPRS 1900MHz Channel = 661)

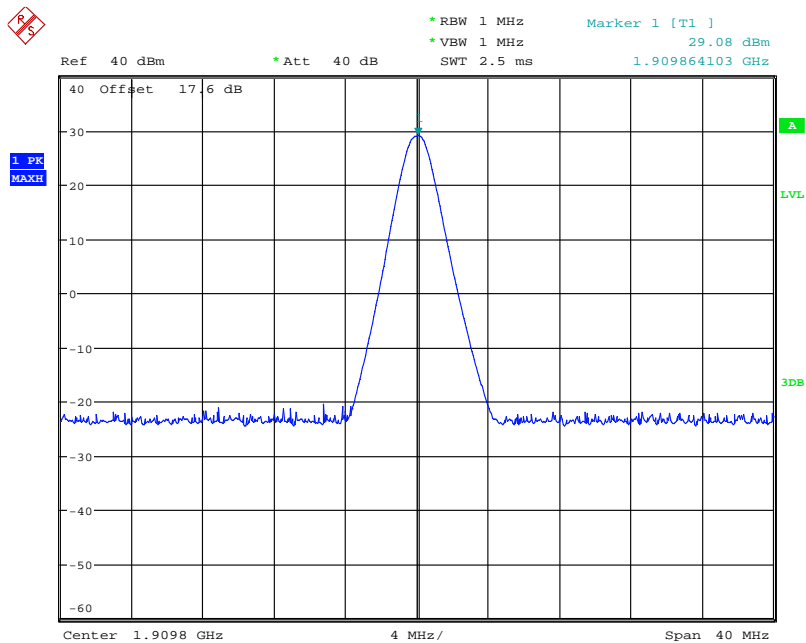


Date: 11.NOV.2010 12:08:51

(Plot L2: GPRS 1900MHz Channel = 810)

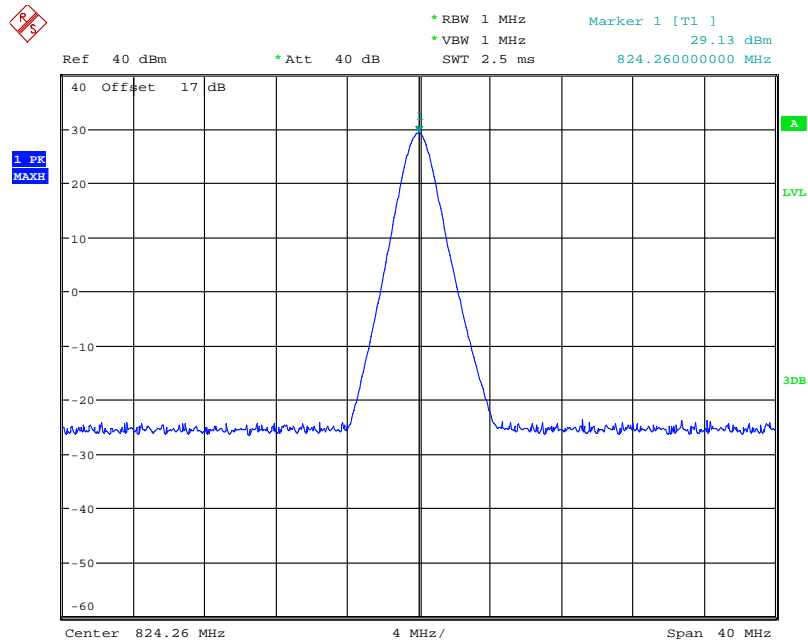


Date: 11.NOV.2010 11:42:39

(Plot M2:EGPRS 850MHz Channel = 128)

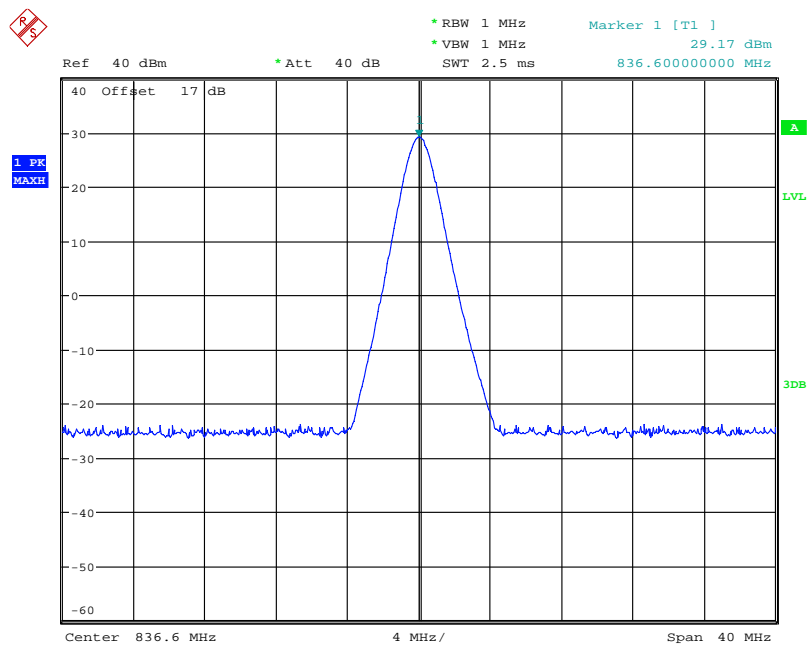


Date: 11.NOV.2010 11:43:36

(Plot N2:EGPRS 850MHz Channel = 190)

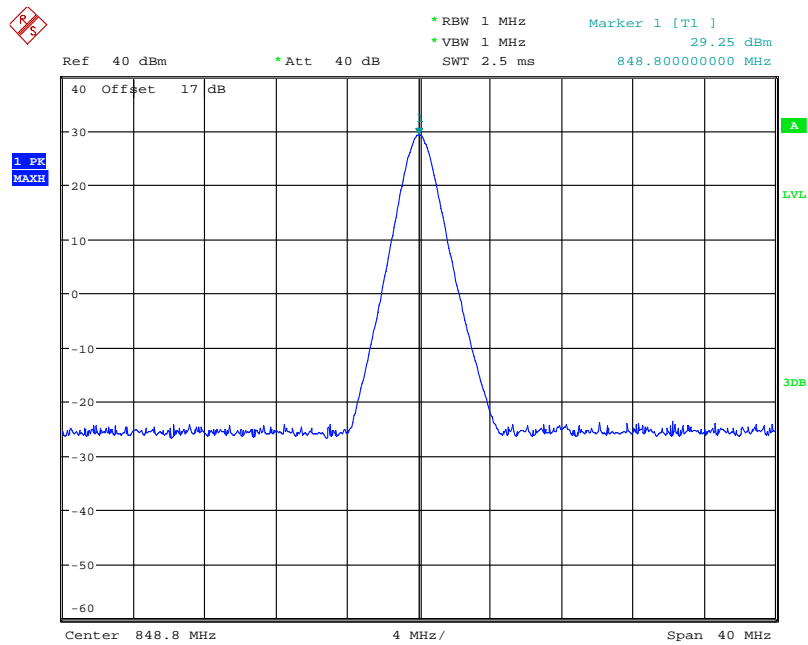


Date: 11.NOV.2010 11:44:15

(Plot O2:EGPRS 850MHz Channel = 251)

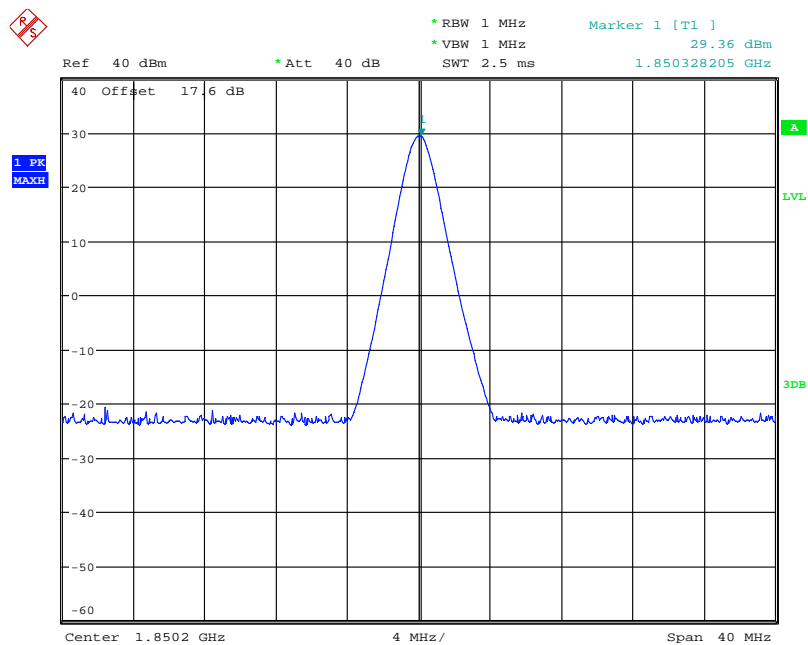


Date: 11.NOV.2010 11:38:03

(Plot P2:EGPRS 1900MHz Channel = 512)

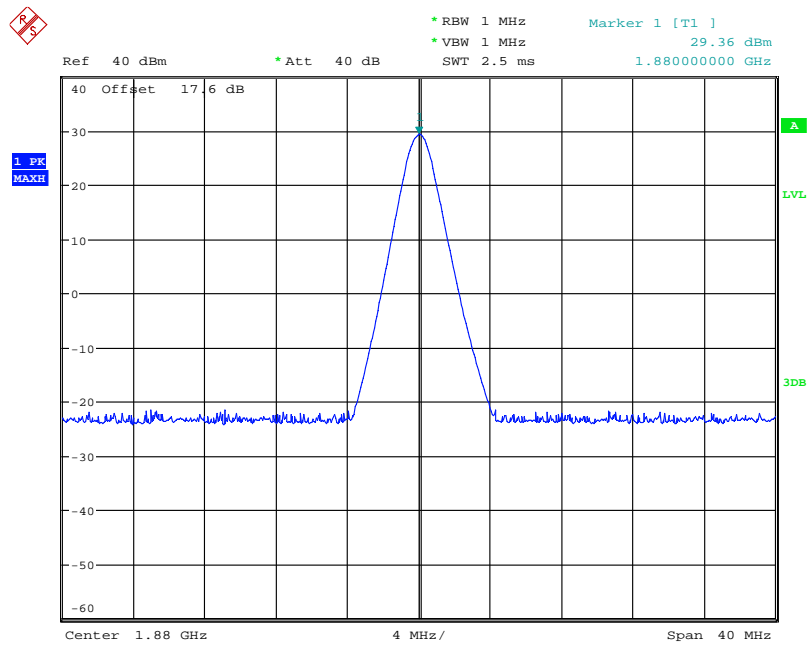

Date: 11.NOV.2010 11:38:57

(Plot Q2:EGPRS 1900MHz Channel = 661)

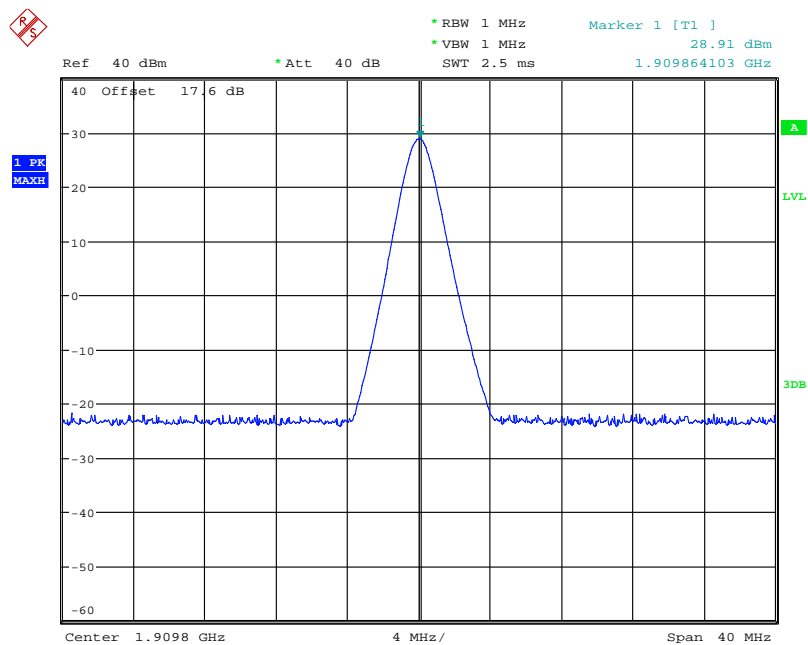

Date: 11.NOV.2010 11:39:53

(Plot R2:EGPRS 1900MHz Channel = 810)

3.3 20dB Occupied Bandwidth

3.3.1 Definition

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power as reference.

3.3.2 Test Description

See section 3.1.2 of this report.

3.3.3 Test Verdict


Here the lowest, middle and highest channels are tested to record the 20dB occupied bandwidth, it's about 300kHz.

1. Test Verdict (GSM) :

Band	Channel	Measured 20dB Occupied Bandwidth (kHz)	Refer to Plot
GSM 850MHz	128	274.0384	Plot A3
	190	283.6538	Plot B3
	251	283.6537	Plot C3
GSM 1900MHz	512	274.0384	Plot D3
	661	288.4615	Plot E3
	810	274.0383	Plot F3


Band	Channel	Measured 99% Occupied Bandwidth (kHz)	Refer to Plot
GSM 850MHz	128	250.0000	Plot A3.1
	190	250.0000	Plot B3.1
	251	254.8076	Plot C3.1
GSM 1900MHz	512	250.0000	Plot D3.1
	661	250.0000	Plot E3.1
	810	250.0000	Plot F3.1

2. Test Plot (GSM) :

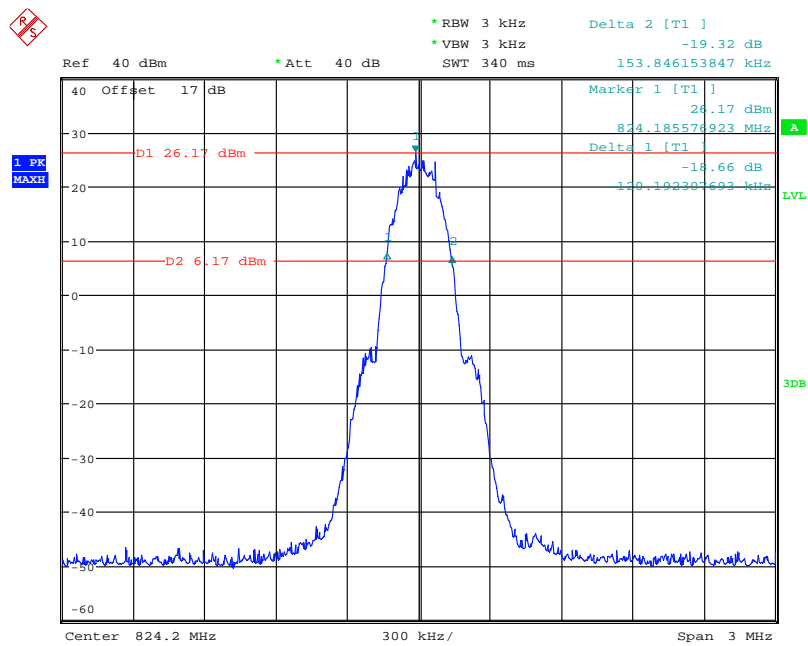


Date: 11.NOV.2010 13:22:20

(Plot A3: GSM 850MHz Channel = 128)

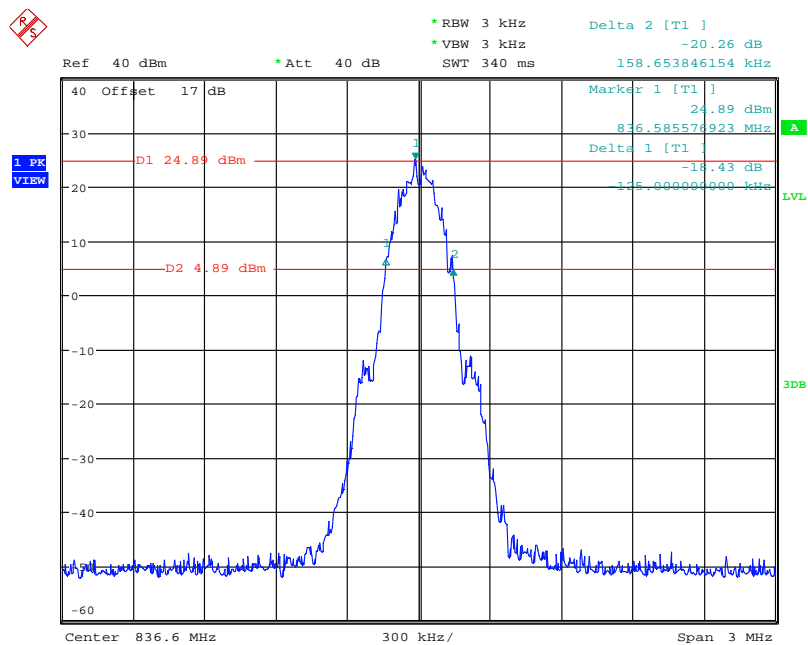


Date: 11.NOV.2010 13:28:40

(Plot B3: GSM 850MHz Channel = 190)

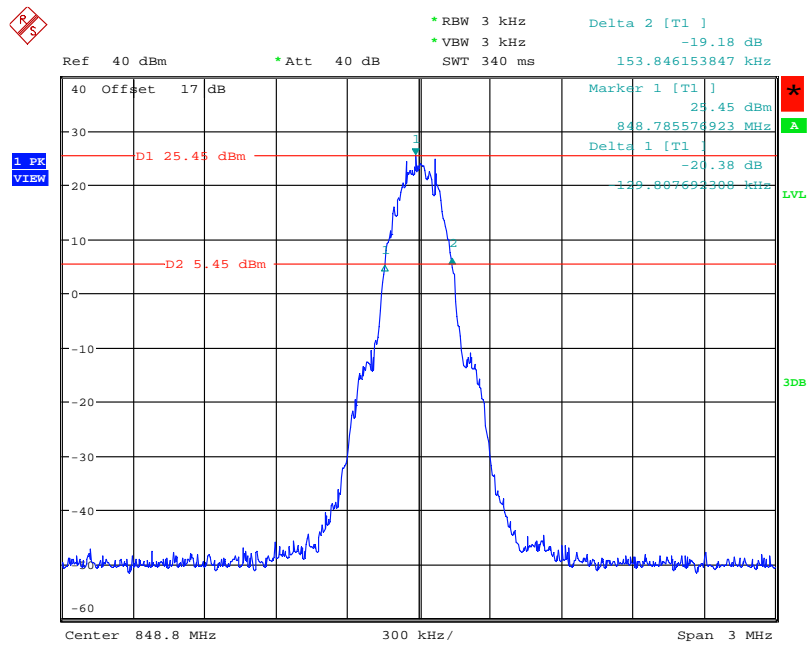


Date: 11.NOV.2010 13:35:08

(Plot C3: GSM 850MHz Channel = 251)

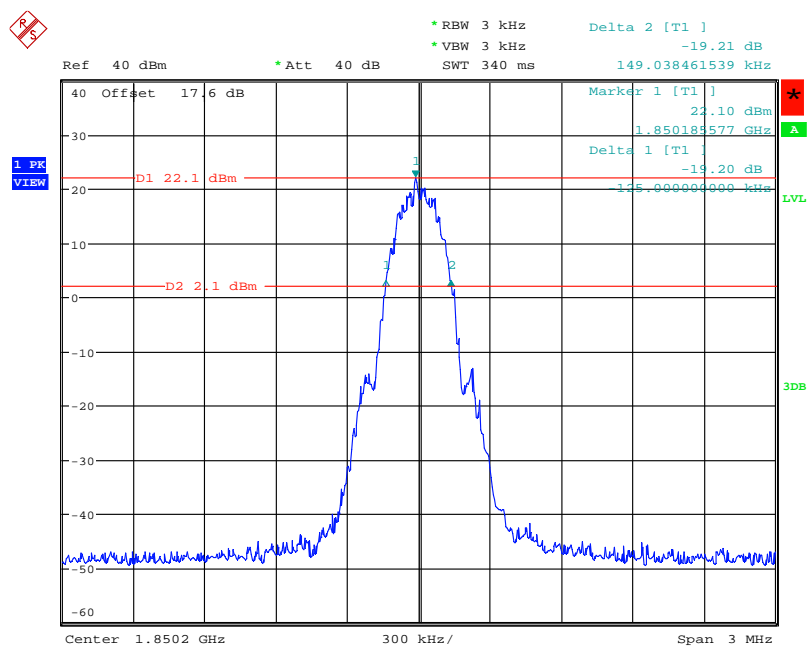


Date: 11.NOV.2010 13:45:17

(Plot D3: GSM 1900MHz Channel = 512)

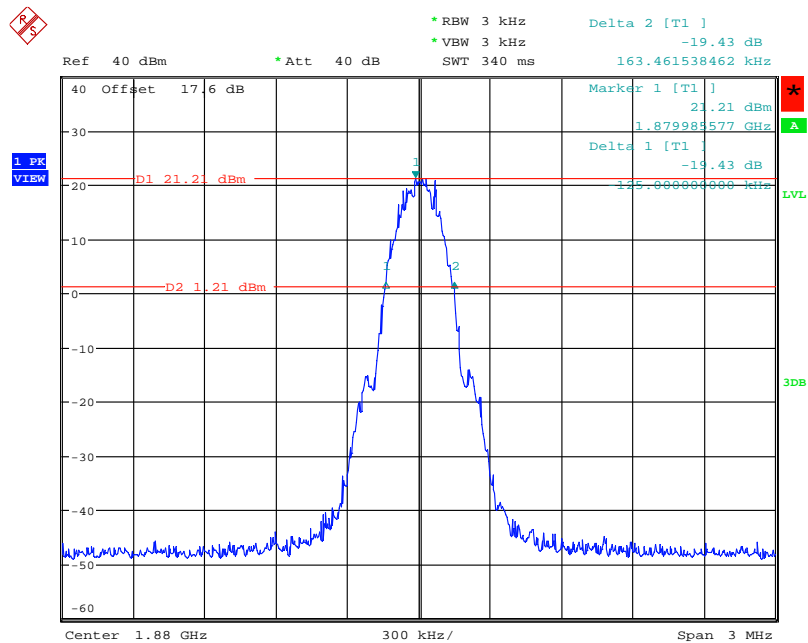


Date: 11.NOV.2010 13:51:59

(Plot E3: GSM 1900MHz Channel = 661)

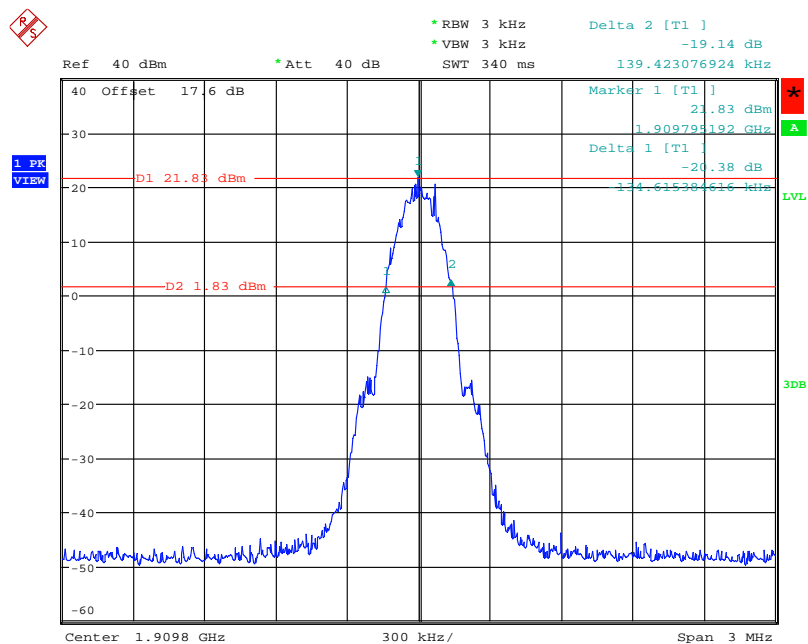


Date: 11.NOV.2010 13:56:35

(Plot F3: GSM 1900MHz Channel = 810)

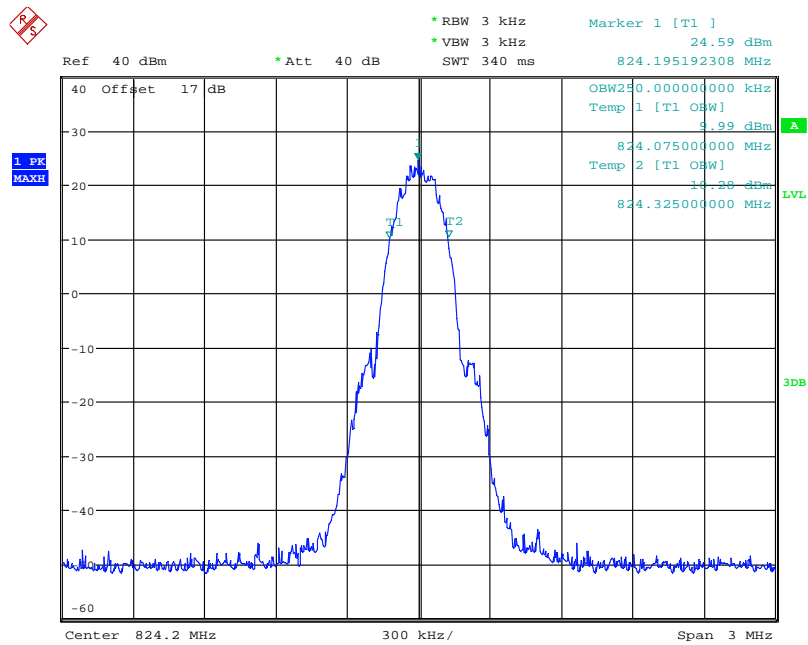


Date: 11.NOV.2010 13:23:43

(Plot A3.1: GSM 850MHz Channel = 128)

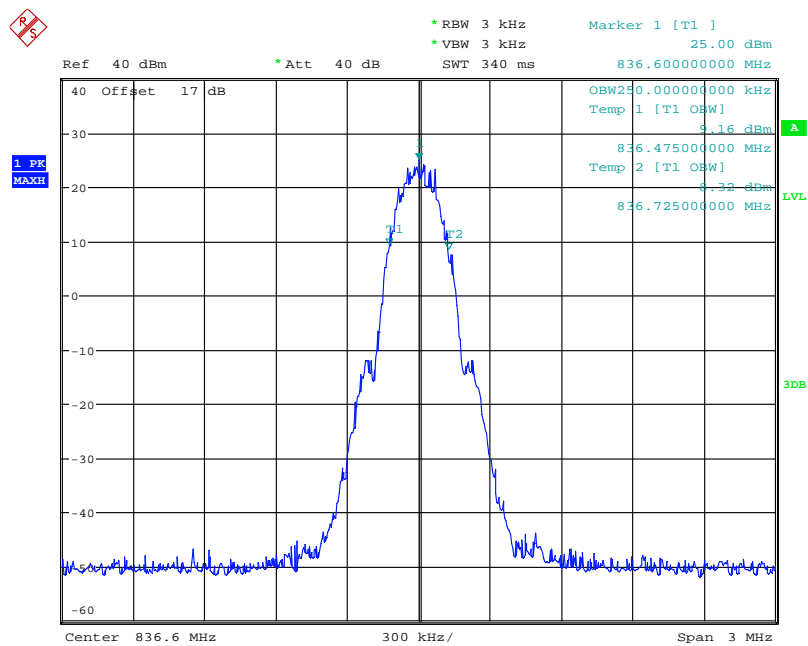


Date: 11.NOV.2010 13:25:22

(Plot B3.1: GSM 850MHz Channel = 190)

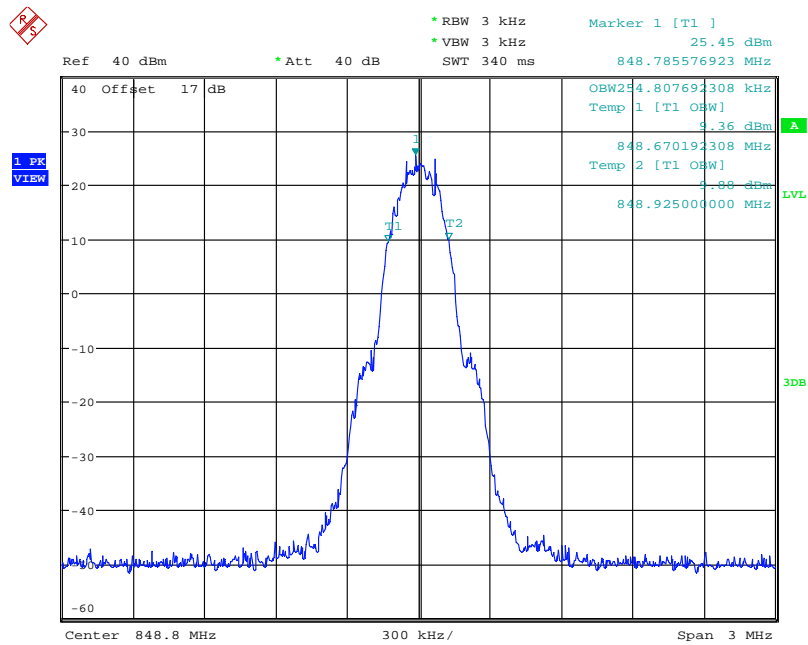


Date: 11.NOV.2010 13:32:46

(Plot C3.1: GSM 850MHz Channel = 251)

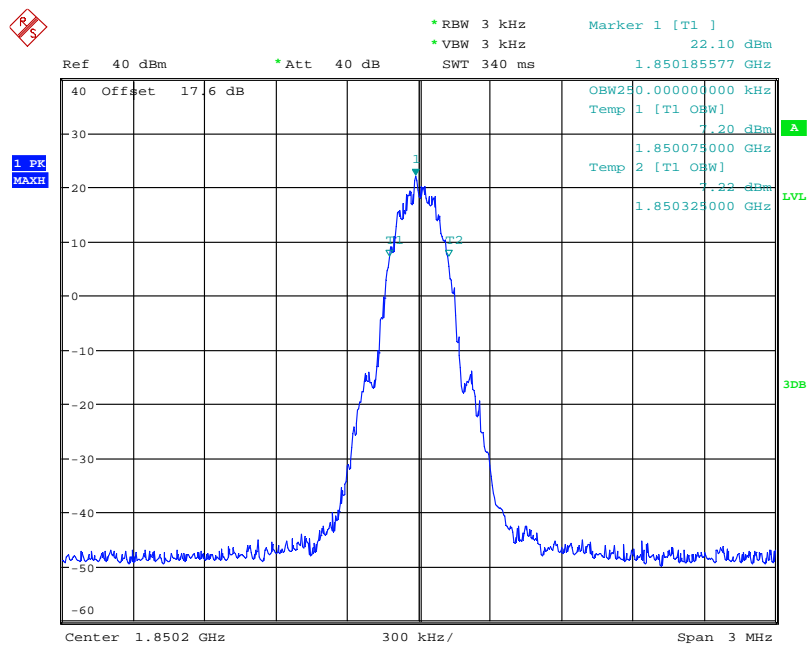


Date: 11.NOV.2010 13:40:42

(Plot D3.1: GSM 1900MHz Channel = 512)

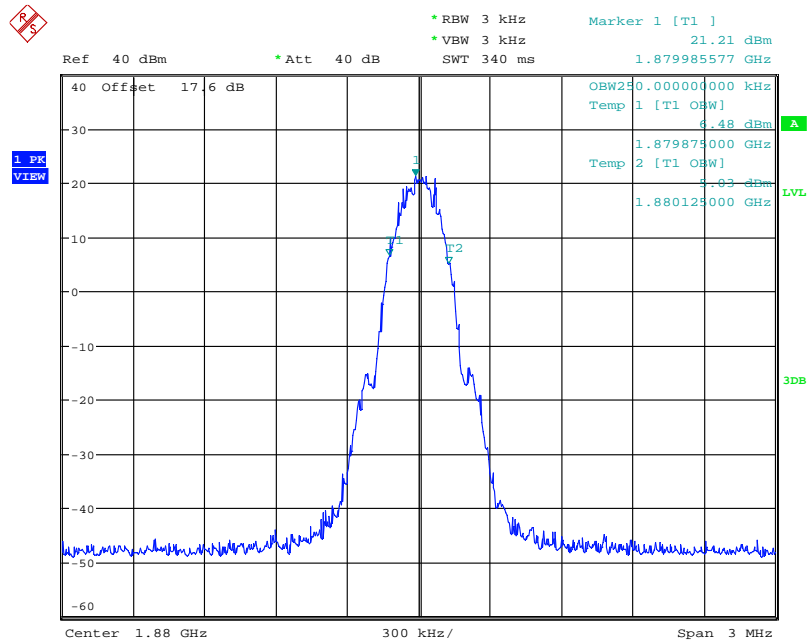

Date: 11.NOV.2010 13:50:28

(Plot E3.1: GSM 1900MHz Channel = 661)

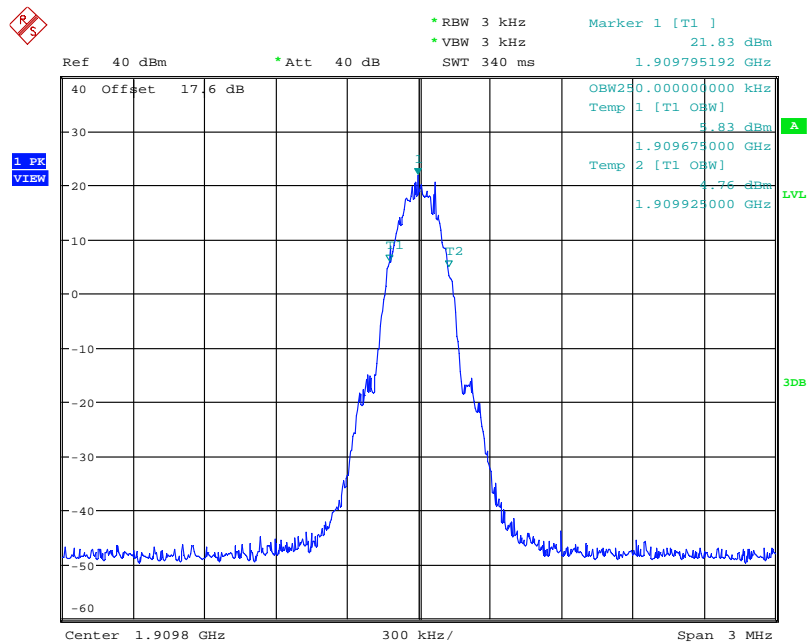

Date: 11.NOV.2010 13:55:22


(Plot F3.1: GSM 1900MHz Channel = 810)

3. Test Verdict (GPRS) :

Band	Channel	Measured 20dB Occupied Bandwidth (kHz)	Refer to Plot
GPRS 850MHz	128	288.4615	Plot G3
	190	278.8462	Plot H3
	251	278.8462	Plot I3
GPRS 1900MHz	512	288.4615	Plot J3
	661	278.8462	Plot K3
	810	283.6538	Plot L3


Band	Channel	Measured 99% Occupied Bandwidth (kHz)	Refer to Plot
GPRS 850MHz	128	250.0000	Plot G3.1
	190	245.1923	Plot H3.1
	251	250.0000	Plot I3.1
GPRS 1900MHz	512	245.1923	Plot J3.1
	661	250.0000	Plot K3.1
	810	250.0000	Plot L3.1

4. Test Plot (GPRS) :

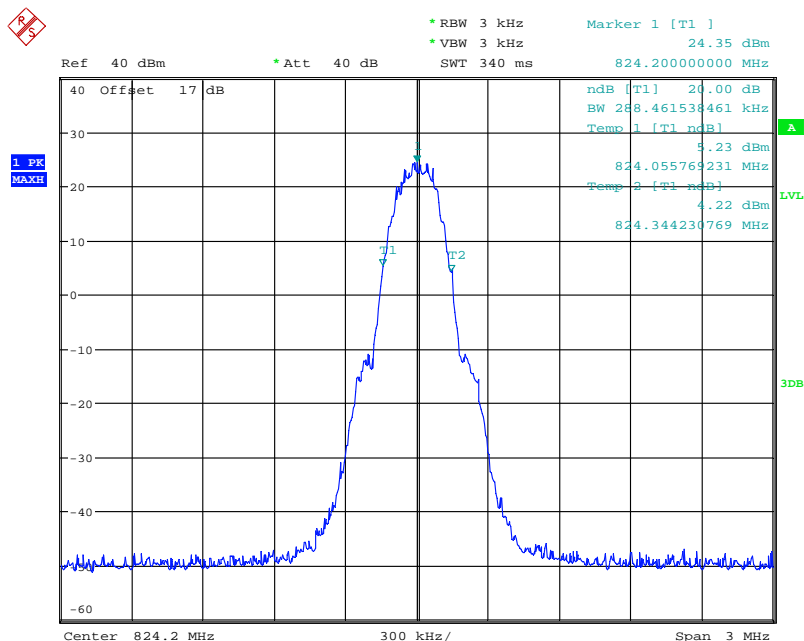


Date: 14.DEC.2010 11:17:55

(Plot G3: GPRS 850MHz Channel = 128)

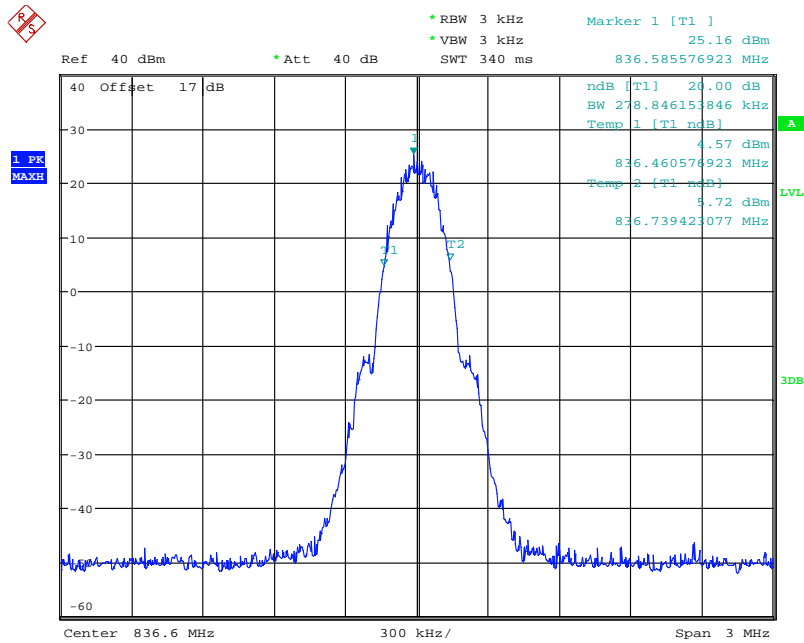


Date: 14.DEC.2010 11:21:09

(Plot H3: GPRS 850MHz Channel = 190)

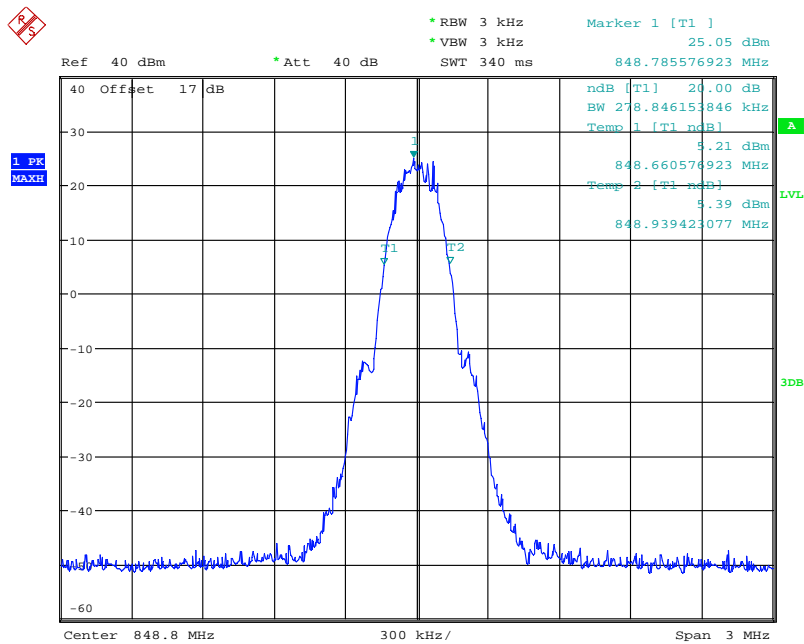


Date: 14.DEC.2010 11:24:40

(Plot I3: GPRS 850MHz Channel = 251)

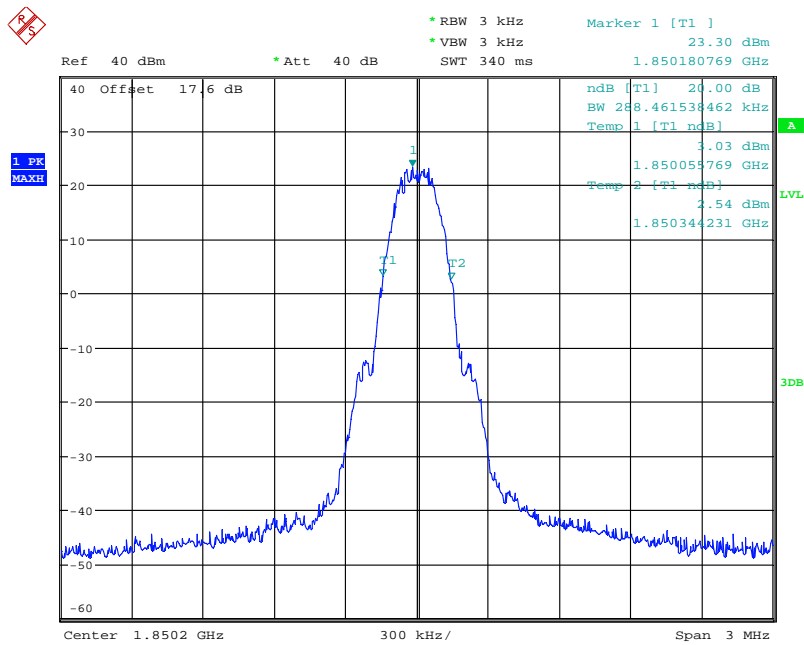


Date: 14.DEC.2010 11:36:09

(Plot J3: GPRS 1900MHz Channel = 512)

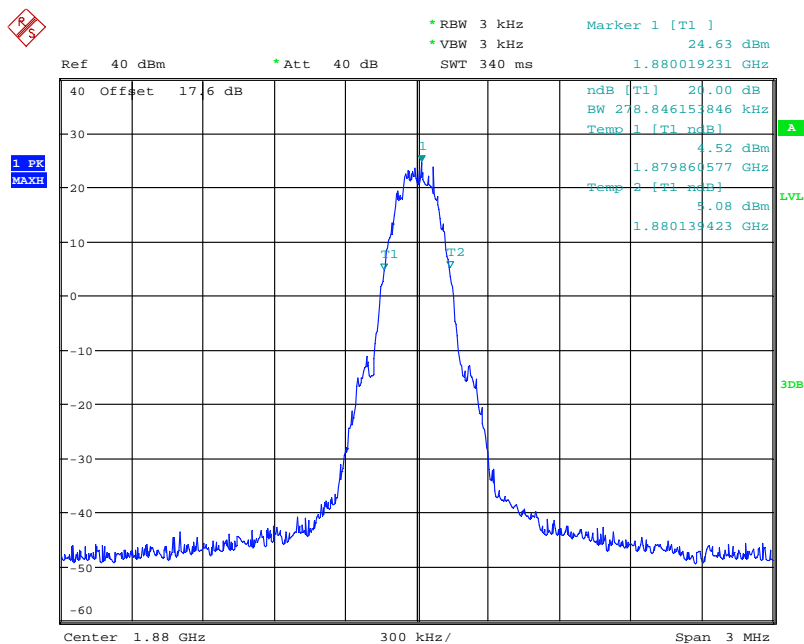


Date: 14.DEC.2010 11:42:55

(Plot K3: GPRS 1900MHz Channel = 661)

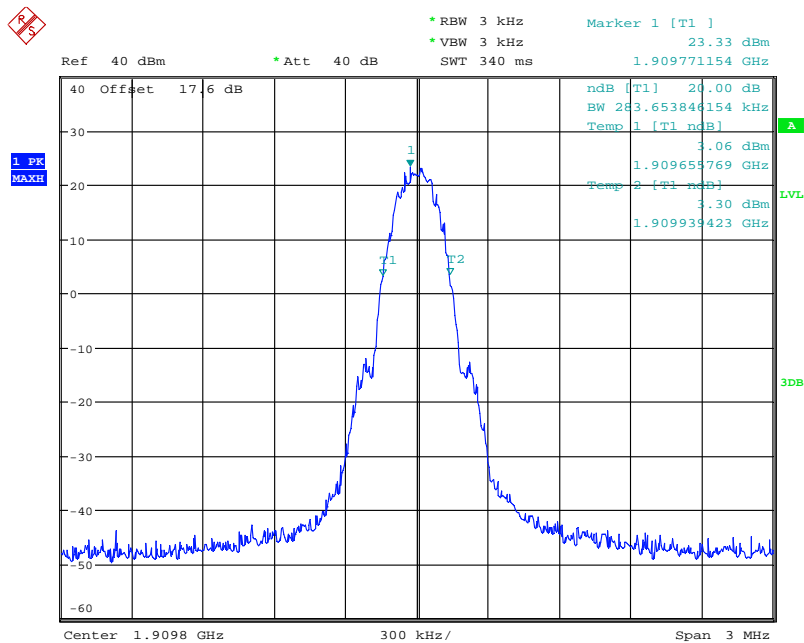


Date: 14.DEC.2010 11:46:34

(Plot L3: GPRS 1900MHz Channel = 810)

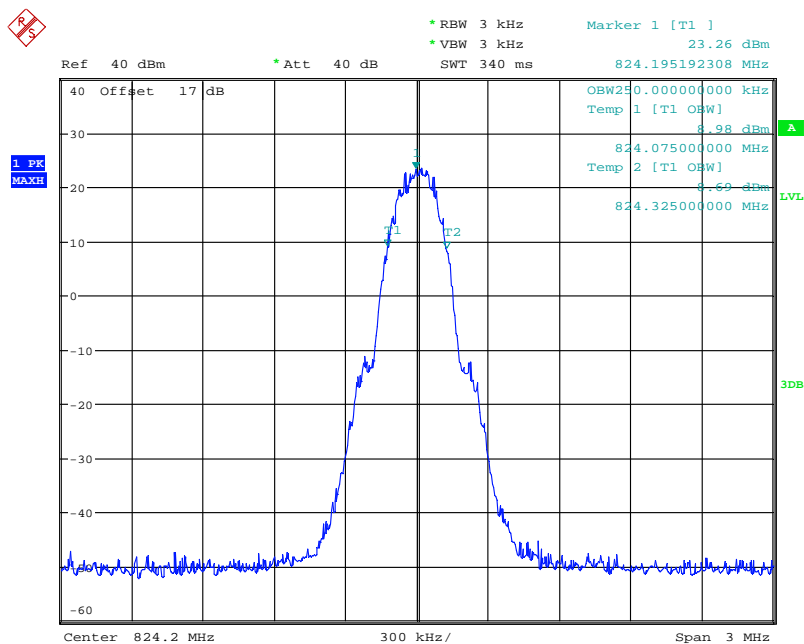


Date: 14.DEC.2010 11:19:06

(Plot G3.1: GPRS 850MHz Channel = 128)

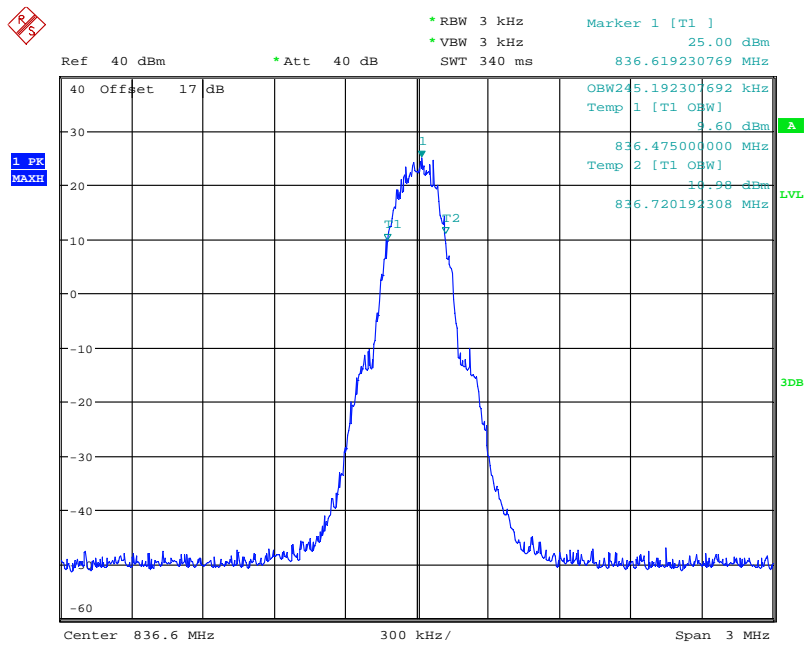


Date: 14.DEC.2010 11:22:48

(Plot H3.1: GPRS 850MHz Channel = 190)

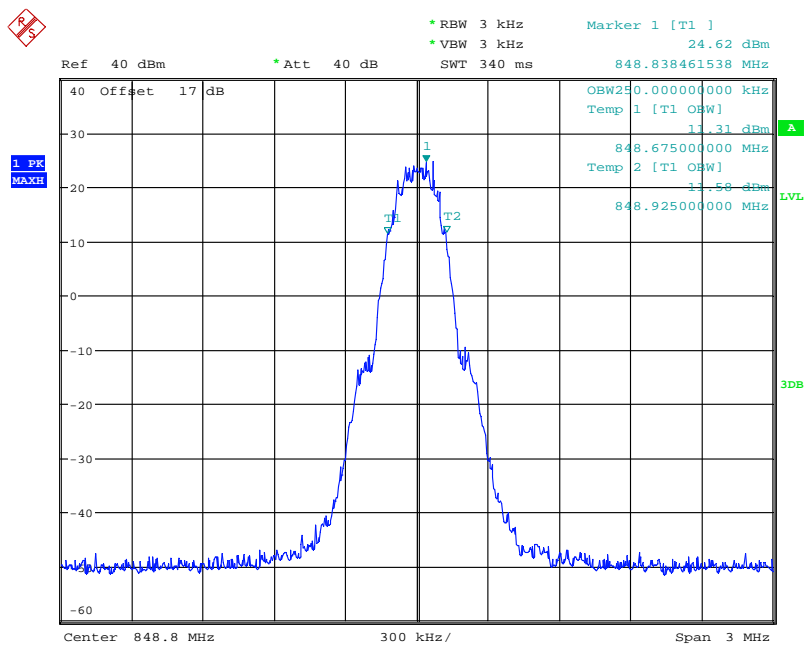


Date: 14.DEC.2010 11:28:15

(Plot I3.1: GPRS 850MHz Channel = 251)

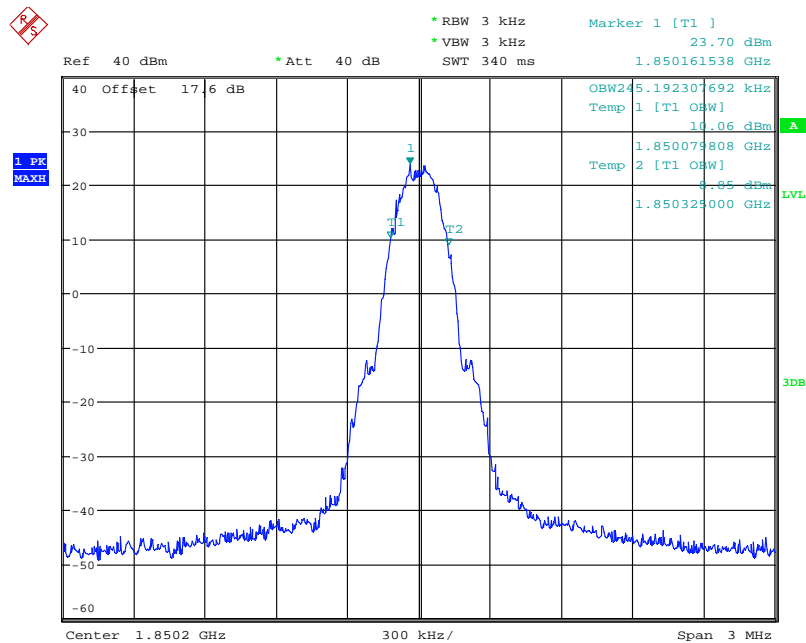


Date: 14.DEC.2010 11:40:43

(Plot J3.1: GPRS 1900MHz Channel = 512)

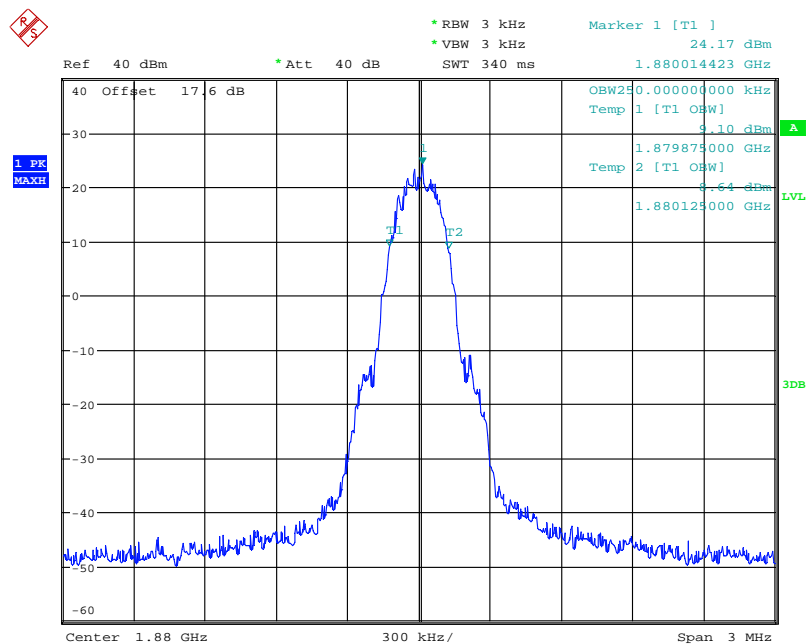

Date: 14.DEC.2010 11:43:37

(Plot K3.1: GPRS 1900MHz Channel = 661)

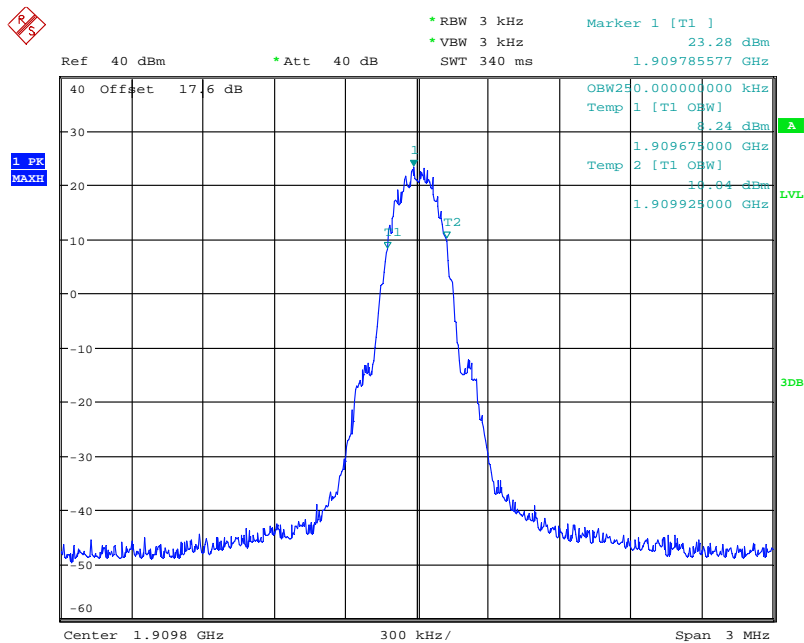

Date: 14.DEC.2010 11:47:46


(Plot L3.1: GPRS 1900MHz Channel = 810)

5. Test Verdict (EGPRS) :

Band	Channel	Measured 20dB Occupied Bandwidth (kHz)	Refer to Plot
EGPRS 850MHz	128	278.8462	Plot M3
	190	278.8462	Plot N3
	251	283.6538	Plot O3
EGPRS 1900MHz	512	288.4615	Plot P3
	661	283.6538	Plot Q3
	810	278.8462	Plot R3


Band	Channel	Measured 99% Occupied Bandwidth (kHz)	Refer to Plot
EGPRS 850MHz	128	250.0000	Plot M3.1
	190	245.1923	Plot N3.1
	251	250.0000	Plot O3.1
EGPRS 1900MHz	512	245.1923	Plot P3.1
	661	240.3846	Plot Q3.1
	810	240.3846	Plot R3.1

6. Test Plot (EGPRS) :

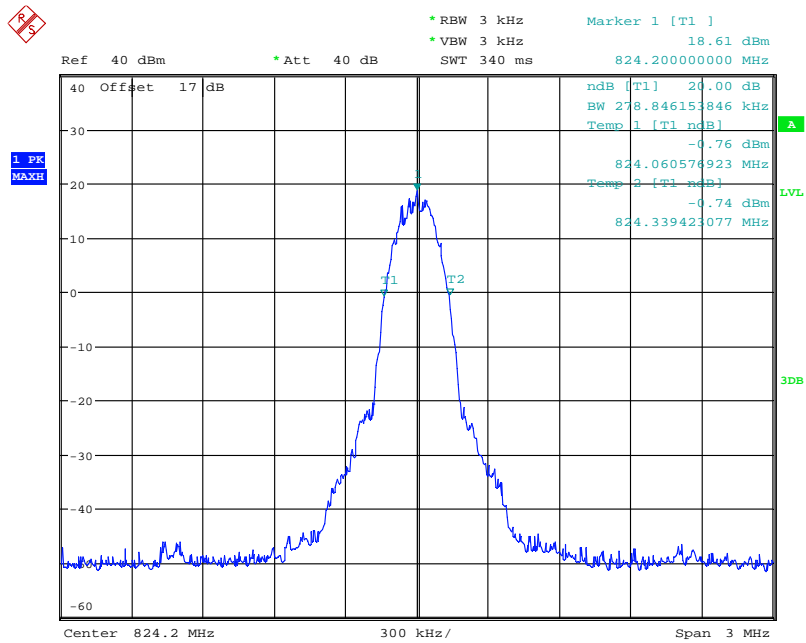


Date: 14.DEC.2010 11:51:56

(Plot M3: EGPRS 850MHz Channel = 128)

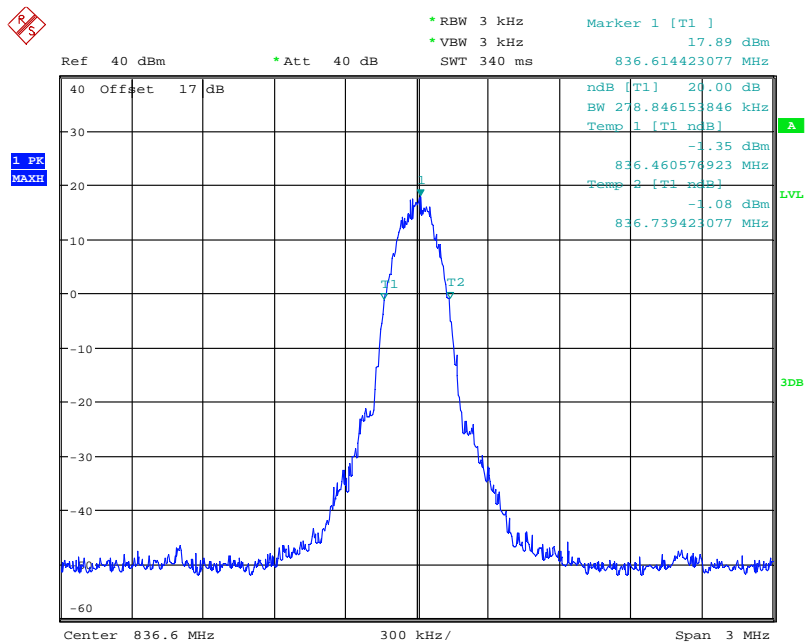


Date: 14.DEC.2010 11:54:01

(Plot N3: EGPRS 850MHz Channel = 190)

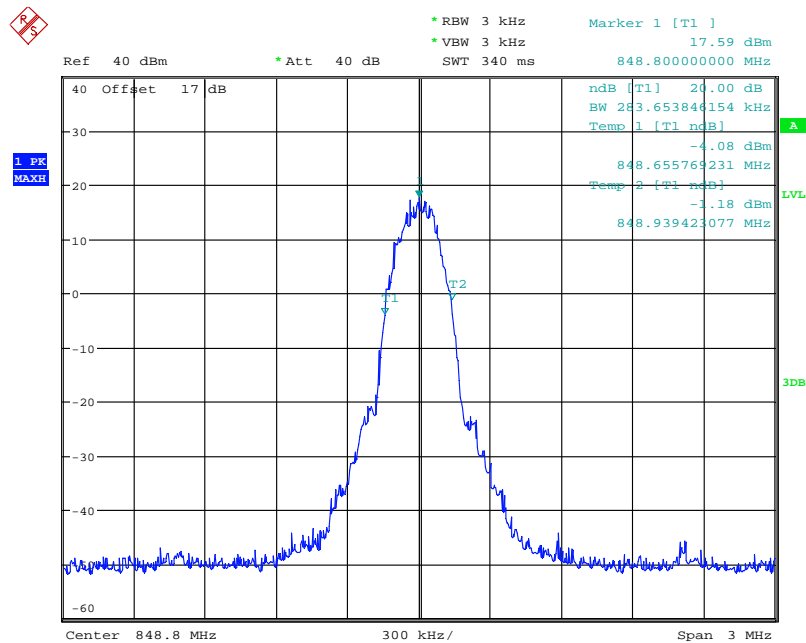


Date: 14.DEC.2010 11:56:24

(Plot O3: EGPRS 850MHz Channel = 251)

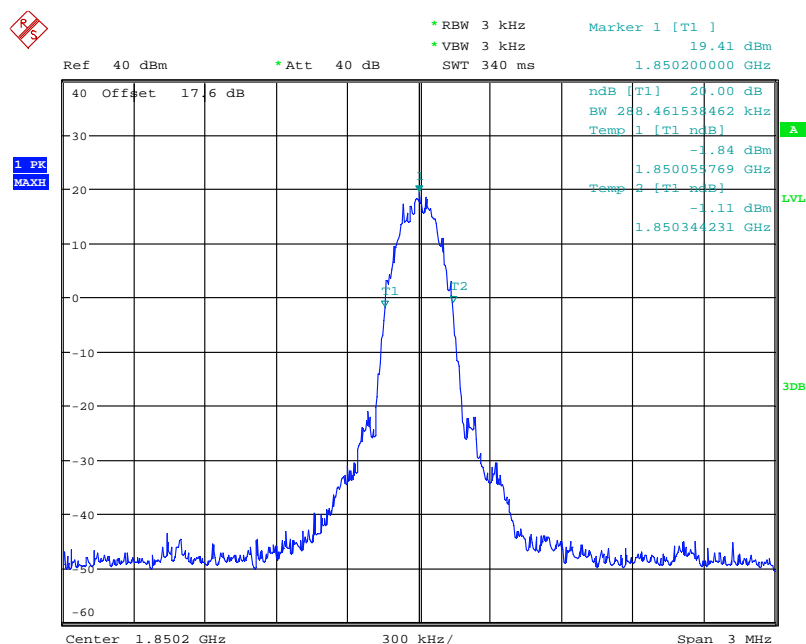


Date: 14.DEC.2010 12:04:01

(Plot P3: EGPRS 1900MHz Channel = 512)

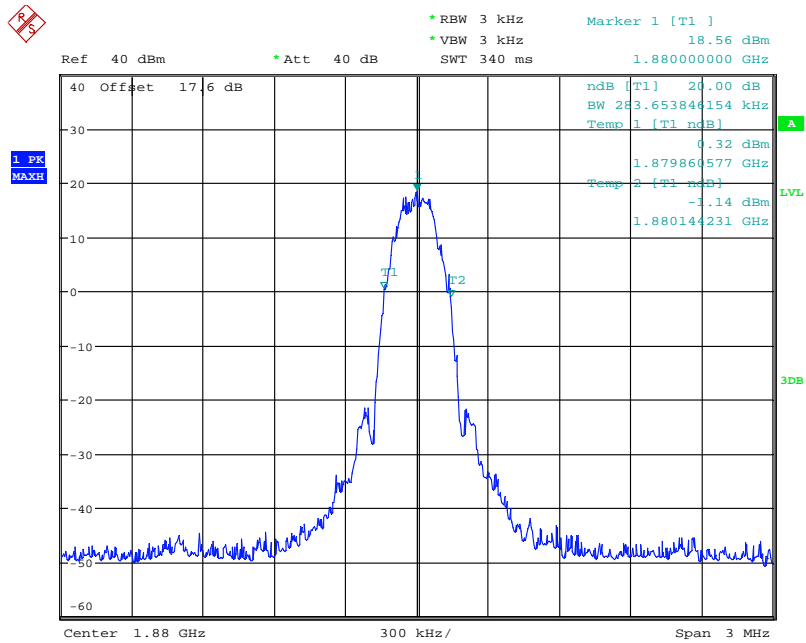


Date: 14.DEC.2010 12:00:54

(Plot Q3: EGPRS 1900MHz Channel = 661)

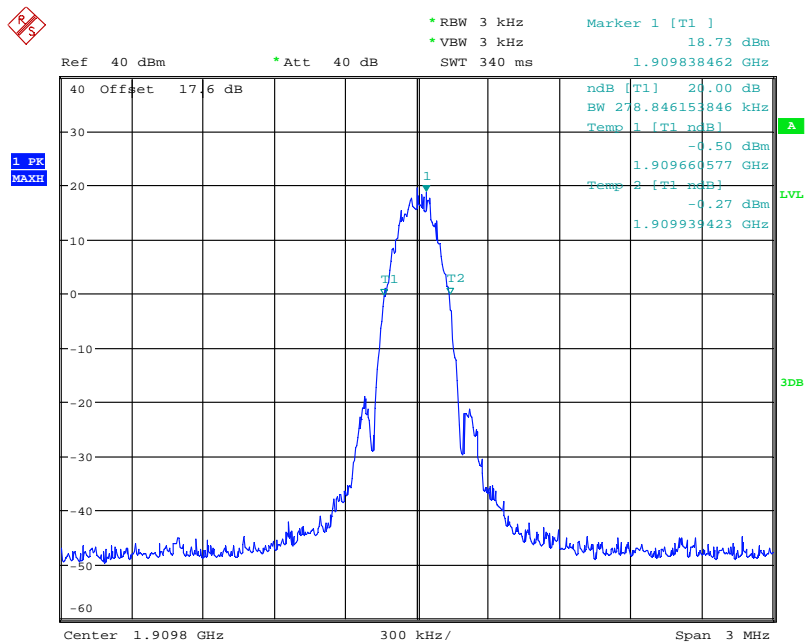


Date: 14.DEC.2010 12:06:26

(Plot R3: EGPRS 1900MHz Channel = 810)

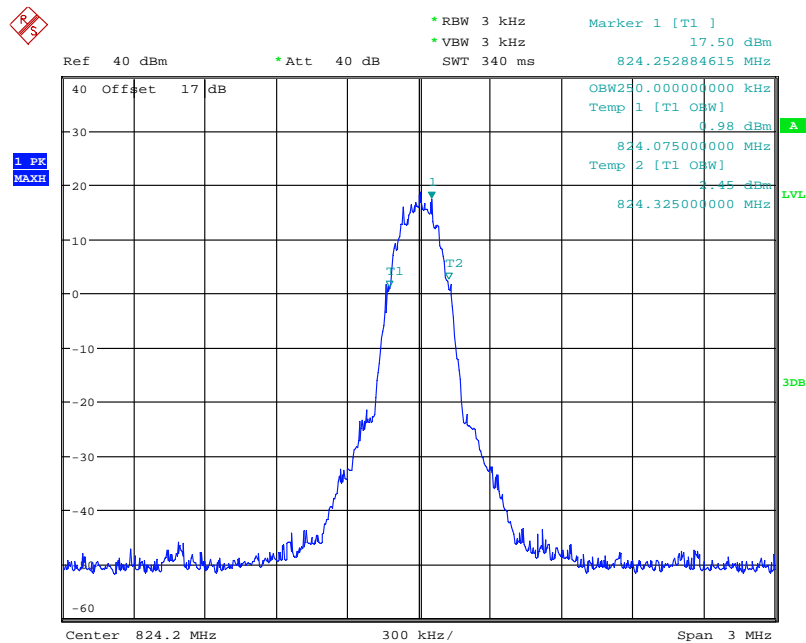


Date: 14.DEC.2010 11:52:51

(Plot M3.1: EGPRS 850MHz Channel = 128)

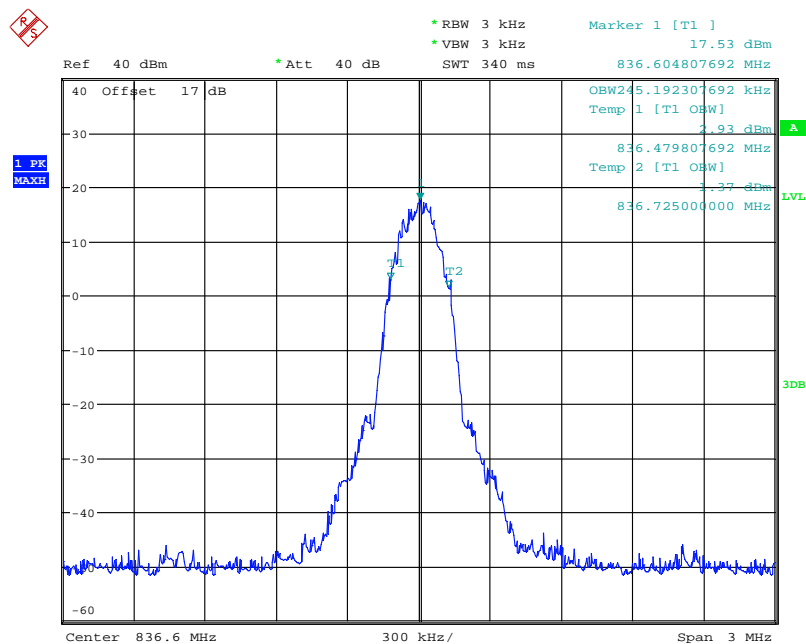


Date: 14.DEC.2010 11:54:55

(Plot N3.1: EGPRS 850MHz Channel = 190)

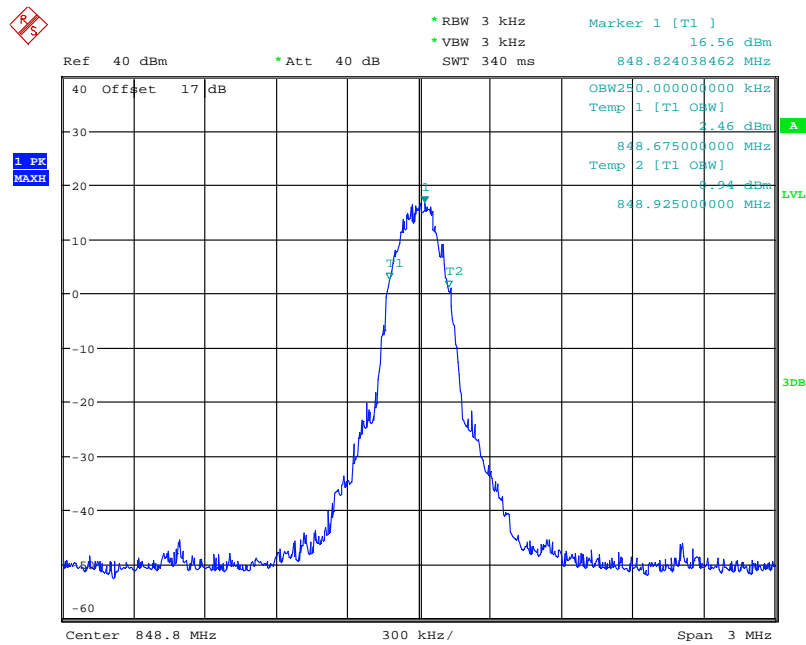


Date: 14.DEC.2010 11:57:04

(Plot O3.1: EGPRS 850MHz Channel = 251)

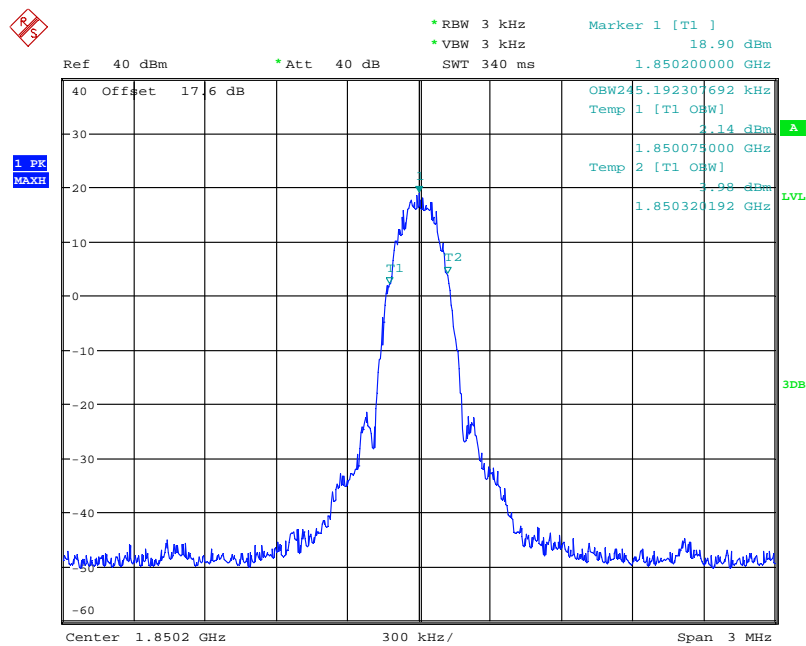


Date: 14.DEC.2010 12:04:41

(Plot P3.1: EGPRS 1900MHz Channel = 512)

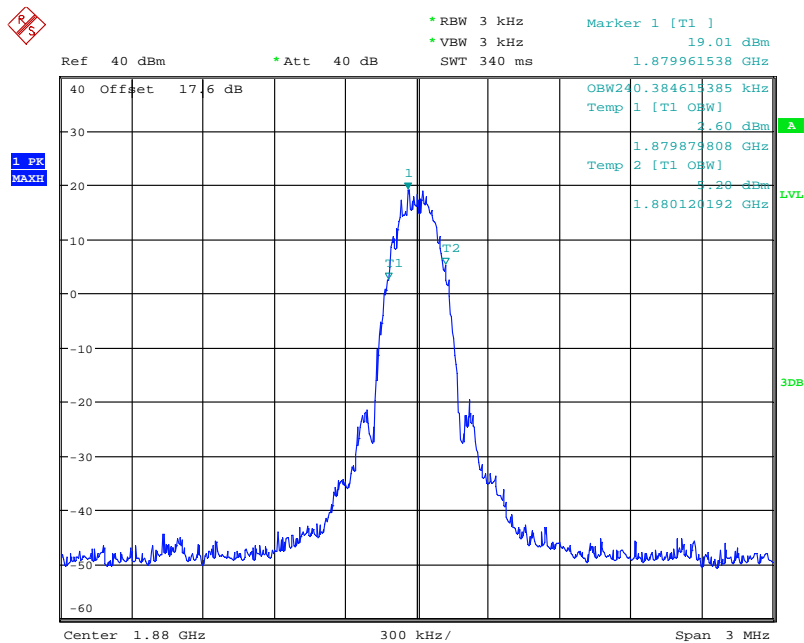

Date: 14.DEC.2010 12:02:43

(Plot Q3.1: EGPRS 1900MHz Channel = 661)

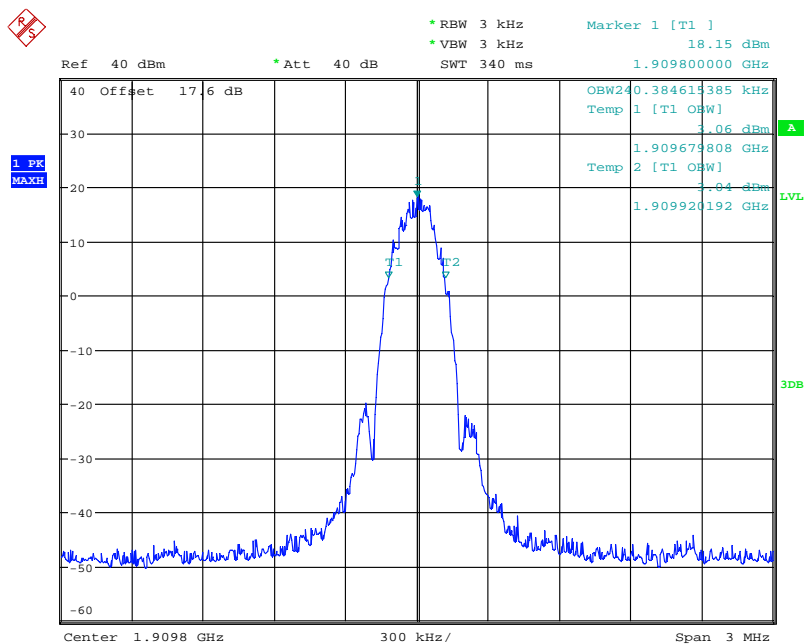

Date: 14.DEC.2010 12:07:07

(Plot R3.1: EGPRS 1900MHz Channel = 810)

3.4 Frequency Stability


3.4.1 Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

3.4.2 Test Description

1. Test Setup:

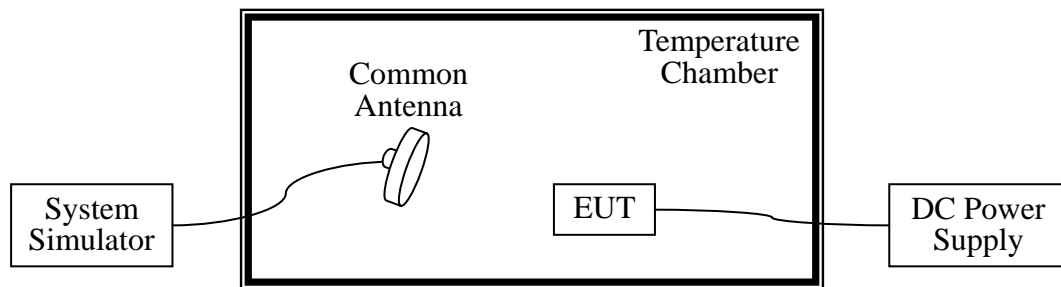

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Rohde&Schwarz	CMU200	105571	2010.9	1year
System Simulator	Agilent	E5515C	GB46040102	2010.9	1year
DC Power Supply	Good Will	GPS-3030DD	EF920938	2009.10	2year
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2010.9	1year

3.4.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.7VDC, 4.2VDC and 3.6VDC,

which are specified by the applicant; the normal temperature here used is 25°C. The frequency deviation limit is ± 2.5 ppm.

Band	Test Conditions		Frequency Deviation						Verdict
	Power (VDC)	Temperature (°C)	Low Channel		Middle Channel		High Channel		Limit ± 2.5 ppm (ppm)
			Dev. Freq. Hz	Deviation (ppm)	Dev. Freq. Hz	Deviation (ppm)	Dev. Freq. Hz	Deviation (ppm)	
GSM 850MHz	3.7	-30	--	--	--	--	--	--	PASS
		-20	--	--	--	--	--	--	
		-10	1	0	-3	0	2	0	
		0	-4	0	-6	0	6	0	
		+10	5	0	-2	0	-1	0	
		+20	-8	0	-8	0	-6	0	
		+30	3	0	-1	0	-2	0	
		+40	2	0	-2	0	1	0	
		+50	-2	0	-1	0	2	0	
	4.2	+25	4	0	2	0	-2	0	
	3.6	+25	-1	0	5	0	4	0	
GSM 1900MHz	3.7	-30	--	--	--	--	--	--	PASS
		-20	--	--	--	--	--	--	
		-10	-9	0	-7	0	-6	0	
		0	-6	0	-5	0	-4	0	
		+10	6	0	9	0	5	0	
		+20	-4	0	1	0	2	0	
		+30	-5	0	-2	0	1	0	
		+40	-3	0	4	0	2	0	
		+50	-1	0	3	0	2	0	
	4.2	+25	3	0	-3	0	-3	0	
	3.6	+25	-5	0	-8	0	-9	0	
GPRS 850MHz	3.7	-30	--	--	--	--	--	--	PASS
		-20	--	--	--	--	--	--	
		-10	7	0	4	0	8	0	
		0	-4	0	-7	0	-5	0	
		+10	6	0	3	0	7	0	
		+20	-8	0	-6	0	-9	0	
		+30	4	0	6	0	5	0	
		+40	-6	0	-3	0	-5	0	
		+50	8	0	5	0	7	0	
	4.2	+25	4	0	-3	0	-1	0	

	3.6	+25	-7	0	-6	0	-5	0	
GPRS 1900MH z	3.7	-30	--	--	--	--	--	--	PASS
		-20	--	--	--	--	--	--	
		-10	3	0	3	0	4	0	
		0	5	0	4	0	6	0	
		+10	-5	0	-5	0	-6	0	
		+20	-3	0	-6	0	-7	0	
		+30	-6	0	-4	0	-8	0	
		+40	-5	0	-8	0	-9	0	
		+50	-3	0	-6	0	-6	0	
	4.2	+25	-6	0	-4	0	-3	0	
	3.6	+25	-4	0	-5	0	-6	0	
EGPRS 850MHz	3.7	-30	--	--	--	--	--	--	PASS
		-20	--	--	--	--	--	--	
		-10	4	0	4	0	9	0	
		0	-1	0	-2	0	-4	0	
		+10	-5	0	-5	0	-6	0	
		+20	-8	0	9	0	-7	0	
		+30	-5	0	3	0	8	0	
		+40	6	0	6	0	5	0	
		+50	3	0	-3	0	4	0	
	4.2	+25	2	0	-9	0	3	0	
	3.6	+25	-8	0	-3	0	8	0	
EGPRS 1900MH z	3.7	-30	--	--	--	--	--	--	PASS
		-20	--	--	--	--	--	--	
		-10	3	0	4	0	-2	0	
		0	-6	0	-6	0	-2	0	
		+10	-1	0	-4	0	-1	0	
		+20	4	0	8	0	-6	0	
		+30	8	0	-2	0	-8	0	
		+40	-3	0	4	0	-4	0	
		+50	6	0	-1	0	-1	0	
	4.2	+25	1	0	8	0	-9	0	
	3.6	+25	-5	0	-9	0	-3	0	
	3.6	+25	-2	0	-3	0	-6	0	

Note:

1. The EUT stops transmitting at temperatures -20°C and -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -10°C~60°C.

3.5 Conducted Out of Band Emissions

3.5.1 Requirement

According to FCC section 22.917(a) and FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

3.5.2 Test Description

See section 3.1.2 of this report.

3.5.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.


Test Verdict:

Band	Channel	Frequency (GHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	1.92	-23.43	Plot A4	-13	PASS
	190	1.92	-23.68	Plot B4		PASS
	251	1.92	-23.11	Plot C4		PASS
GSM 1900MHz	512	11.92	-23.26	Plot D4	-13	PASS
	661	10.89	-23.37	Plot E4		PASS
	810	16.69	-22.11	Plot F4		PASS
GPRS 850MHz	128	1.92	-23.77	Plot G4	-13	PASS
	190	1.92	-23.30	Plot H4		PASS
	251	1.92	-23.59	Plot I4		PASS
GPRS 1900MHz	512	3.10	-22.80	Plot J4	-13	PASS
	661	16.15	-22.17	Plot K4		PASS
	810	5.67	-23.25	Plot L4		PASS
EGPRS 850MHz	128	1.91	-23.15	Plot M4	-13	PASS
	190	1.91	-22.79	Plot N4		PASS
	251	1.91	-22.87	Plot O4		PASS

Band	Channel	Frequency (GHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
EGPRS 1900MHz	128	16.08	-22.05	PlotP4	-13	PASS
	190	3.10	-22.52	PlotQ4		PASS
	251	8.46	-23.32	Plot R4		PASS


3. Test Plot for the Whole Measurement Frequency Range:

Note: the power of the EUT transmitting frequency should be ignored.

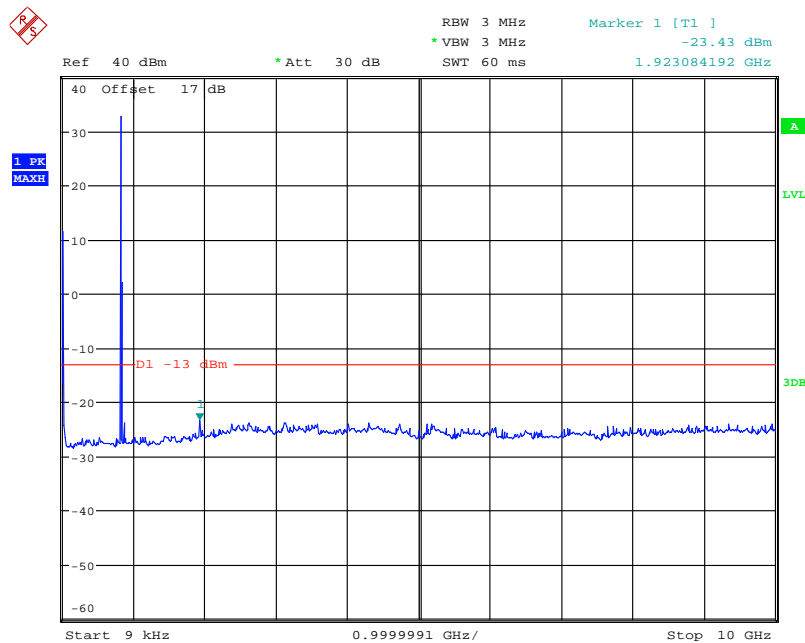


Date: 15.NOV.2010 12:12:36

(Plot A4.:GSM 850MHz Channel = 128, 9KHz to 10GHz)

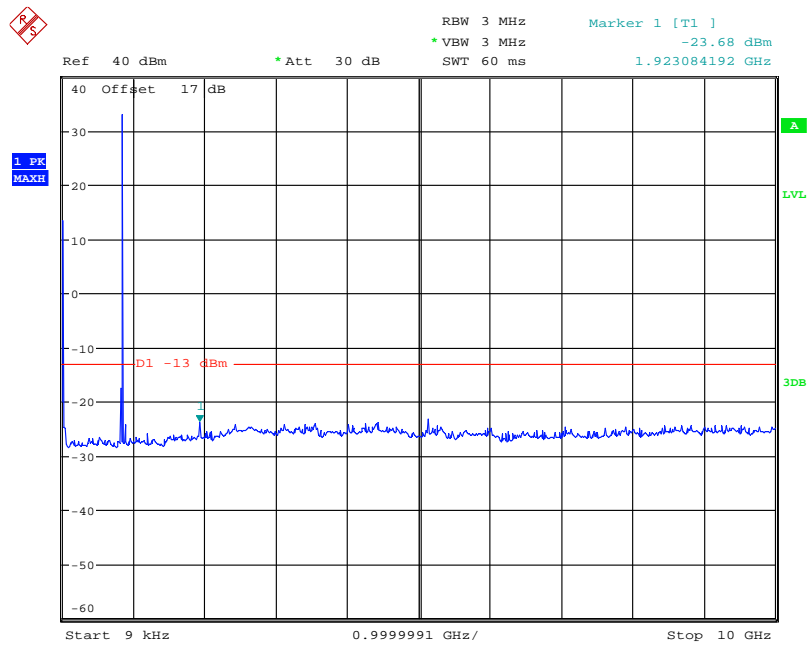


Date: 15.NOV.2010 12:13:26

(Plot B4.:GSM 850MHz Channel = 190, 9KHz to 10GHz)

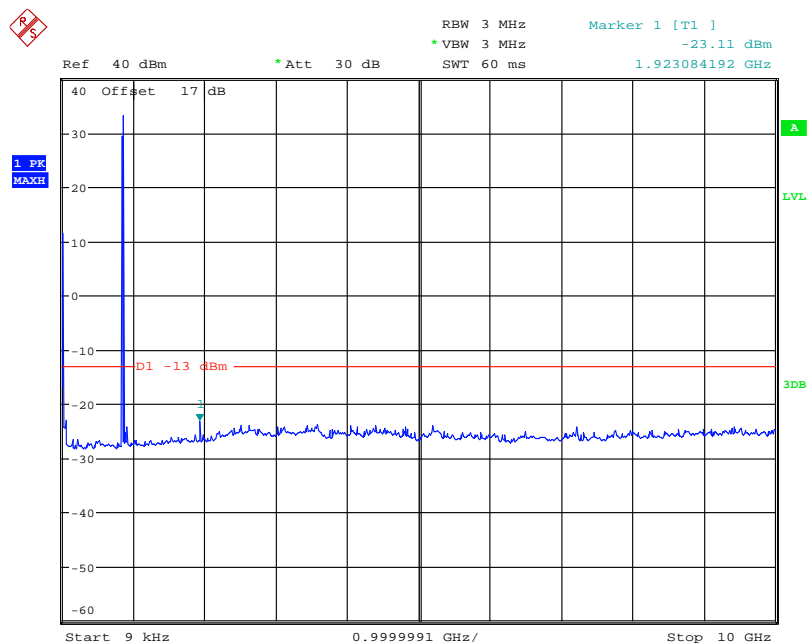


Date: 15.NOV.2010 12:14:27

(Plot C4.:GSM 850MHz Channel = 251, 9KHz to 10GHz)

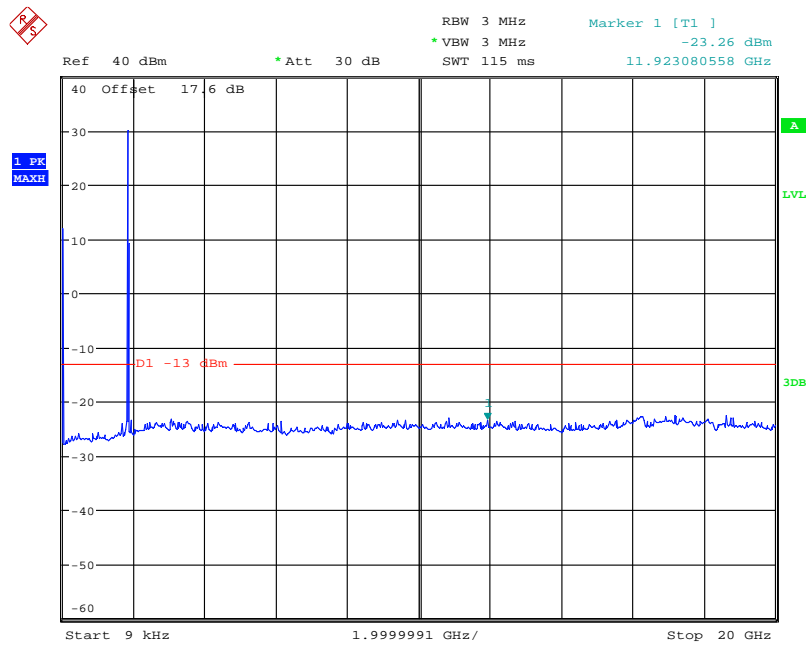


Date: 15.NOV.2010 12:07:12

(Plot D4.:GSM 1900MHz Channel = 512, 9KHz to 20GHz)

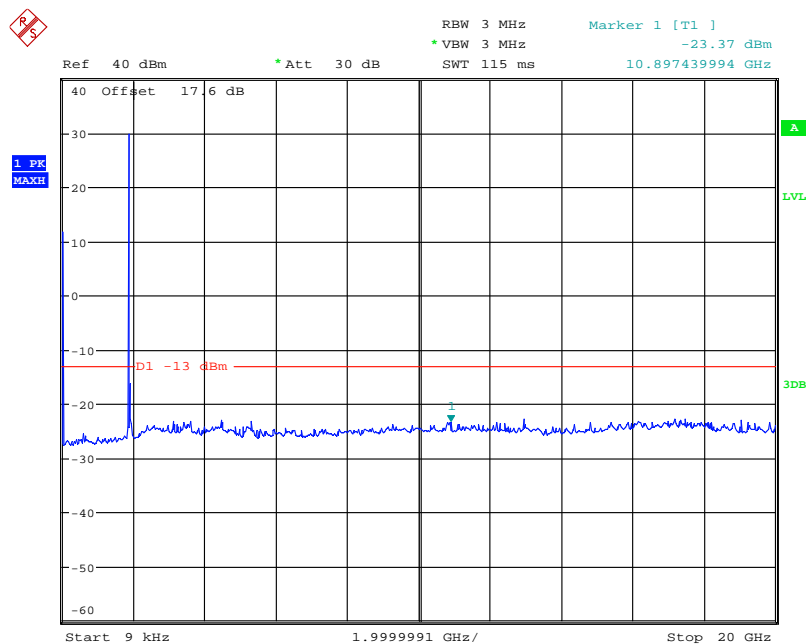


Date: 15.NOV.2010 12:08:29

(Plot E4.: GSM 1900MHz Channel = 661, 9KHz to 20GHz)

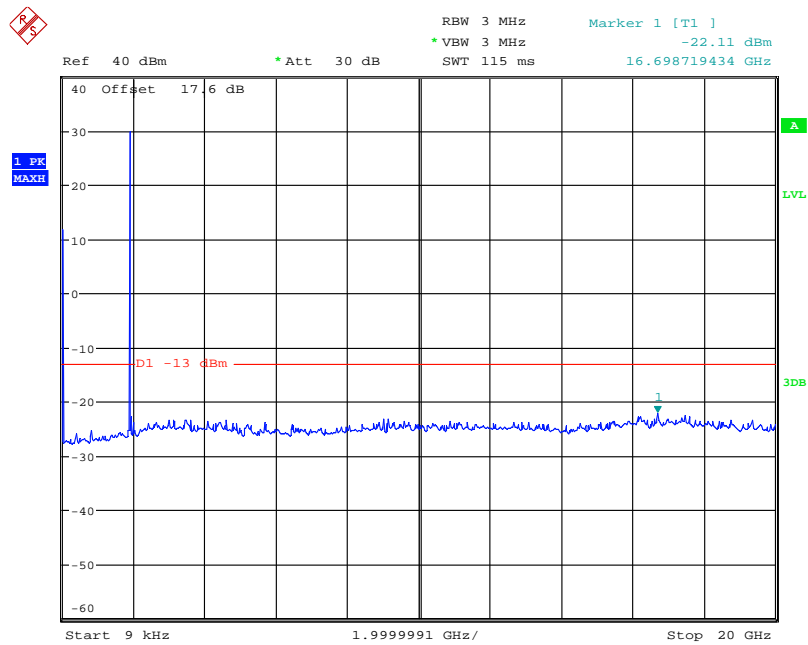


Date: 15.NOV.2010 12:09:32

(Plot F4.: GSM 1900MHz Channel = 810, 9KHz to 20GHz)

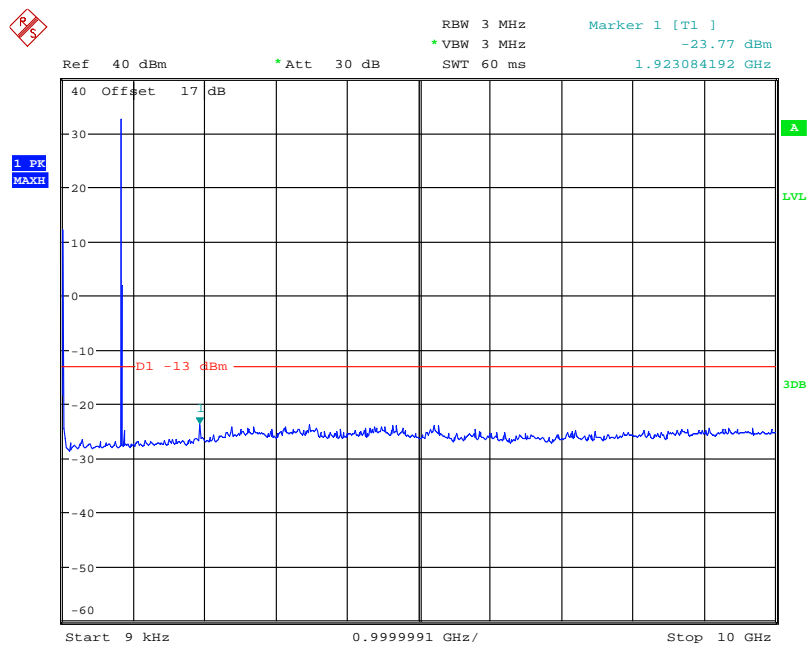


Date: 15.NOV.2010 12:16:40

(Plot G4.:GPRS 850MHz Channel = 128, 9KHz to 10GHz)

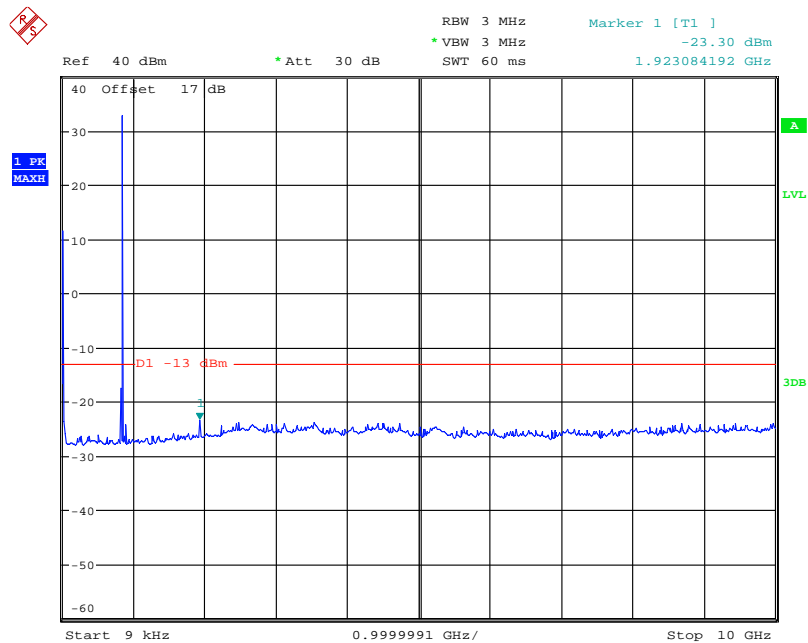


Date: 15.NOV.2010 12:18:13

(Plot H4.: GPRS 850MHz Channel = 190, 9KHz to 10GHz)

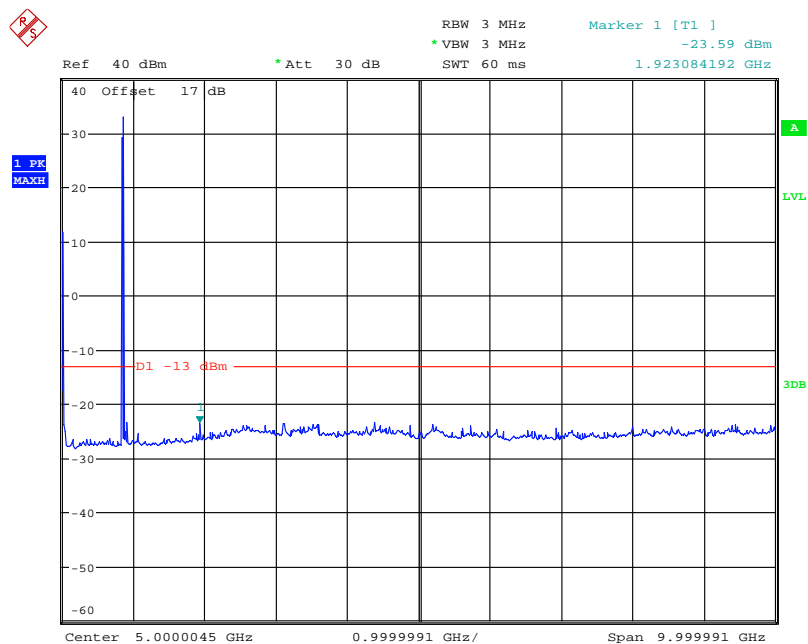


Date: 15.NOV.2010 12:20:40

(Plot I4.: GPRS 850MHz Channel = 251, 9KHz to 10GHz)

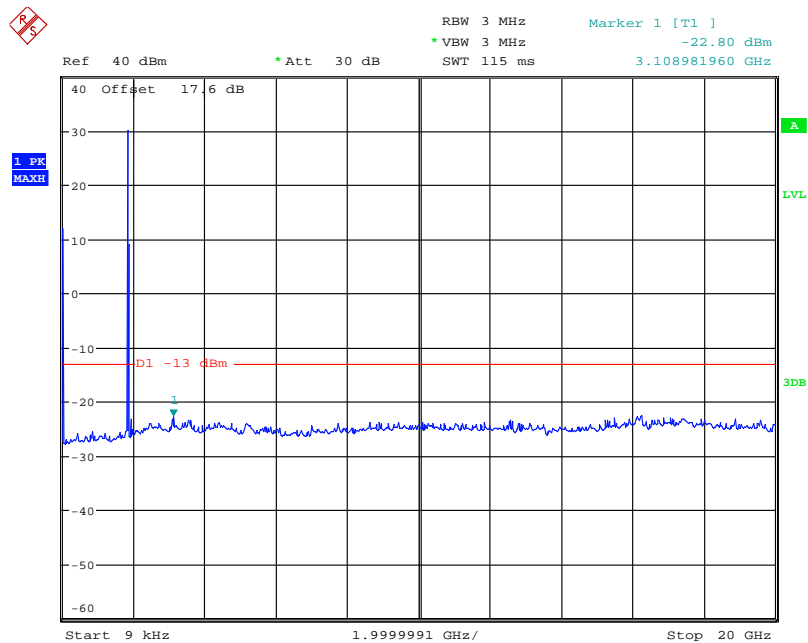


Date: 15.NOV.2010 12:22:35

(Plot J4.: GPRS 1900MHz Channel = 512, 9KHz to 20GHz)

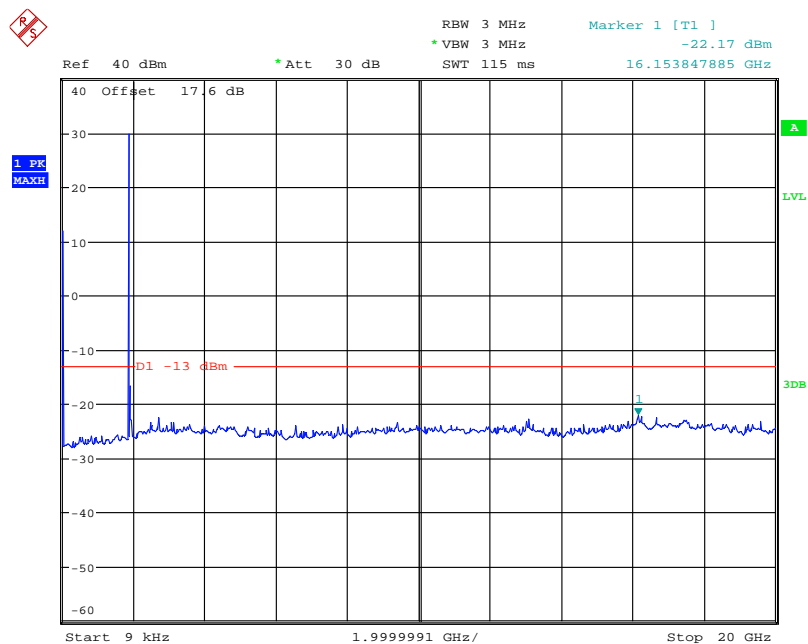


Date: 15.NOV.2010 12:23:30

(Plot K4.: GPRS 1900MHz Channel = 661, 9KHz to 20GHz)

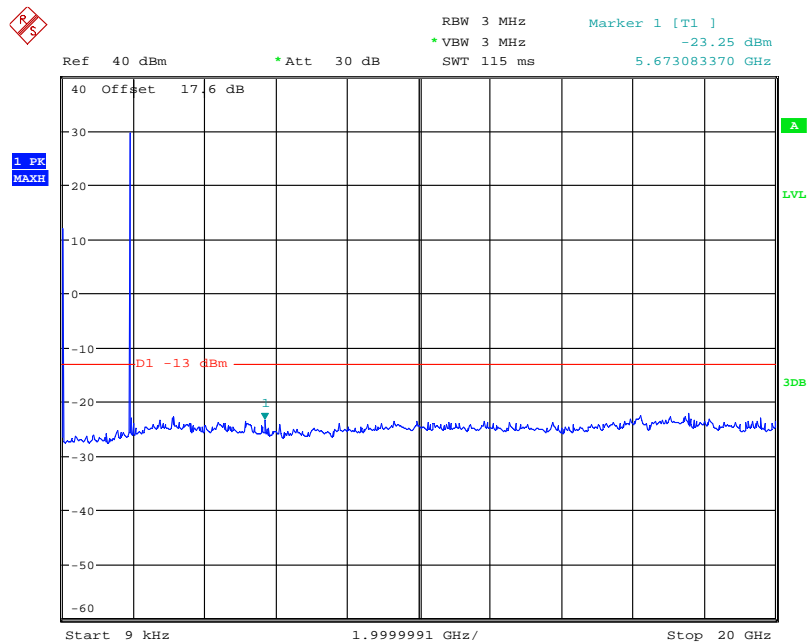


Date: 15.NOV.2010 12:24:28

(Plot L4.: GPRS 1900MHz Channel = 810, 9KHz to 20GHz)

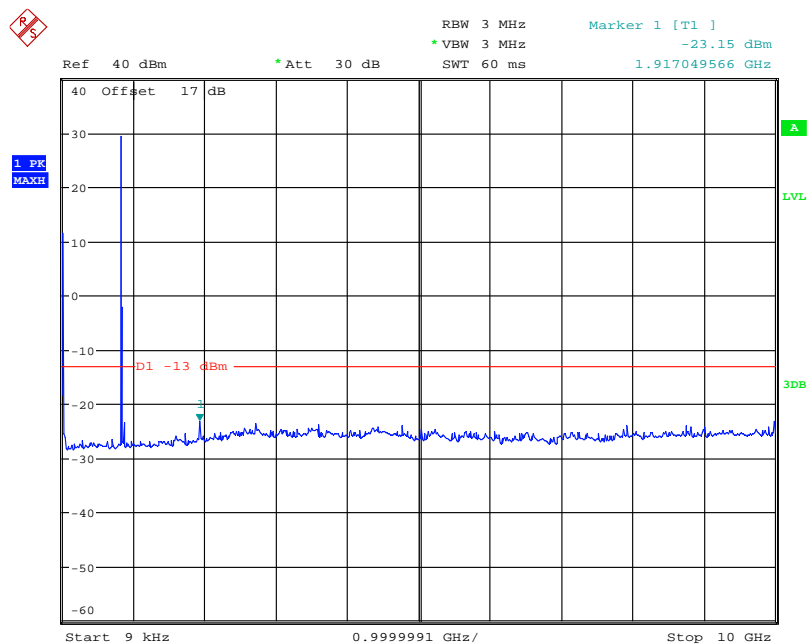


Date: 15.NOV.2010 12:29:00

(Plot M4.:EGPRS 850MHz Channel = 128, 9KHz to 10GHz)

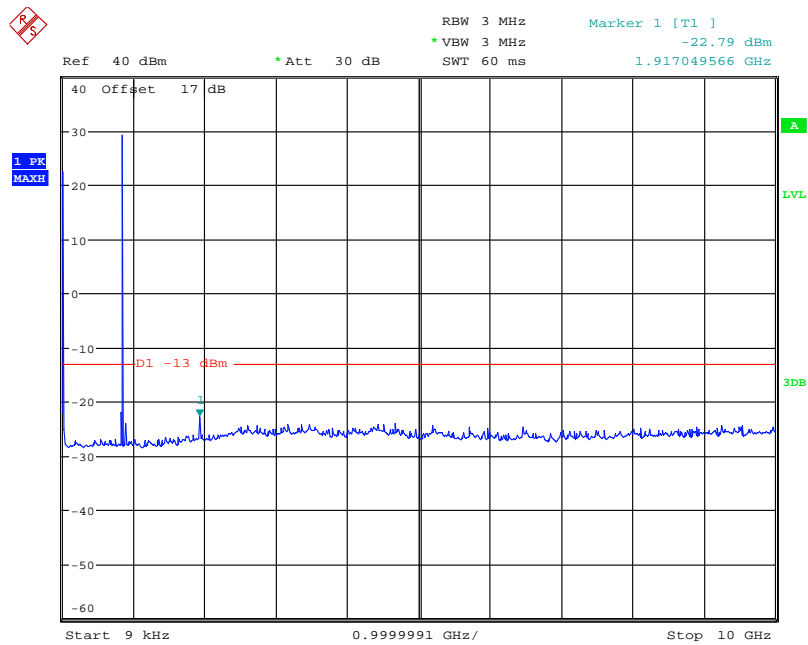


Date: 15.NOV.2010 12:30:03

(Plot N4.:EGPRS 850MHz Channel = 190, 9KHz to 10GHz)

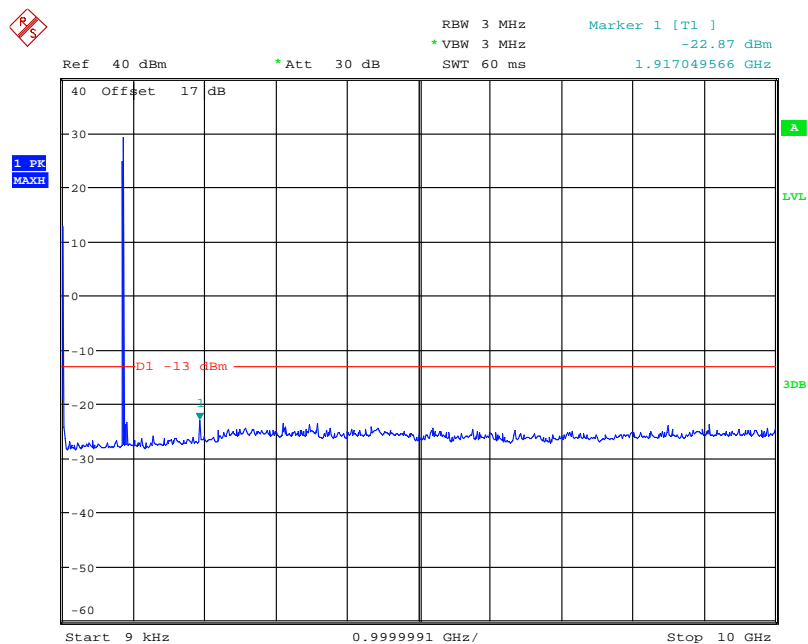


Date: 15.NOV.2010 12:31:16

(Plot O4.:EGPRS 850MHz Channel = 251, 9KHz to 10GHz)

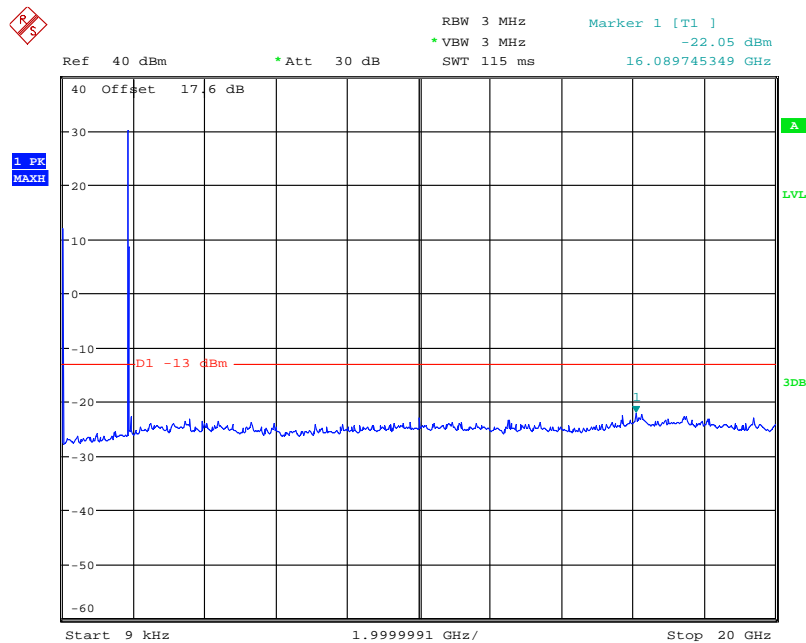


Date: 15.NOV.2010 12:33:08

(Plot P4.:EGPRS 1900MHz Channel = 512, 9KHz to 20GHz)

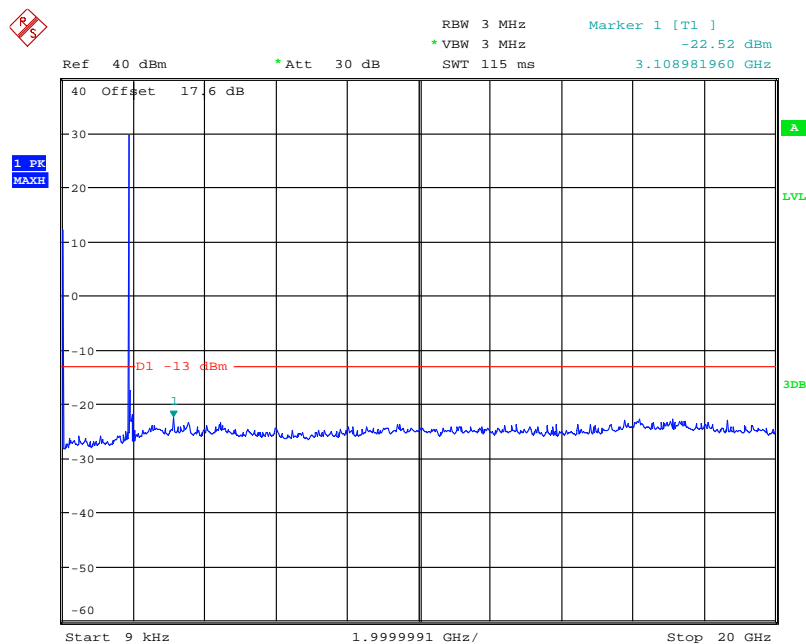

Date: 15.NOV.2010 12:33:43

(Plot Q4.:EGPRS 1900MHz Channel = 661, 9KHz to 20GHz)

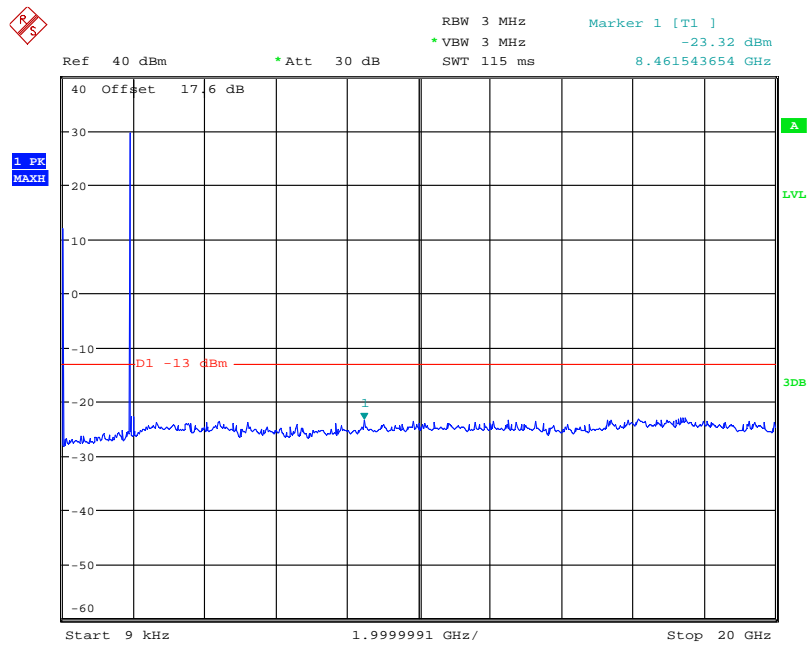

Date: 15.NOV.2010 12:34:24

(Plot R4.:EGPRS 1900MHz Channel = 810, 9KHz to 20GHz)

3.6 Band Edge

3.6.1 Requirement

According to FCC section 22.917(b) and FCC section 24.238(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

3.6.2 Test Description

See section 3.1.2 of this report.


3.6.3 Test Result

The lowest and highest channels are tested to verify the band edge emissions.

Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	823.97	-14.07	Plat A5	-13	PASS
	251	849.01	-17.60	Plot B5		PASS
GSM 1900MHz	512	1849.97	-15.06	Plat C5		PASS
	810	1910.02	-14.40	Plot D5		PASS
GPRS 850MHz	128	823.99	-14.32	Plat E5		PASS
	251	849.02	-15.05	Plot F5		PASS
GPRS 1900MHz	512	1849.97	-14.84	Plat G5		PASS
	810	1910.01	-16.12	Plot H5		PASS
EGPRS 850MHz	128	823.97	-22.19	Plat I5		PASS
	251	849.02	-23.40	Plot J5		PASS
EGPRS 1900MHz	512	1849.97	-22.60	Plat K5		PASS
	810	1910.01	-23.18	Plot L5		PASS

4. Test Plot:

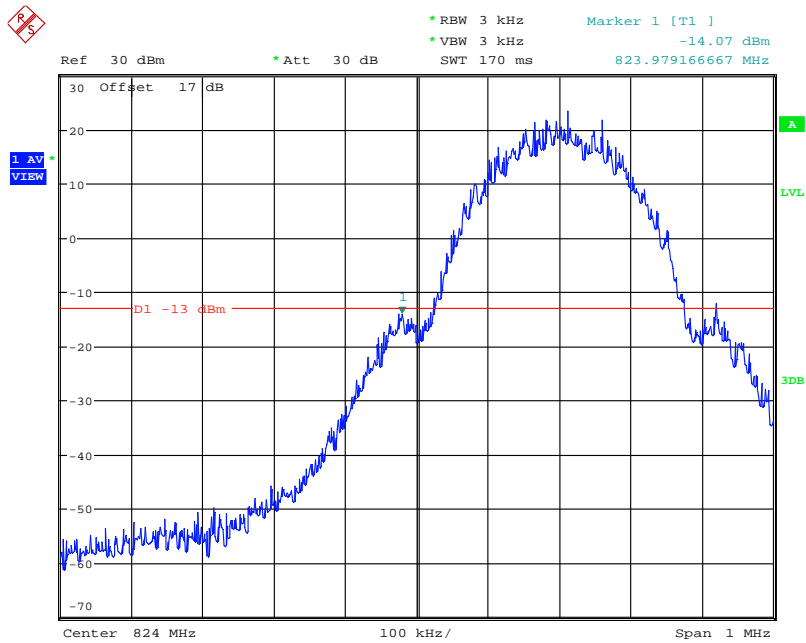


Date: 15.NOV.2010 14:50:10

(Plot A5: GSM 850MHz Channel = 128)

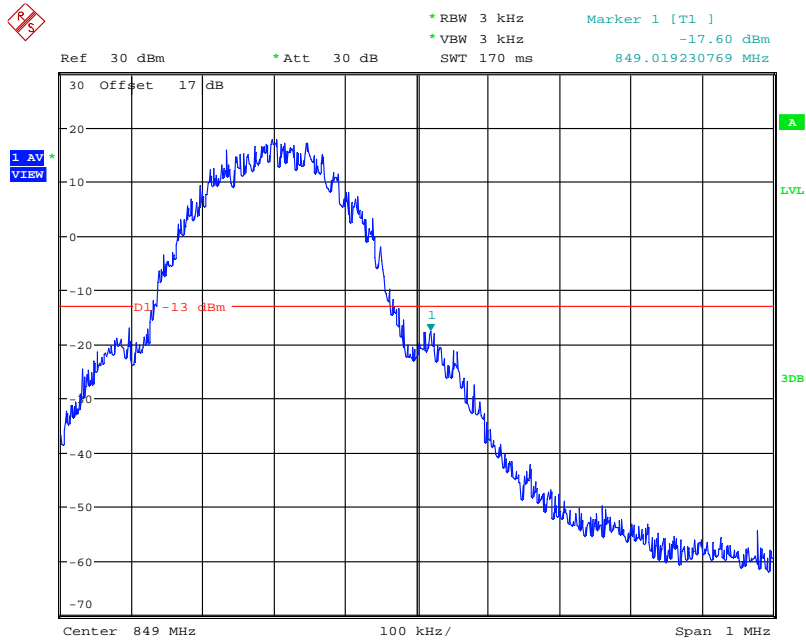


Date: 15.NOV.2010 14:52:46

(Plot B5: GSM 850MHz Channel = 251)

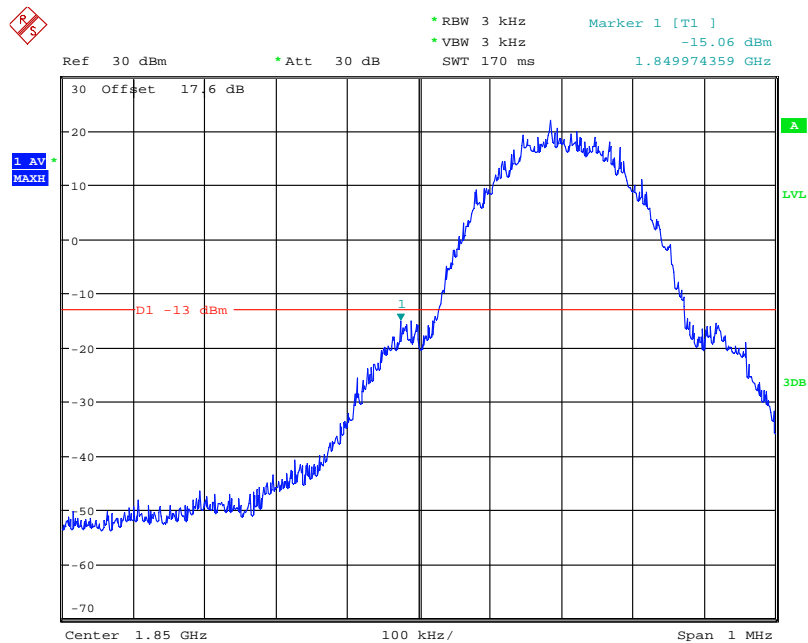


Date: 15.NOV.2010 14:57:51

(Plot C5: GSM 1900MHz Channel = 512)

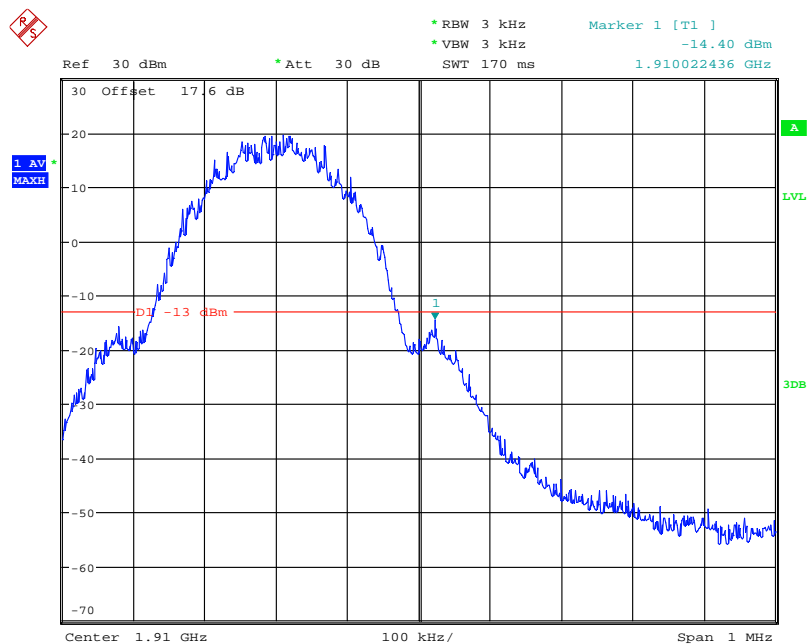


Date: 15.NOV.2010 15:00:25

(Plot D5: GSM 1900MHz Channel = 810)

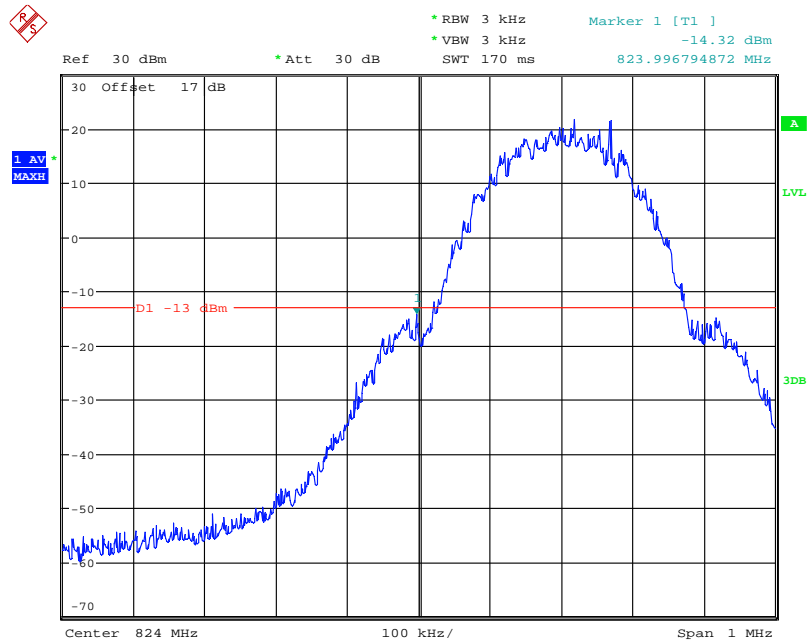


Date: 15.NOV.2010 15:11:00

(Plot E5: GPRS 850MHz Channel = 128)

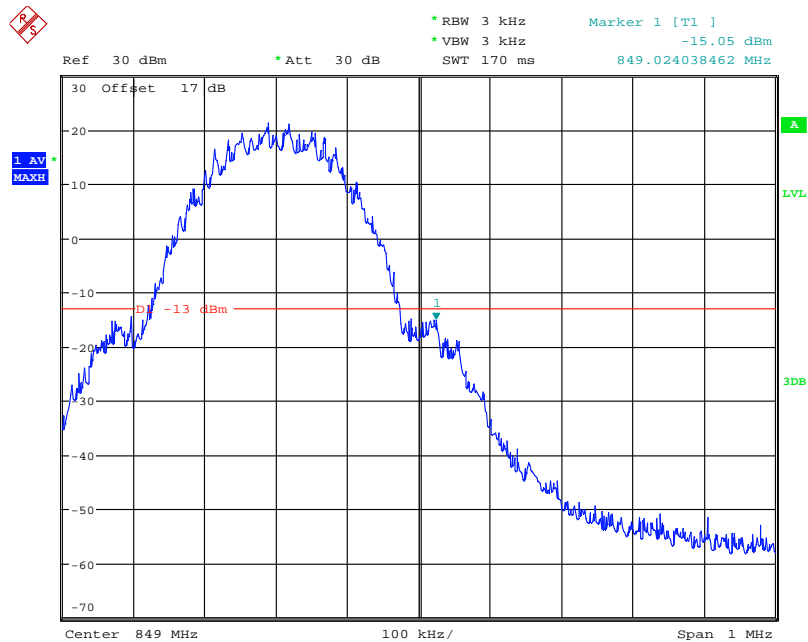


Date: 15.NOV.2010 15:14:54

(Plot F5: GPRS 850MHz Channel = 251)

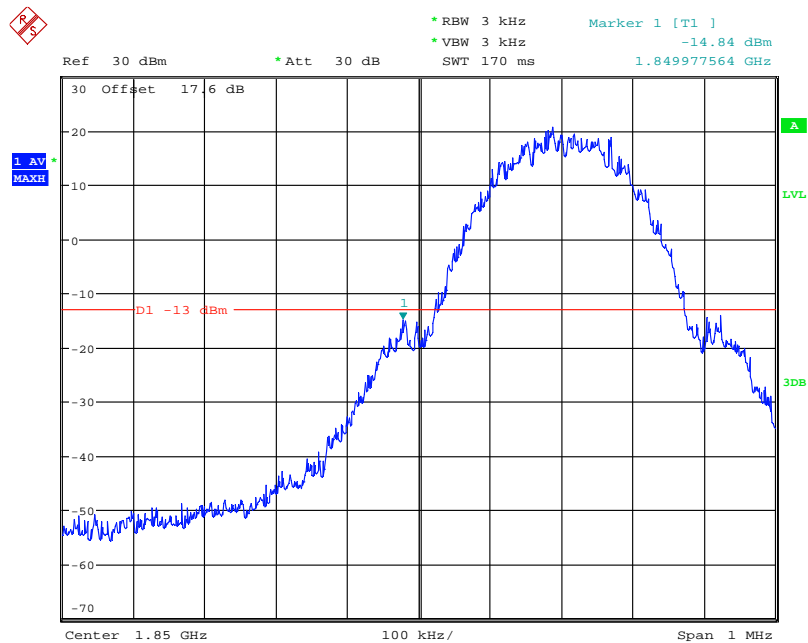


Date: 15.NOV.2010 15:17:48

(Plot G5: GPRS 1900MHz Channel = 512)

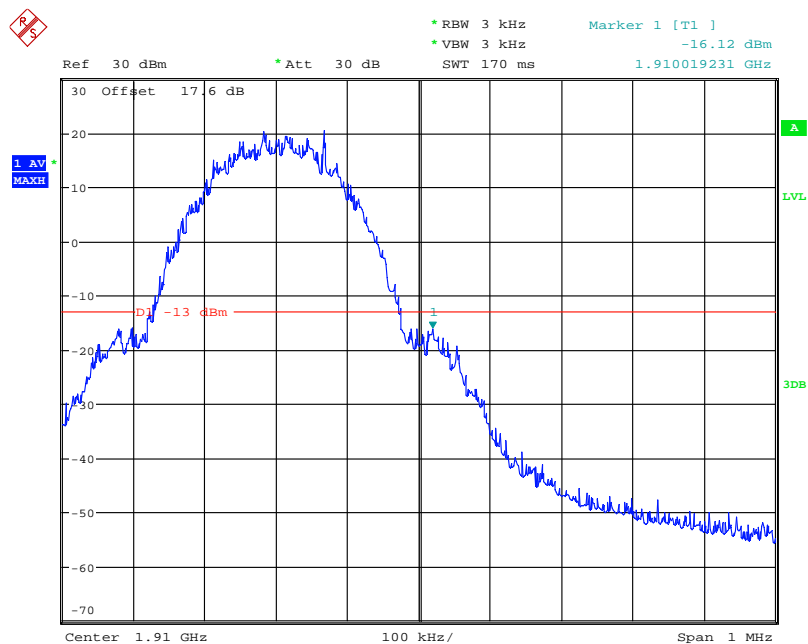


Date: 15.NOV.2010 15:19:13

(Plot H5: GPRS 1900MHz Channel = 810)

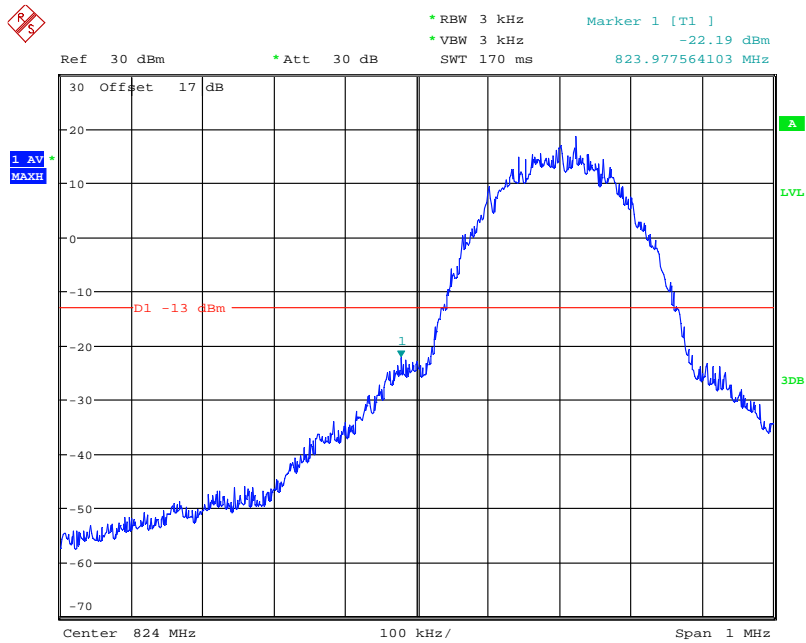


Date: 15.NOV.2010 15:23:43

(Plot I5: EGPRS 850MHz Channel = 128)

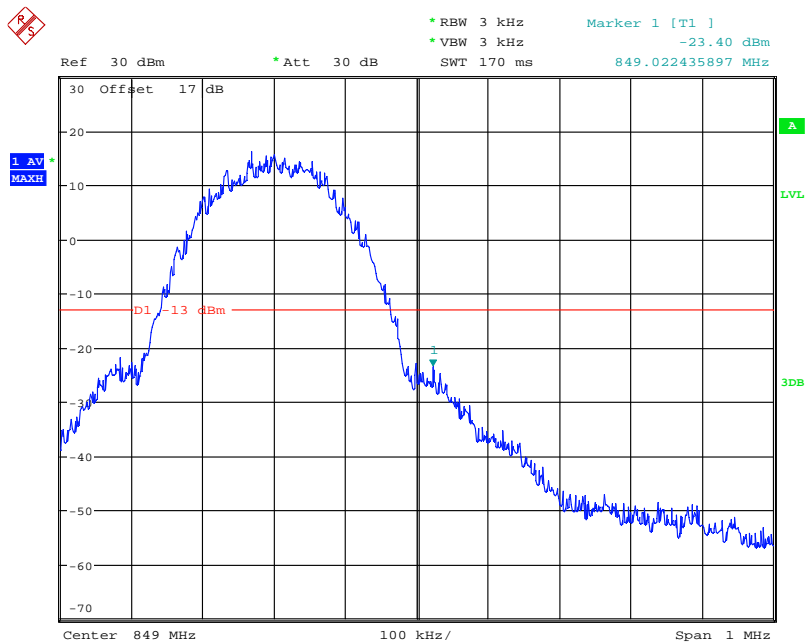


Date: 15.NOV.2010 15:25:03

(Plot J5: EGPRS 850MHz Channel = 251)

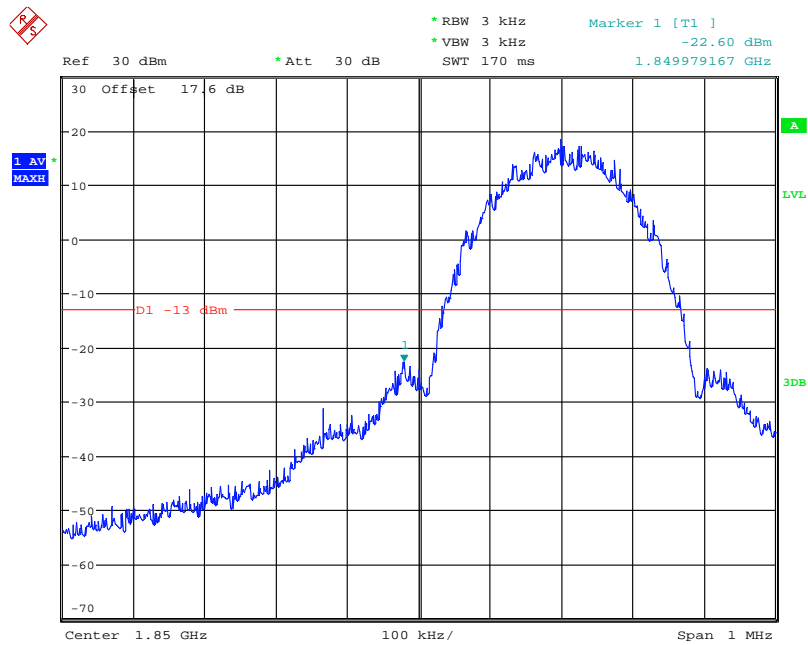

Date: 15.NOV.2010 15:27:41

(Plot K5: EGPRS 1900MHz Channel = 512)

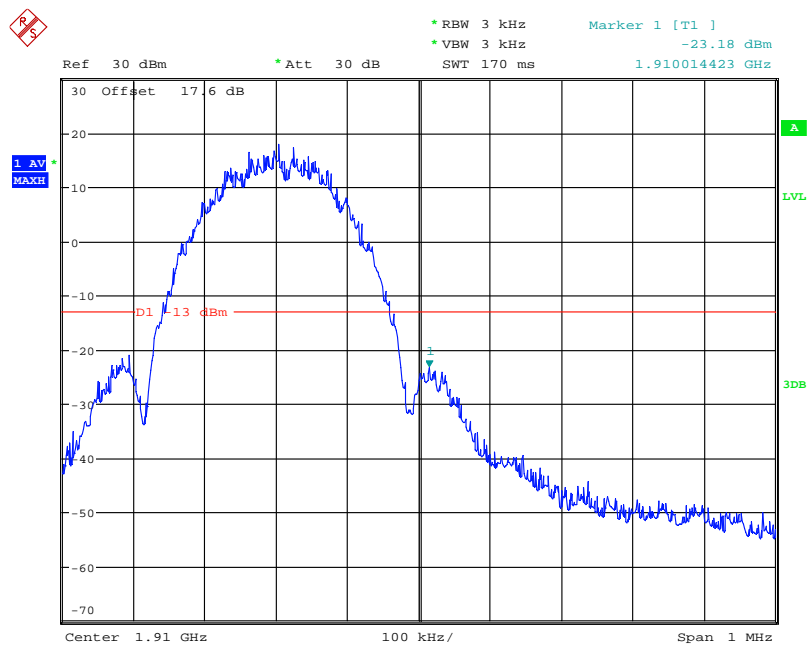

Date: 15.NOV.2010 15:28:49

(Plot L5: EGPRS 1900MHz Channel = 810)


3.7 Transmitter Radiated Power (EIRP/ERP)

3.7.1 Requirement

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts, and FCC section 24.232, the broadband PCS mobile station is limited to 2Watts e.i.r.p. peak power.

3.7.2 Test Description

1. Test Setup:

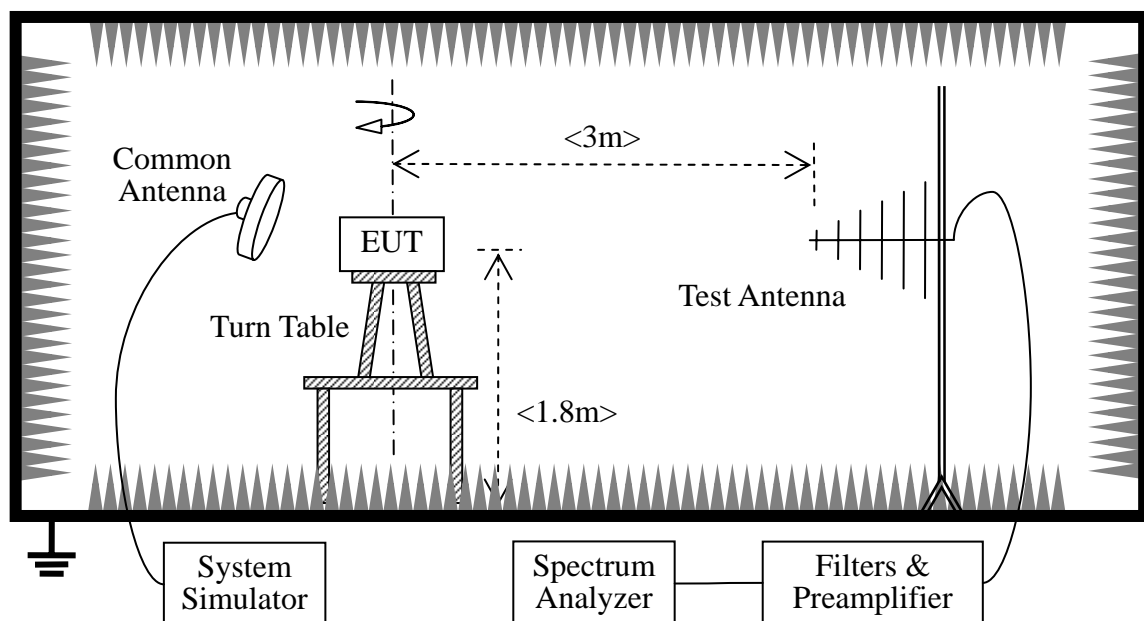

The EUT, which is powered by the Battery charged with the AC Adapter, is located in a 3m Full-Anechoic Chamber; the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. GSM850MHz band Power Control Level (PCL) = 5 and Power Class = 4 and GSM1900MHz band Power Control Level (PCL) = 0 and Power Class = 1. A call is established between the EUT and the SS via a Common Antenna.

The Test Antenna is a Bi-Log one (used for 30MHz to 1GHz) or a Horn one (used for above 3GHz), and it's located at the same height as the EUT. The Filters consists of Notch Filters and High Pass Filter.

According to FCC §22.913, the ERP of Cellular mobile transmitters must not exceed 7 Watts (38.5dBm).

The measurements procedures in TIA-603C-2004 are used.

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
2. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $A_{Rpl} = P_{in} - P_r$. The A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + A_{Rpl}$$

3. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
5. The EUT is then put into continuously transmitting mode at its maximum power level.
6. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in})
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.
9. The test system should be checked before test by a standard comb signal source. The signal source put on the position, instead of the EUT. The test result should be compared with the test result before. If the test result is similar with the initial one, then the test system can work stably.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
SS	Agilent	E5515C	GB46040102	2010.9	1year
Spectrum Analyzer	Agilent	E4440A	MY46187763	2010.9	1year
Spectrum Analyzer	R&S	FSP30	101020	2010.9	1year
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2009.10	2year
Test Antenna - Bi-Log	Rohde&Schwarz	HL562	100385	2010.9	1year
Test Antenna - Horn	Rohde&Schwarz	HF906	100565	2010.9	1year


3.7.3 Test Result

The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested.

Test Verdict:


Band	Channel	Measured			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
GSM 850MHz	128	30.04	1.00	Plot A6	<38.5	<7	PASS
	190	28.99	0.79	Plot B6			PASS
	251	29.41	0.87	Plot C6			PASS
GSM 1900MHz	512	27.90	0.61	Plot D6	<33.0	<2	PASS
	661	25.85	0.38	Plot E6			PASS
	810	25.62	0.36	Plot F6			PASS

3. Test Plot

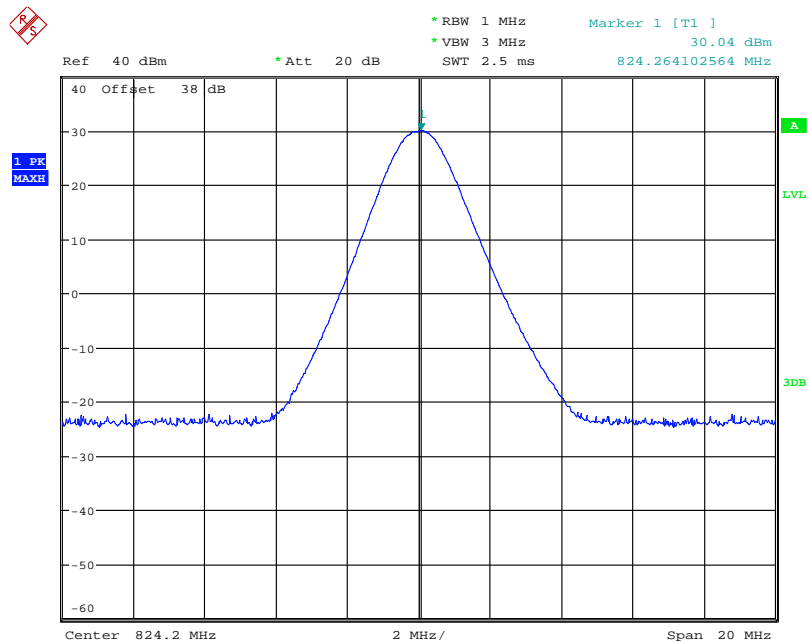


Date: 15.NOV.2010 17:02:11

(Plot A6:GSM 850MHz Channel = 128)

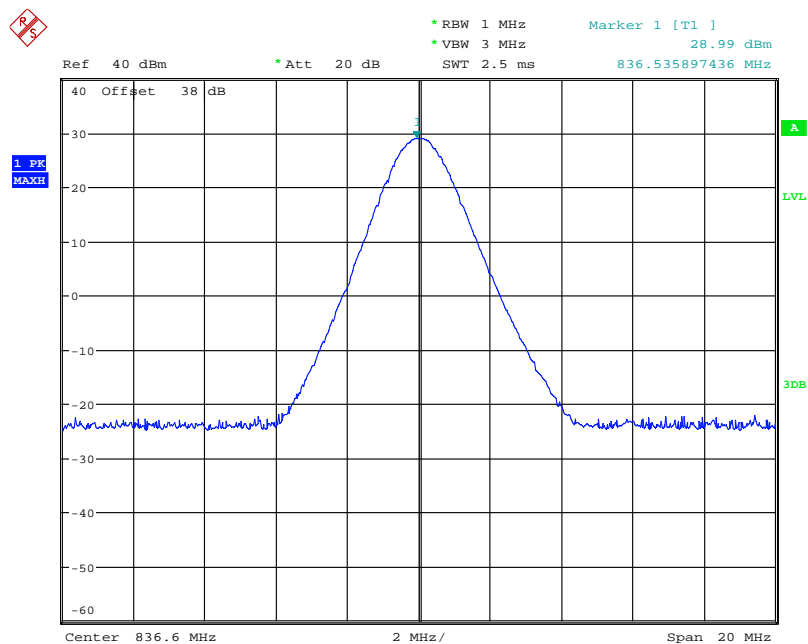


Date: 15.NOV.2010 17:04:00

(Plot B6:GSM 850MHz Channel = 190)

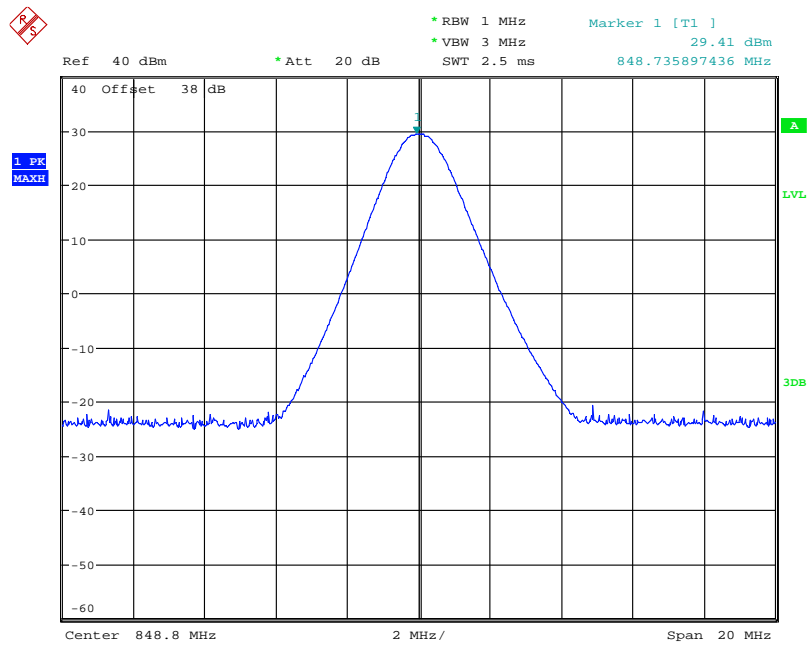


Date: 15.NOV.2010 17:05:12

(Plot C6:GSM 850MHz Channel = 251)

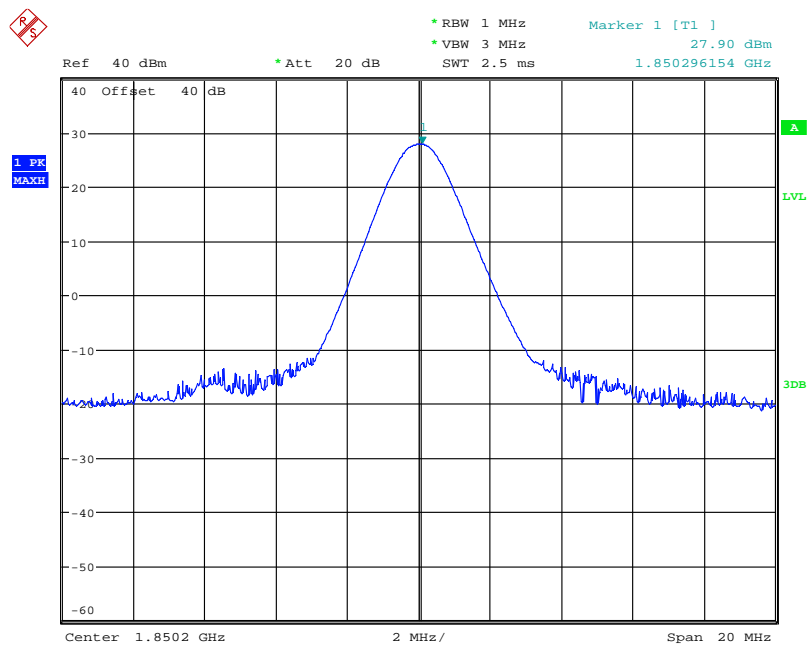


Date: 15.NOV.2010 17:07:11

(Plot D6:GSM 1900MHz Channel = 512)

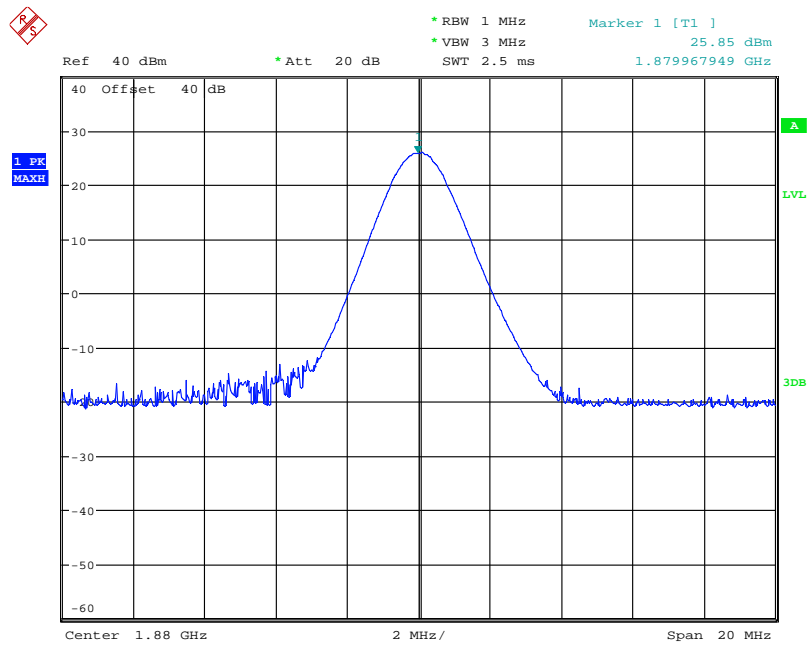

Date: 15.NOV.2010 17:07:58


(Plot E6:GSM 1900MHz Channel = 661)

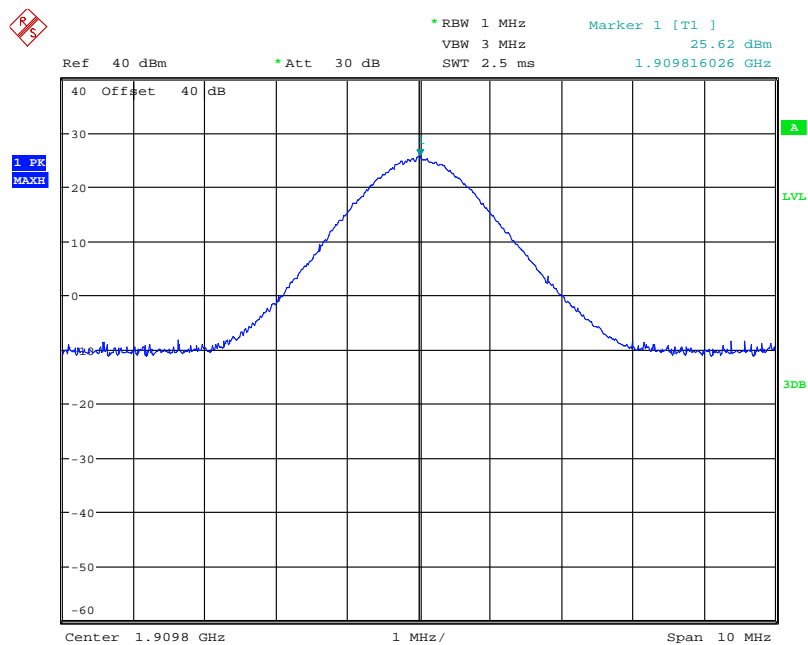

Date: 16.NOV.2010 11:41:19


(Plot F6:GSM 1900MHz Channel = 810)

Band	Channel	Measured			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
GPRS 850MHz	128	29.23	0.83	Plot A6.1	<38.5	<7	PASS
	190	28.96	0.78	Plot B6.1			PASS
	251	29.40	0.87	Plot C6.1			PASS
GPRS 1900MHz	512	27.30	0.53	Plot D6.1	<33.0	<2	PASS
	661	26.51	0.44	Plot E6.1			PASS
	810	26.07	0.40	Plot F6.1			PASS

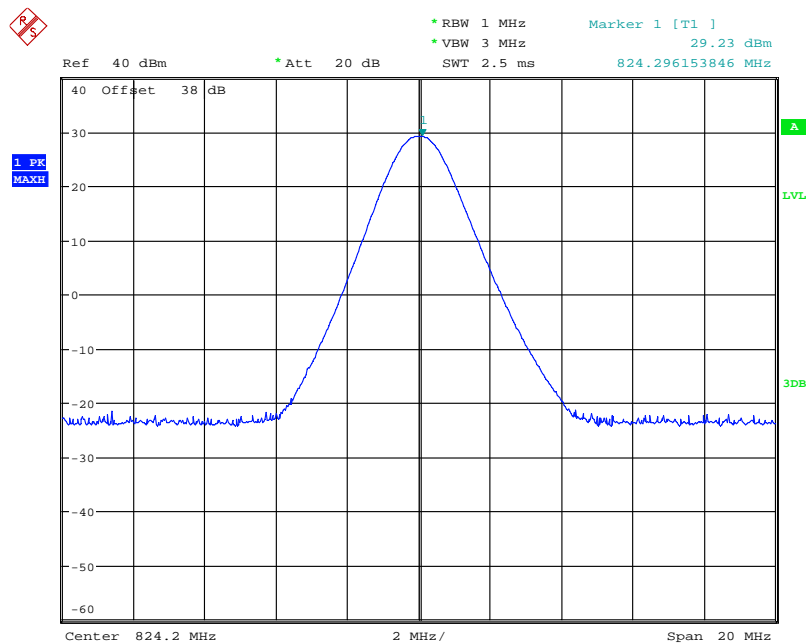


Date: 15.NOV.2010 17:16:17

(Plot A6.1:GPRS 850MHz Channel = 128)

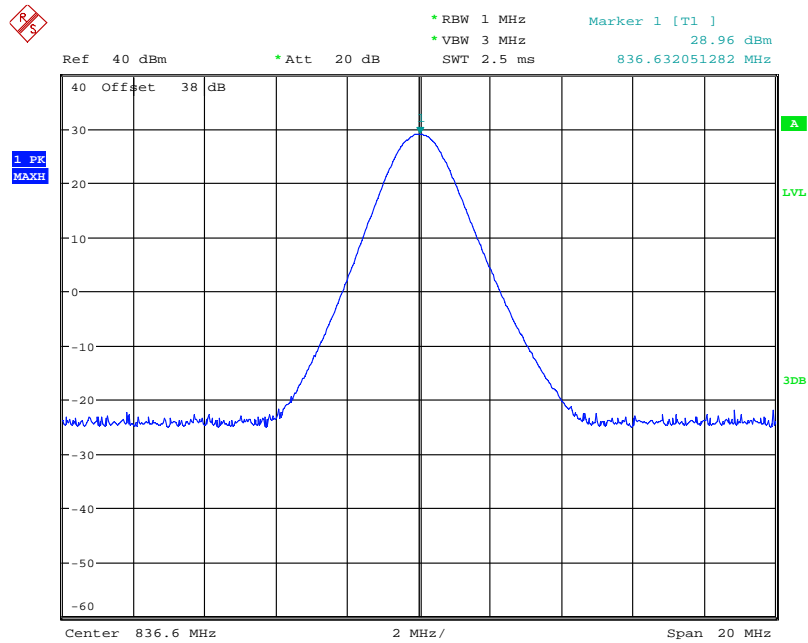


Date: 15.NOV.2010 17:17:05

(Plot B6.1:GPRS 850MHz Channel = 190)

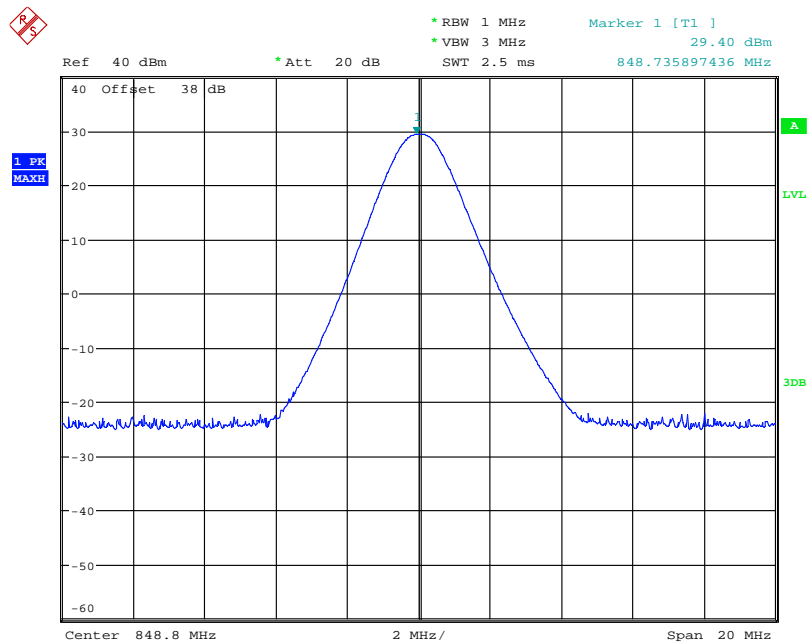


Date: 15.NOV.2010 17:18:55

(Plot C6.1:GPRS 850MHz Channel = 251)

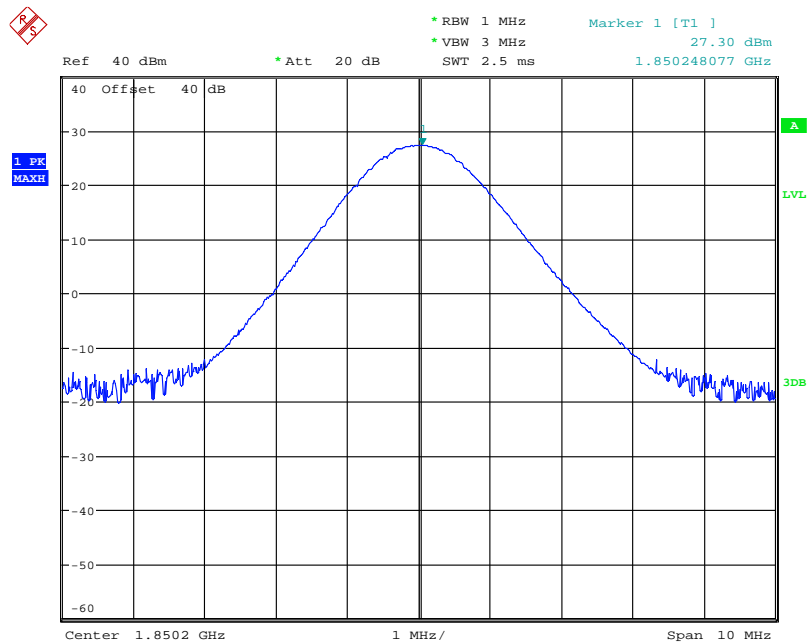


Date: 15.NOV.2010 17:21:37

(Plot D6.1:GPRS 1900MHz Channel = 512)

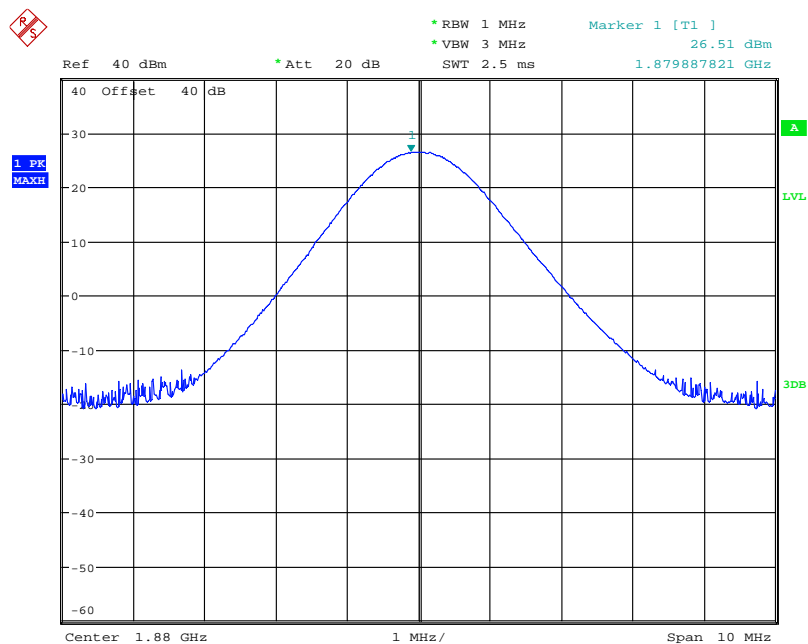

Date: 15.NOV.2010 17:22:36


(Plot E6.1:GPRS 1900MHz Channel = 661)

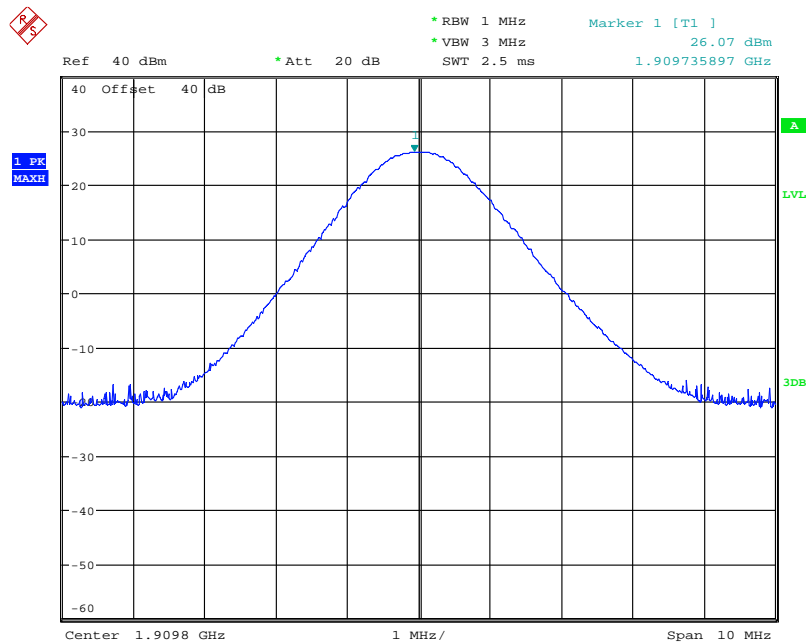

Date: 15.NOV.2010 17:24:07


(Plot F6.1:GPRS 1900MHz Channel = 810)

Band	Channel	Measured			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
EGPRS 850MHz	128	25.01	0.31	Plot A6.2	<38.5	<7	PASS
	190	24.33	0.27	Plot B6.2			PASS
	251	23.53	0.22	Plot C6.2			PASS
EGPRS 1900MHz	512	24.62	0.28	Plot D6.2	<33.0	<2	PASS
	661	23.71	0.23	Plot E6.2			PASS
	810	22.17	0.16	Plot F6.2			PASS

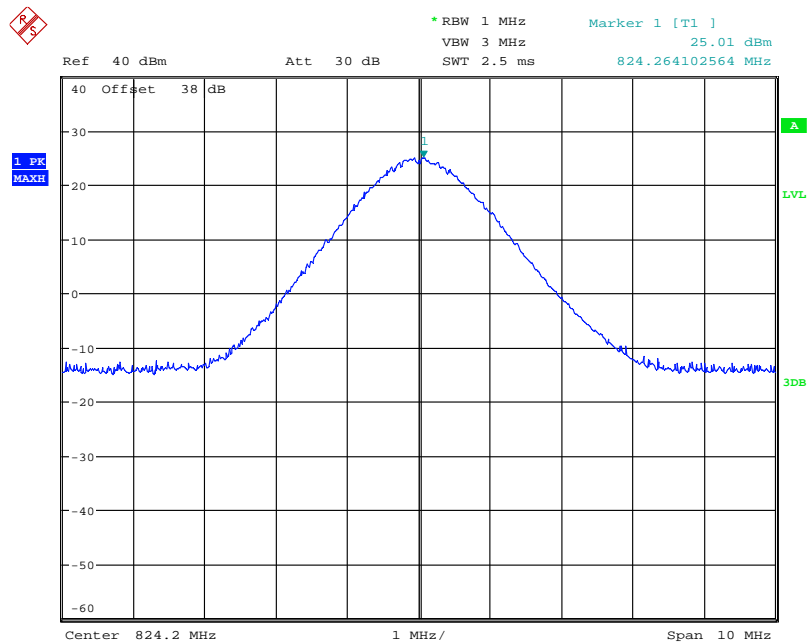


Date: 16.NOV.2010 11:19:30

(Plot A6.2:EGPRS 850MHz Channel = 128)

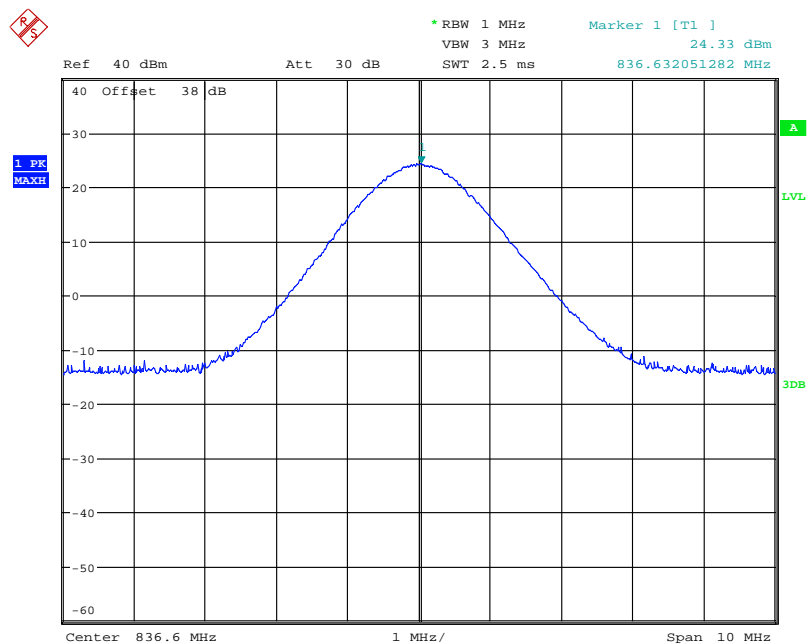


Date: 16.NOV.2010 11:20:33

(Plot B6.2:EGPRS 850MHz Channel = 190)

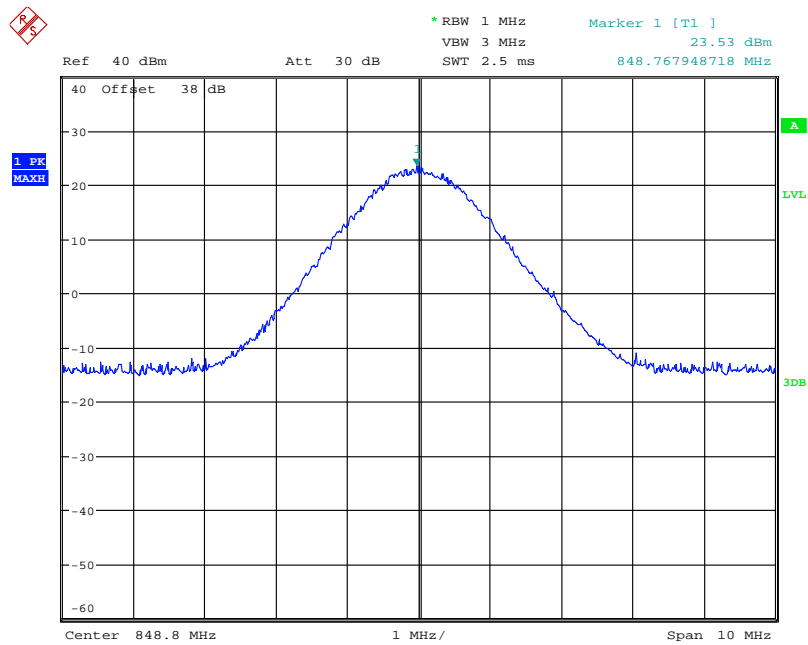


Date: 16.NOV.2010 11:21:07

(Plot C6.2:EGPRS 850MHz Channel = 251)

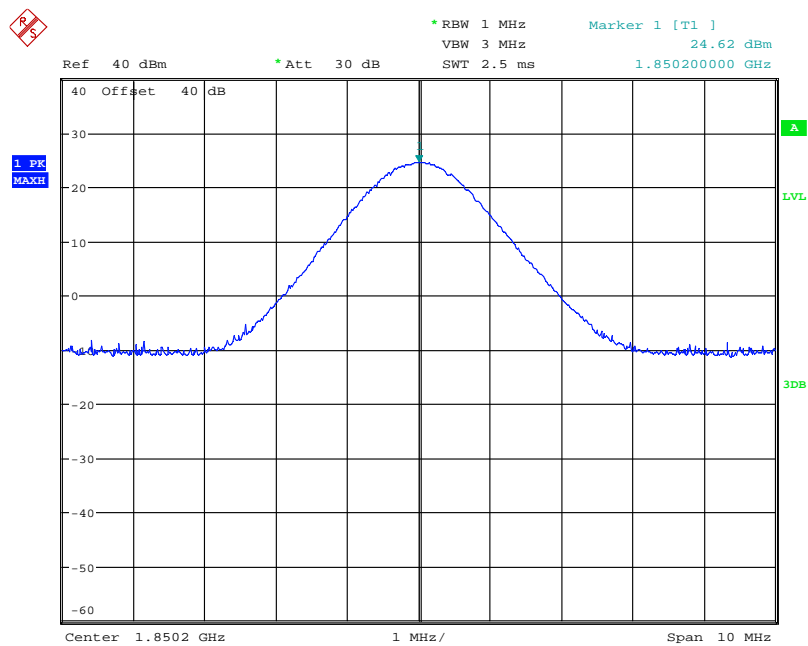


Date: 16.NOV.2010 11:37:30

(Plot D6.2:EGPRS 1900MHz Channel = 512)

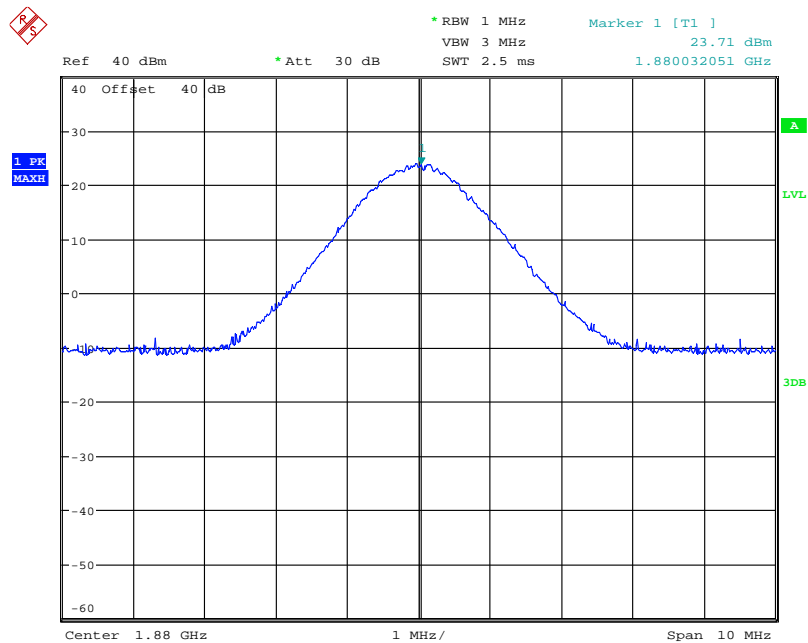

Date: 16.NOV.2010 11:38:30

(Plot E6.2:EGPRS 1900MHz Channel = 661)

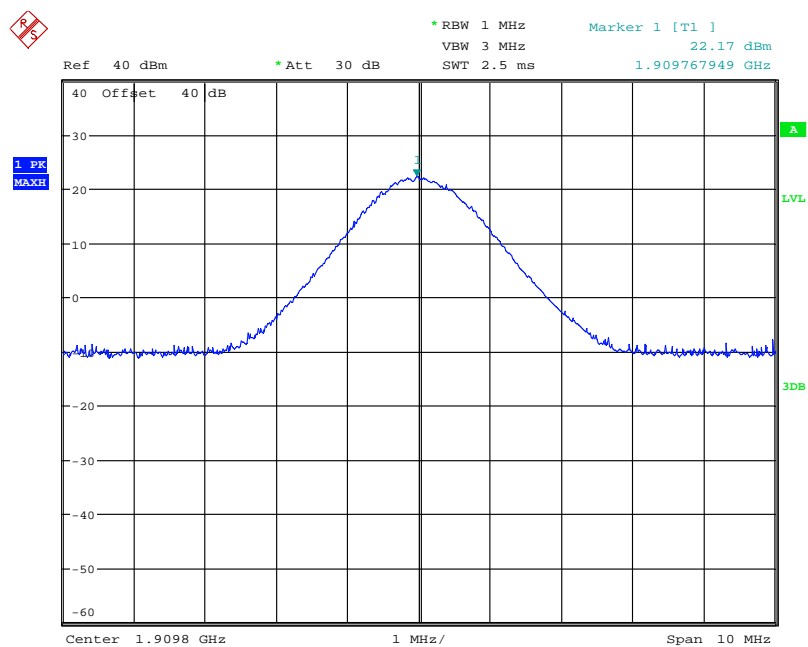

Date: 16.NOV.2010 11:42:06

(Plot F6.2:EGPRS 1900MHz Channel = 810)

3.8 Radiated Out of Band Emissions

3.8.1 Requirement

According to FCC section 22.917(a) and section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

3.8.2 Test Description

See section 3.7.2 of this report.

3.8.3 Test Procedure

1. Perform test system setup as section 2.4.2
2. Make a limit line whose value is -13dBm on the Spectrum Analyzer, and set the RBW of the Spectrum Analyzer to 1MHz.
3. The lowest and the highest channel were selected to perform tests respectively.
4. Employ the bi-log Test Antenna as the test system receiving antenna and set the frequency range of the Spectrum Analyzer from 30MHz to 3GHz.
5. The measurement is performed with the Test Antenna at both horizontal and vertical polarization respectively. Set the polarization of the Test Antenna to be horizontal.
6. Actuate the Turn Table to turn from 0 degrees to 360 degrees to find the maximum reading via the Spectrum Analyzer, mark the fundamental frequency and the harmonics thereof, after then record the harmonics and the plot.
7. Set the polarization of the Test Antenna to be vertical, then repeat step 6.
8. Employ the horn Test Antenna as the test system receiving antenna and set the frequency range of the Spectrum Analyzer from 3GHz to 10th harmonic of the fundamental frequency (here used 10GHz), then repeat step 5 to 7.
9. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak and mark it; finally record the peak and the plot.

3.8.4 Test Result

Table for the Harmonics


I GSM 850MHz

No.	Frequency (MHz)	Emission Power (dBm)	Test Antenna polarity	Limit (dBm)
TCH number set to 190 (836.6MHz)				
1	1673.25	-45.872	H	-13
2	3346.50	-47.225	H	-13
3	7529.87	-41.777	H	-13
4	1673.25	-43.341	V	-13
5	3346.50	-43.028	V	-13
6	6693.37	-39.088	V	-13
7	7529.87	-37.073	V	-13
8	9202.87	-39.361	V	-13

Test Plot


GSM850 CH190-H 30MHz-10GHz

MORLAB-RSE-FCC-GSM850 30M-18G

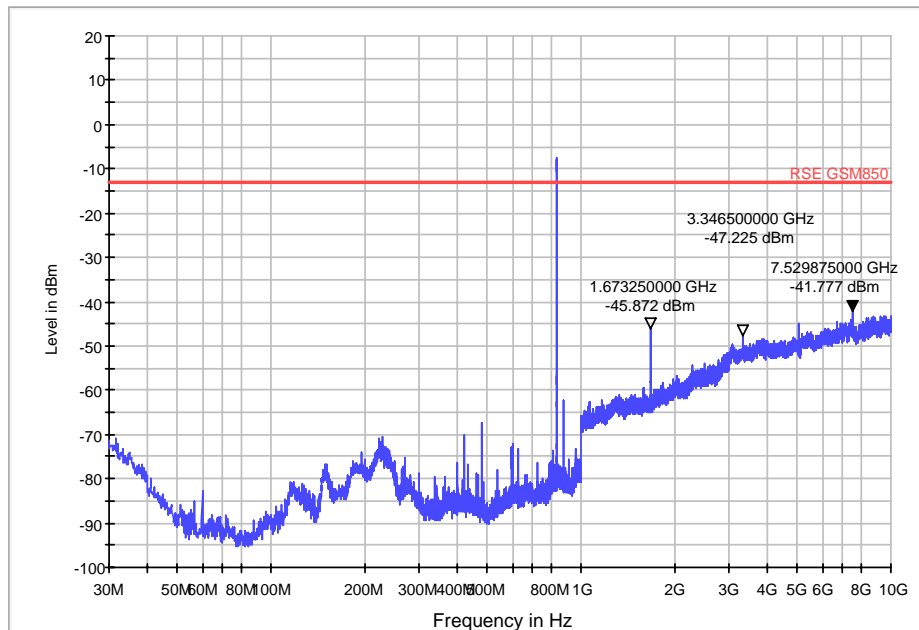

GSM850 CH190-V 3G-10G

MORLAB-RSE-FCC-GSM850 30M-18G

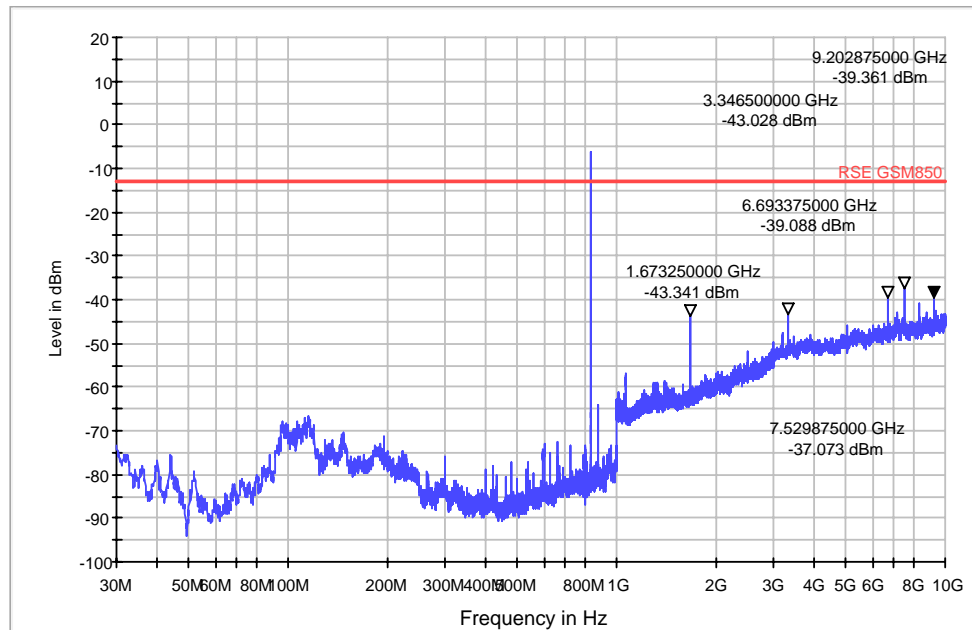


II GSM 1900MHz

No.	Frequency (MHz)	Emission Power (dBm)	Test Antenna polarity	Limit (dBm)
TCH number set to 661 (1880.2MHz)				
1	3759.37	-27.851	H	-13
2	7518.75	-29.511	H	-13
3	11280.00	-32.477	H	-13
4	13160.62	-32.951	H	-13
5	3759.37	-26.527	V	-13
6	7520.62	-28.387	V	-13
7	11280.00	-21.882	V	-13

Test Plot


GSM1900 CH661-H 3G-20G

MORLAB-RSE-FCC-GSM1900 30M-18G

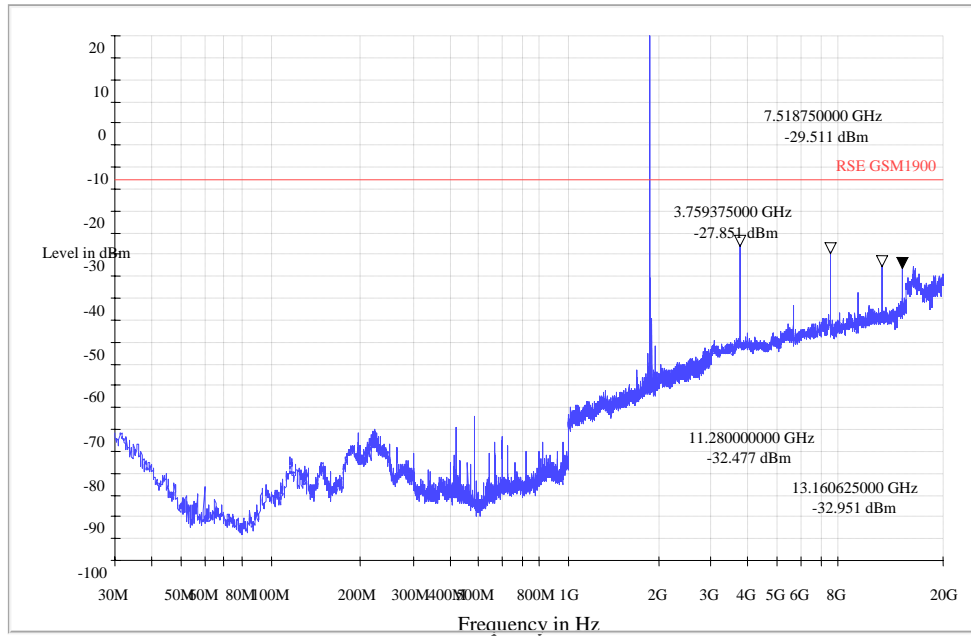

GSM1900 CH661-V 3G-20G

MORLAB-RSE-FCC-GSM1900 30M-18G

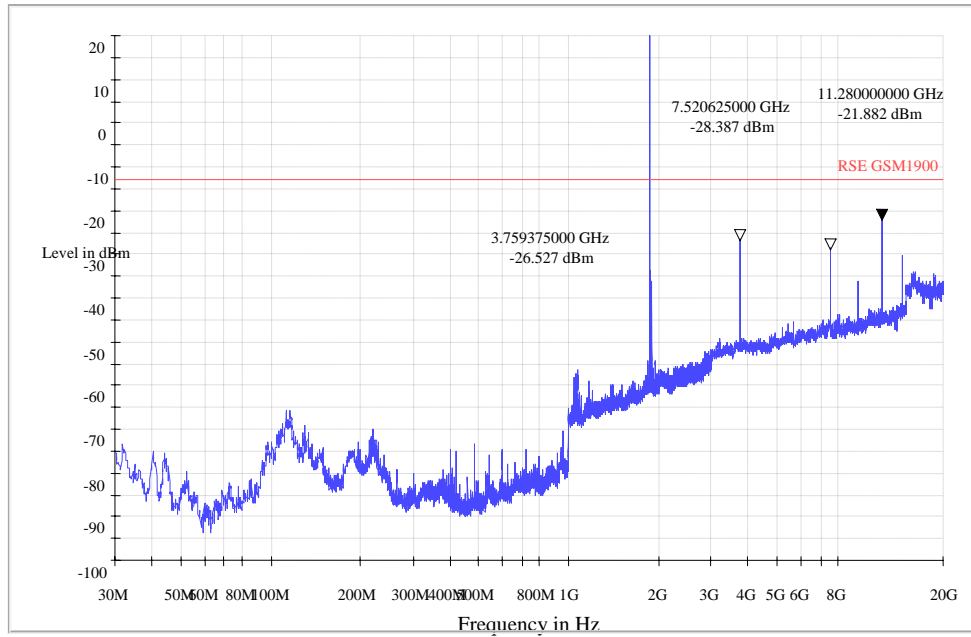

** END OF REPORT **