920 MHz Antenna

P/N 0920AT50A080

Detail Specification: 09/15/05

Page 1 of 4


General Specifications

Part Number	0920AT50A080		
Frequency Range	880 - 960 Mhz		
Peak Gain	-0.7 dBi typ. (XZ-V)		
Average Gain	-2.6 dBi typ. (XZ-V)		
Return Loss	8.5 dB min.		

Input Power	5W max.		
Impedance	50 Ω		
Operating Temperature	-40 to +85°C		
Reel Quanity	1,000		

Mechanical Dimensions

	In		mm			
L	0.433	±	0.012	11.00	±	0.30
W	0.201	±	0.012	5.10	±	0.30
Т	0.059	±	0.008	1.50	±	0.20
а	0.039	±	0.008	1.00	±	0.20
b	0.020	±	0.012	0.50	±	0.30
С	0.020	±	0.012	0.50	±	0.30

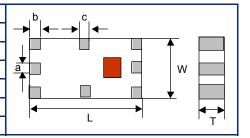

Terminal Configuration

No.	Function			
1	NC			
2	Feed Point			
3	NC			
4	NC			
5	5 NC			
6	NC			
7	7 NC			
8	NC			
	4			
6	1			
7	2			
a				


Mounting Considerations

Mount these devices with brown mark facing up. Units: mm

Line width should be designed to provide 50Ω impedance matching characteristics.

a) Without Matching Circuits

Via 0.7 mm

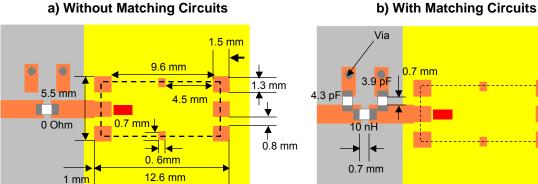




P/N 0920AT50A080 920 MHz Antenna

Page 2 of 4 Detail Specification: 09/15/05

Typical Electrical Characteristics (T=25°C)

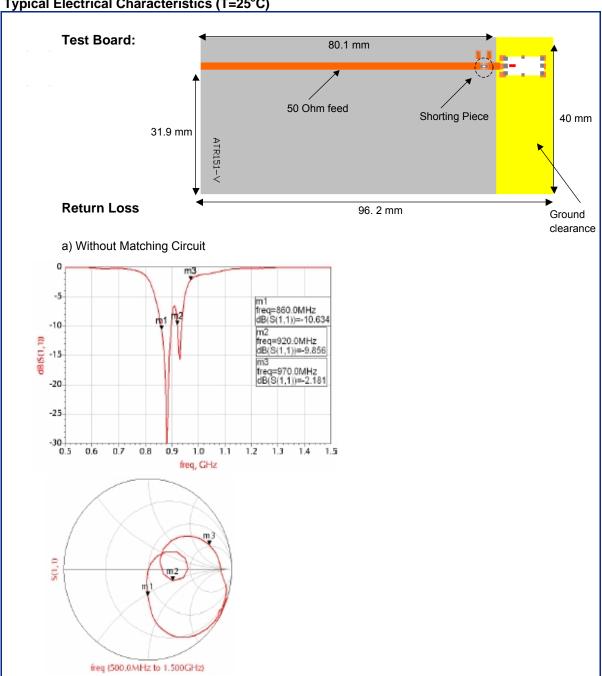




P/N 0920AT50A080 920 MHz Antenna

Page 3 of 4 Detail Specification: 09/15/05

Typical Electrical Characteristics (T=25°C)

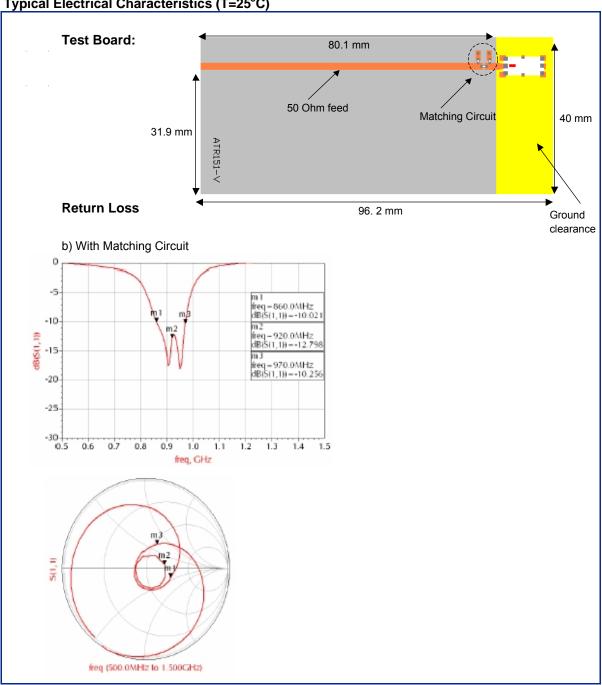



920 MHz Antenna P/N 0920AT50A080

Detail Specification: 09/15/05 Page 4 of 4

