LABEL LOCATION

Brad name : Edge-corE Model name : ECWO7220-L







Model Name : ECWO7220-L

Input Voltage Range : 48V==0.64A


FCC ID: YZKECWO7220L

FCC CLASS B





Made in XXXXX 24600000XXXXA R01

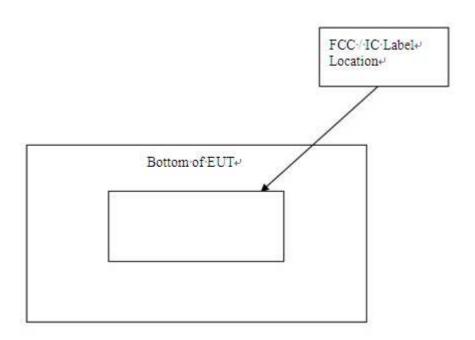

安規貼紙備註:

- ① 印刷顏色:黑色
- 2 製造國家(MFG Country):


Decided by import & export country For example:


- 1. MADE IN TAIWAN
- 2. MADE IN CHINA

印刷廠商代號 (Vender ID): (CSA 要求標示)

Decided by Vender

③ 印製廠商所用材料必需申請UL認證(PGDQ2) 且符合Outdoor Use

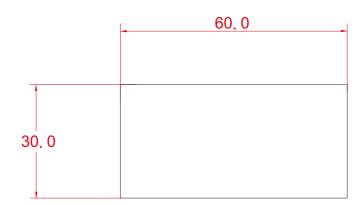

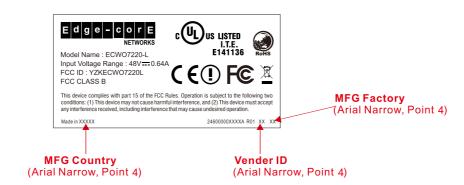

Modification	Card Paper / Top linebo	ard	Corrugate list	Die Cut Legend	Die Cut Tolerance = +/ -0.3 mm	Bag (A Degree)	Clear Pink	Label list	(Total Thic	kness = mm <u>±</u> 10%)	Comply with RoHs	Acataa	
1	GSM CCNB SBS	ouble SBS	Single wall Double wall GSM gimi[Reference] Bursting End Crush Crush	(CL) Cutting Line	0 16 0.05 0.1 0.15 0.2 0.2 0.5	Normal Anti-St	tatic ESD Value/ohm = 9-11	Material 8	k Thickness	Adhesive (Except all leds in FP label.)	Others	Accton -	TECHNOLOGY CORP.
2	250		A/C Taiwan 230 X 180 X 230 16 33.6	(C1) Crease Line (PBL) Nartial Blunt Line	16 — 63 0.05 0.15 0.2 0.3 0.3 0.8 7 63 — 250 0.05 0.2 0.25 0.4 0.5 1.2	Anti-Static Electro	onic ESD Value/ _{ohm} < 5	Art paper	0.025mm / 25# / 1mil	Acrylic T=0.022mr	Material Spec:	D-4N- 0400000	VVVVA DEV 04
4	280	\dashv	B China 250 X 112 X 250 14 26.2	(SO) Slit-Score Line	250 — 500 0.1 0.25 0.3 0.6 0.8 1.8 Thick 500 — 1000 0.3 0.5 0.8 1.2 30	kness/mm 0.04	0.06 0.08	✓ Metalized \	/ 0.050mm / 50# / 2mil	✓ Acrylic UL approved T=0.022mn	IQC Inspect Color	Part No. 24600000	XXXXA REV. U1
5	310	╁	AB Taiwan 230X100X100X230 18 37 1	(SL) Slit Line	Printing Tolerance = +/ - Rum Bub	oble Bag layer	(By 1.5M/Width x 100M/Length)	White Polyester (PP)Pepa paper	0.076mm / 75# / 3mil	"R" Adhesive T=0.022mr Water Adhesive T=0.022mr	Please refer to	Description:	
6	340	╬	A/C Taiwan 250 X 100 X 230 16 26	Flute	Pulo Tray Recycle Kraft 80% Ø=	(ayer	e Put-in material >= 16 kg (By 1.5M/Width x 100M/Length)	PC 8B35	0.254mm / 10mil	3M 467 T=0.05mm/2m	Approve Melody MAR21'1	UL LABEL OAP112	22B-0614-EC
This document and the technical data disclosed	Coated UV R	ar .	B Taiwan 220 X 100 X 200 14 28.5	Manufactory MFG	Weight/gs= +/-5%	PE Foam	White Pink	PC 8010	0.381mm / 15mil	3M 468 T=0.127mm/5m		UNIT SCALE	1 / 1 SIZE A3
are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without	Vai	nish T=	E Taiwan 220 X 100 X 200 12 18.6	Stamp STAMP	Thickness/mm 1.5 2.0 De	ensity (kg / m³)		Other	0.500mm / 20mil	3M 7945 T=0.127mm/5m	Check		
expressed written permission.	PP Film LF / 0.15 DF	= / 0.8 mm	BC China 175X100X100X150X250 18 37.4	Joint	Draft Angle 3° Hydrous % 7-14%	Laminated	Non - laminated	PP Film	/ LF (T = 0.045mm)	DF (T = 0.035mm)	Design Carry MAR21'1	₹ MM (₦N) Outside \	new Sheet For F