1. Printing color: Black


2. 製造國家(MFG Country):

Decide by import and export country for example:

1. MADE IN TAIWAN

2. MADE IN CHINA

印刷廠商代號(Vender ID): (CSA 要求標示)

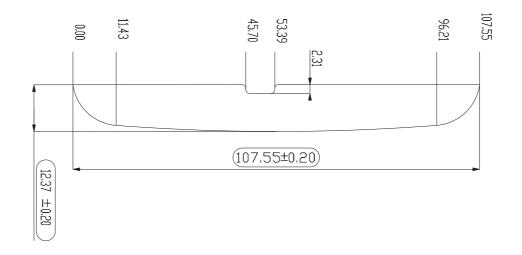



Modification	Card Paper /	Top line	eboard		Corrugate list	\[Die Cut Legend	Die Cut Tolerance = +/ -0.5 mm	PE Bag	(A Degree)	Clear Pink		Label list	(Total Thick	kness = mn	m <u>±</u> 10%)	Comp	ly with	RoHs	A	t	
1	GSM CCN	B SBS	Double SBS	Plute (A Degree	Single wall/ Double wall GSM g/mineferance) (Top lineboard/Medium/Bottom lineboard) (Kgf /cm²)	End Crush Test (Kgf / cm)	Cutting Line	O 16 0.05 0.1 0.15 0.2 0.2 0.5	Normal	Anti-Sta	tic ESD Value/ $_{ohm}^{\Omega}$ = 9-	-11	Material &	Thickness	Adhesi	ive FP label)		Others	;	ACC	ton techni	OLOGY CORP.
2	250	+			Taiwan 230 X 180 X 230 16 China 250 X 150 X 250 16	33.6 (CI	Crease Line BL) Rartial Blunt Line	16 — 63 0.05 0.15 0.2 0.3 0.3 0.8 63 — 250 0.05 0.2 0.25 0.4 0.5 1.2	Anti-Static	Electron	ic ESD Value/ _{ohm} <	5	Art paper 🗸	0.025mm / 25# / 1mil	Acrylic	T=0.022mm	Material S	ec:		Darid Nia O /	COOOOOVY	V A DEV A O
4	280		\Box	- ੈ -	B China 250 X 100 X 250 14	26.2) Slit Booro Lino	250 — 500 01 025 03 06 08 18	Thickness/mm	0.04	0.06 0.0)8 V	Metalized	0.050mm / 50# / 2mil	Acrylic UL approve	ed T=0.022mm	100	I manage	- l	Part No. 24	6000000XX	XA REV. AU
5	300	acksquare	\vdash	ا*ا	China \$50 X 100 X 250 14	22.5) Slit Line	Printing Tolerance = +/ -	Bubble Bag	Single layer	Put-in material >= 8 P (By 1.5M/Width x 100M/Len	kg ngth)	White Polyester	0.076mm / 75# / 3mil	"R" Adhesive	T=0.022mm	IQU	Inspect C	clor	Description:		
6	340	\wedge	╌	\perp	BC China 250X100X 00X150X250 18	37.1	5) 4 A	Pulo Tray Recycle Kraft 80% + Newspaper 20%	(Bubble)	Double	Put-in material >= 16	^9	(PP)Pepa paper	0.178mm / 7mil	Water Adhesive	T=0.022mm	Please refer	to		'	EAP9112A-FLF-EC	(FCW5110)
7	350				China 205 X 100 X 230 16	26 F	rection A		EDE E	layer	(By 1.5M/Width x 100M/Len	. —	PC 8B35	0.254mm / 10mil	3M 467	T=0.05mm / 2mil	Approve	Lin	03.2813		T	<u>'</u>
This document and the technical data disclosed	Coated U	vΠ	Mar Resistant	— [‡] }-	B China 175 X 140 X 230 14 Taiwan 220 X 100 X 200	28.5 Man	nufactory MFS	Weight/gs= +/-5%	EPE F		White Pini	K	PC 8010	0.381mm / 15mil	3M 468	T=0.127mm / 5mil	Check			UNIT	SCALE 1 / 1	SIZE A3
are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without		, T=	Varish	┦╸	AB Taiwan 230X100X100X100X230	18.6	Glue	Thickness/mm 1.5 2.0	Density (k	* 	27≥0 Othe	er	Other	0.500mm / 20mil	_	T=0.127mm / 5mil	<u> </u>	Allison	03.28.13	MM /JND	Outside View	Sheet 1 of 1
expressed written permission.	PP Film LF	- / 0.15 mm	DF / 0.8		BC China 175X100X100X150X250 18	37.4 J	Joint	Draft Angle 3 Hydrous % 7-11%	Lamina	ted	Non - laminated	$\setminus \sqcup$	PP Film	LF (T = 0.045mm)	DF (T = 0.035mm)		Design	Allison	03.20.13	101101 (11.07)	Outside view	Officer 1 of 1

1. Printing color: Black


2. 製造國家(MFG Country):

Decide by import and export country for example:

1. MADE IN TAIWAN

2. MADE IN CHINA

印刷廠商代號(Vender ID): (CSA 要求標示)

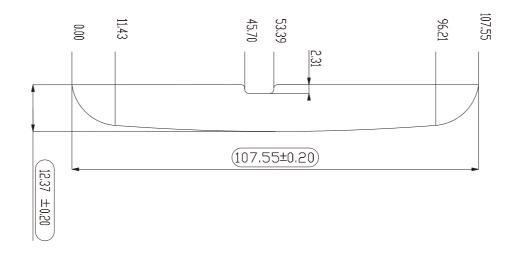



Modification	Card Paper /	Top line	board		Corrugate list	Die Cut Legend	Die Cut Tolerance = +/ -0.5 mm	PE Bag (A	Degree)	Clear Pin	nk	Label list	(Total Thick	kness = mn	n <u>±</u> 10%)	Comp	ly with	RoHs	A 00	too	
1	GSM CCN	SBS	Double SBS	Plute (A Degree)	Single wall Double wall GSM g/mi(Reference) (Top lineboard/Medium/Bottom lineboard) Strength (Kgr / cm *) (Kgr / cm *)	(CL) Cutting Line	O 16 0.05 0.1 0.15 0.2 0.2 0.5	Normal	Anti-Stati	ic ESD Value/ _{ohm} = 9	9-11	Material &	Thickness	Adhesi (Except all leds in I	VE FP label)		Others		Acc	LOII TECHNO	DLOGY CORP.
2	250				Taiwan 230 X 180 X 230 China 250 X 150 X 250 16 33.6	(PBL) Rartial Blunt Line	16 — 63 0.05 0.15 0.2 0.3 0.3 0.8 63 — 250 0.05 0.2 0.25 0.4 0.5 1.2	Anti-Static	Electroni	c ESD Value/ _{ohm} <	< 5	 ' ' '	0.025mm / 25# / 1mil	Acrylic	T=0.022mm	Material S	ec:		Dort No. 24	6000000	/
4	280		\vdash	- <u> </u> -	B China 250 X 100 X 250 14 26.2 Taiwan 230 X 100 X 230 14 22.5	(SO) Slit-Score Line	250 — 500 0.1 0.25 0.3 0.6 0.8 1.8 500 — 1000 0.3 0.5 0.8 1.2 3.0	Thickness/mm	0.04 Signlo	0.06 0.	.08		0.050mm / 50# / 2mil	*		IOC	Inspect C	alor		6000000XXX	A REV. AU
5	310	ackslash		⊢ ^ <u> </u>	China 250 X 100 X 250 14 22.3 AB Taiwan 230X10X100X100X230 18 37.1	(SL) Slit Line	Printing Tolerance = +/ -	Bubble Bag	layer	(By 1.5M/Width x 100M/L	ength)	White Polyester (PP)Pepa paper	0.076mm / 75# / 3mil	"R" Adhesive Water Adhesive	T=0.022mm T=0.022mm	Please refer		0.01	Description:		
6	340	\perp			VC Taiwan 230 X 100 X 230 16 26	Flute	Pulo Tray Recycle Kraft 80% + Newspaper 20%	(ø=10mm)	Double layer	Put-in material >= 1 (By 1.5M/Width x 100M/L	l6 kg .ength)	PC 8B35	0.254mm / 10mil	3M 467	. 0102211111	Approve	Lin	03.2813	ULLABEL	EAP9112A-FLF-EC	(ECW5110-L)
This document and the technical data disclosed	Coated U	, 1	Mar Projetant] ite	B Taiwan 220 X 100 X 200 14 28.5	Manufactory MFG	Weight/gs= +/-5%	EPE Fo	am	White Pi	ink	PC 8010	0.381mm / 15mil		T=0.127mm / 5mil	Check	LIII	03.2013	UNIT	SCALE 1 / 1	SIZE A3
are proprietary to Accton Tech. Corp. and shall not be		/ . T=	Varish	- \$ -	E Taiwan 220 X 100 X 200 12 18.6 China 175 X 100 X 250 12 18.6 AB Taiwan 230X100X100X100X230	Stamp STAMP	Thickness/mm 7.5 2.0	Density (kg	. ,	27≥0 Qt	her	Other	0.500mm / 20mil	_	T=0.127mm / 5mil	J 	Allison	03.28.13	MM MM	Outside View	Sheet 1 of 1
expressed written permission.	PP Film LF	/ 0.15 mm	DF / 0008		BC China 175X100X100X150X250 18 37.4	Joint 🗐	Draft Angle 3 Hydrous % 7-11%	Laminate	d	Non - laminated	d 🔪	PP Film	LF (T = 0.045mm)	DF (T = 0.035mm)		Design	AlliSOII	03.20.13	141141 (1147)	Cutaide view	Officer 1 of 1

1. Printing color: Black


2. 製造國家(MFG Country):

Decide by import and export country for example:

1. MADE IN TAIWAN

2. MADE IN CHINA

印刷廠商代號(Vender ID): (CSA 要求標示)

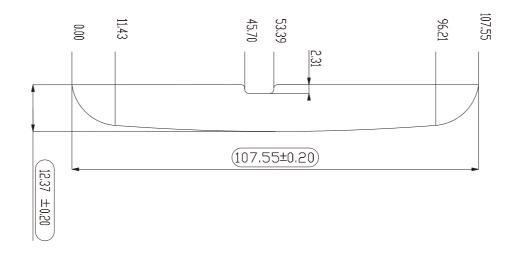



Modification	Card Paper /	Top line	eboard		Corrugate list	Die	e Cut Legend	Die Cut Tolerance = +/ -0.5 mm	PE Bag ((A Degree)	Clear Pink		Label list	(Total Thick	ness = mn	n <u>±</u> 10%)	Comp	ly with	RoHs	A	t ~ ~	
1	GSM CCN	B SBS	Double SBS	Plute (A Deglee	Single wall / Double wall GSM g/mi/Reference) Strength (Top lineboard/Medium/Bottom lineboard)	End Crush Test (Kgf/cm)	Cutting Line	GRADE 0 1 2 3 4 5 0 16 0.05 0.1 0.15 0.2 0.2 0.5	Normal	Anti-Sta	tic ESD Value/ $_{ohm}^{\Omega} = 9$ -	-11	Material &	Thickness	Adhesi	VE FP label)		Others	;	ACC	TON TECHN	OLOGY CORP.
2	250	+		-	Taiwan 230 X 180 X 230 China 250 X 150 X 250 Taiwan 230 X 100 X 230	33.6 (CI)	Crease Line	16 — 63 0.05 0.15 0.2 0.3 0.3 0.8 63 — 250 0.05 0.2 0.25 0.4 0.5 1.2	Anti-Static	Electron	ic ESD Value/ _{ohm} < ξ	5 A	rt paper 🗸	0.025mm / 25# / 1mil	Acrylic	T=0.022mm	Material S	ec:		David Na. O.	10000000	V A DEV A O
4	280		\Box	≨ -	B China 230 X 100 X 230 14	26.2	Slit Coro Lino	250 — 500 01 023 03 06 08 18	Thickness/mm	0.04	0.06 0.0	8 <mark>V</mark> N	Metalized	0.050mm / 50# / 2mil	Acrylic UL approve	ed T=0.022mm	100	Vincency (-l	Part No. 24	16000000XX	XA REV. AU
5	300	acksquare	\vdash	ا*إ	E China 250 X 100 X 250 14 AB Taiwan 230 X 100 X 100 X 230	22.5	Slit Line	Printing Tolerance = +/ - 12 30	Bubble Bag	Single layer	Put-in material >= 8 k (By 1.5M/Width x 100M/Len	(g V	/hite Polyester	0.076mm / 75# / 3mil	"R" Adhesive	T=0.022mm		Inspect C	clor	Description:		
6	340	\wedge	╌	\perp	BC China 250X100X 00X150X250 18	37.1	- I A	Pulo Tray Recycle Kraft 80% + Newspaper 20%	(Bubble)	Double	Put-in material >= 16	Ny H	PP)Pepa paper	0.178mm / 7mil	Water Adhesive	T=0.022mm	Please refer	to			LEAP9112A-FLF-	17(WAP5110)
7	350			- <u>-</u> -	A/C China 205 X 140 X 200 16	26 Flu Direc	ction X	Weight/gs + Newspaper 20%	EDE E	layer	(By 1.5M/Width x 100M/Len		C 8B35	0.254mm / 10mil	3M 467	T=0.05mm / 2mil	Approve	Lin	03.2813		T	
This document and the technical data disclosed	Coated U	v 📗	Mar Resistant	┦┋┞	B China 175 X 140 X 230 14 Taiwan 220 X 100 X 200	28.5 Manufa	actory MF	Troight go 7 %	EPE FO	2	vvnite Pini	K F	PC 8010	0.381mm / 15mil	3M 468	T=0.127mm / 5mil	Check			UNIT	SCALE 1 / 1	SIZE A3
are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without	PP Film LF	T= 1015	Variush DE (30	┦╸┤	AB Taiwan 230X100X100X230 40	18.6 Glu	ue l	Thickness/mm 7.5 2.0	Density (kg	' ' 	27≥0 Othe	er C	Other	0.500mm / 20mil		T=0.127mm / 5mil	<u> </u>	Allison	03.28.13	CUHT MM	Outside View	Sheet 1 of 1
expressed written permission.	PP FIIIM	mm	DL \ mm		BC China 175X100X100X150X250 18	3/14 Joi	int 🗐 🔪	Draπ Angle 3 Hydrous % 7-11%	Laminat	iea	Non - laminated	\ P	'P Film	LF (T = 0.045mm)	DF (T = 0.035mm)		Design	A1119011	00.20.10	''''' (II'\	J Catolao Viow	31.000 1 01 1

1. Printing color: Black


2. 製造國家(MFG Country):

Decide by import and export country for example:

1. MADE IN TAIWAN

2. MADE IN CHINA

印刷廠商代號(Vender ID): (CSA 要求標示)

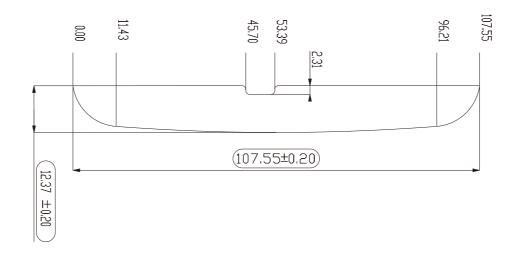




Modification	Card Paper / Top lineboard	Corrugate list Die Cut Legend	Die Cut Tolerance = +/-0.5 mm BE Bag (A	Degree) Clear Pink	Label list	(Total Thickness = mm±10%)	Comply with RoHs	Acctoc
1	GSM CCNB SBS Double	Prute Single wall Double wall GSM glmipederance) Single wall Double wall GSM glmipederance) Bursting Strength Test [Veg/cm] (CL) Cutting Line	0 16 0.05 0.1 0.15 0.2 0.2 0.5 Normal	Anti-Static ESD Value/ $_{ohm}^{\Omega}$ = 9-11	Material & Th	Adhesive	Others	ACCTON TECHNOLOGY CORP.
2	250	Taiwan 230 X 180 X 230 16 33.6 (C1) Crease Line 250 X 150 X 250 16 33.6 (C1) Crease Line (PBL) Partial Blunt Lin	. 16 — 63 0.05 0.15 0.2 0.3 0.3 0.8 Anti-Static Anti-Static	Electronic ESD Value/ _{ohm} < 5	Art paper 🗸 0.02	25mm / 25# / 1mil Acrylic T=0.022mm	Material Spec:	D (N 040000000VVVA DEV 40
4	280	B Ching 230 X 100 X 230 14 26.2 (FDL) Palual Billit Lill Ching 250 X 112 X 250 14 26.2 (FDL) Palual Billit Lill Ching 250 X 120 X 230 14 22.5 (SO) Slit-Score Line	250 — 500 01 025 03 0.6 0.8 1.8 Thickness/mm	0.04 0.06 0.08	✓ Metalized 0.05	60mm / 50# / 2mil 🗸 Acrylic UL approved T=0.022mm	IOC Increase Solori	Part No. 246000000XXXA REV. A0
5	300	AB Taiwan 230X NOX100X100X230 (SL.) Slit Line	Printing Tolerance = +/- Bubble Bag	Single Put-in material >= 8 kg layer (By 1.5M/Width x 100M/Length)	The state of the s	6mm / 75# / 3mil	IQC Inspect Color	Description:
6	340	BC China 250X100X00X150X250 18 37.1 (CE7)	Pulo Tray Recycle Kraft 80% (Bubble) + Newspaper 20% (S=10mm)	Double Put-in material >= 16 kg	() - - - - - -		Please refer to	UL LABEL EAP9112A-FLF-17 (WAP5110-L)
7	350	A/C China 205 X 140 X 280 16 26 Prute Direction	Weight/gs +/-5% EPE Fo	M/bito Dipk	1.0000	1 1	Approve Lin 03.2813	
This document and the technical data disclosed are proprietary to Accton Tech. Corp. and shall not be	Coated UV Resistant	China 175 X 140 X 230 14 20.3 Manufactory Taiwan 220 X 100 X 200 18 18 6 Stamp	Thickness/mm 1.5 2.0 Density (kg /	. 2.	H	31 mm / 15mil 3M 468 T=0.127mm / 5mil	Check	UNIT SCALE 1 / 1 SIZE A3
duplicated, used, released, or disclosed without expressed written permission.	PP Film LF / 0.15 mm DF / 0.18	S	Draft Angle 3° Hydrous % 7-4% Laminate	,		00mm / 20mil 3M 7945 T=0.127mm / 5mil T = 0.045mm) DF (T = 0.035mm)	Design Allison 03.28.13	MM (tN) Outside View Sheet 1 of 1

LABEL LOCATION

The label will be permanently affixed at a conspicuous location on the device.

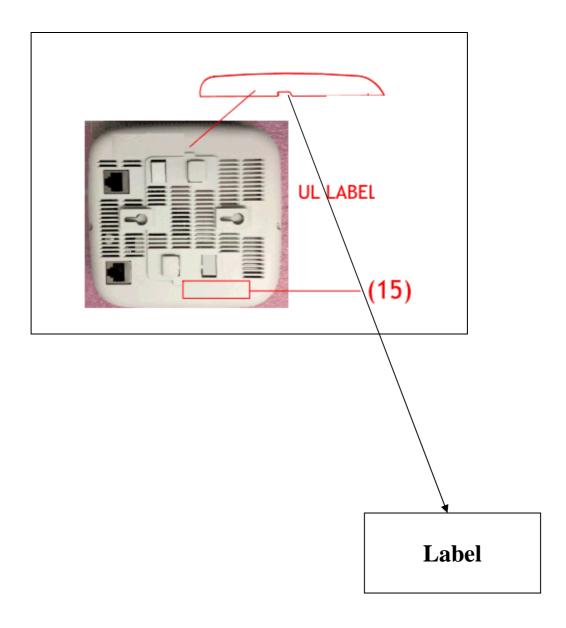

FCC ID: YZKWAP5110