



# FCC PART 15.407 TEST REPORT

For

# Grandstream Networks, Inc.

126 Brookline Ave, 3rd Floor Boston, MA 02215, USA

FCC ID: YZZGWN7630LR

Report Type: Product Type:

Original Report Outdoor Long-Range High-Performance

802.11ac Wi-Fi Access Point

**Report Number:** RSZ190917002-00C

**Report Date:** 2019-11-06

Kieron Luo Kieron Luo

**Reviewed By:** RF Engineer

**Prepared By:** Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

**Note**: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '\*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

# **TABLE OF CONTENTS**

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
Measurement Uncertainty Test Facility	
SYSTEM TEST CONFIGURATION	
DESCRIPTION OF TEST CONFIGURATION	
EUT Exercise Software	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS EXTERNAL I/O CABLE	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	
TEST EQUIPMENT LIST	
-	
§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	
Applicable Standard	
FCC §15.203 – ANTENNA REQUIREMENT	
APPLICABLE STANDARD	
Antenna Connector Construction	22
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS	23
APPLICABLE STANDARD	
EUT SETUP	
EMI TEST RECEIVER SETUP	
TEST PROCEDURE	
TEST DATA	
§15.205 & §15.209 & §15.407(B) (1), (4), (6), (7) – UNDESIRABLE EMISSION	
APPLICABLE STANDARD	27
EUT Setup	27
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST DATA	
FCC §15.407(a) (1) (5), (e) – 26 dB & 6dB EMISSION BANDWIDTH	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	

FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER	67
APPLICABLE STANDARD	67
TEST PROCEDURE	67
TEST DATA	
FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY	75
APPLICABLE STANDARD	75
TEST PROCEDURE	75
TEST DATA	76

# **GENERAL INFORMATION**

# **Product Description for Equipment under Test (EUT)**

Product	Outdoor Long-Range High-Performance 802.11ac Wi-Fi Access Point
Model	GWN7630LR
Frequency Range	5G Wi-Fi: 5150-5250 MHz, 5725-5850 MHz
Average Output Power	5150-5250 MHz: 21.79dBm (802.11a), 21.55dBm(802.11n20), 22.71 dBm(802.11n40), 21.51dBm (802.11ac20), 22.43dBm(802.11 ac40),13.43dBm(802.11 ac80) 5725-5850 MHz 23.50dBm (802.11a), 22.51dBm(802.11n20), 21.33 dBm(802.11n40), 20.58dBm (802.11ac20), 19.57dBm(802.11 ac40), 19.83 dBm(802.11 ac80)
Modulation Technique	Wi-Fi: OFDM
Antenna Specification	3.5dBi
Voltage Range	DC 48V from POE
Date of Test	2019/09/21~2019/10/31
Sample serial number	190917002
Received date	2019/09/17
Sample/EUT Status	Good condition

Report No.: RSZ190917002-00C

# **Objective**

This type approval report is prepared on behalf of *Grandstream Networks, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

# **Related Submittal(s)/Grant(s)**

FCC Part 15B JAB and FCC Part 15.247 DTS submissions with FCC ID: YZZGWN7630LR.

# **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15.407 Page 4 of 136

# **Measurement Uncertainty**

Parameter		Uncertainty
Occupied Cha	nnel Bandwidth	±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions,	Below 1GHz	±4.75dB
Radiated Above 1GHz		±4.88dB
Temperature		±1℃
Humidity		±6%
Supply	voltages	±0.4%

Report No.: RSZ190917002-00C

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

# **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

FCC Part 15.407 Page 5 of 136

# **SYSTEM TEST CONFIGURATION**

# **Description of Test Configuration**

The system was configured for testing in an engineering mode, which was provided by manufacturer.

Report No.: RSZ190917002-00C

The device support 802.11a/n20/n40/ac20/ac40/ac80 modes.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

Note: 802.11a/n20/n40/ac20/ac40/ac80 all support SISO&MIMO mode, the pre-scan result for MIMO mode is the worst, so just test MIMO mode.

FCC Part 15.407 Page 6 of 136

# **EUT Exercise Software**

"Putty, QATool" was used in the test. Test frequencies and power level were configured (Ant 0&1&2&3) used the same power level as below:


U-NII	Mode	Channel Number	Frequency (MHz)	Rate (Mbps)	Power Level
		CH36	5180	6	15.5
	802.11 a	CH40	5200	6	15.5
		CH48	5240	6	16
		CH36	5180	MCS0	15.5
	802.11 n20	CH40	5200	MCS0	15.5
		CH48	5240	MCS0	16
5150 – 5250MHz	802.11 n40	CH38	5190	MCS0	13.5
3130 – 3230MHZ		CH46	5230	MCS0	18.5
	802.11 ac20	CH36	5180	MCS0	15.5
		CH40	5200	MCS0	15.5
		CH48	5240	MCS0	16
	802.11 ac40	CH38	5190	MCS0	13.0
		CH46	5230	MCS0	18.5
	802.11 ac80	CH42	5210	MCS0	10.5

U-NII	Mode	Channel Number	Frequency (MHz)	Rate (Mbps)	Power Level
		CH149	5745	6	18.5
	802.11 a	CH157	5785	6	18.5
		CH165	5825	6	17.5
		CH149	5745	MCS0	18.5
	802.11 n20	CH157	5785	MCS0	18.5
		CH165	5825	MCS0	17.5
802.11 ac2	802.11 n40	CH151	5755	MCS0	18.5
		CH159	5795	MCS0	18.5
	802.11 ac20	CH149	5745	MCS0	18.5
		CH157	5785	MCS0	18.5
		CH165	5825	MCS0	17.5
	802.11 ac40	CH151	5755	MCS0	18.5
		CH159	5795	MCS0	18.5
	802.11 ac80	CH155	5775	MCS0	18.5

FCC Part 15.407 Page 7 of 136


# **Duty cycle** 5150-5250 MHz

#### 802.11a mode

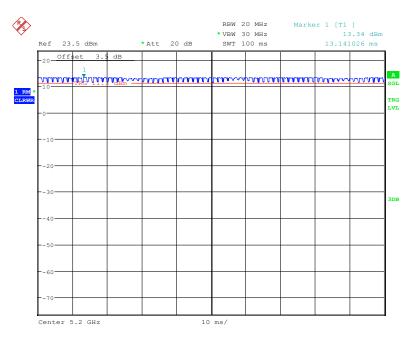

Date: 16.0CT.2019 20:20:14


# 802.11n20 mode

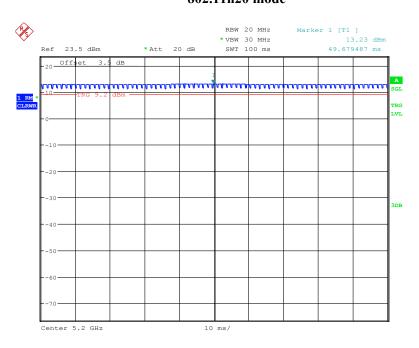

Date: 16.0CT.2019 20:23:58


FCC Part 15.407 Page 8 of 136

# 802.11n40 Mode

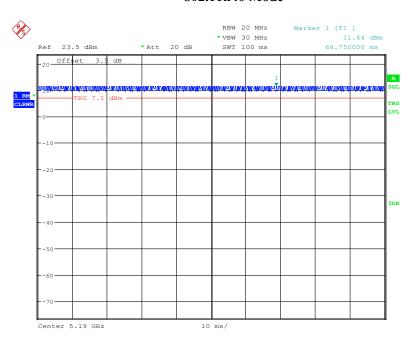

Date: 16.0CT.2019 19:55:51

# 802.11ac20 Mode

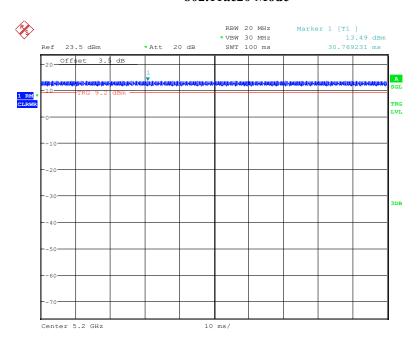


Date: 16.0CT.2019 20:24:24

FCC Part 15.407 Page 9 of 136


# Report No.: RSZ190917002-00C

# 802.11ac40 Mode

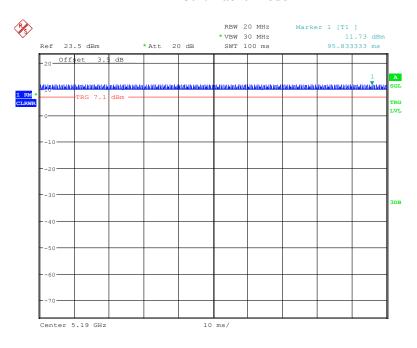

Date: 16.0CT.2019 19:56:47

# 802.11ac80 Mode

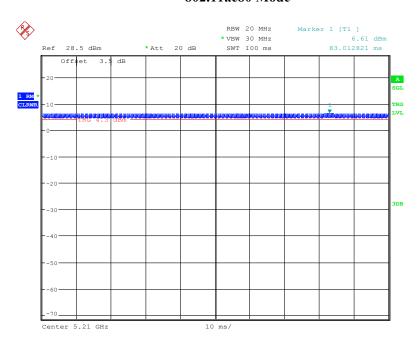

Date: 31.OCT.2019 17:52:56


FCC Part 15.407 Page 10 of 136

Band	Duty Cycle (%)	T(ms)	1/T(kHz)	VBW Setting	10log(1/x)
802.11a	100	-	-	10Hz	-
802.11n20	100	-	-	10Hz	-
802.11n40	100	-	-	10Hz	-
802.11ac20	100	-	-	10Hz	-
802.11ac40	100	-	-	10Hz	-
802.11ac80	100	-	-	10Hz	-

FCC Part 15.407 Page 11 of 136


# 5725-5850 MHz

# 802.11a mode

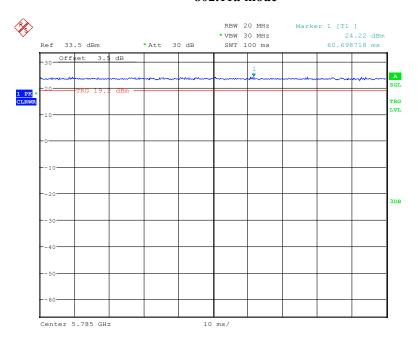

Date: 23.OCT.2019 00:01:01


## 802.11n20 mode

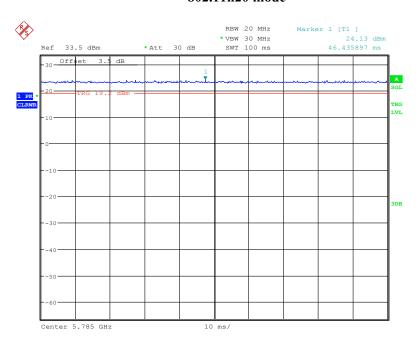

Date: 23.OCT.2019 00:01:37


FCC Part 15.407 Page 12 of 136

# 802.11n40 Mode

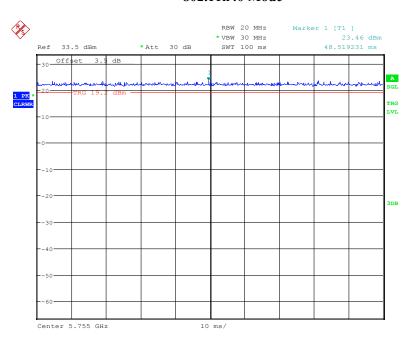

Date: 23.0CT.2019 00:03:00


# 802.11ac20 Mode

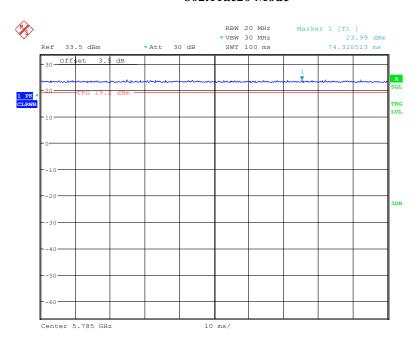

Date: 23.OCT.2019 00:01:59


FCC Part 15.407 Page 13 of 136

# 802.11ac40 Mode

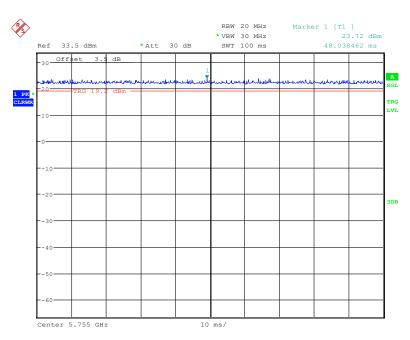

Date: 23.OCT.2019 00:03:22

# 802.11ac80 Mode

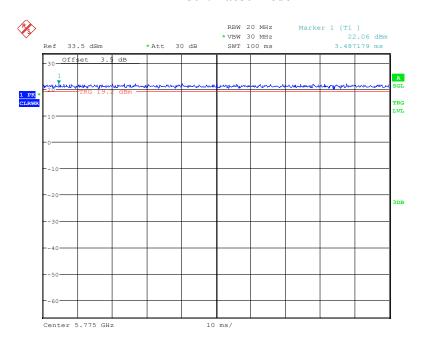

Date: 23.OCT.2019 00:04:36

FCC Part 15.407 Page 14 of 136

Band	Duty Cycle (%)	T(ms)	1/T(kHz)	VBW Setting	10log(1/x)
802.11a	100	-	-	10Hz	-
802.11n20	100	-	-	10Hz	-
802.11n40	100	-	-	10Hz	-
802.11ac20	100	-	-	10Hz	-
802.11ac40	100	-	-	10Hz	-
802.11ac80	100	-	-	10Hz	-

# **Equipment Modifications**

No modification was made to the EUT tested.

# **Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
Unknown	POE	VX-Pl1000GB	Unknown
HP	Laptop	Compaq CQ45	5CG33407QL


# **External I/O Cable**

Cable Description	Length (m)	From/Port	То
Unshielded Detachable AC Cable	1.0	LISN	POE
Unshielded Detachable RJ45 Cable	1.2	POE	EUT
Unshielded Detachable RJ45 Cable	1.8	EUT	Laptop

FCC Part 15.407 Page 15 of 136

# **Block Diagram of Test Setup**

For conducted emission:

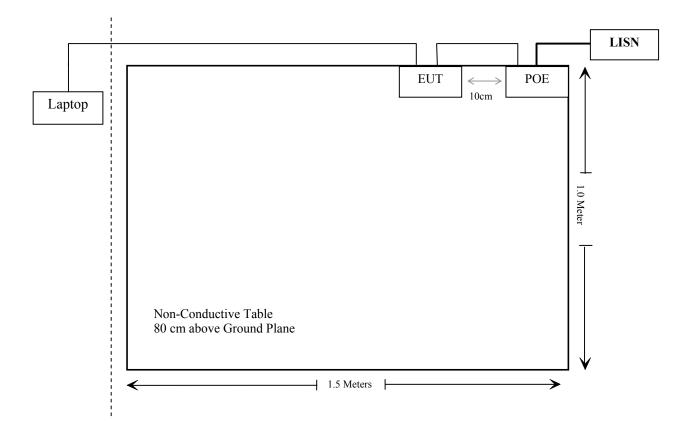

FCC Part 15.407 Page 16 of 136

# SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) (1) & §2.1091	MaximuM Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
\$15.205& \$15.209 &\$15.407(b) (1), (4),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(a) (1), (5),(e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliance
§15.407(a)(1), (3)	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1), (3)	Power Spectral Density	Compliance

Report No.: RSZ190917002-00C

FCC Part 15.407 Page 17 of 136

# TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
	A	C Line Conducted	test		
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2019-07-11	2020-07-11
Rohde & Schwarz	LISN	ENV216	3560.6650.12- 101613-Yb	2019-01-25	2020-01-25
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019-03-02	2020-03-02
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Un-known	Conducted Emission Cable	78652	UF A210B-1- 0720-504504	2018-11-12	2019-11-12
		Radiated Emission T	est		
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2019-07-22	2020-07-21
Agilent	Spectrum Analyzer	8564E	3943A01781	2019-03-02	2020-03-01
Sunol Sciences	Broadband Antenna	ЈВ1	A040904-1	2017-12-22	2020-12-21
COM-POWER	Pre-amplifier	PA-122	181919	2018-11-12	2019-11-12
Sonoma Instrument	Amplifier	310N	186238	2018-11-12	2019-11-12
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2019-07-09	2020-07-08
Ducommun technologies	RF Cable	UFA147A-2362- 100100	MFR64639 231029- 003	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	RG-214	1	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	RG-214	2	2018-11-12	2019-11-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-03	2016-11-18	2019-11-18
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2018-11-12	2019-11-12
Sinoscite Technology	Band Reject Filter	BSF5150-5850MN- 0899-004	Unknown	2018-11-12	2019-11-12

Report No.: RSZ190917002-00C

FCC Part 15.407 Page 18 of 136

Report No.: RSZ190917002-00C

FCC Part 15.407 Page 19 of 136

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

# **Applicable Standard**

According to subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Report No.: RSZ190917002-00C

Limits for General Population/Uncontrolled Exposure								
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (Minutes)				
0.3-1.34	614	1.63	*(100)	30				
1.34-30	824/f	2.19/f	$*(180/f^2)$	30				
30-300	27.5	0.073	0.2	30				
300-1500	/	/	f/1500	30				
1500-100,000	/	/	1.0	30				

f = frequency in MHz

\* = Plane-wave equivalent power density

#### Result

#### **Calculated Formulary:**

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_{i} \frac{S_{i}}{S_{Limit,i}} \le 1$$

FCC Part 15.407 Page 20 of 136

Frequency	Antenna Gain		<b>Conducted Power</b>		Evaluation	Power	MPE Limit	
(MHz)	(dBi)	i) (numeric) (dBm) (mW)		(mW)	Distance (cm)	Density (mW/cm <sup>2</sup> )	(mW/cm <sup>2</sup> )	
5150-5250	3.5	2.24	23	199.53	20	0.09	1.0	
5725-5850	3.5	2.24	24	251.19	20	0.11	1.0	

#### Note:

- 1) The conducted power is the tune-up power of the Max Conducted Output Power.
- 2) 2.4GHz or 5GHz Wi-Fi can transmit simultaneously for this device.
- 3) Simultaneous transmitting consideration: (referring to the DTS report, the highest MPE for 2.4G band is 0.22mW/cm²)

The ratio=MPE<sub>DTS</sub>/limit+MPE<sub>UNII</sub>/limit=0.22+0.11=0.33  $\leq$  1.0, simultaneous exposure is not required.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result: Compliance** 

FCC Part 15.407 Page 21 of 136

# FCC §15.203 – ANTENNA REQUIREMENT

# **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

Report No.: RSZ190917002-00C

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has four external antennas use a unique type of connector to attach to the EUT. The gain is 3.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.


FCC Part 15.407 Page 22 of 136

# FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

# **Applicable Standard**

FCC §15.207, §15.407(b) (6)

# **EUT Setup**

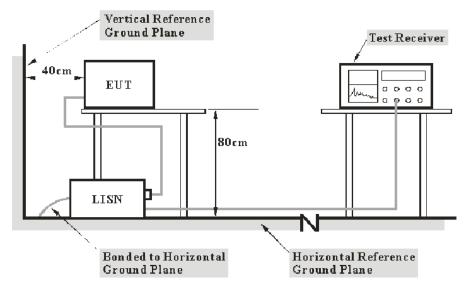

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

# **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

#### **Test Procedure**

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

FCC Part 15.407 Page 23 of 136

# **Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Report No.: RSZ190917002-00C

# **Test Data**

# **Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kiki Geng on 2019-09-21.

EUT operation mode: Transmitting (worst case is 802.11a mode, 5240MHz)

FCC Part 15.407 Page 24 of 136


# AC 120 V/60 Hz, Line:

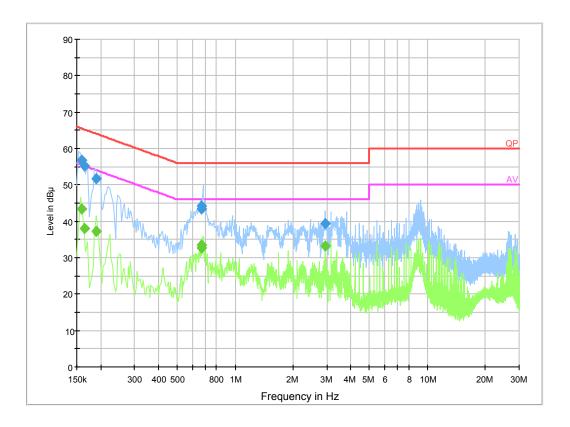

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.158500	56.8	19.8	65.5	8.7	QP
0.165500	55.2	19.9	65.2	10.0	QP
0.190501	51.6	19.8	64.0	12.4	QP
0.667870	43.5	19.8	56.0	12.5	QP
0.671770	44.2	19.8	56.0	11.8	QP
2.941870	39.3	19.9	56.0	16.7	QP
0.158500	43.4	19.8	55.5	12.1	Ave.
0.165500	38.1	19.9	55.2	17.1	Ave.
0.190501	37.3	19.8	54.0	16.7	Ave.
0.667870	32.8	19.8	46.0	13.2	Ave.
0.671770	33.5	19.8	46.0	12.5	Ave.
2.941870	33.3	19.9	46.0	12.7	Ave.

FCC Part 15.407 Page 25 of 136

# AC 120 V/60 Hz, Neutral:

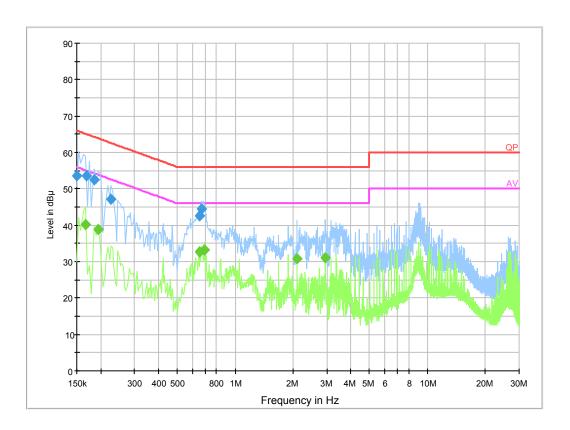

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.150000	53.5	19.8	66.0	12.5	QP
0.169500	53.6	19.8	65.0	11.4	QP
0.185500	52.6	19.8	64.2	11.6	QP
0.225500	47.3	19.8	62.6	15.3	QP
0.652130	42.7	19.8	56.0	13.3	QP
0.671950	44.4	19.8	56.0	11.6	QP
0.166000	40.3	19.8	55.2	14.9	Ave.
0.194000	38.9	19.8	53.9	15.0	Ave.
0.654000	32.6	19.8	46.0	13.4	Ave.
0.690000	33.3	19.8	46.0	12.7	Ave.
2.102000	30.7	19.9	46.0	15.3	Ave.
2.946000	31.2	19.9	46.0	14.8	Ave.

# Note:

- 1) Correction Factor =LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor 3) Margin = Limit Corrected Amplitude

FCC Part 15.407 Page 26 of 136

Report No.: RSZ190917002-00C

# §15.205 & §15.209 & §15.407(B) (1), (4), (6), (7) – UNDESIRABLE EMISSION

# **Applicable Standard**


FCC §15.407 (b) (1), (4), (6), (7); §15.209; §15.205;

- (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:
- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of –27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
- (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.


### **EUT Setup**

#### **Below 1 GHz:**

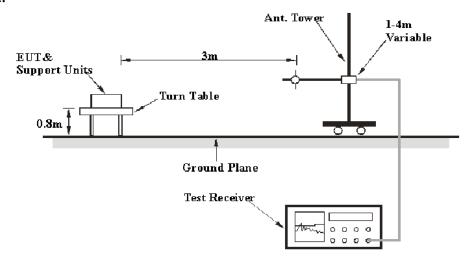

FCC Part 15.407 Page 27 of 136

#### Above 1 GHz:

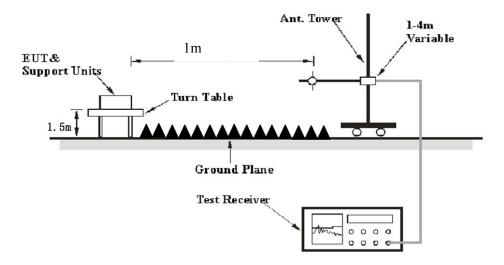

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

# **EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1MHz	10 Hz Note 1	/	Average
	1MHz	>1/T Note 2	/	Average

Note 1: when duty cycle is no less than 98% Note 2: when duty cycle is less than 98%

FCC Part 15.407 Page 28 of 136

#### **Test Procedure**

# **Radiated Spurious Emission**

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

Report No.: RSZ190917002-00C

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left( \frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

E<sub>SpecLimit</sub> is the field strength of the emission at the distance specified by the limit, in

dBμV/m

 $E_{\text{Meas}}$  is the field strength of the emission at the measurement distance, in dB $\mu$ V/m

 $d_{\text{Meas}}$  is the measurement distance, in m  $d_{\text{SpecLimit}}$  is the distance specified by the limit, in m

So the extrapolation factor of 1m is  $20*\log(1/3) = -9.5$  dB

#### **Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit - Corrected Amplitude

FCC Part 15.407 Page 29 of 136

# **Test Results Summary**

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart E, section 15.205, 15.209 and 15.407 rules.</u>

Report No.: RSZ190917002-00C

# **Test Data**

# **Environmental Conditions**

Temperature:	24~25 ℃
Relative Humidity:	51~52 %
ATM Pressure:	101.0 kPa


The testing was performed by Zero Yan on 2019-09-23 for below 1G and by Curry Xiang on 2019-10-31 for above 1G.

EUT operation mode: Transmitting

FCC Part 15.407 Page 30 of 136

Report No.: RSZ190917002-00C

**30 MHz – 1 GHz:** (worst case is 802.11a mode 5240MHz)

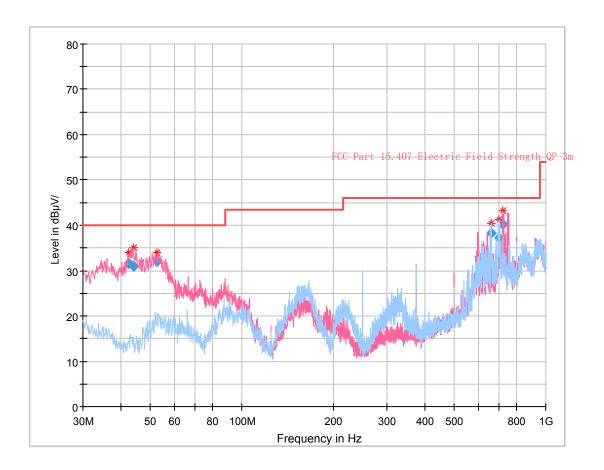

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
42.464250	31.72	108.0	V	176.0	-15.5	40.00	8.28
43.898250	30.95	108.0	V	305.0	-16.5	40.00	9.05
52.643625	32.05	119.0	V	164.0	-19.8	40.00	7.95
659.127125	38.21	110.0	Н	286.0	-3.1	46.00	7.79
701.276750	37.14	108.0	Н	284.0	-1.2	46.00	8.86
724.825125	40.23	115.0	V	180.0	-0.8	46.00	5.77

FCC Part 15.407 Page 31 of 136

# 30 MHz ~ 40 GHz:

# 5150-5250 MHz:

	Re	eceiver	Turntable	Rx An	tenna	Corrected	Corrected	FCC 1 15.407/2		
Frequency (MHz)	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)	Factor	Amplitude (dBμV/m)	Limit (dBµV/m)	Margin (dB)	
802.11a										
5180 MHz										
5149.30	40.41	PK	70	1.3	Н	38.36	78.77	83.5	4.73	
5149.30	21.19	Ave.	70	1.3	Н	38.36	59.55	63.5	3.95	
5428.56	30.30	PK	120	1.7	Н	39.19	69.49	83.5	14.01	
5428.56	16.24	Ave.	120	1.7	Н	39.19	55.43	63.5	8.07	
10360.00	55.13	PK	245	1.0	Н	17.42	72.55	77.7	5.15	
5200 MHz										
10400.00	54.93	PK	187	1.5	Н	17.58	72.51	77.7	5.19	
				524	40 MHz					
5137.08	32.89	PK	232	2.5	Н	38.36	71.25	83.5	12.25	
5137.08	17.28	Ave.	232	2.5	Н	38.36	55.64	63.5	7.86	
5358.84	32.10	PK	93	1.9	Н	39.09	71.19	83.5	12.31	
5358.84	16.81	Ave.	93	1.9	Н	39.09	55.90	63.5	7.60	
10480.00	55.96	PK	275	1.8	Н	17.25	73.21	77.7	4.49	
				802	2.11n20					
				518	30 MHz					
5149.53	38.45	PK	287	1.9	Н	38.36	76.81	83.5	6.69	
5149.53	19.12	Ave.	287	1.9	Н	38.36	57.48	63.5	6.02	
5436.76	31.30	PK	149	2.0	Н	39.29	70.59	83.5	12.91	
5436.76	16.42	Ave.	149	2.0	Н	39.29	55.71	63.5	7.79	
10360.00	45.74	PK	192	1.2	Н	17.42	63.16	77.7	14.54	
				520	00 MHz					
10400.00	43.55	PK	357	2.3	Н	17.52	61.07	77.7	16.63	
_				524	40 MHz					
5106.83	31.67	PK	303	2.0	Н	38.26	69.93	83.5	13.57	
5106.83	16.33	Ave.	303	2.0	Н	38.26	54.59	63.5	8.91	
5434.29	30.64	PK	296	1.1	Н	39.29	69.93	83.5	13.57	
5434.29	16.77	Ave.	296	1.1	Н	39.29	56.06	63.5	7.44	
10480.00	42.45	PK	271	1.9	Н	17.25	59.70	77.7	18.00	

FCC Part 15.407 Page 32 of 136

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected	Corrected	FCC Part 15.407/205/209				
	Reading (dBµV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)	Factor (dB/m)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)			
802.11n40												
5190 MHz												
5149.24	41.85	PK	347	2.1	Н	38.36	80.21	83.5	3.29			
5149.24	21.64	Ave.	347	2.1	Н	38.36	60.00	63.5	3.50			
5366.96	31.29	PK	294	1.0	Н	39.09	70.38	83.5	13.12			
5366.96	16.53	Ave.	294	1.0	Н	39.09	55.62	63.5	7.88			
10380.00	46.33	PK	215	2.4	Н	17.42	63.75	77.7	13.95			
				5230	MHz			-	-			
5148.08	36.18	PK	136	1.3	Н	38.36	74.54	83.5	8.96			
5148.08	21.12	Ave.	136	1.3	Н	38.36	59.48	63.5	4.02			
5354.54	30.63	PK	211	2.0	Н	39.09	69.72	83.5	13.78			
5354.54	16.24	Ave.	211	2.0	Н	39.09	55.33	63.5	8.17			
10460.00	42.33	PK	127	2.1	Н	17.15	59.48	77.7	18.22			
				802.1	1ac20							
				5180	MHz			-	-			
5147.72	42.13	PK	206	1.4	Н	38.36	80.49	83.5	3.01			
5147.72	23.02	Ave.	206	1.4	Н	38.36	61.38	63.5	2.12			
5377.94	31.51	PK	10	2.2	Н	39.09	70.60	83.5	12.90			
5377.94	16.22	Ave.	10	2.2	Н	39.09	55.31	63.5	8.19			
10360.00	49.28	PK	91	1.5	Н	17.42	66.70	77.7	11.00			
5200 MHz												
10400.00	47.31	PK	285	1.1	Н	17.52	64.83	77.7	12.87			

FCC Part 15.407 Page 33 of 136

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected	Corrected	FCC Part 15.407/205/209			
	Reading (dBµV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)	Factor (dB/m)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)		
5240 MHz											
5113.27	31.47	PK	324	1.3	Н	38.26	69.73	83.5	13.77		
5113.27	16.82	Ave.	324	1.3	Н	38.26	55.08	63.5	8.42		
5392.11	30.63	PK	184	2.5	Н	39.19	69.82	83.5	13.68		
5392.11	15.94	Ave.	184	2.5	Н	39.19	55.13	63.5	8.37		
10480.00	47.98	PK	11	1.0	Н	17.25	65.23	77.7	12.47		
	802.11ac40										
				5190	MHz	_					
5147.35	39.26	PK	299	2.3	Н	38.36	77.62	83.5	5.88		
5147.35	20.63	Ave.	299	2.3	Н	38.36	58.99	63.5	4.51		
5442.73	30.68	PK	246	1.5	Н	39.29	69.97	83.5	13.53		
5442.73	16.42	Ave.	246	1.5	Н	39.29	55.71	63.5	7.79		
10380.00	44.01	PK	293	2.1	Н	17.42	61.43	77.7	16.27		
				5230	MHz						
5148.86	38.59	PK	48	2.4	Н	38.36	76.95	83.5	6.55		
5148.86	22.09	Ave.	48	2.4	Н	38.36	60.45	63.5	3.05		
5419.33	30.34	PK	44	1.9	Н	39.19	69.53	83.5	13.97		
5419.33	16.27	Ave.	44	1.9	Н	39.19	55.46	63.5	8.04		
10460.00	48.23	PK	101	2.1	Н	17.15	65.38	77.7	12.32		
				802.1	1ac80						
5210 MHz											
5100.25	34.34	PK	53	1.1	Н	38.26	72.60	83.5	10.90		
5100.25	21.87	Ave.	53	1.1	Н	38.26	60.13	63.5	3.37		
5375.10	30.80	PK	48	1.3	Н	39.09	69.89	83.5	13.61		
5375.10	15.93	Ave.	48	1.3	Н	39.09	55.02	63.5	8.48		
10420.00	42.98	PK	250	1.0	Н	17.52	60.50	77.7	17.20		

FCC Part 15.407 Page 34 of 136

# 5725-5850 MHz:

_	Re	eceiver		Rx Antenna		Corrected	Corrected	FCC Part 15.407/205/209		
Frequency (MHz)	Reading (dBµV)	PK/QP/Ave.	Turntable Degree	Height (m)	Polar (H/V)		Amplitude (dBμV/m)		Margin (dB)	
802.11a										
5745 MHz										
5695.33	42.92	PK	189	1.8	V	39.49	82.41	111.24	28.83	
5704.47	51.43	PK	189	1.8	V	39.49	90.92	115.95	25.03	
5724.54	61.23	PK	257	1.6	V	39.49	100.72	130.65	29.93	
11490.00	57.57	PK	161	2.4	V	17.47	75.04	83.5	8.46	
11490.00	40.80	Ave.	161	2.4	V	17.47	58.27	63.5	5.23	
				5785 M	Hz					
11570.00	58.02	PK	340	1.7	V	17.51	75.53	83.5	7.97	
11570.00	42.87	Ave.	340	1.7	V	17.51	60.38	63.5	3.12	
				5825 M	Hz					
5850.67	56.07	PK	166	1.6	V	39.87	95.94	130.17	34.23	
5855.13	49.72	PK	166	1.6	V	39.87	89.59	120.26	30.67	
5875.25	40.43	PK	318	1.7	V	39.87	80.30	114.52	34.22	
11650.00	60.20	PK	226	1.7	V	16.18	76.38	83.5	7.12	
11650.00	45.26	Ave.	226	1.7	V	16.18	61.44	63.5	2.06	
	•		•	802.11n	20			'		
				5745 M	Hz					
5691.87	33.45	PK	123	1.1	V	39.49	72.94	108.68	35.74	
5717.03	41.91	PK	123	1.1	V	39.49	81.40	119.47	38.07	
5724.18	48.60	PK	200	1.9	V	39.49	88.09	129.83	41.74	
11490.00	44.16	PK	268	1.4	V	17.47	61.63	83.5	21.87	
11490.00	30.09	Ave.	268	1.4	V	17.47	47.56	63.5	15.94	
5785 MHz										
11570.00	44.62	PK	248	2.3	V	17.51	62.13	83.5	21.37	
11570.00	30.15	Ave.	248	2.3	V	17.51	47.66	63.5	15.84	
5825 MHz										
5850.16	41.05	PK	123	1.6	V	39.87	80.92	131.34	50.42	
5856.05	38.91	PK	123	1.6	V	39.87	78.78	120.01	41.23	
5876.55	33.08	PK	79	1.0	V	39.87	72.95	104.05	31.10	
11650.00	47.55	PK	191	1.9	V	16.18	63.73	83.5	19.77	
11650.00	31.33	Ave.	191	1.9	V	16.18	47.51	63.5	15.99	

Report No.: RSZ190917002-00C

FCC Part 15.407 Page 35 of 136

	Re	eceiver		Rx Antenna		Corrected	Corrected	FCC Part 15.407/205/209			
Frequency (MHz)	Reading (dBµV)	PK/QP/Ave.	Turntable Degree	Height (m)	Polar (H/V)	Factor (dB/m)	Amplitude		Margin (dB)		
802.11n40											
5755 MHz											
5698.37	35.81	PK	23	1.5	V	39.49	75.30	113.49	38.19		
5719.98	46.92	PK	23	1.5	V	39.49	86.41	120.29	33.88		
5722.29	47.82	PK	289	1.4	V	39.49	87.31	125.52	38.21		
11510.00	45.01	PK	330	2.1	V	17.47	62.48	83.5	21.02		
11510.00	31.36	Ave.	330	2.1	V	17.47	48.83	63.5	14.67		
				5795 M	Hz						
5852.13	38.78	PK	130	1.6	V	39.87	78.65	126.84	48.19		
5857.73	36.74	PK	130	1.6	V	39.87	76.61	119.54	42.93		
5903.47	32.51	PK	109	1.7	V	39.87	72.38	93.63	21.25		
11590.00	45.51	PK	100	2.3	V	17.51	63.02	83.5	20.48		
11590.00	30.44	Ave.	100	2.3	V	17.51	47.95	63.5	15.55		
				802.11a	c20						
				5745 M	Hz						
5699.81	34.88	PK	277	1.9	V	39.49	74.37	114.56	40.19		
5716.65	42.51	PK	277	1.9	V	39.49	82.00	119.36	37.36		
5724.41	49.37	PK	48	1.4	V	39.49	88.86	130.35	41.49		
11490.00	44.13	PK	18	2.0	V	17.47	61.60	83.5	21.90		
11490.00	29.06	Ave.	18	2.0	V	17.47	46.53	63.5	16.97		
				5785 M	Hz						
11570.00	45.04	PK	340	2.3	V	17.51	62.55	83.5	20.95		
11570.00	30.22	Ave.	340	2.3	V	17.51	47.73	63.5	15.77		
5825 MHz											
5850.14	43.39	PK	329	2.2	V	39.87	83.26	131.38	48.12		
5855.91	39.31	PK	329	2.2	V	39.87	79.18	120.05	40.87		
5724.41	33.81	PK	318	1.4	V	39.49	73.30	113.18	39.88		
11650.00	45.04	PK	152	2.0	V	16.18	61.22	83.5	22.28		
11650.00	30.22	Ave.	152	2.0	V	16.18	46.40	63.5	17.10		

FCC Part 15.407 Page 36 of 136

Frequency	Receiver		Turntable	Rx An	itenna		Corrected		C Part /205/209
(MHz)	Reading (dBµV)	PK/QP/Ave.		Height (m)	Polar (H/V)	Factor (dB/m)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
			;	802.11a	c40				
5755 MHz									
5699.02	36.59	PK	336	1.8	V	39.49	76.08	113.97	37.89
5718.74	49.23	PK	336	1.8	V	39.49	88.72	119.95	31.23
5712.52	50.42	PK	93	1.7	V	39.49	89.91	103.25	13.34
11510.00	43.17	PK	219	1.7	V	17.47	60.64	83.5	22.86
11510.00	29.22	Ave.	219	1.7	V	17.47	46.69	63.5	16.81
				5795 M	Hz				
5850.95	38.86	PK	357	1.6	V	39.87	78.73	129.53	50.80
5855.70	35.71	PK	357	1.6	V	39.87	75.58	120.1	44.52
5915.52	33.62	PK	16	1.9	V	39.87	73.49	84.72	11.23
11590.00	42.74	PK	114	1.1	V	17.51	60.25	83.5	23.25
11590.00	28.31	Ave.	114	1.1	V	17.51	45.82	63.5	17.68
			;	802.11a	c80				
				5775 M	Hz				
5688.38	43.11	PK	265	2.4	V	39.49	82.60	106.1	23.50
5716.59	48.64	PK	265	2.4	V	39.49	88.13	119.35	31.22
5724.30	49.38	PK	86	1.6	V	39.49	88.87	130.1	41.23
5850.35	46.04	PK	10	1.9	V	39.87	85.91	130.9	44.99
5855.56	43.29	PK	245	1.3	V	39.87	83.16	120.14	36.98
5875.68	36.89	PK	245	1.3	V	39.87	76.76	114.2	37.44
11550.00	42.11	PK	97	2.2	V	17.51	59.62	83.5	23.88
11550.00	29.58	Ave.	97	2.2	V	17.51	47.09	63.5	16.41

FCC Part 15.407 Page 37 of 136

## 2.4G Wi-Fi (802.11b mode, 2412MHz) & 5G Wi-Fi (802.11a mode, 5180MHz) simultaneous transmission:

Frequency (MHz) Reading (dBµV) PK/QP/A		eceiver	Turntable	Rx Antenna		Corrected	Corrected	Limit	Margin
		PK/QP/Ave.	Degree	Height (m)	Polar (H/V)	Factor (dB/m)	Amplitude (dBμV/m)	(dBµV/m)	(dB)
727.66	40.32	QP	54	1.8	Н	-0.7	39.62	46	6.38
727.66	38.03	QP	88	2.3	V	-0.7	37.33	46	8.67
2590.00	60.60	PK	196	1.9	Н	0.04	60.64	74	13.36
2590.00	29.16	Ave.	196	1.9	Н	0.04	29.20	54	24.80
4413.00	64.23	PK	56	2.0	Н	4.56	68.79	74	5.21
4413.00	35.87	Ave.	56	2.0	Н	4.56	40.43	54	13.57
4824.00	44.02	PK	39	2.1	Н	5.40	49.42	74	24.58
4824.00	31.29	Ave.	39	2.1	Н	5.40	36.69	54	17.31
10360.00	56.23	PK	289	1.0	Н	17.42	73.65	77.7	4.05

## Note:


Corrected Amplitude = Corrected Factor + Reading Corrected Factor=Antenna factor (RX) + Cable Loss - Amplifier Factor

Margin = Limit- Corr. Amplitude


All other spurious emissions are 20 dB below the limit or are on the system noise floor level.

FCC Part 15.407 Page 38 of 136

#### Pre-scan with 802.11a 5240MHZ, for Peak Horizontal

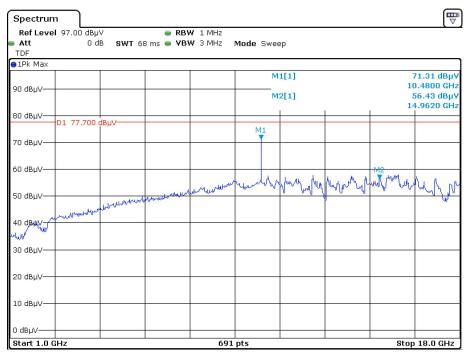


Date: 31.0CT.2019 21:18:31

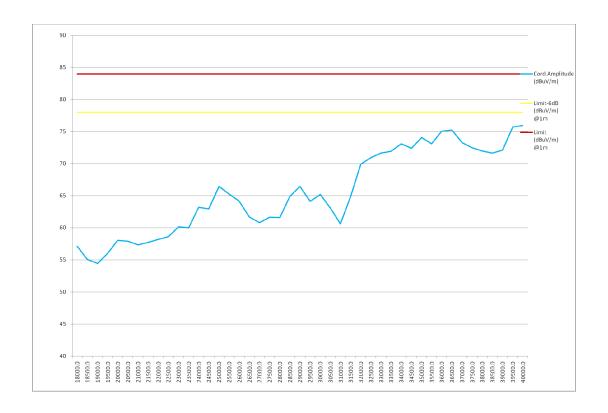


FCC Part 15.407 Page 39 of 136

## Vertical

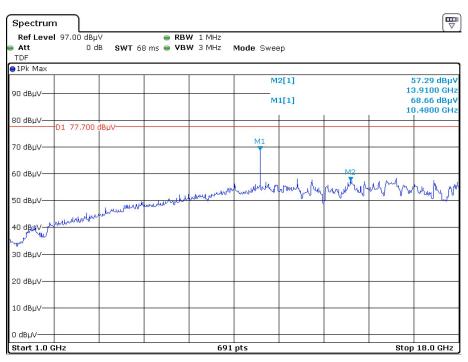


Date: 31.0CT.2019 21:26:43

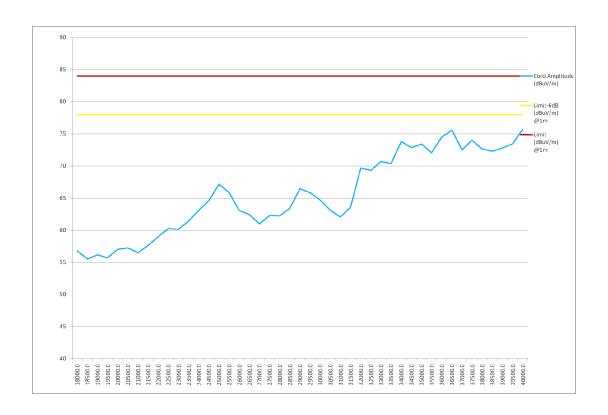


FCC Part 15.407 Page 40 of 136

# Pre-scan with 802.11a 5240MHz, for **Average** Horizontal

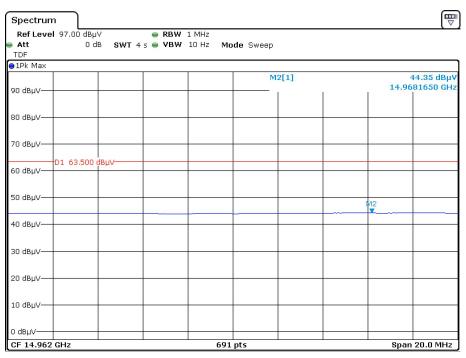


Date: 31.0CT.2019 21:22:16

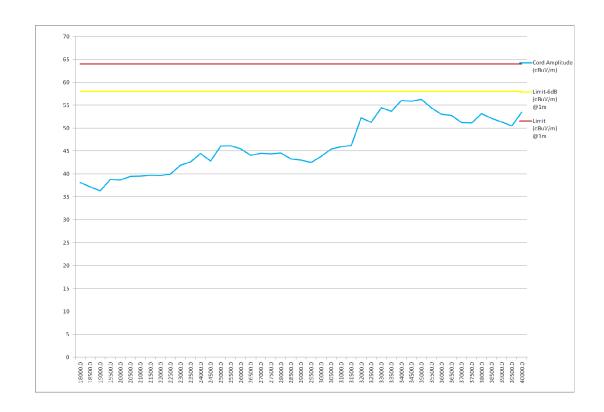


FCC Part 15.407 Page 41 of 136

#### Vertical

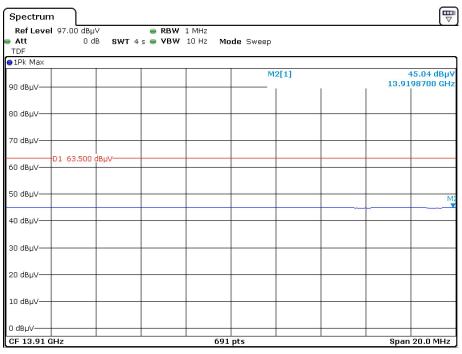

Date: 31.0CT.2019 21:31:09

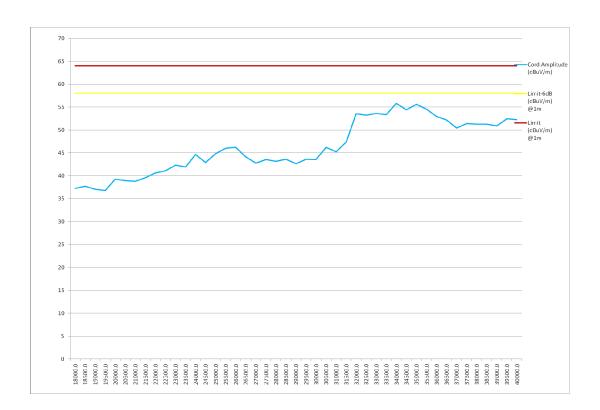

FCC Part 15.407 Page 42 of 136

## FCC §15.407(a) (1) (5), (e) – 26 dB & 6dB EMISSION BANDWIDTH

#### **Applicable Standard**

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Report No.: RSZ190917002-00C

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### **Test Procedure**


#### 1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times RBW$ .
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



FCC Part 15.407 Page 43 of 136

## **Test Data**

#### **Environmental Conditions**

Temperature:	25~26 ℃
Relative Humidity:	50~51 %
ATM Pressure:	101.0 kPa

The testing was performed by George Zhong from 2019-10-16 to 2019-10-31.

Report No.: RSZ190917002-00C

EUT operation mode: Transmitting

For Antenna 0:


Test Result: Pass; please refer to the following tables and plots.

## 5120 MHz - 5250 MHz:

Frequency (MHz)	26dB bandwidth (MHz)	99% Bandwidth (MHz)	Remark				
	802.11a						
5180	20.12	16.60					
5200	20.18	16.54					
5240	20.14	16.54					
	802.11n20						
5180	20.45	17.63					
5200	20.46	17.69					
5240	20.45	17.63					
	802.11n40						
5190	45.15	36.41	No transmitted signal in the 99% bandwidth extends into				
5230	41.69	36.41	the U-NII-2A band				
	802.11ac20						
5180	27.13	17.88					
5200	27.99	17.82					
5240	25.45	17.82					
	802.11ac40						
5190	73.15	40.90					
5230	76.15	40.90					
	802.11ac80						
5210	82.10	75.38					


FCC Part 15.407 Page 44 of 136

## 802.11a mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5180 MHz

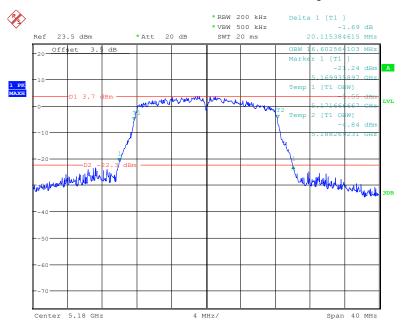

Date: 16.OCT.2019 20:42:45


## 802.11a mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5200 MHz

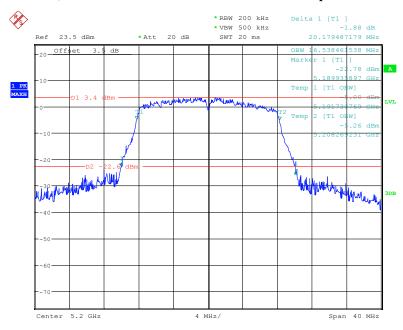

Date: 16.OCT.2019 20:44:13


FCC Part 15.407 Page 45 of 136

## 802.11a mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5240 MHz

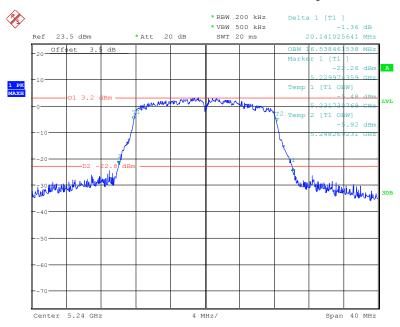

Date: 16.OCT.2019 20:45:08


# 802.11n20 mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5180 MHz

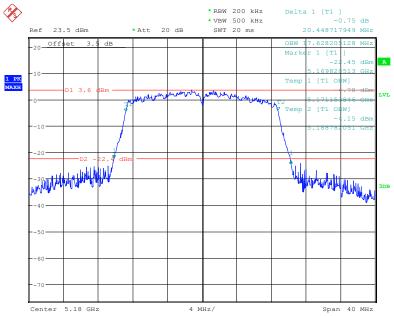

Date: 16.OCT.2019 20:46:28


FCC Part 15.407 Page 46 of 136

802.11n20 mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5200 MHz

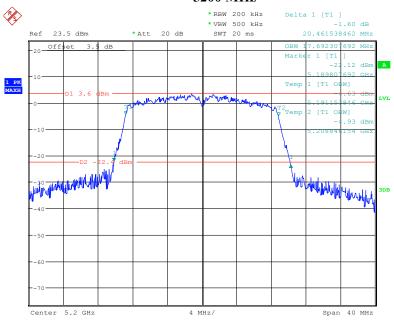

Date: 16.OCT.2019 20:47:28


# 802.11n20 mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5240 MHz

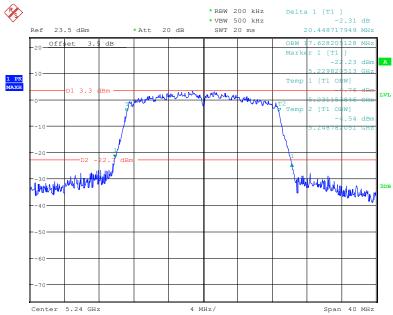

Date: 16.OCT.2019 20:48:51


FCC Part 15.407 Page 47 of 136

802.11n40 mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5190 MHz

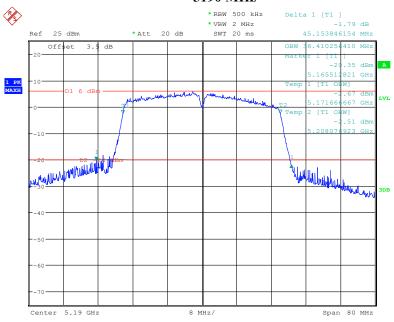

Date: 16.0CT.2019 21:12:06


# 802.11n40 mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5230 MHz

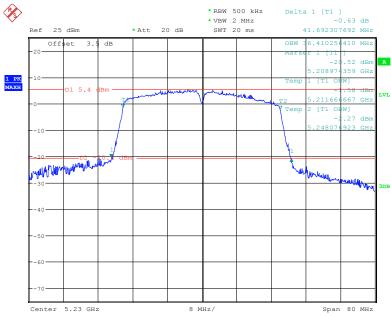

Date: 16.OCT.2019 21:10:40


FCC Part 15.407 Page 48 of 136

# 802.11ac20 mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5180 MHz

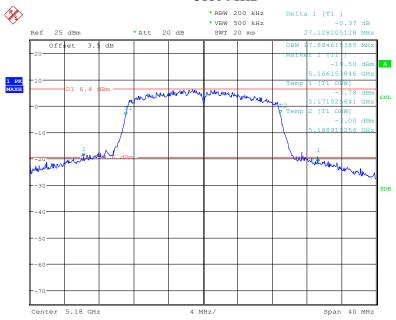

Date: 16.OCT.2019 20:52:05


# 802.11ac20 mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5200 MHz

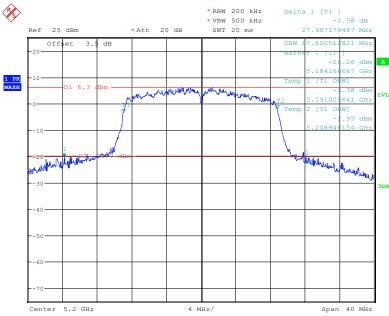

Date: 16.OCT.2019 20:53:31


FCC Part 15.407 Page 49 of 136

# 802.11ac20 mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5240 MHz

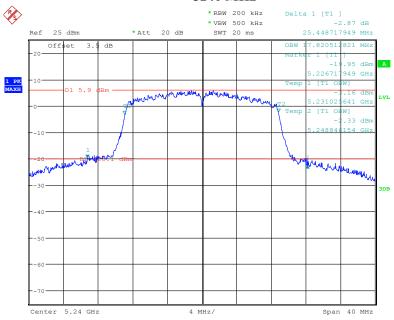

Date: 16.OCT.2019 20:55:22


# 802.11ac40 mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5190 MHz

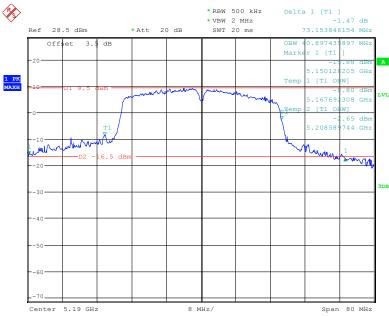

Date: 16.OCT.2019 21:14:51

FCC Part 15.407 Page 50 of 136

802.11ac40 mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5230 MHz

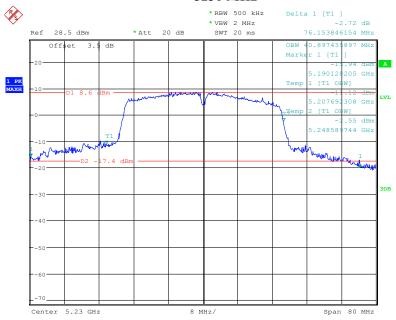

Date: 16.OCT.2019 21:16:05

# 802.11ac80 mode, 26 dB Emissions Bandwidth & 99% Occupied Bandwidth, 5210 MHz



Date: 31.OCT.2019 17:55:27


FCC Part 15.407 Page 51 of 136

## 5725 MHz – 5850 MHz:

Frequency (MHz)	6dB bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Remark		
	8	02.11a				
5745	15.18	18.27	0.5			
5785	15.17	17.95	0.5			
5825	15.21	17.50	0.5			
	80	2.11n20				
5745	15.18	18.65	0.5			
5785	15.17	18.40	0.5			
5825	15.21	18.14	0.5			
	80	2.11n40				
5755	35.26	37.18	0.5	No transmitted signal in the 99% bandwidth		
5795	35.23	36.92	0.5	extends into the U-NII- 2C band		
	802	2.11ac20		2C band		
5745	15.18	18.65	0.5			
5785	15.18	18.40	0.5			
5825	15.21	18.14	0.5			
	802.11ac40					
5755	35.28	37.31	0.5			
5795	35.23	36.92	0.5			
	802.11ac80					
5775	75.59	77.18	0.5			


FCC Part 15.407 Page 52 of 136

802.11a mode, 99% Occupied Bandwidth, 5745 MHz

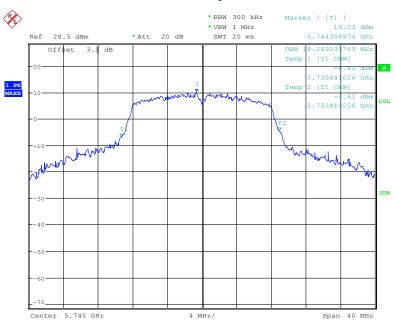

Date: 23.OCT.2019 00:21:32


## 802.11a mode, 99% Occupied Bandwidth, 5785 MHz

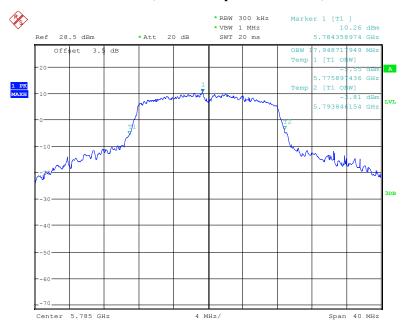

Date: 23.OCT.2019 00:23:46


FCC Part 15.407 Page 53 of 136

## 802.11a mode, 99% Occupied Bandwidth, 5825 MHz

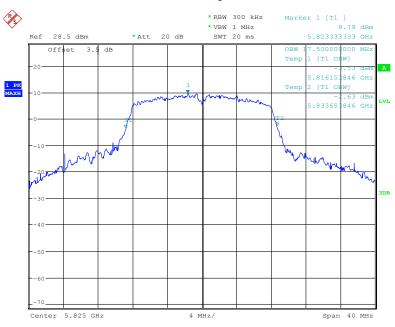

Date: 23.OCT.2019 00:25:00


## 802.11n20 mode, 99% Occupied Bandwidth, 5745 MHz

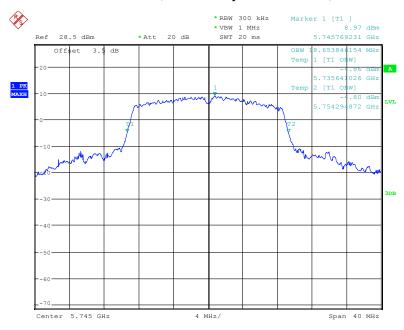

Date: 23.OCT.2019 00:22:02


FCC Part 15.407 Page 54 of 136

## 802.11n20 mode, 99% Occupied Bandwidth, 5785 MHz

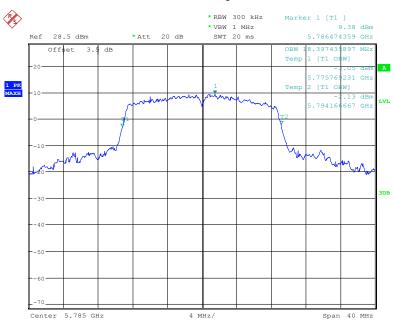

Date: 23.OCT.2019 00:23:20

## 802.11n20 mode, 99% Occupied Bandwidth, 5825 MHz

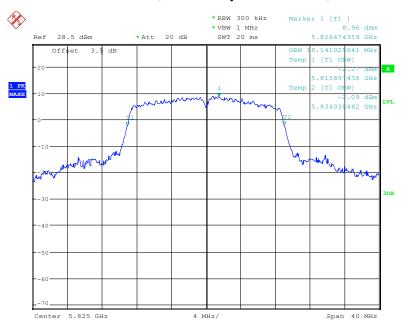


Date: 23.OCT.2019 00:25:35

FCC Part 15.407 Page 55 of 136


## 802.11n40 mode, 99% Occupied Bandwidth, 5755 MHz

Report No.: RSZ190917002-00C

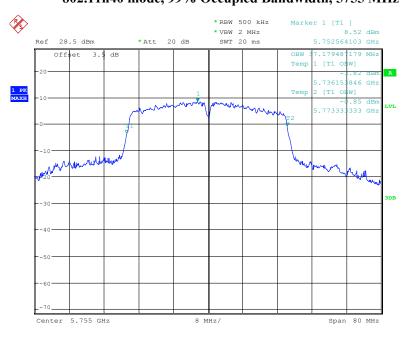

Date: 23.OCT.2019 00:18:25


## 802.11n40 mode, 99% Occupied Bandwidth, 5795 MHz

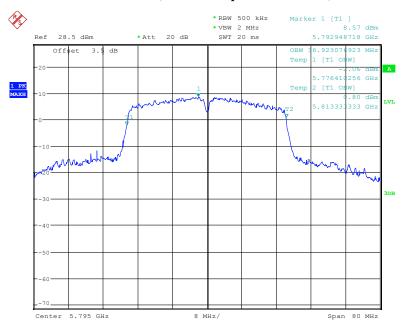

Date: 23.OCT.2019 00:20:14


FCC Part 15.407 Page 56 of 136

## 802.11ac20 mode, 99% Occupied Bandwidth, 5745 MHz

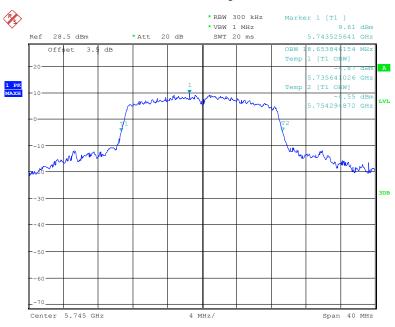

Date: 23.OCT.2019 00:22:33


## 802.11ac20 mode, 99% Occupied Bandwidth, 5785 MHz

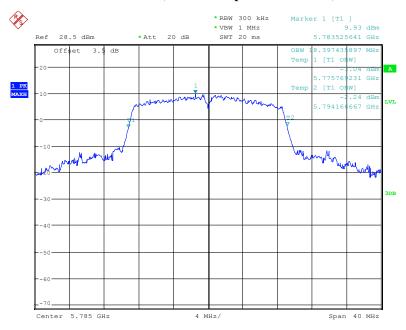

Date: 23.0CT.2019 00:22:56


FCC Part 15.407 Page 57 of 136

## 802.11ac20 mode, 99% Occupied Bandwidth, 5825 MHz

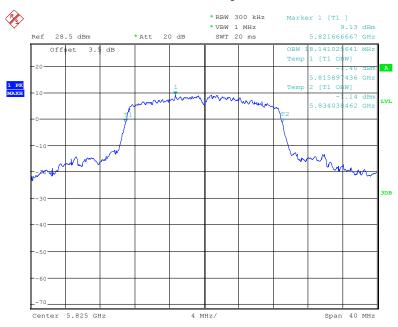

Date: 23.OCT.2019 00:26:15


## 802.11ac40 mode, 99% Occupied Bandwidth, 5755 MHz

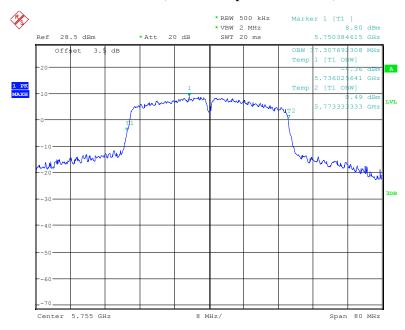

Date: 23.0CT.2019 00:18:58


FCC Part 15.407 Page 58 of 136

## 802.11ac40 mode, 99% Occupied Bandwidth, 5795 MHz

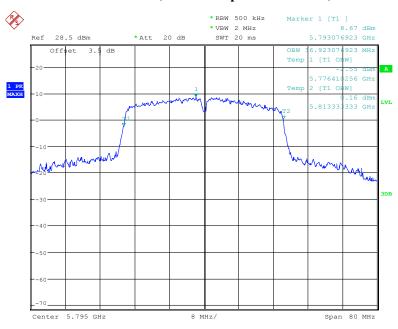

Date: 23.OCT.2019 00:19:45


## 802.11ac80 mode, 99% Occupied Bandwidth, 5775 MHz

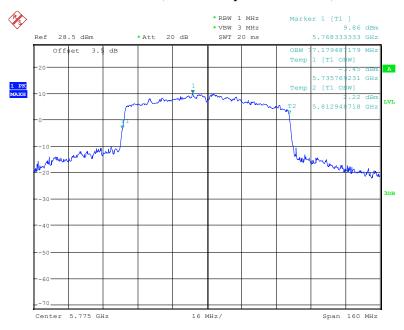

Date: 23.OCT.2019 00:11:44


FCC Part 15.407 Page 59 of 136

802.11a mode, 6 dB Emissions Bandwidth, 5745 MHz

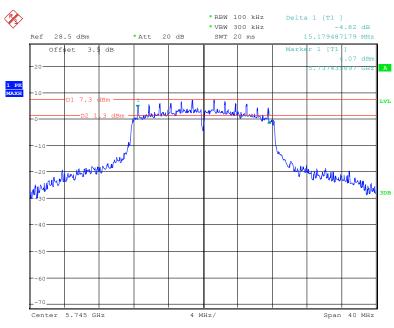

Date: 23.OCT.2019 00:35:35


802.11a mode, 6 dB Emissions Bandwidth, 5785 MHz

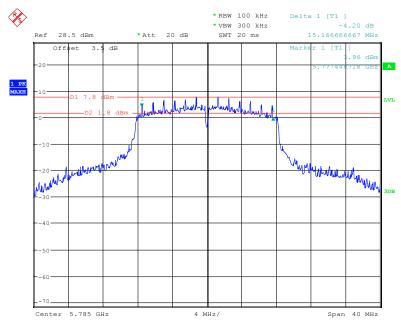

Date: 23.OCT.2019 00:31:11


FCC Part 15.407 Page 60 of 136

802.11a mode, 6 dB Emissions Bandwidth, 5825 MHz

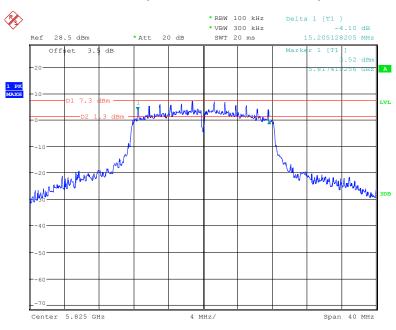

Date: 23.OCT.2019 00:29:17


#### 802.11n20 mode, 6 dB Emissions Bandwidth, 5745 MHz

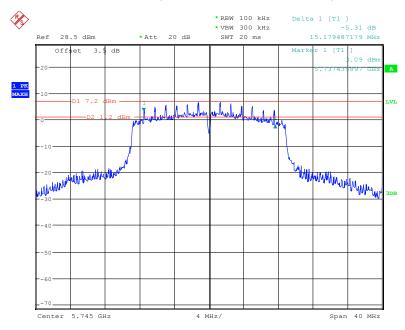

Date: 23.OCT.2019 00:34:45


FCC Part 15.407 Page 61 of 136

802.11n20 mode, 6 dB Emissions Bandwidth, 5785 MHz

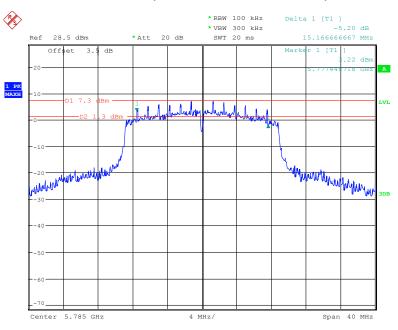

Date: 23.OCT.2019 00:32:14


802.11n20 mode, 6 dB Emissions Bandwidth, 5825 MHz

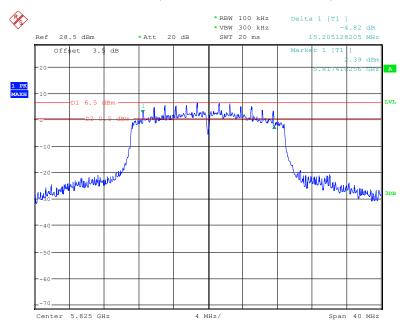

Date: 23.OCT.2019 00:28:24


FCC Part 15.407 Page 62 of 136

## 802.11n40 mode, 6 dB Emissions Bandwidth, 5755 MHz

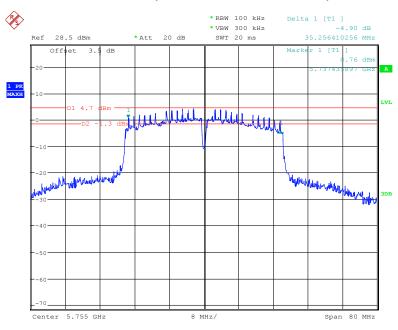

Date: 23.OCT.2019 00:17:16


#### 802.11n40 mode, 6 dB Emissions Bandwidth, 5795 MHz

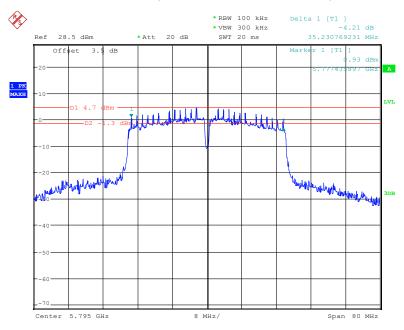

Date: 23.OCT.2019 00:16:22


FCC Part 15.407 Page 63 of 136

## 802.11ac20 mode, 6 dB Emissions Bandwidth, 5745 MHz

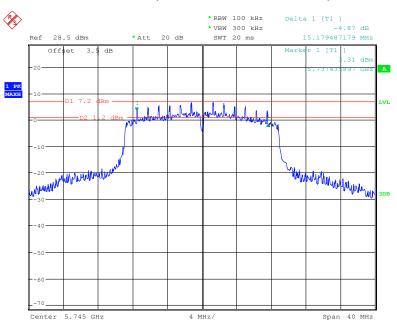

Date: 23.OCT.2019 00:34:07


#### 802.11ac20 mode, 6 dB Emissions Bandwidth, 5785 MHz

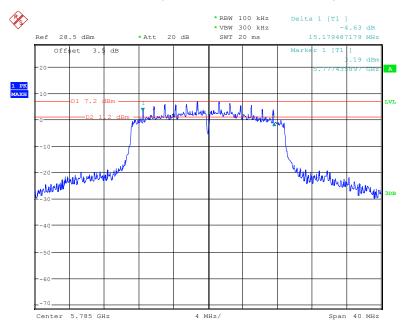

Date: 23.OCT.2019 00:33:09


FCC Part 15.407 Page 64 of 136

## 802.11ac20 mode, 6 dB Emissions Bandwidth, 5825 MHz

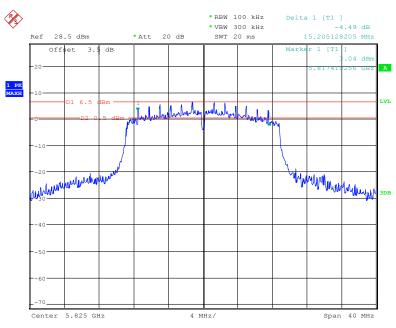

Date: 23.OCT.2019 00:27:38


#### 802.11ac40 mode, 6 dB Emissions Bandwidth, 5755 MHz

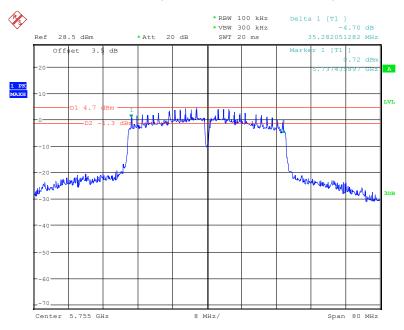

Date: 23.OCT.2019 00:15:01


FCC Part 15.407 Page 65 of 136

#### 802.11ac40 mode, 6 dB Emissions Bandwidth, 5795 MHz

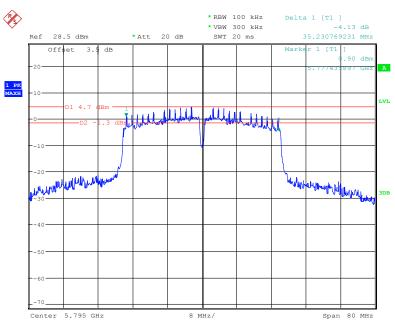

Date: 23.OCT.2019 00:15:45

#### 802.11ac80 mode, 6 dB Emissions Bandwidth, 5775 MHz

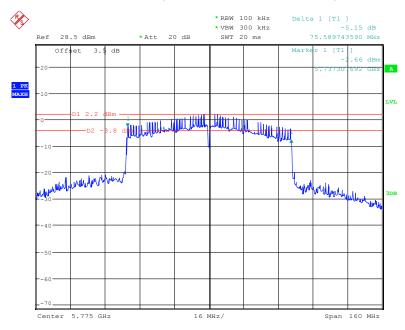

Date: 23.OCT.2019 00:13:09

FCC Part 15.407 Page 66 of 136

## FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER

Report No.: RSZ190917002-00C


#### **Applicable Standard**

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

#### **Test Procedure**

- 1. Place the EUT on a bench and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.



FCC Part 15.407 Page 67 of 136

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by George Zhong on 2019-10-17.

EUT operation mode: Transmitting

Note: According to KDB 662911 D01 v02r01, For power measurement on IEEE 802.11 devices Array Gain =0 dB(i.e., no array gain) for  $N_{Ant} \le 4$ ; So the directional gain in this chapter is 3.5dBi, it's less than 6dBi.

Report No.: RSZ190917002-00C

**Test Result:** Pass

Please refer to the following tables.

5150 MHz - 5250 MHz (this is a outdoor access point)

Frequency(MHz)	Antenna Port Average Output Power (dBm)		Total Power (dBm)	Limit (dBm)		
		802.11a	1			
	0	15.68				
5100	1	15.08	21.66			
5180	2	15.72	21.66			
	3	16.03				
	0	15.83				
5200	1	15.29	21.60	20		
5200	2	15.75	21.68	30		
	3	15.74				
	0	15.96				
5240	1	15.42				
	2	15.77	21.79			
	3	15.92				

FCC Part 15.407 Page 68 of 136

Frequency(MHz)	Antenna Port	Average Output Power (dBm)	Total Power (dBm)	Limit (dBm)		
		802.11n20				
	0	15.16				
5180	1	14.95	21.20			
3180	2	15.32	21.20			
	3	15.27				
	0	15.02				
5200	1	14.85	21.18	30		
3200	2	15.43	21.10	30		
	3	15.32				
	0	15.68				
5240	1	15.23	21.55			
3240	2	15.62	21.33			
	3	15.58				
		802.11n40				
	0	11.24				
5190	1	10.90	17.25			
3190	2	11.28	17.23			
	3	11.47		30		
	0	16.78		30		
5230	1	16.04	16.04 22.71			
3230	2	17.02	22.71			
	3	16.85				
		802.11ac20				
	0	15.02				
5180	1	14.95	21.17			
3100	2	15.28	21.17			
	3	15.33				
	0	14.92				
5200	1	15.18	21.20	20		
5200	2	15.56	21.30	30		
	3	15.42				
	0	15.23				
5240	1	15.55	21.51			
5240	2	15.64	21.51			
	3	15.53				

FCC Part 15.407 Page 69 of 136

Frequency(MHz)	Antenna Port	Average Output Power (dBm)	Total Power (dBm)	Limit (dBm)	
		802.11ac	40		
	0	10.76			
5190	1	10.13	16.69		
3190	2	10.57	10.09	20	
	3	11.14			
	0	16.58		30	
5230	1	15.87	22.43		
3230	2	16.82	22.43		
	3	16.32			
		802.11ac8	80		
	0	7.56		20	
5210	1	7.49	13.43		
3210	2	7.43	13.43	30	
	3	7.16			

FCC Part 15.407 Page 70 of 136

## Maximum EIRP at any elevation angle above 30 degress:

Frequency (MHz)	Antenna Port	Average Output Power (dBm)	Total Power (dBm)	Elevation angle above 30° Max Gain (dBi)	Elevation angle above 30° Max EIRP (dBm)	Limit (dBm)
			802.11a		_	_
	0	15.68				
5180	1	15.08	21.66	-2.2	19.46	
3180	2	15.72	21.00	-2.2	19.40	
	3	16.03				
	0	15.83		-2.2		
5200	1	15.29	21.60		19.48	21
3200	2	15.75	21.68		19.40	
	3 15.74					
	0	15.96			19.59	
5240	1	15.42	21.79	-2.2		
3240	2	15.77				
	3	15.92				
			802.11n20	)		
	0	15.16	21.20	-2.2	19.00	21
5180	1	14.95				
3180	2	15.32	21.20			
	3	15.27				
	0	15.02				
5200	1	14.85	21.18	-2.2	10.00	
3200	2	15.43	21.10	-2.2	18.98	
	3	15.32				
	0	15.68				
5240	1	15.23	21.55	-2.2	19.35	
3240	2	15.62	21.33	-2.2		
	3	15.58				

FCC Part 15.407 Page 71 of 136

Frequency (MHz)	Antenna Port	Average Output Power (dBm)	Total Power (dBm)	Elevation angle above 30° Max Gain (dBi)	Elevation angle above 30° Max EIRP (dBm)	Limit (dBm)
			802.11n40			
	0	11.24				
5190	1	10.90	17.25	-2.2	15.05	
	2	11.28	17.23	-2.2	13.03	
	3	11.47				21
	0	16.78				<u> </u>
5230	1	16.04	22.71	-2.2	20.51	
3230	2	17.02	22.71	2.2	20.31	
	3	16.85				
	1		802.11ac20	T	<u> </u>	
	0	15.02	21.17			21
5180	1	14.95		-2.2	18.97	
2100	2	15.28				
	3	15.33				
	0	14.92	21.30	-2.2		
5200	1	15.18			19.10	
0200	2	15.56				
	3	15.42				
	0	15.23	=	-2.2	19.31	
5240	1	15.55	21.51			
02.0	2	15.64				
	3	15.53				
	T		802.11ac40	T		
	0	10.76	-		14.49	21
5190	1	10.13	16.69	-2.2		
0 - 2 0	2	10.57				
	3	11.14				
	0	16.58	-			
5230	1	15.87	22.43	-2.2	20.23	
5 = 5 3	2	16.82			20.23	
	3	16.32				
	i	_	802.11ac80	<del> </del>	<u> </u>	
	0	7.56	_			
5210	1	7.49	13.43	-2.2	11.23	21
	2	7.43				21
	3	7.16				

FCC Part 15.407 Page 72 of 136

### 5725 MHz - 5850 MHz:

Frequency(MHz)	Antenna Port	Average Output Power (dBm)	Total Power (dBm)	Limit (dBm)
		802.11a		
	0	17.69		
	1	17.33	22.44	
5745	2	17.28	23.44	
	3	17.36		
	0	17.21		
5705	1	17.86	22.50	20
5785	2	17.43	23.50	30
	3	17.40		
	0	16.93		
5025	1	16.46	22.65	
5825	2	16.51	22.65	
	3	16.59		
		802.11n2	0	
	0	16.44		30
5745	1	16.17	22.51	
3/43	2	16.88		
	3	16.44		
	0	16.16		
5785	1	16.28	22.40	
3763	2	16.69	22.40	
	3	16.37		
	0	15.93		
5825	1	15.47	21.70	
3623	2	15.46		
	3	15.83		
		802.11n4	0	
	0	15.24		
5755	1	15.65	21.33	
3133	2	15.10		
	3	15.23		30
	0	15.16	21.21	50
5795	1	15.46		
5/95	2	15.02		
	3	15.12		

FCC Part 15.407 Page 73 of 136

Frequency(MHz)	Antenna Port	Average Output Power (dBm)	Total Power (dBm)	Limit (dBm)			
	802.11ac20						
	0	14.73					
5745	1	14.63	20.58				
3/43	2	14.51	20.38				
	3	14.37					
	0	14.30					
5705	1	14.58	20.52	20			
5785	2	14.65	20.53	30			
	3	14.48					
	0	14.05	20.01				
5025	1	13.91					
5825	2	13.67					
	3	14.32					
		802.11ac40	)				
	0	13.22	19.57				
5755	1	13.85		30			
5755	2	13.36					
	3	13.72					
	0	13.06	19.53				
5705	1	13.72					
5795	2	13.54					
	3	13.69					
802.11ac80							
	0	13.22	19.83 30				
5775	1	14.50		20			
5775	2	13.67		30			
	3	13.75					

FCC Part 15.407 Page 74 of 136

# FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY

#### **Applicable Standard**

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

Report No.: RSZ190917002-00C

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

#### **Test Procedure**

For devices operating in the bands 5.15-5.25 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $\widetilde{RBW} \ge 1/T$ , where T is defined in section II.B.l.a).
- b) Set VBW  $\geq$  3 RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10 log (500 kHz/RBW) to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add 10 log (1MHz/RBW) to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

FCC Part 15.407 Page 75 of 136

## **Test Data**

### **Environmental Conditions**

Temperature:	25~26 ℃	
Relative Humidity:	50~51 %	
ATM Pressure:	101.0 kPa	

The testing was performed by George Zhong from 2019-10-12 to 2019-10-22.

Report No.: RSZ190917002-00C

EUT operation mode: Transmitting

**Test Result:** Pass

Please refer to the following tables and plots.

FCC Part 15.407 Page 76 of 136

## 5150 MHz – 5250 MHz (this is a outdoor access point):

Note: directional gain=array gain+Ant gain=10\*log(Nant/Nss)+3.5 dBi=9.5 dBi Limit<sub>psd</sub>=17-(directional gain-6) dBm/MHz=13.5 dBm/MHz


Frequency (MHz)	Antenna Port	Power Spectral Density (dBm/MHz)	Total Power Spectral (dBm/MHz)	Limit (dBm/MHz)
		802.11a	l	
	0	7.13		
<b>51</b> 00	1	6.08	12.14	
5180	2	7.57	13.14	
	3	7.52		
	0	7.09		
5200	1	6.23	12.14	12.5
5200	2	7.51	13.14	13.5
	3	7.51		
	0	7.18		
5240	1	6.84	12.16	
5240	2	6.91	13.16	
	3	7.57		
	•	802.11n2	20	
	0	6.62		13.5
5100	1	5.53	12.61	
5180	2	7.00		
	3	7.06		
	0	6.68		
5200	1	5.52	12.53	
5200	2	7.02		
	3	6.68		
	0	6.71		
5240	1	6.22	12.79	
5240	2	7.03		
	3	7.05		
	•	802.11n4	40	
	0	0.39	6.29	
5100	1	-0.33		
5190	2	0.51		
	3	0.44		12.5
	0	5.55	11.52	13.5
5220	1	5.28		
5230	2	6.16		
	3	4.92		

FCC Part 15.407 Page 77 of 136

Frequency (MHz)	Antenna Port	Power Spectral Density (dBm/MHz)	Total Power Spectral (dBm/MHz)	Limit (dBm/MHz)	
802.11ac20					
	0	6.38			
5180	1	5.48	12.55		
3180	2	7.14	12.33		
	3	6.93			
	0	6.58			
5200	1	5.39	12.50	13.5	
3200	2	7.06	12.30	13.3	
	3	6.70			
	0	6.62			
5240	1	5.97	12.63		
5240	2	6.79			
	3	6.98			
		802.11ac4	0		
	0	0.01	5.90		
5190	1	-0.70		13.5	
3190	2	0.04			
	3	0.13			
	0	5.46	11.46		
5230	1	5.14			
3230	2	6.00			
	3	5.08			
802.11ac80					
	0	-5.31	0.78 13.5		
5210	1	-5.71		12.5	
3210	2	-4.98		13.3	
	3	-5.02			


FCC Part 15.407 Page 78 of 136

Antenna 0 802.11a mode, Power Spectral Density, 5180 MHz

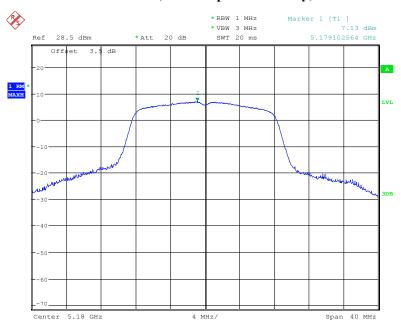

Date: 21.0CT.2019 22:58:33


### 802.11a mode, Power Spectral Density, 5200 MHz

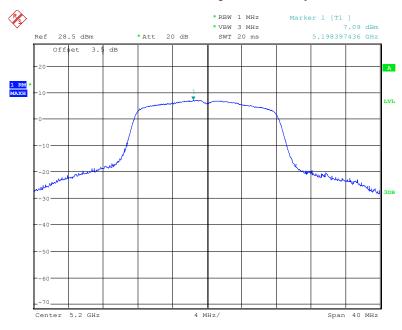

Date: 21.0CT.2019 22:58:00


FCC Part 15.407 Page 79 of 136

### 802.11a mode, Power Spectral Density, 5240 MHz

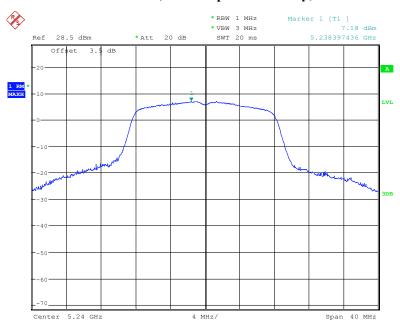

Date: 21.0CT.2019 22:57:17


### 802.11n20 mode, Power Spectral Density, 5180 MHz

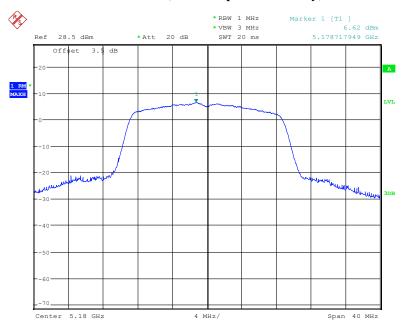

Date: 21.OCT.2019 22:55:39


FCC Part 15.407 Page 80 of 136

## 802.11n20 mode, Power Spectral Density, 5200 MHz

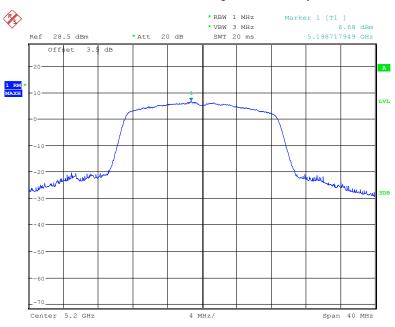

Date: 21.OCT.2019 22:56:12


### 802.11n20 mode, Power Spectral Density, 5240 MHz

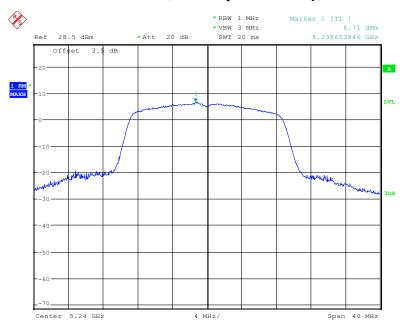

Date: 21.OCT.2019 22:56:40


FCC Part 15.407 Page 81 of 136

## 802.11n40 mode, Power Spectral Density, 5190 MHz

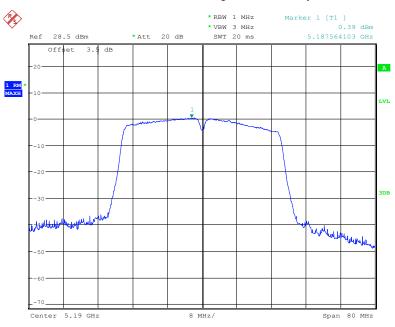

Date: 22.OCT.2019 23:29:51


### 802.11n40 mode, Power Spectral Density, 5230 MHz

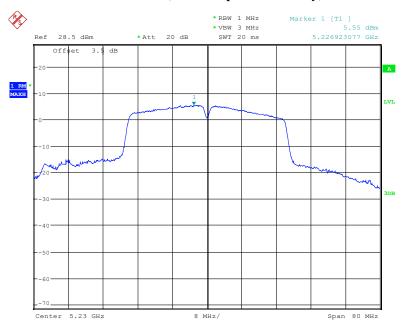

Date: 21.0CT.2019 23:00:31


FCC Part 15.407 Page 82 of 136

## 802.11ac20 mode, Power Spectral Density, 5180 MHz

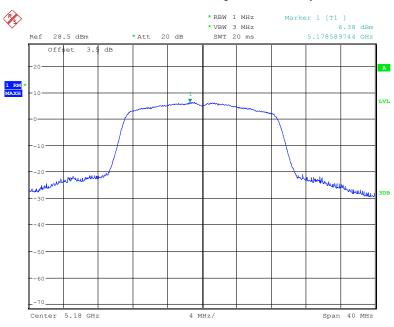

Date: 21.OCT.2019 22:54:56


### 802. 11ac20 mode, Power Spectral Density, 5200 MHz

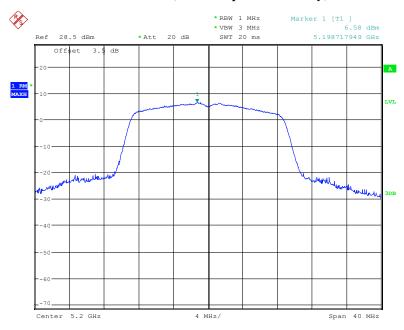

Date: 21.OCT.2019 22:54:23


FCC Part 15.407 Page 83 of 136

802. 11ac20 mode, Power Spectral Density, 5240 MHz

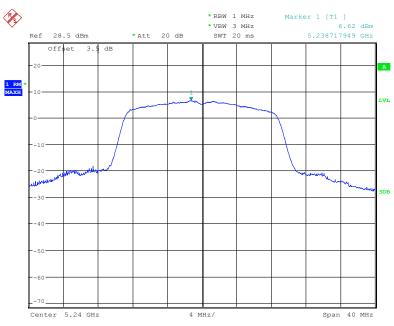

Date: 21.OCT.2019 22:53:24


### 802. 11ac40 mode, Power Spectral Density, 5190 MHz

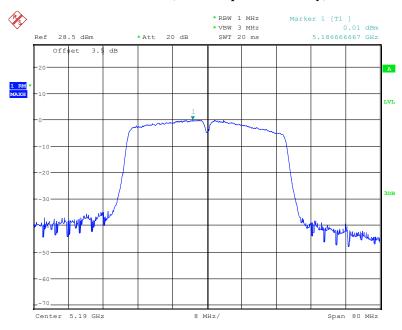

Date: 22.OCT.2019 23:42:08


FCC Part 15.407 Page 84 of 136

## 802. 11ac40 mode, Power Spectral Density, 5230 MHz

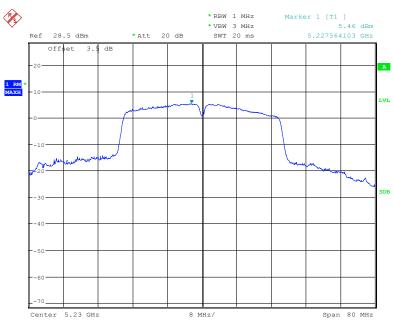

Date: 21.0CT.2019 23:01:00


### 802. 11ac80 mode, Power Spectral Density, 5210 MHz

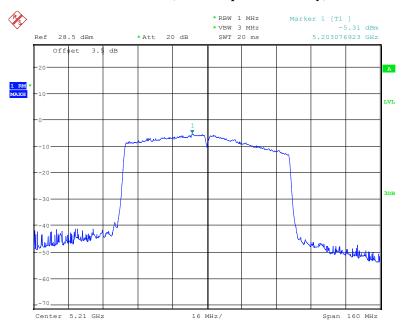

Date: 22.0CT.2019 23:50:43


FCC Part 15.407 Page 85 of 136

Antenna 1 802.11a mode, Power Spectral Density, 5180 MHz

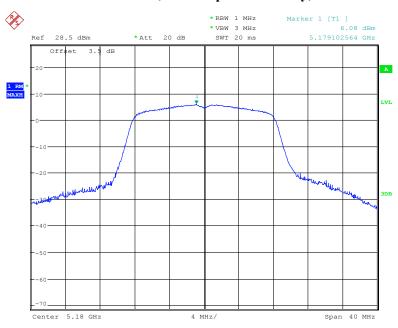

Date: 21.0CT.2019 23:14:31


### 802.11a mode, Power Spectral Density, 5200 MHz

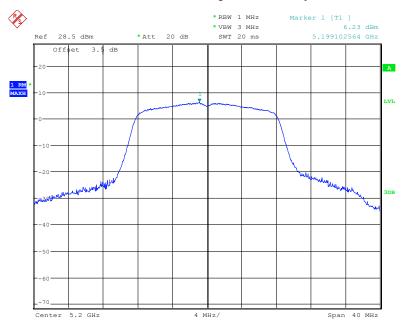

Date: 21.OCT.2019 23:14:59


FCC Part 15.407 Page 86 of 136

## 802.11a mode, Power Spectral Density, 5240 MHz

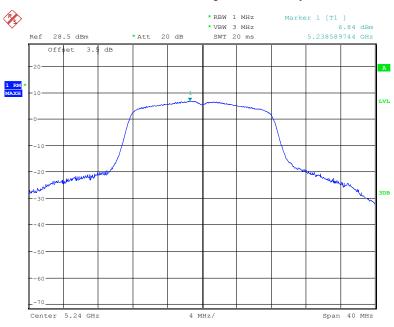

Date: 21.0CT.2019 23:16:16


### 802.11n20 mode, Power Spectral Density, 5180 MHz

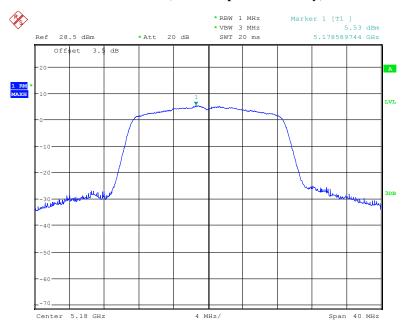

Date: 21.OCT.2019 23:13:54


FCC Part 15.407 Page 87 of 136

## 802.11n20 mode, Power Spectral Density, 5200 MHz

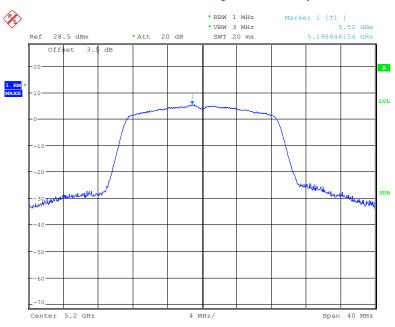

Date: 21.0CT.2019 23:13:14


### 802.11n20 mode, Power Spectral Density, 5240 MHz

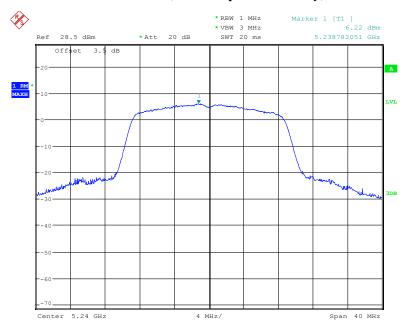

Date: 21.OCT.2019 23:12:16


FCC Part 15.407 Page 88 of 136

### 802.11n40 mode, Power Spectral Density, 5190 MHz

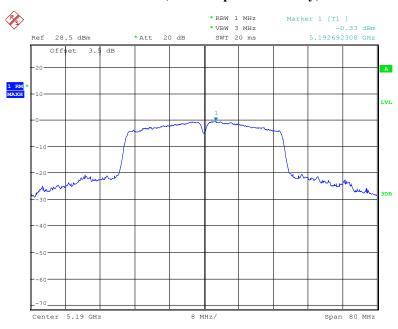

Date: 22.OCT.2019 23:28:54


### 802.11n40 mode, Power Spectral Density, 5230 MHz

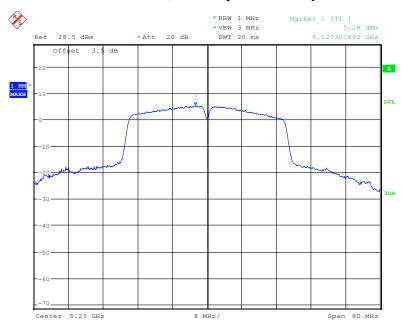

Date: 21.0CT.2019 23:04:47


FCC Part 15.407 Page 89 of 136

## 802.11ac20 mode, Power Spectral Density, 5180 MHz

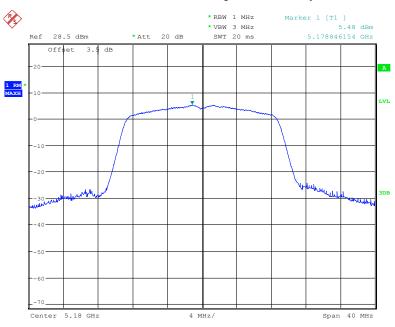

Date: 21.0CT.2019 23:08:23


### 802. 11ac20 mode, Power Spectral Density, 5200 MHz

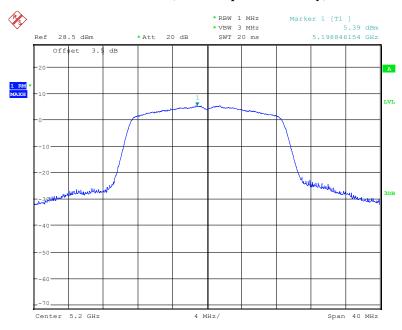

Date: 21.0CT.2019 23:09:13


FCC Part 15.407 Page 90 of 136

802. 11ac20 mode, Power Spectral Density, 5240 MHz

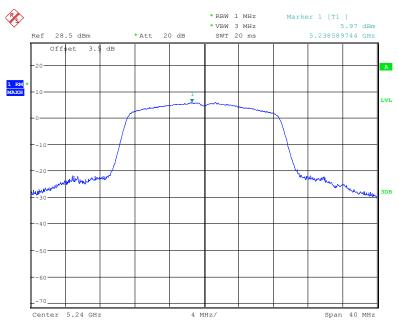

Date: 21.OCT.2019 23:09:42


### 802. 11ac40 mode, Power Spectral Density, 5190 MHz

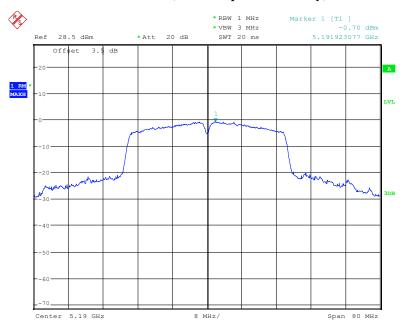

Date: 22.OCT.2019 23:41:37


FCC Part 15.407 Page 91 of 136

## 802. 11ac40 mode, Power Spectral Density, 5230 MHz

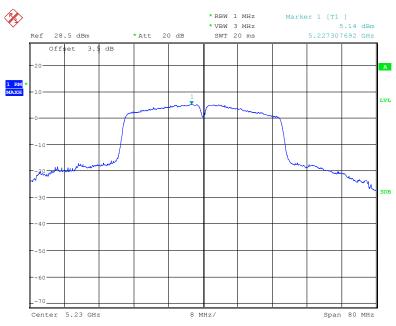

Date: 21.OCT.2019 23:04:08


### 802. 11ac80 mode, Power Spectral Density, 5210 MHz

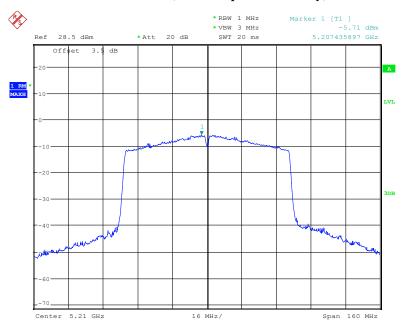

Date: 22.OCT.2019 23:51:14


FCC Part 15.407 Page 92 of 136

Antenna 2 802.11a mode, Power Spectral Density, 5180 MHz

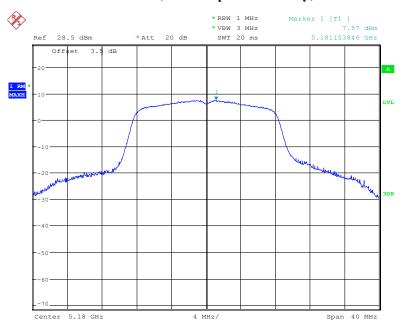

Date: 21.0CT.2019 23:20:14


### 802.11a mode, Power Spectral Density, 5200 MHz

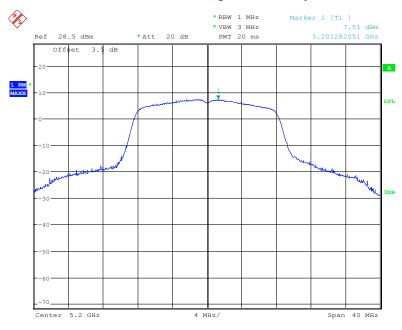

Date: 21.0CT.2019 23:19:33


FCC Part 15.407 Page 93 of 136

### 802.11a mode, Power Spectral Density, 5240 MHz

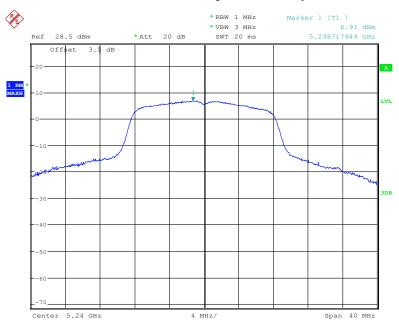

Date: 21.0CT.2019 23:18:25


### 802.11n20 mode, Power Spectral Density, 5180 MHz

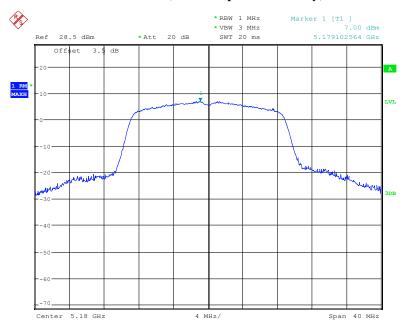

Date: 21.0CT.2019 23:21:00


FCC Part 15.407 Page 94 of 136

## 802.11n20 mode, Power Spectral Density, 5200 MHz

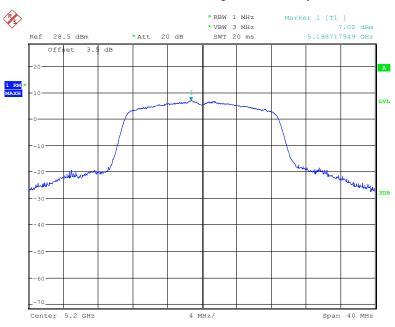

Date: 21.0CT.2019 23:21:32


### 802.11n20 mode, Power Spectral Density, 5240 MHz

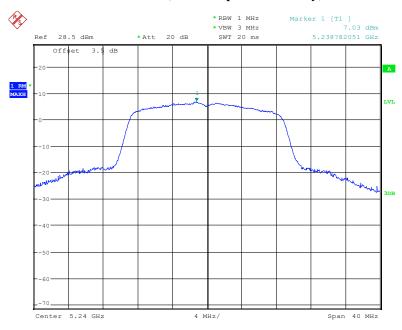

Date: 21.0CT.2019 23:22:12


FCC Part 15.407 Page 95 of 136

## 802.11n40 mode, Power Spectral Density, 5190 MHz

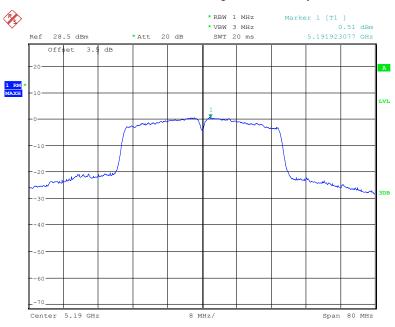

Date: 22.OCT.2019 23:39:36


### 802.11n40 mode, Power Spectral Density, 5230 MHz

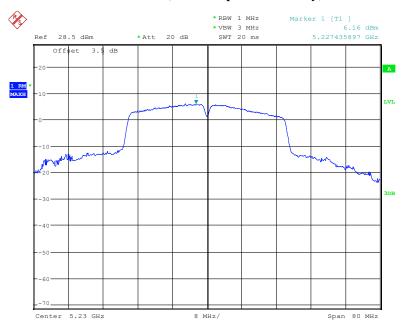

Date: 21.OCT.2019 23:25:43


FCC Part 15.407 Page 96 of 136

### 802.11ac20 mode, Power Spectral Density, 5180 MHz

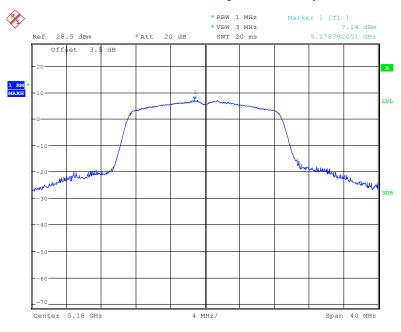

Date: 21.0CT.2019 23:23:47


### 802. 11ac20 mode, Power Spectral Density, 5200 MHz

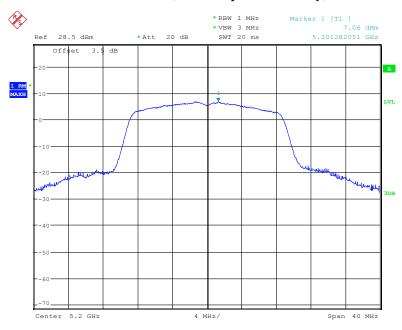

Date: 21.OCT.2019 23:23:19


FCC Part 15.407 Page 97 of 136

802. 11ac20 mode, Power Spectral Density, 5240 MHz

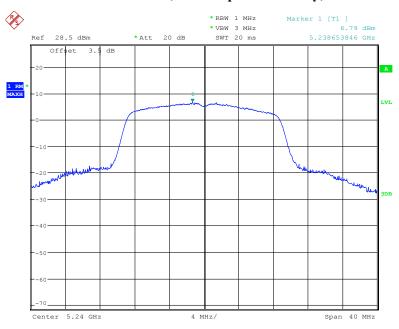

Date: 21.0CT.2019 23:22:45


### 802. 11ac40 mode, Power Spectral Density, 5190 MHz

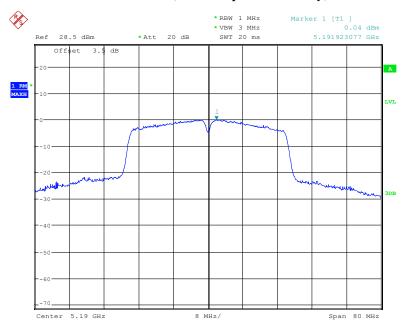

Date: 22.0CT.2019 23:40:21


FCC Part 15.407 Page 98 of 136

## 802. 11ac40 mode, Power Spectral Density, 5230 MHz

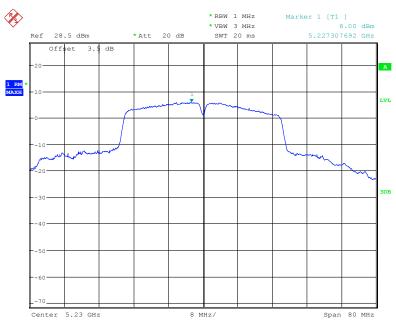

Date: 21.0CT.2019 23:25:15


### 802. 11ac80 mode, Power Spectral Density, 5210 MHz

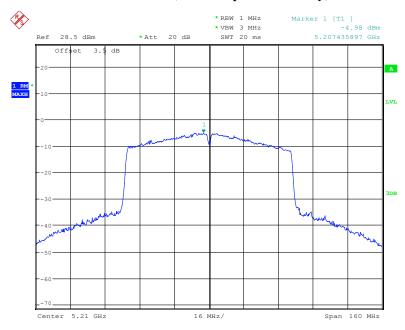

Date: 22.OCT.2019 23:51:43


FCC Part 15.407 Page 99 of 136

Antenna 3 802.11a mode, Power Spectral Density, 5180 MHz

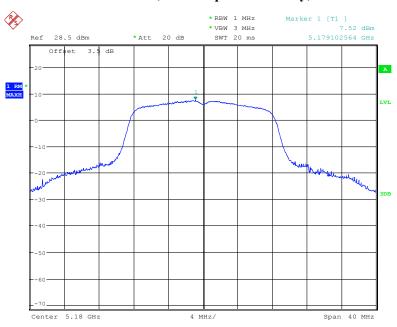

Date: 21.0CT.2019 23:39:25


### 802.11a mode, Power Spectral Density, 5200 MHz

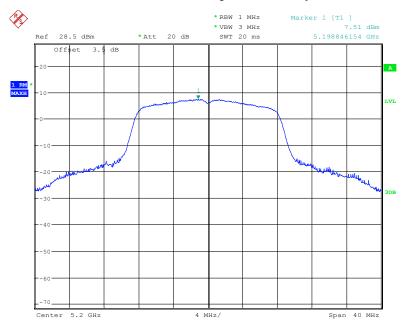

Date: 21.0CT.2019 23:39:54


FCC Part 15.407 Page 100 of 136

## 802.11a mode, Power Spectral Density, 5240 MHz

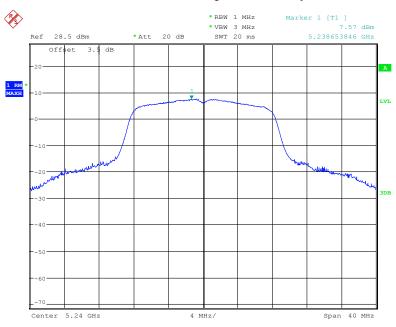

Date: 21.OCT.2019 23:40:21


### 802.11n20 mode, Power Spectral Density, 5180 MHz

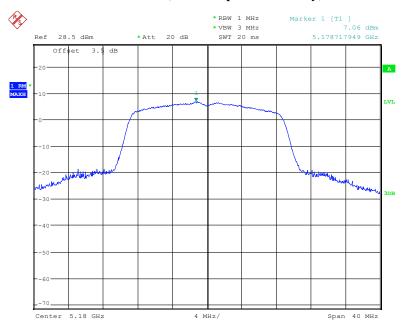

Date: 21.0CT.2019 23:36:14


FCC Part 15.407 Page 101 of 136

## 802.11n20 mode, Power Spectral Density, 5200 MHz

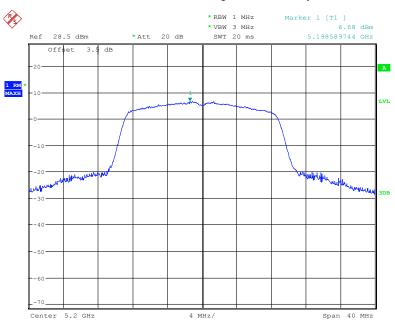

Date: 21.OCT.2019 23:36:49


### 802.11n20 mode, Power Spectral Density, 5240 MHz

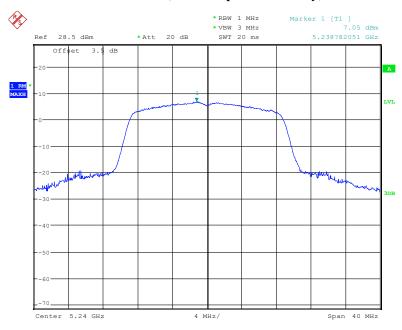

Date: 21.0CT.2019 23:37:21


FCC Part 15.407 Page 102 of 136

### 802.11n40 mode, Power Spectral Density, 5190 MHz

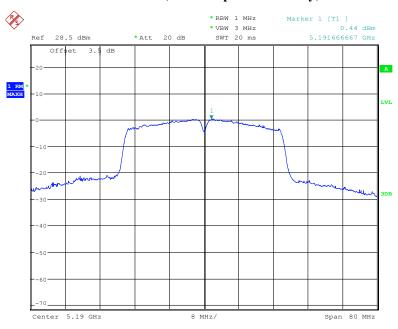

Date: 22.OCT.2019 23:28:14


### 802.11n40 mode, Power Spectral Density, 5230 MHz

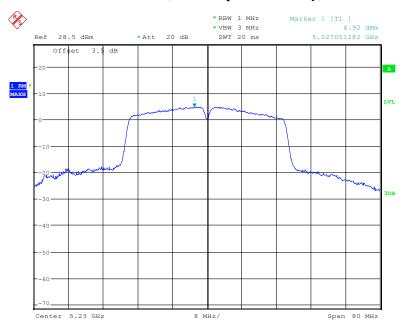

Date: 21.OCT.2019 23:34:34


FCC Part 15.407 Page 103 of 136

### 802.11ac20 mode, Power Spectral Density, 5180 MHz

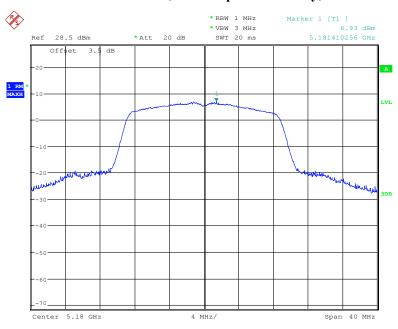

Date: 21.0CT.2019 23:38:56


### 802. 11ac20 mode, Power Spectral Density, 5200 MHz

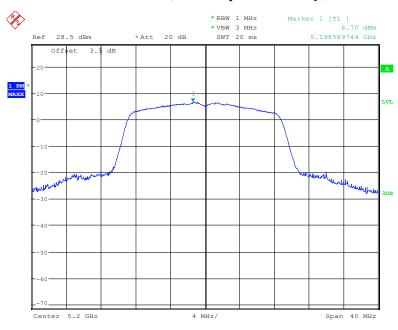

Date: 21.OCT.2019 23:38:27


FCC Part 15.407 Page 104 of 136

## 802. 11ac20 mode, Power Spectral Density, 5240 MHz

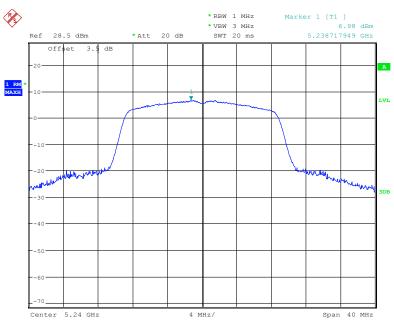

Date: 21.0CT.2019 23:37:53


### 802. 11ac40 mode, Power Spectral Density, 5190 MHz

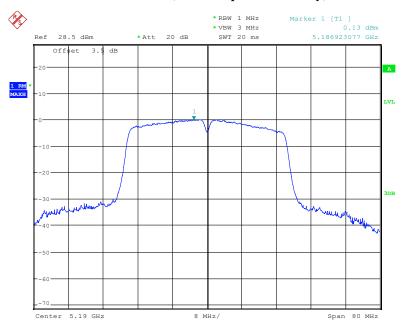

Date: 22.OCT.2019 23:41:05


FCC Part 15.407 Page 105 of 136

## 802. 11ac40 mode, Power Spectral Density, 5230 MHz

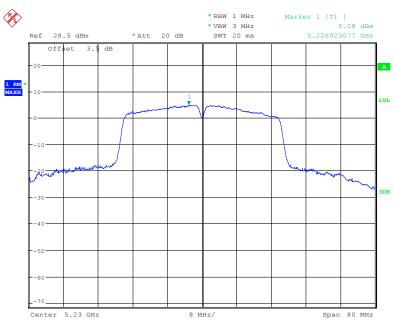

Date: 21.0CT.2019 23:33:37

### 802. 11ac80 mode, Power Spectral Density, 5210 MHz

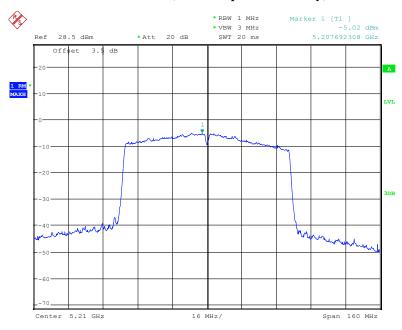

Date: 22.OCT.2019 23:52:09

FCC Part 15.407 Page 106 of 136

### 5725 MHz - 5850 MHz:

Frequency (MHz)	Antenna Port	Power Spectral Density (dBm/500kHz)	Total Power Spectral (dBm/500kHz)	Limit (dBm/500kHz)		
802.11a						
	0	7.45				
5745	1	8.60	14.02			
3743	2	8.05	14.02			
	3	7.81				
	0	7.38				
5785	1	8.50	13.98	26.5		
3763	2	7.96	13.90	20.3		
	3	7.91				
	0	7.97				
5825	1	7.73	12.00			
3823	2	7.69	13.90			
	3	8.13				
		802.11n2	20			
	0	6.83		26.5		
5745	1	7.66	13.47			
3743	2	7.60				
	3	7.65				
	0	7.10				
5785	1	7.88	13.54			
3763	2	7.57				
	3	7.50				
	0	7.45				
5825	1	7.28	13.42			
3823	2	7.17				
	3	7.69				
		802.11n4	10			
	0	4.14	10.55			
5755	1	5.00				
5755	2	4.30				
	3	4.62		26.5		
	0	4.12	10.39	26.5		
5705	1	4.82				
5795	2	4.05				
	3	4.44				


Report No.: RSZ190917002-00C

FCC Part 15.407 Page 107 of 136

Frequency (MHz)	Antenna Port	Power Spectral Density (dBm/500kHz)	Total Power Spectral (dBm/500kHz)	Limit (dBm/500kHz)	
		802.11ac2	20		
	0	7.53	14.17		
5745	1	8.95			
3743	2	7.98	14.17		
	3	8.00			
	0	7.55			
5785	1	8.52	13.91	26.5	
3/83	2	7.80	13.91	20.3	
	3	7.63			
	0	7.79	13.88		
5825	1	7.86			
3823	2	7.45			
	3	8.28			
		802.11ac	40		
	0	4.77	11.49		
5755	1	5.71		- 26.5	
3733	2	4.98			
	3	6.27			
	0	5.15	11.46		
5795	1	6.02			
3193	2	4.74			
	3	5.72			
802.11ac80					
	0	1.99	8.37 26.5		
5775	1	2.78		26.5	
5775	2	1.96		20.3	
	3	2.60			


FCC Part 15.407 Page 108 of 136

Antenna 0 802.11a mode, Power Spectral Density, 5745 MHz

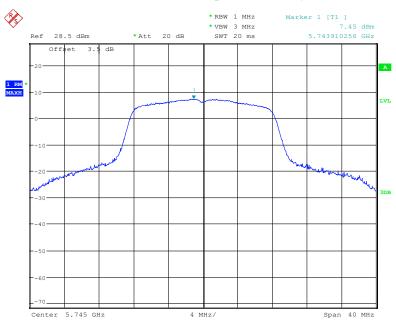

Date: 13.0CT.2019 00:09:23


802.11a mode, Power Spectral Density, 5785 MHz

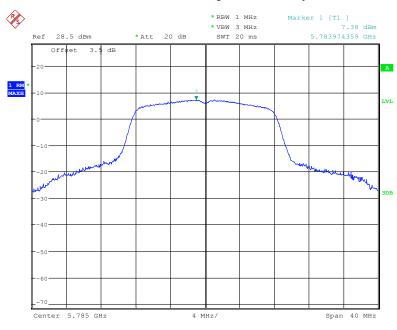

Date: 13.0CT.2019 00:09:03


FCC Part 15.407 Page 109 of 136

## 802.11a mode, Power Spectral Density, 5825 MHz

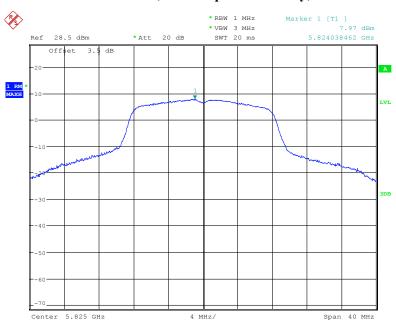

Date: 13.0CT.2019 00:08:36


## 802.11n20 mode, Power Spectral Density, 5745 MHz

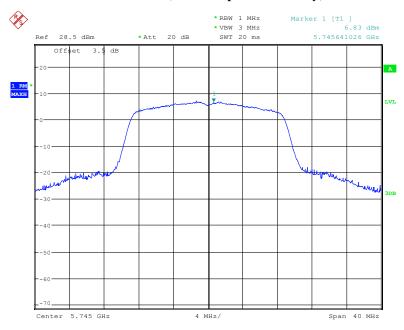

Date: 13.OCT.2019 00:09:47


FCC Part 15.407 Page 110 of 136

## 802.11n20 mode, Power Spectral Density, 5785 MHz

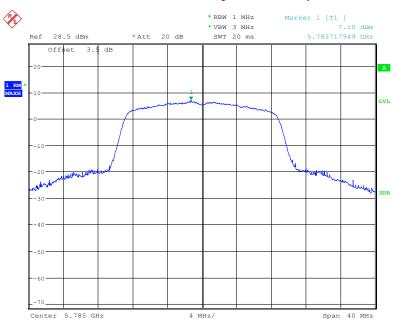

Date: 13.0CT.2019 00:10:08


## 802.11n20 mode, Power Spectral Density, 5825 MHz

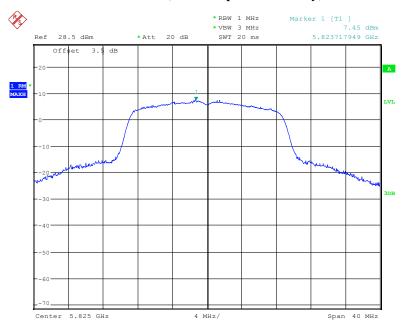

Date: 13.OCT.2019 00:10:26


FCC Part 15.407 Page 111 of 136

## 802.11n40 mode, Power Spectral Density, 5755 MHz

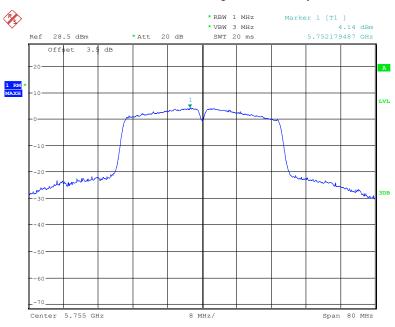

Date: 13.0CT.2019 00:13:30


## 802.11n40 mode, Power Spectral Density, 5795 MHz

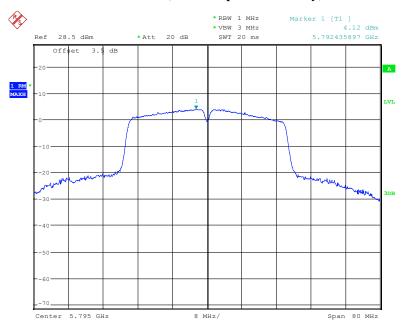

Date: 13.0CT.2019 00:13:01


FCC Part 15.407 Page 112 of 136

# 802.11ac20 mode, Power Spectral Density, 5745 MHz

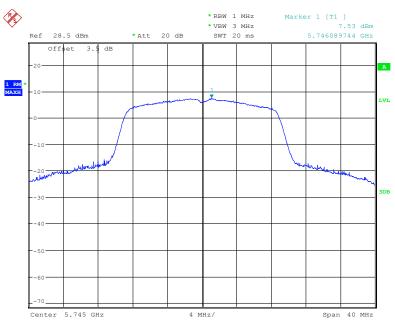

Date: 13.0CT.2019 00:11:53


## 802. 11ac20 mode, Power Spectral Density, 5785 MHz

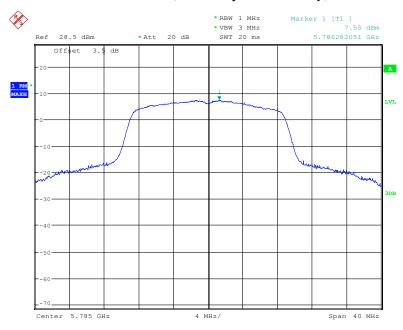

Date: 13.0CT.2019 00:11:26


FCC Part 15.407 Page 113 of 136

802. 11ac20 mode, Power Spectral Density, 5825 MHz

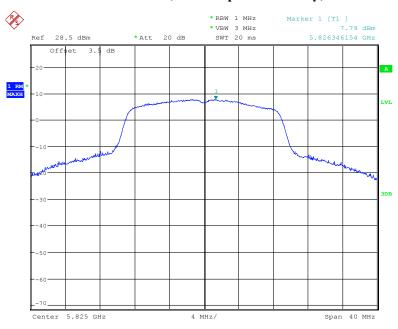

Date: 13.OCT.2019 00:10:57


## 802. 11ac40 mode, Power Spectral Density, 5755 MHz

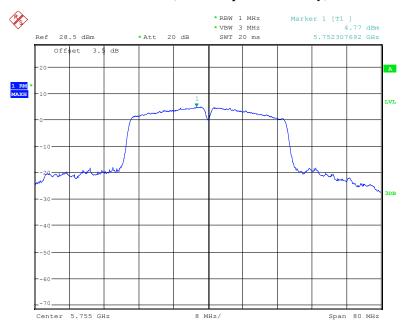

Date: 13.0CT.2019 00:12:19


FCC Part 15.407 Page 114 of 136

## 802. 11ac40 mode, Power Spectral Density, 5795 MHz

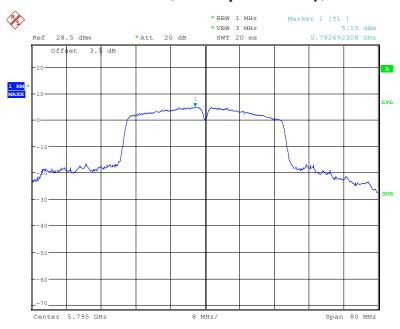

Date: 13.OCT.2019 00:12:45


## 802. 11ac80 mode, Power Spectral Density, 5775 MHz

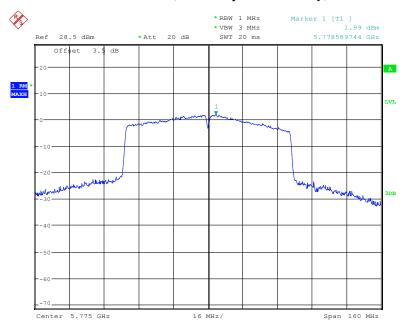

Date: 13.0CT.2019 00:14:25


FCC Part 15.407 Page 115 of 136

Antenna 1 802.11a mode, Power Spectral Density, 5745 MHz

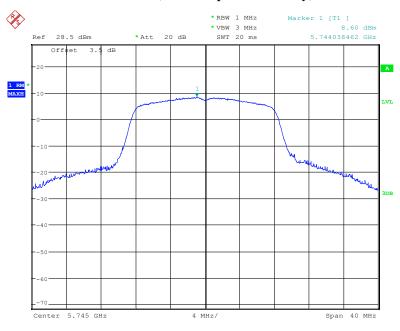

Date: 13.0CT.2019 00:05:59


802.11a mode, Power Spectral Density, 5785 MHz

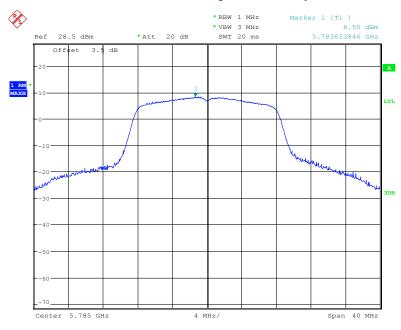

Date: 13.0CT.2019 00:06:22


FCC Part 15.407 Page 116 of 136

## 802.11a mode, Power Spectral Density, 5825 MHz

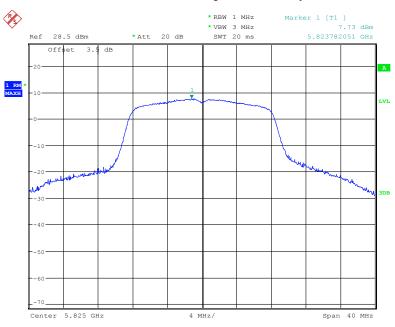

Date: 13.OCT.2019 00:06:45


## 802.11n20 mode, Power Spectral Density, 5745 MHz

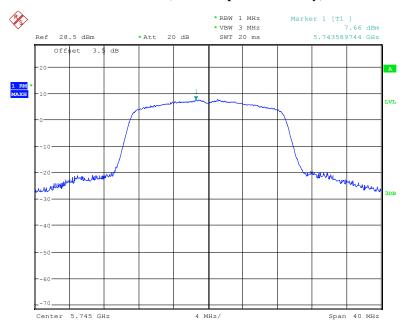

Date: 13.0CT.2019 00:03:42


FCC Part 15.407 Page 117 of 136

## 802.11n20 mode, Power Spectral Density, 5785 MHz

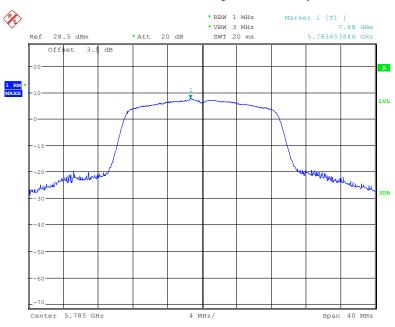

Date: 13.OCT.2019 00:04:09


## 802.11n20 mode, Power Spectral Density, 5825 MHz

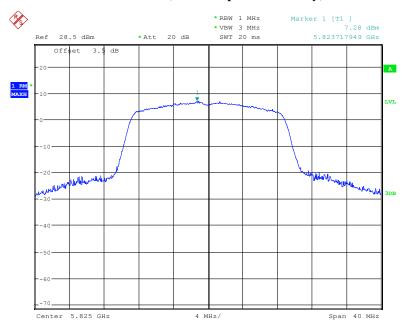

Date: 13.OCT.2019 00:04:29


FCC Part 15.407 Page 118 of 136

## 802.11n40 mode, Power Spectral Density, 5755 MHz

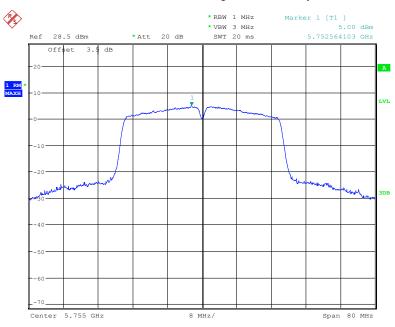

Date: 13.0CT.2019 00:02:56


## 802.11n40 mode, Power Spectral Density, 5795 MHz

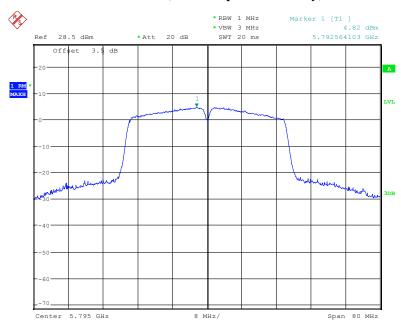

Date: 13.0CT.2019 00:02:09


FCC Part 15.407 Page 119 of 136

## 802.11ac20 mode, Power Spectral Density, 5745 MHz

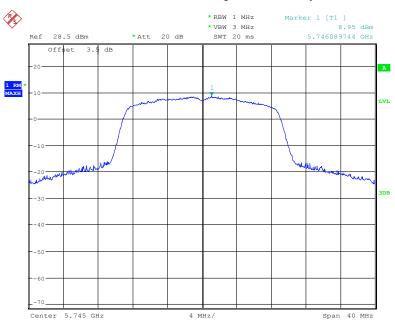

Date: 13.0CT.2019 00:05:37


## 802. 11ac20 mode, Power Spectral Density, 5785 MHz

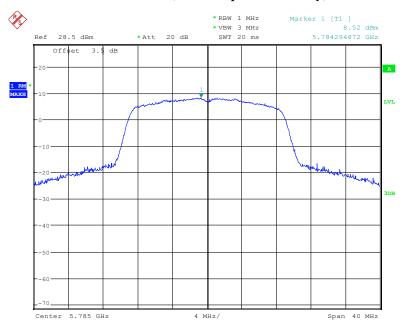

Date: 13.0CT.2019 00:05:13


FCC Part 15.407 Page 120 of 136

802. 11ac20 mode, Power Spectral Density, 5825 MHz

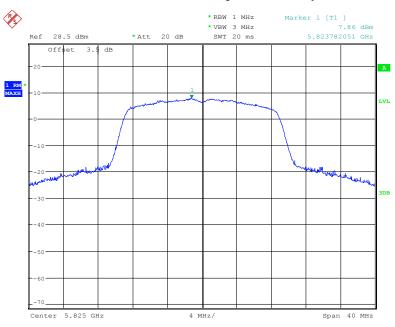

Date: 13.OCT.2019 00:04:48


802. 11ac40 mode, Power Spectral Density, 5755 MHz

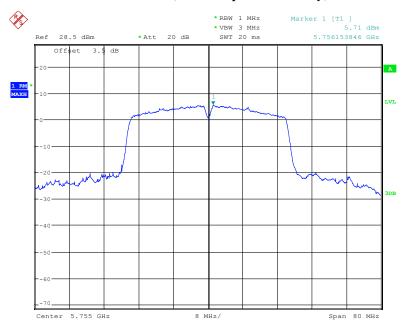

Date: 13.0CT.2019 00:01:15


FCC Part 15.407 Page 121 of 136

802. 11ac40 mode, Power Spectral Density, 5795 MHz

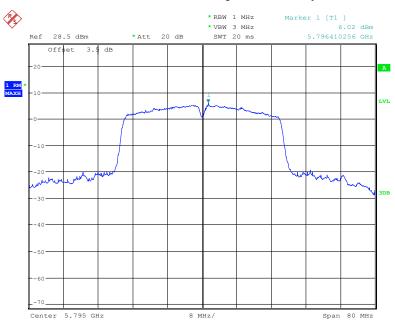

Date: 13.OCT.2019 00:01:45


## 802. 11ac80 mode, Power Spectral Density, 5775 MHz

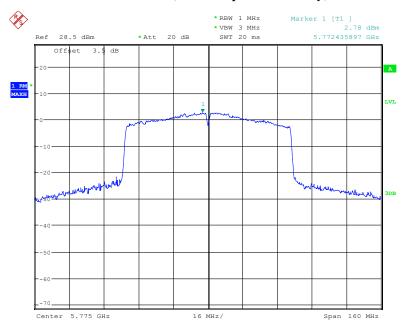

Date: 13.0CT.2019 00:00:23


FCC Part 15.407 Page 122 of 136

Antenna 2 802.11a mode, Power Spectral Density, 5745 MHz

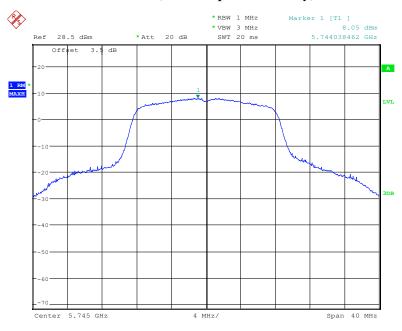

Date: 12.0CT.2019 23:32:58


802.11a mode, Power Spectral Density, 5785 MHz

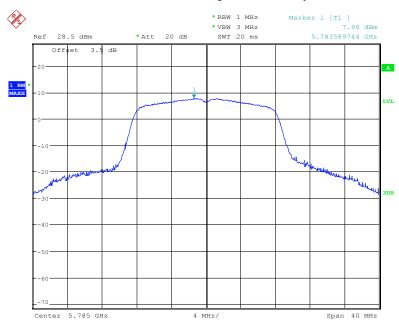

Date: 12.0CT.2019 23:33:24


FCC Part 15.407 Page 123 of 136

## 802.11a mode, Power Spectral Density, 5825 MHz

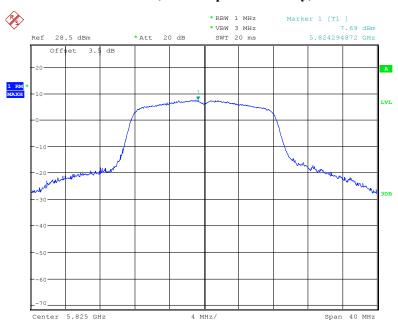

Date: 12.0CT.2019 23:33:40


## 802.11n20 mode, Power Spectral Density, 5745 MHz

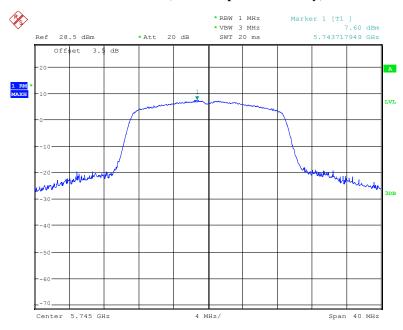

Date: 12.0CT.2019 23:34:47


FCC Part 15.407 Page 124 of 136

## 802.11n20 mode, Power Spectral Density, 5785 MHz

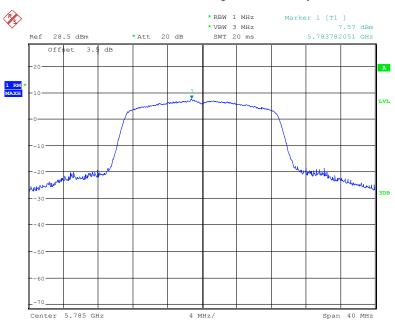

Date: 12.0CT.2019 23:34:25


## 802.11n20 mode, Power Spectral Density, 5825 MHz

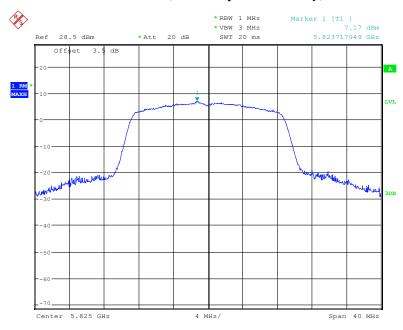

Date: 12.0CT.2019 23:34:02


FCC Part 15.407 Page 125 of 136

## 802.11n40 mode, Power Spectral Density, 5755 MHz

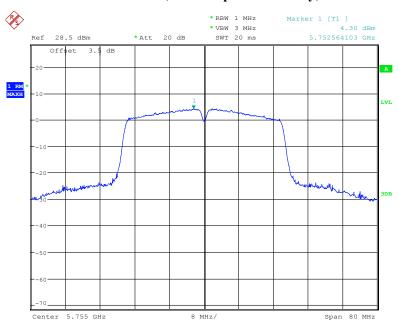

Date: 12.0CT.2019 23:40:38


## 802.11n40 mode, Power Spectral Density, 5795 MHz

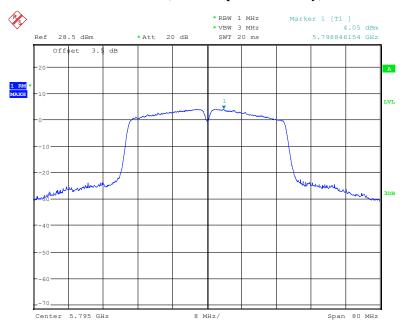

Date: 12.0CT.2019 23:38:35


FCC Part 15.407 Page 126 of 136

# 802.11ac20 mode, Power Spectral Density, 5745 MHz

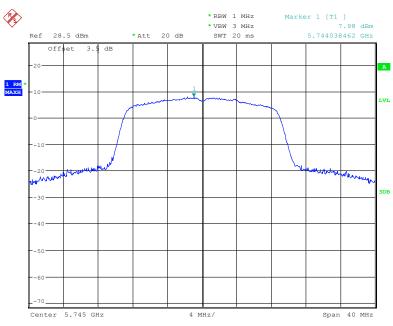

Date: 12.0CT.2019 23:35:09


## 802. 11ac20 mode, Power Spectral Density, 5785 MHz

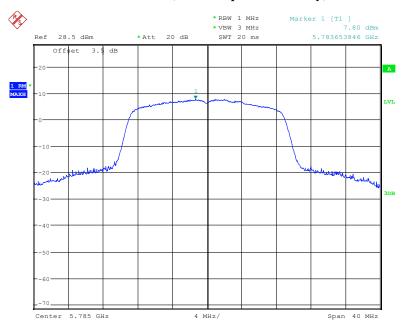

Date: 12.0CT.2019 23:35:36


FCC Part 15.407 Page 127 of 136

802. 11ac20 mode, Power Spectral Density, 5825 MHz

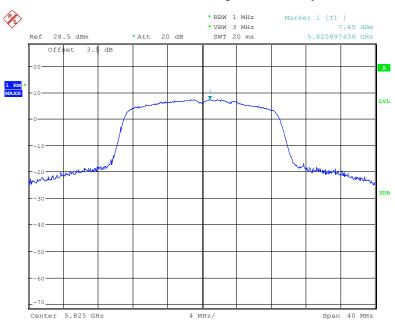

Date: 12.0CT.2019 23:36:00


802. 11ac40 mode, Power Spectral Density, 5755 MHz

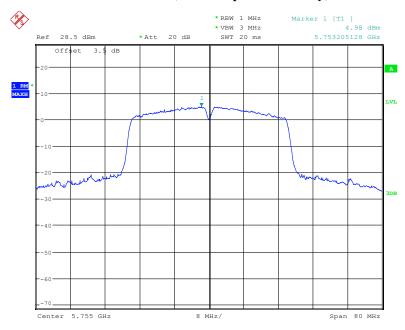

Date: 12.0CT.2019 23:37:12


FCC Part 15.407 Page 128 of 136

## 802. 11ac40 mode, Power Spectral Density, 5795 MHz

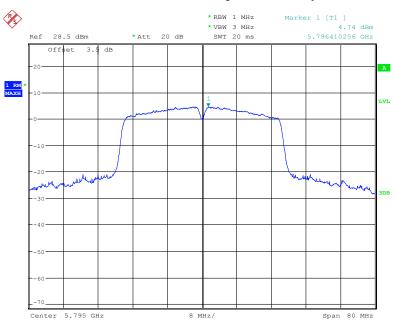

Date: 12.0CT.2019 23:38:03


## 802. 11ac80 mode, Power Spectral Density, 5775 MHz

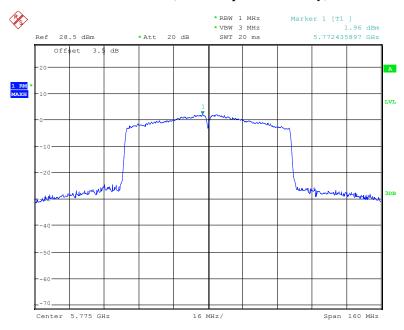

Date: 12.0CT.2019 23:41:30


FCC Part 15.407 Page 129 of 136

Antenna 3 802.11a mode, Power Spectral Density, 5745 MHz

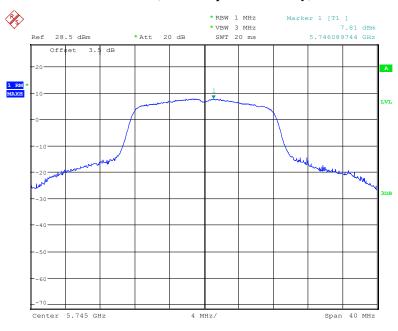

Date: 12.OCT.2019 23:28:31


802.11a mode, Power Spectral Density, 5785 MHz

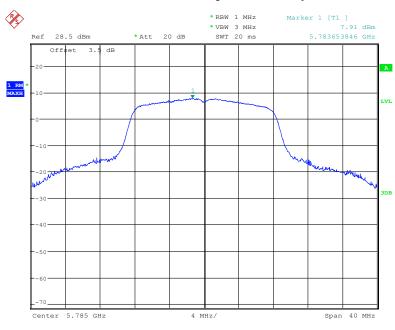

Date: 12.0CT.2019 23:28:52


FCC Part 15.407 Page 130 of 136

## 802.11a mode, Power Spectral Density, 5825 MHz

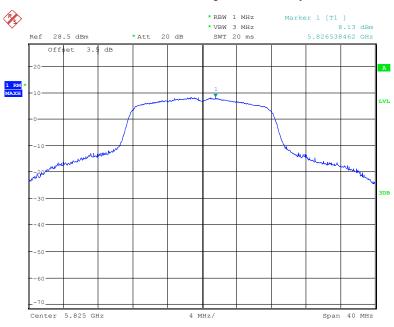

Date: 12.0CT.2019 23:29:08


## 802.11n20 mode, Power Spectral Density, 5745 MHz

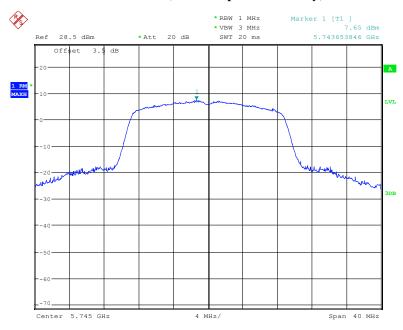

Date: 12.OCT.2019 23:26:24


FCC Part 15.407 Page 131 of 136

## 802.11n20 mode, Power Spectral Density, 5785 MHz

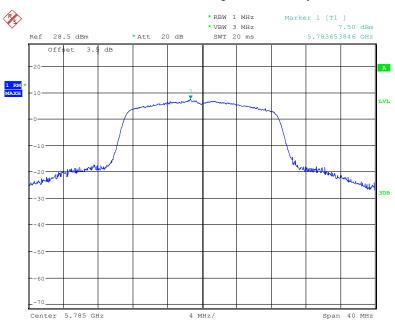

Date: 12.0CT.2019 23:26:53


## 802.11n20 mode, Power Spectral Density, 5825 MHz

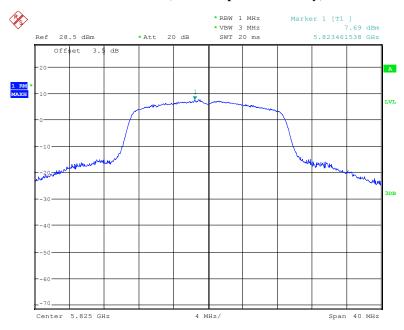

Date: 12.0CT.2019 23:27:11


FCC Part 15.407 Page 132 of 136

## 802.11n40 mode, Power Spectral Density, 5755 MHz

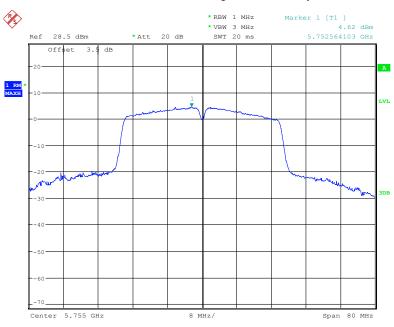

Date: 12.0CT.2019 23:25:02


## 802.11n40 mode, Power Spectral Density, 5795 MHz

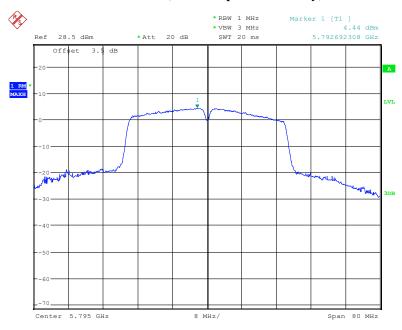

Date: 12.0CT.2019 23:24:38


FCC Part 15.407 Page 133 of 136

## 802.11ac20 mode, Power Spectral Density, 5745 MHz

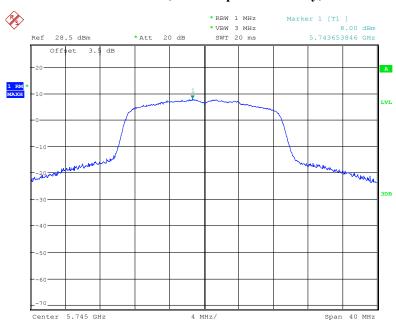

Date: 12.0CT.2019 23:28:08


## 802. 11ac20 mode, Power Spectral Density, 5785 MHz

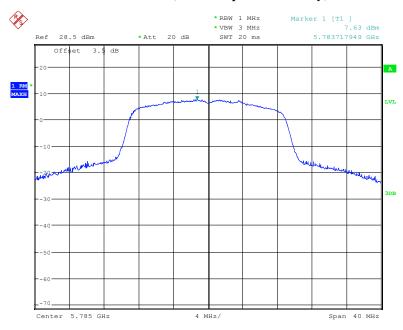

Date: 12.0CT.2019 23:27:51


FCC Part 15.407 Page 134 of 136

## 802. 11ac20 mode, Power Spectral Density, 5825 MHz

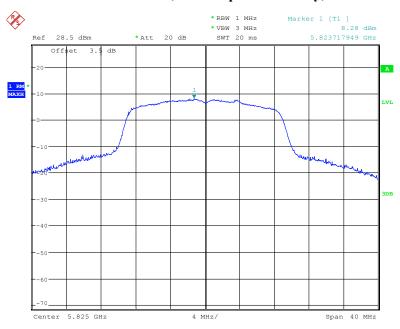

Date: 12.0CT.2019 23:27:29


## 802. 11ac40 mode, Power Spectral Density, 5755 MHz

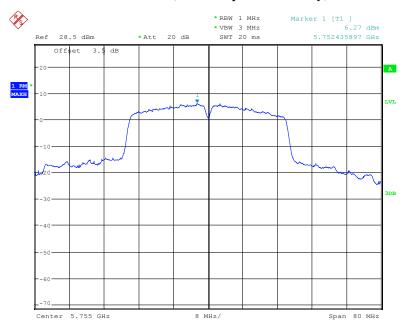

Date: 12.0CT.2019 23:23:44


FCC Part 15.407 Page 135 of 136

802. 11ac40 mode, Power Spectral Density, 5795 MHz

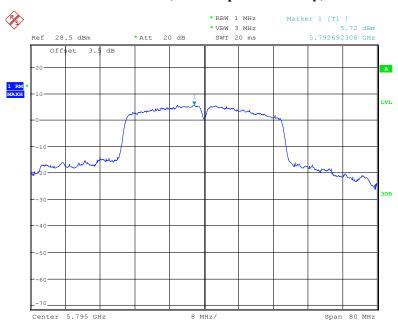

Date: 12.0CT.2019 23:24:19

## 802. 11ac80 mode, Power Spectral Density, 5775 MHz

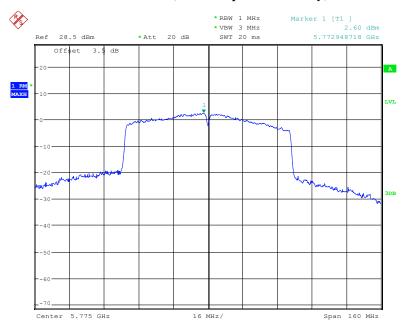

Date: 12.0CT.2019 23:22:34

\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 15.407 Page 136 of 136