

## FCC 47 CFR PART 15 SUBPART C

Product Type : PDA Phone  
Applicant : VERZO Technology, LLC.  
Address : Delnicka 12, Praha 7, Prague, 17000, Czech Republic  
Trade Name : VERZO  
Model Number : KINZO  
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2010  
ANSI C63.4-2009  
Application Purpose: : Original  
Receive Date : Aug. 23, 2011  
Issue Date : Nov. 25, 2011

### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.  
Tel : +86-3-2710188 / Fax : +86-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

**Revision History**

Rev.	Issue Date	Revisions	Revised By
00	Nov. 10, 2011	Initial Issue	
01	Nov. 25, 2011	Add spurious radiated emissions 9kHz~30MHz results	Joyce Liao

## Verification of Compliance

Issued Date: 11/25/2011

Product Type : PDA Phone  
Applicant : VERZO Technology, LLC.  
Address : Delnicka 12, Praha 7, Prague, 17000, Czech Republic  
Trade Name : VERZO  
Model Number : KINZO  
FCC ID : Z2UKINZO  
EUT Rated Voltage : DC 5.0V, 1000mA  
Test Voltage : 120 Vac / 60 Hz  
Applicable : FCC 47 CFR PART 15 SUBPART C: Oct., 2010  
Standard : ANSI C63.4-2009  
Test Result : Complied  
Application : Original  
Purpose :  
Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.

Tel : +86-3-2710188 / Fax : +86-3-2710190

Taiwan Accreditation Foundation accreditation number:  
1330



<http://www.atl-lab.com.tw/e-index.htm>

The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.

Approved By : 

(Manager)

(Alex Wu)

Reviewed By : 

(Testing Engineer)

(Fly Lu)

## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>6</b>
<b>2</b>	<b>EUT Description .....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>8</b>
3.1.	Mode of Operation .....	8
3.2.	EUT Exercise Software.....	8
3.3.	Configuration of Test System Details .....	9
3.4.	Test Site Environment.....	9
<b>4</b>	<b>Conducted Emission Measurement.....</b>	<b>10</b>
4.1.	Limit.....	10
4.2.	Test Instruments .....	10
4.3.	Test Setup.....	10
4.4.	Test Procedure .....	11
4.5.	Test Result.....	12
<b>5</b>	<b>Radiated Interference Measurement.....</b>	<b>16</b>
5.1.	Limit.....	16
5.2.	Test Instruments .....	16
5.3.	Setup .....	17
5.4.	Test Procedure .....	19
5.5.	Test Result.....	21
<b>6</b>	<b>Maximum Conducted Output Power Measurement.....</b>	<b>29</b>
6.1.	Limit.....	29
6.2.	Test Setup.....	29
6.3.	Test Instruments .....	29
6.4.	Test Procedure .....	29
6.5.	Test Result.....	30
<b>7</b>	<b>6dB RF Bandwidth Measurement .....</b>	<b>31</b>
7.1.	Limit.....	31
7.2.	Test Setup.....	31
7.3.	Test Instruments .....	31
7.4.	Test Procedure .....	31
7.5.	Test Result.....	32
7.6.	Test Graphs .....	33

<b>8</b>	<b>Maximum Power Density Measurement .....</b>	<b>36</b>
8.1.	Limit .....	36
8.2.	Test Setup .....	36
8.3.	Test Instruments .....	36
8.4.	Test Procedure .....	36
8.5.	Test Result .....	37
8.6.	Test Graphs .....	38
<b>9</b>	<b>Out of Band Conducted Emissions Measurement .....</b>	<b>41</b>
9.1.	Limit .....	41
9.2.	Test Setup .....	41
9.3.	Test Instruments .....	41
9.4.	Test Procedure .....	41
9.5.	Test Graphs .....	42
<b>10</b>	<b>Band Edges Measurement .....</b>	<b>45</b>
10.1.	Limit .....	45
10.2.	Test Setup .....	45
10.3.	Test Instruments .....	45
10.4.	Test Procedure .....	46
10.5.	Test Result .....	47
<b>11</b>	<b>99 % Occupied Bandwidth Measurement .....</b>	<b>59</b>
11.1.	Limit .....	59
11.2.	Test Setup .....	59
11.3.	Test Instruments .....	59
11.4.	Test Procedure .....	59
11.5.	Test Result .....	60
11.6.	Test Graphs .....	61
<b>12</b>	<b>Antenna Measurement .....</b>	<b>64</b>
12.1.	Limit .....	64
12.2.	Antenna Connector Construction .....	64

## 1 General Information

### 1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

### 1.2 Measurement Uncertainty

#### Conducted Emission

The measurement uncertainty is evaluated as  $\pm 2.24$  dB.

#### Radiated Emission

The measurement uncertainty of 30 MHz - 1GHz is evaluated as  $\pm 3.072$ dB.

## 2 EUT Description

Product	:	PDA Phone
Trade Name	:	VERZO
Model No.	:	KINZO
Applicant	:	VERZO Technology, LLC. Delnicka 12, Praha 7, Prague, 17000, Czech Republic
Manufacturer	:	VERZO Technology, LLC. Delnicka 12, Praha 7, Prague, 17000, Czech Republic
FCC ID	:	Z2UKINZO
Frequency Range	:	2412 ~ 2462 MHz
Modulation Type	:	IEEE 802.11b:DSSS(CCK, DQPSK, DBPSK)  IEEE 802.11g:DSSS(CCK, DQPSK, DBPSK)+ OFDM(QPSK, BPSK, 16-QAM, 64-QAM)  draft 802.11n Standard-20MHz channel mode: OFDM(6.5,7.2, 13,14.4, 14.44, 19.5,217,26,28.89,28.9,39.43.3,43.33,52,57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67,104,115.56,117,130 and 144.44 Mbps)
Antenna Type	:	Internal Type
Antenna Gain	:	-4.0 dBi
RF Output Power	:	IEEE 802.11b: 0.027 W / 14.35 dBm  IEEE 802.11g: 0.219 W / 23.40 dBm  draft 802.11n Standard-20MHz: 0.229 W / 23.60 dBm
Component		
Battery	:	Model: U-5002  3.7 Vdc, 1530mAh
Power Adapter	:	TINYPLUG, TPUU1000  Input:100-240Vac, 50-60Hz, 120mA  Output: 5.0Vdc, 1000mA  Cable out: Shielded, 1.0 m

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: IDLE Mode
Mode 2: Normal Operation Mode
Mode 3: IEEE 802.11b Link Mode
Mode 4: IEEE 802.11g Link Mode
Mode 5: draft 802.11n Standard-20MHz Link Mode
Mode 6: Receiver Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.


By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

#### 3.2. EUT Exercise Software

1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to AP.
4.	EUT run test program.



### 3.3. Configuration of Test System Details

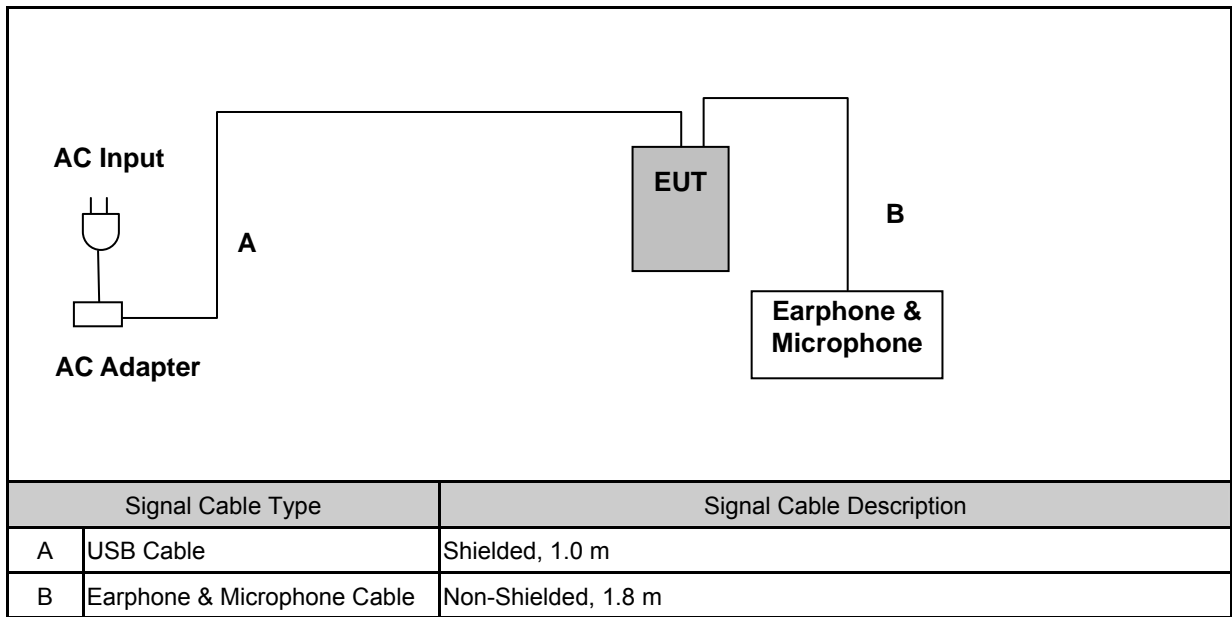

### 3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

## 4 Conducted Emission Measurement

### 4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


### 4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/30/2011	(1)
LISN	R&S	ENV216	101040	03/04/2011	(1)
LISN	R&S	ENV216	101041	03/04/2011	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 4.3. Test Setup

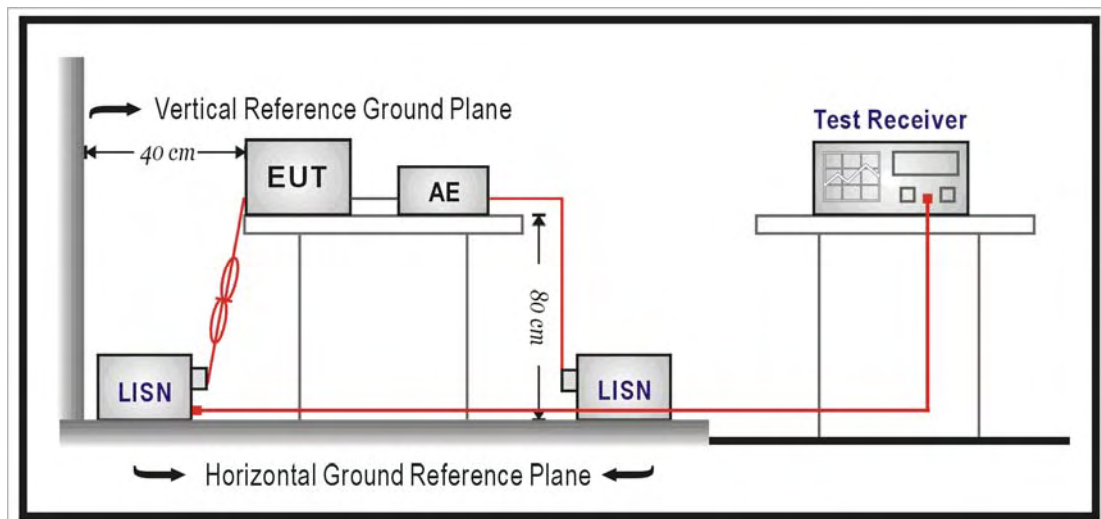

#### **4.4. Test Procedure**


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.


#### 4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	11/03/2011
		Test By:	Fly Lu
Description:			

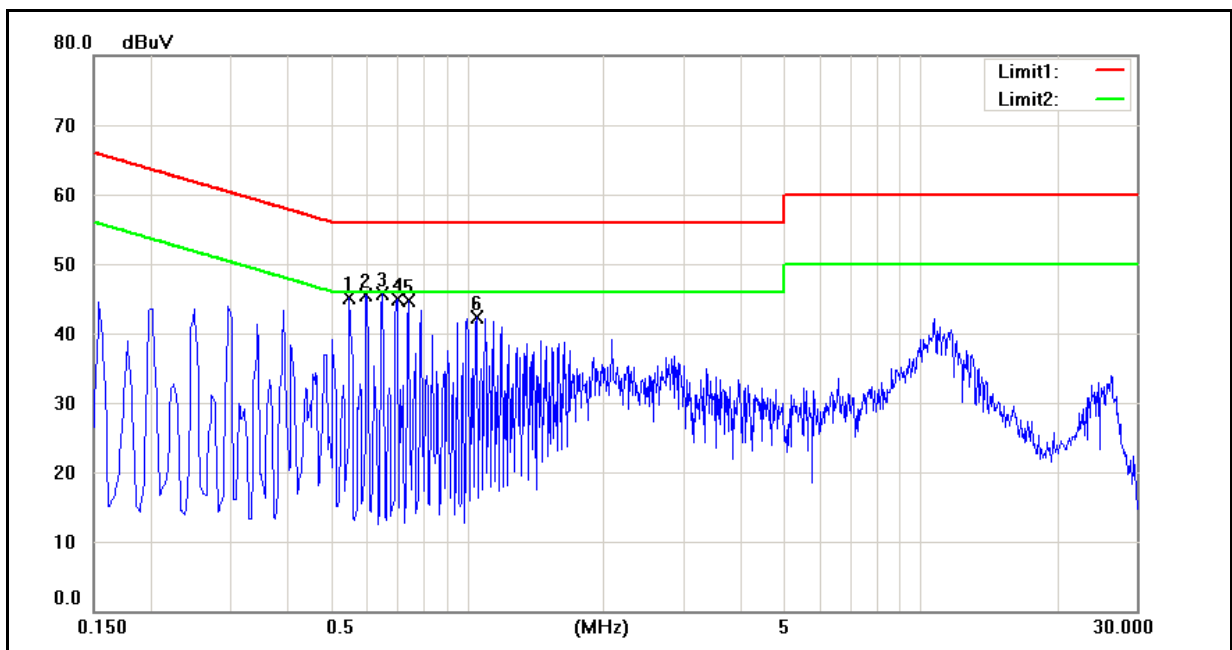


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.5500	33.83	21.74	9.91	43.74	31.65	56.00	46.00	-12.26	-14.35	Pass
2	0.5980	34.33	22.01	9.89	44.22	31.90	56.00	46.00	-11.78	-14.10	Pass
3	0.6500	34.00	21.27	9.87	43.87	31.14	56.00	46.00	-12.13	-14.86	Pass
4	0.7020	31.47	17.75	9.86	41.33	27.61	56.00	46.00	-14.67	-18.39	Pass
5	0.7460	33.67	21.26	9.84	43.51	31.10	56.00	46.00	-12.49	-14.90	Pass
6	1.0500	30.29	17.51	9.72	40.01	27.23	56.00	46.00	-15.99	-18.77	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	11/03/2011
		Test By:	Fly Lu
Description:			

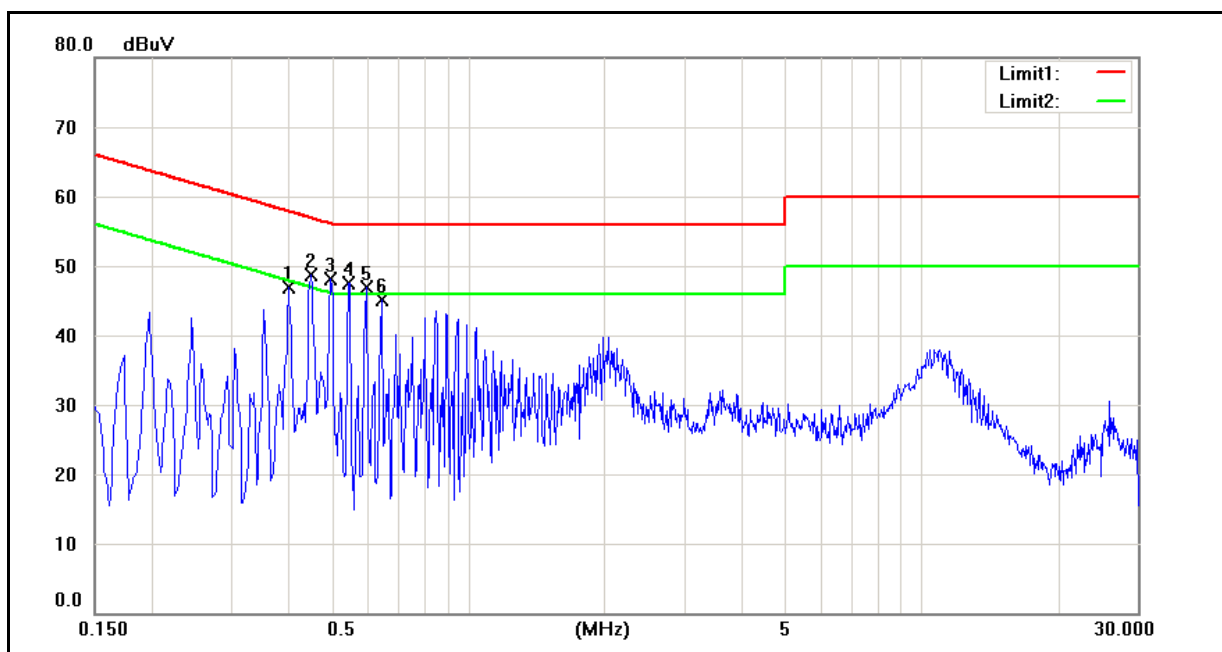


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.4020	34.79	26.95	10.05	44.84	37.00	57.81	47.81	-12.97	-10.81	Pass
2	0.4500	36.41	29.00	10.03	46.44	39.03	56.88	46.88	-10.44	-7.85	Pass
3	0.4980	36.40	28.32	10.01	46.41	38.33	56.03	46.03	-9.62	-7.70	Pass
4	0.5460	35.34	24.79	9.99	45.33	34.78	56.00	46.00	-10.67	-11.22	Pass
5	0.5980	35.48	25.52	9.97	45.45	35.49	56.00	46.00	-10.55	-10.51	Pass
6	0.6460	33.75	22.61	9.95	43.70	32.56	56.00	46.00	-12.30	-13.44	Pass

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/03/2011
		Test By:	Fly Lu
Description:			

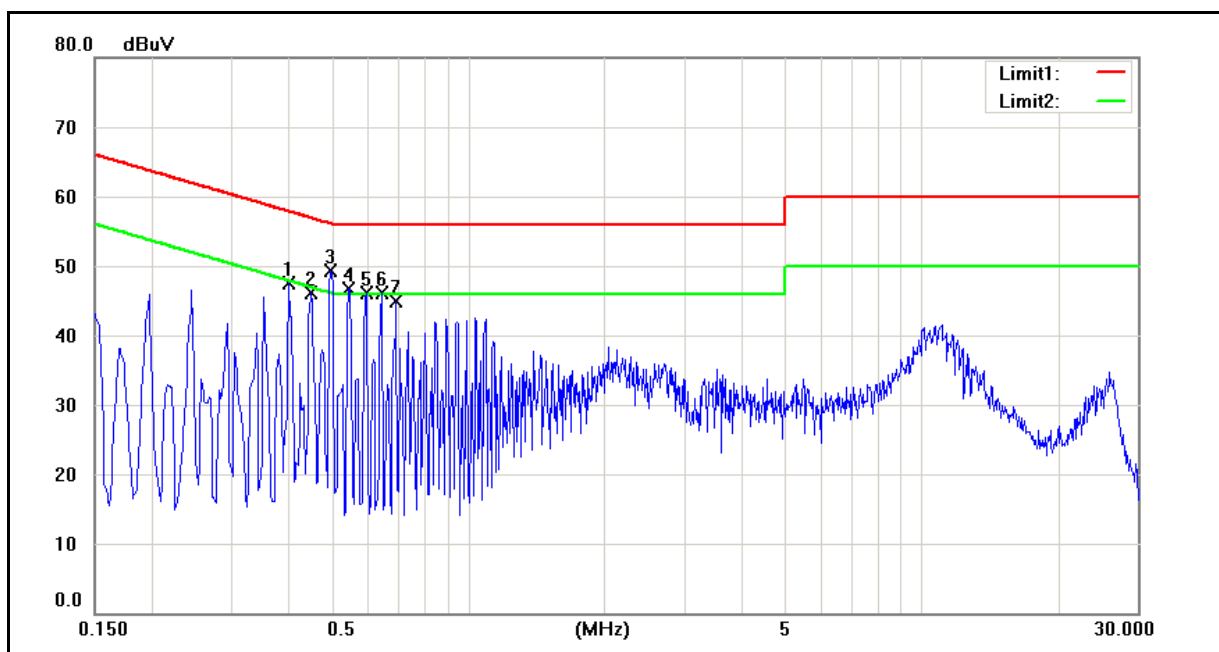

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.4020	35.84	23.37	9.97	45.81	33.34	57.81	47.81	-12.00	-14.47	Pass
2	0.4500	33.79	23.01	9.95	43.74	32.96	56.88	46.88	-13.14	-13.92	Pass
3	0.4994	37.31	24.80	9.93	47.24	34.73	56.01	46.01	-8.77	-11.28	Pass
4	0.5460	35.48	23.72	9.91	45.39	33.63	56.00	46.00	-10.61	-12.37	Pass
5	0.5980	34.95	22.67	9.89	44.84	32.56	56.00	46.00	-11.16	-13.44	Pass
6	0.6460	35.02	22.90	9.87	44.89	32.77	56.00	46.00	-11.11	-13.23	Pass
7	0.6940	33.97	21.00	9.85	43.82	30.85	56.00	46.00	-12.18	-15.15	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	11/03/2011
		Test By:	Fly Lu
Description:			

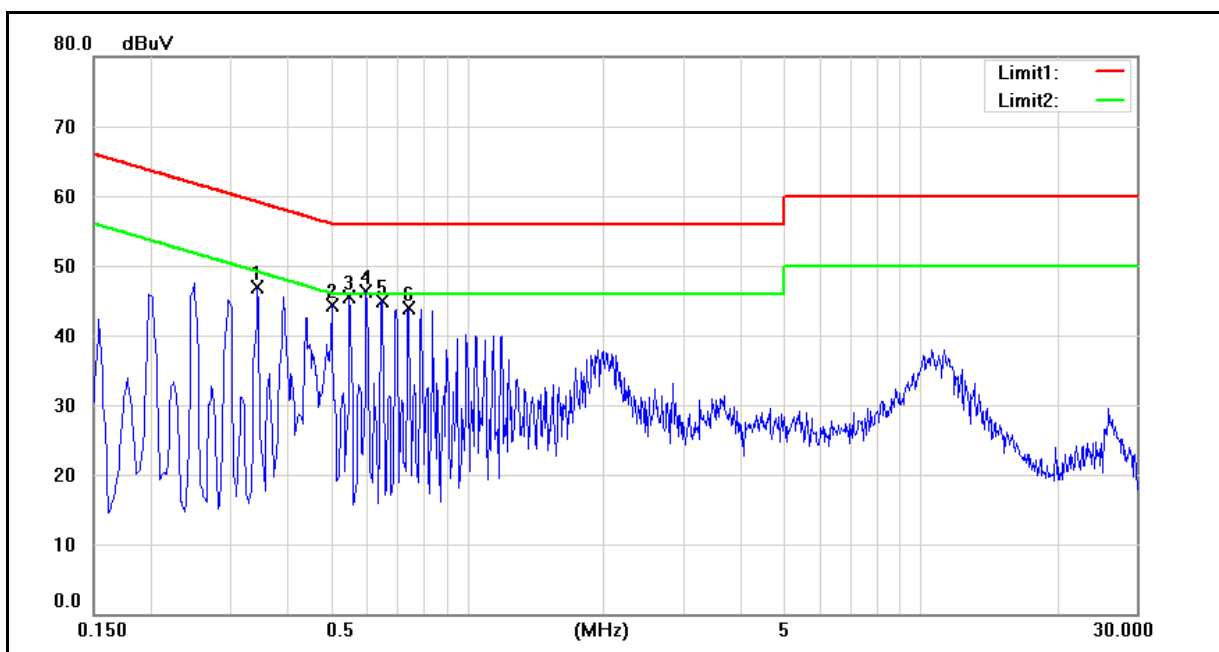

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.3460	36.48	24.69	10.07	46.55	34.76	59.06	49.06	-12.51	-14.30	Pass
2	0.5020	32.69	22.74	10.01	42.70	32.75	56.00	46.00	-13.30	-13.25	Pass
3	0.5500	34.79	23.42	9.99	44.78	33.41	56.00	46.00	-11.22	-12.59	Pass
4	0.5980	35.55	24.89	9.97	45.52	34.86	56.00	46.00	-10.48	-11.14	Pass
5	0.6500	32.44	20.21	9.95	42.39	30.16	56.00	46.00	-13.61	-15.84	Pass
6	0.7460	33.04	24.35	9.91	42.95	34.26	56.00	46.00	-13.05	-11.74	Pass

## 5 Radiated Interference Measurement

### 5.1. Limit

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ at meter)	Measurement Distance (meter)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30.0 – 88.0	100**	3
88.0 – 216.0	150**	3
216.0 – 960.0	200**	3
Above 960	500	3

### 5.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/18/2011	(2)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/18/2011	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/23/2011	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/23/2011	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/29/2011	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/29/2011	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/28/2011	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2009	(3)
Test Site	ATL	TE01	888001	12/24/2010	(1)


Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

NOTE: N.C.R. = No Calibration Request.




### 5.3. Setup


9kHz ~ 30MHz

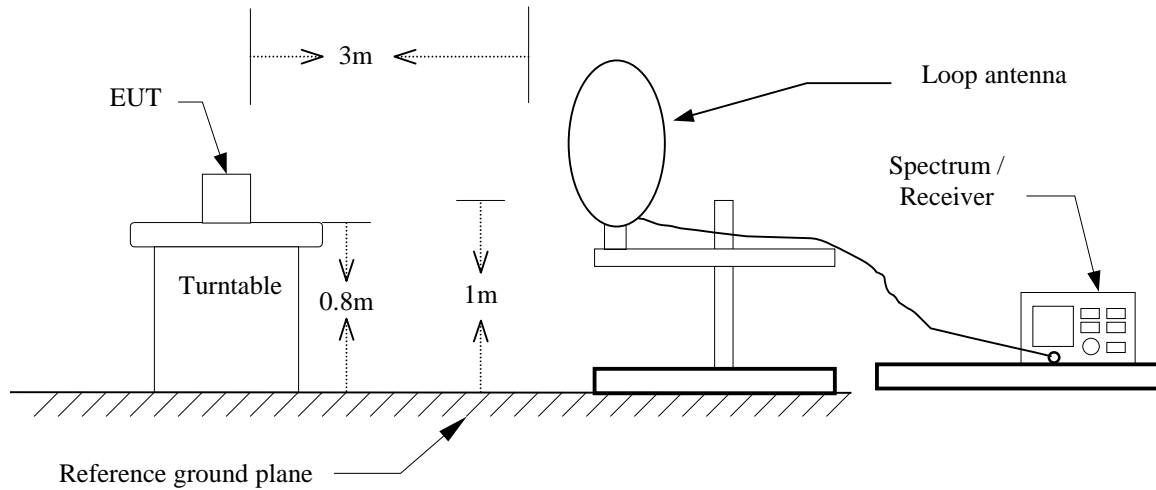

30MHz ~ 1 GHz

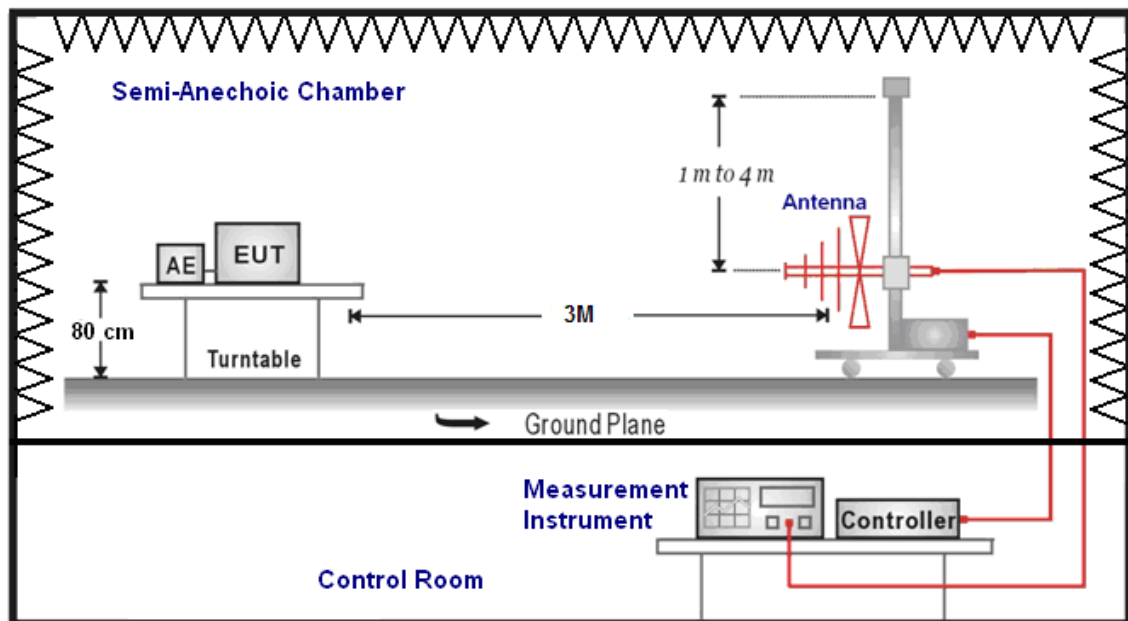

Above 1GHz

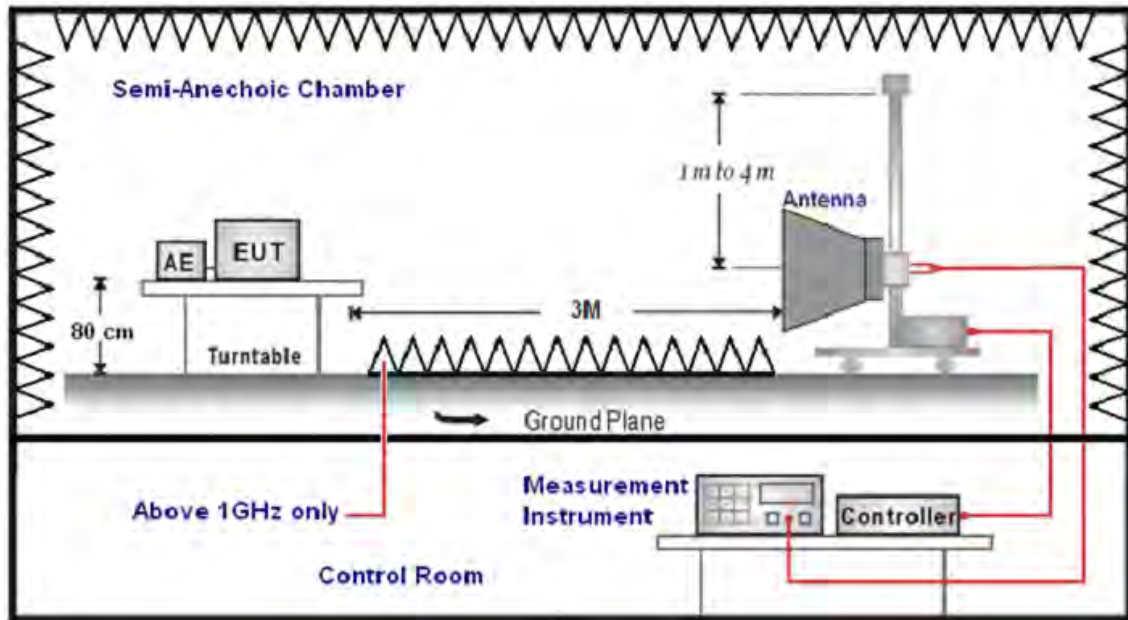

## 5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1)  $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2)  $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis (dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

## 5.5. Test Result

### Below 1GHz

Standard:		FCC Part 15C		Test Distance:		1m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		KINZO		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 2		Date:		11/23/2011	
Ant.Polar.:		Horizontal		Test By:		Fly Lu	
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0090	-65.33	17.00	-48.33	48.52	-96.85	QP
2	0.6088	-51.34	13.67	-37.67	31.91	-69.58	QP
3	6.9670	-75.15	15.79	-59.36	29.54	-88.90	QP
4	15.7243	-75.41	13.32	-62.09	29.54	-91.63	QP
5	21.1826	-74.55	13.67	-60.88	29.54	-90.42	QP
6	28.7704	-72.88	11.84	-61.04	29.54	-90.58	QP

Standard:	FCC Part 15C	Test Distance:	1m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	Mode 2	Date:	11/23/2011				
Ant.Polar.:	Vertical	Test By:	Fly Lu				
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0090	-55.25	17.00	-38.25	48.52	-86.77	QP
2	2.0784	-58.93	15.08	-43.85	21.25	-65.10	QP
3	5.9172	-70.49	15.40	-55.09	29.54	-84.63	QP
4	13.6250	-74.63	13.41	-61.22	29.54	-90.76	QP
5	16.1741	-72.77	13.41	-59.36	29.54	-88.90	QP
6	22.6222	-72.22	13.01	-59.21	29.54	-88.75	QP

Note: The level is measured at 1 meter and is converted into result at 300 or 30 meter.

The converted formula listed below:

Measure result (1 meter distance): a

Compute result (30 or 300 meter distance): A

$A = a + (40 \cdot \log(1/300 \text{ or } 1/30))$

ex. a (0.0090 MHz) = 33.75 dBuV,  $A = 33.75 + (40 \cdot \log(1/300)) = -65.33 \text{ dBuV}$

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/20/2011
Ant.Polar.:	Horizontal	Test By:	Fly Lu

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	37.0000	36.49	-12.73	23.76	40.00	-16.24	QP
2	111.0000	37.83	-14.24	23.59	43.50	-19.91	QP
3	234.0000	37.25	-12.45	24.80	46.00	-21.20	QP
4	508.5000	26.96	-6.62	20.34	46.00	-25.66	QP
5	749.0000	26.39	-2.19	24.20	46.00	-21.80	QP
6	935.5000	27.20	0.74	27.94	46.00	-18.06	QP

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/20/2011
Ant.Polar.:	Vertical	Test By:	Fly Lu

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	49.25	-13.64	35.61	40.00	-4.39	QP
2	38.0000	42.80	-12.51	30.29	40.00	-9.71	QP
3	58.5000	39.52	-12.37	27.15	40.00	-12.85	QP
4	104.0000	39.15	-13.69	25.46	43.50	-18.04	QP
5	234.0000	34.43	-12.45	21.98	46.00	-24.02	QP
6	540.0000	29.95	-6.34	23.61	46.00	-22.39	QP

**Above 1GHz**

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	KINZO			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	09/20/2011		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3100.000	39.49	2.42	41.91	74.00	-32.09	peak	H
4542.000	37.21	7.09	44.30	74.00	-29.70	peak	H
6418.000	37.06	12.73	49.79	74.00	-24.21	peak	H
3331.000	39.60	2.93	42.53	74.00	-31.47	peak	V
5074.000	37.12	8.73	45.85	74.00	-28.15	peak	V
6250.000	37.48	11.97	49.45	74.00	-24.55	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	KINZO			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	09/20/2011		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2491.000	42.51	0.38	42.89	74.00	-31.11	peak	H
4094.000	37.80	5.64	43.44	74.00	-30.56	peak	H
6453.000	36.32	12.88	49.20	74.00	-24.80	peak	H
2995.000	38.42	2.18	40.60	74.00	-33.40	peak	V
4346.000	37.72	6.45	44.17	74.00	-29.83	peak	V
5487.000	35.76	9.95	45.71	74.00	-28.29	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		KINZO		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 3		Date:		09/20/2011	
Frequency:		2462MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1973.000	40.83	-1.90	38.93	74.00	-35.07	peak	H
3653.000	38.71	3.93	42.64	74.00	-31.36	peak	H
7020.000	36.38	14.76	51.14	74.00	-22.86	peak	H
4367.000	37.57	6.52	44.09	74.00	-29.91	peak	V
5382.000	36.56	9.65	46.21	74.00	-27.79	peak	V
6292.000	36.67	12.15	48.82	74.00	-25.18	peak	V



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	KINZO			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	09/20/2011		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2043.000	40.25	-1.60	38.65	74.00	-35.35	peak	H
4003.000	38.14	5.34	43.48	74.00	-30.52	peak	H
5697.000	36.55	10.34	46.89	74.00	-27.11	peak	H
3933.000	37.93	5.06	42.99	74.00	-31.01	peak	V
4570.000	37.28	7.17	44.45	74.00	-29.55	peak	V
5291.000	36.89	9.36	46.25	74.00	-27.75	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	KINZO			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	09/20/2011		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3303.000	38.90	2.87	41.77	74.00	-32.23	peak	H
5788.000	35.76	10.49	46.25	74.00	-27.75	peak	H
6964.000	35.59	14.59	50.18	74.00	-23.82	peak	H
4976.000	34.85	8.43	43.28	74.00	-30.72	peak	V
6530.000	34.05	13.19	47.24	74.00	-26.76	peak	V
7265.000	32.15	15.51	47.66	74.00	-26.34	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		KINZO		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 4		Date:		09/20/2011	
Frequency:		2462MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3702.000	38.22	4.12	42.34	74.00	-31.66	peak	H
4906.000	38.20	8.20	46.40	74.00	-27.60	peak	H
6523.000	36.39	13.16	49.55	74.00	-24.45	peak	H
3149.000	38.29	2.53	40.82	74.00	-33.18	peak	V
4857.000	36.39	8.06	44.45	74.00	-29.55	peak	V
6033.000	35.49	11.01	46.50	74.00	-27.50	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	KINZO			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	09/20/2011		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2757.000	39.10	1.34	40.44	74.00	-33.56	peak	H
4458.000	37.18	6.81	43.99	74.00	-30.01	peak	H
6068.000	35.67	11.16	46.83	74.00	-27.17	peak	H
1406.000	42.42	-4.33	38.09	74.00	-35.91	peak	V
4073.000	39.24	5.56	44.80	74.00	-29.20	peak	V
6901.000	35.82	14.38	50.20	74.00	-23.80	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	KINZO			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	09/20/2011		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2085.000	39.86	-1.40	38.46	74.00	-35.54	peak	H
3744.000	36.58	4.30	40.88	74.00	-33.12	peak	H
5879.000	34.91	10.66	45.57	74.00	-28.43	peak	H
4353.000	36.26	6.48	42.74	74.00	-31.26	peak	V
5795.000	36.66	10.50	47.16	74.00	-26.84	peak	V
6089.000	35.79	11.26	47.05	74.00	-26.95	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	KINZO			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	09/20/2011		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2085.000	40.86	-1.40	39.46	74.00	-34.54	peak	H
4353.000	38.47	6.48	44.95	74.00	-29.05	peak	H
6705.000	36.31	13.75	50.06	74.00	-23.94	peak	H
2071.000	39.65	-1.48	38.17	74.00	-35.83	peak	V
3856.000	38.10	4.74	42.84	74.00	-31.16	peak	V
6278.000	36.71	12.10	48.81	74.00	-25.19	peak	V


Standard:	FCC Part 15C				Test Distance:	3m		
Test item:	Radiated Emission				Power:	AC 120V/60Hz		
Model Number:	KINZO				Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 6				Date:	09/20/2011		
Modulation:	IEEE 802.11b				Test By:	Fly Lu		
Frequency:	2437MHz							
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Peak Limit (dBuV/m)	AVG. Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4577.000	37.50	7.19	44.69	74.00	54.00	-29.31	peak	H
5424.000	36.75	9.76	46.51	74.00	54.00	-27.49	peak	H
6096.000	35.61	11.30	46.91	74.00	54.00	-27.09	peak	H
3499.000	38.84	3.31	42.15	74.00	54.00	-31.85	peak	V
5760.000	36.64	10.45	47.09	74.00	54.00	-26.91	peak	V
6831.000	36.35	14.17	50.52	74.00	54.00	-23.48	peak	V

## 6 Maximum Conducted Output Power Measurement

### 6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

### 6.2. Test Setup

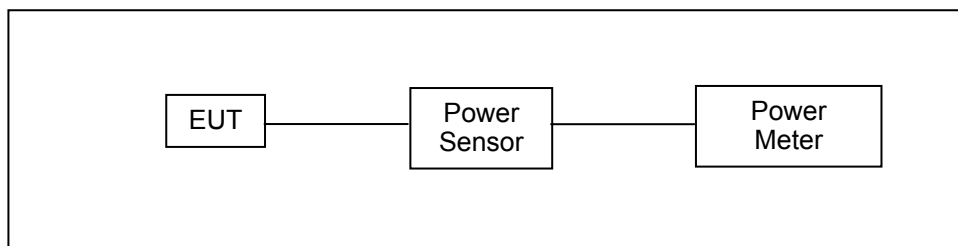

### 6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	07/19/2010	(2)
Wideband Power Meter	Agilent	N1921A	MY45241957	07/19/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

## 6.5. Test Result

Model Number	KINZO					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 3: IEEE 802.11b Link Mode					
Date of Test	08/31/2011			Test Site	TE02	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	1	11.70	0.015	<b>14.35</b>	<b>0.027</b>	< 30
2437		11.18	0.013	13.67	0.023	< 30
2462		11.23	0.013	13.70	0.023	< 30
2412	11	11.49	0.014	13.97	0.025	< 30
2437		10.90	0.012	13.37	0.022	< 30
2462		11.05	0.013	13.40	0.022	< 30

Model Number	KINZO					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 4: IEEE 802.11g Link Mode					
Date of Test	08/31/2011			Test Site	TE02	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	6	11.50	0.014	<b>23.40</b>	<b>0.219</b>	< 30
2437		10.95	0.012	22.25	0.168	< 30
2462		10.90	0.012	20.80	0.120	< 30
2412	54	10.66	0.012	22.67	0.185	< 30
2437		10.10	0.010	21.92	0.156	< 30
2462		10.10	0.010	20.75	0.119	< 30


Model Number	KINZO					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode					
Date of Test	08/31/2011			Test Site	TE02	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	MCS0	11.40	0.014	<b>23.60</b>	<b>0.229</b>	< 30
2437		10.80	0.012	21.83	0.152	< 30
2462		10.80	0.012	20.84	0.121	< 30
2412	MCS7	10.10	0.010	22.45	0.176	< 30
2437		9.60	0.009	21.75	0.150	< 30
2462		9.55	0.009	20.55	0.114	< 30

## 7 6dB RF Bandwidth Measurement

### 7.1. Limit

Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

### 7.2. Test Setup

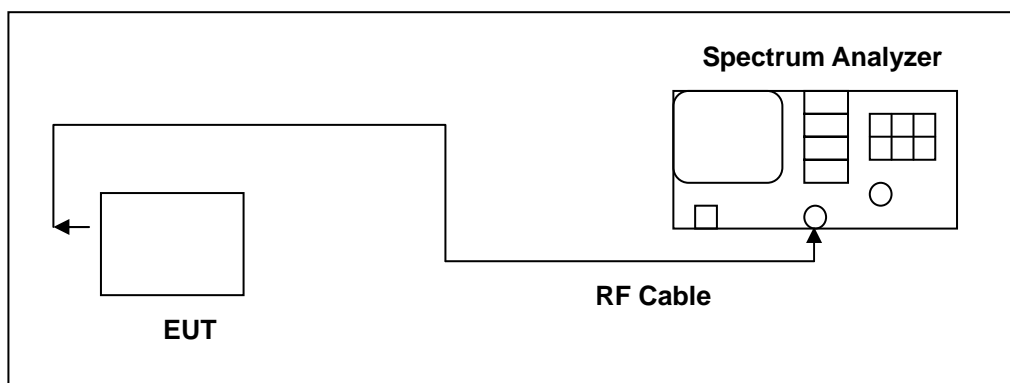

### 7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel 1, 6, 11)

## 7.5. Test Result


Model Number	KINZO		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	08/31/2011	Test Site	TE02
Frequency (MHz)	Measurement (kHz)		Limit (kHz)
2412	8500		> 500
2437	9125		> 500
2462	9250		> 500

Model Number	KINZO		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	08/31/2011	Test Site	TE06
Frequency (MHz)	Measurement (kHz)		Limit (kHz)
2412	16000		> 500
2437	15875		> 500
2462	15750		> 500

Model Number	KINZO		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	08/31/2011	Test Site	TE02
Frequency (MHz)	Measurement (kHz)		Limit (kHz)
2412	16625		> 500
2437	15250		> 500
2462	16500		> 500




## 7.6. Test Graphs

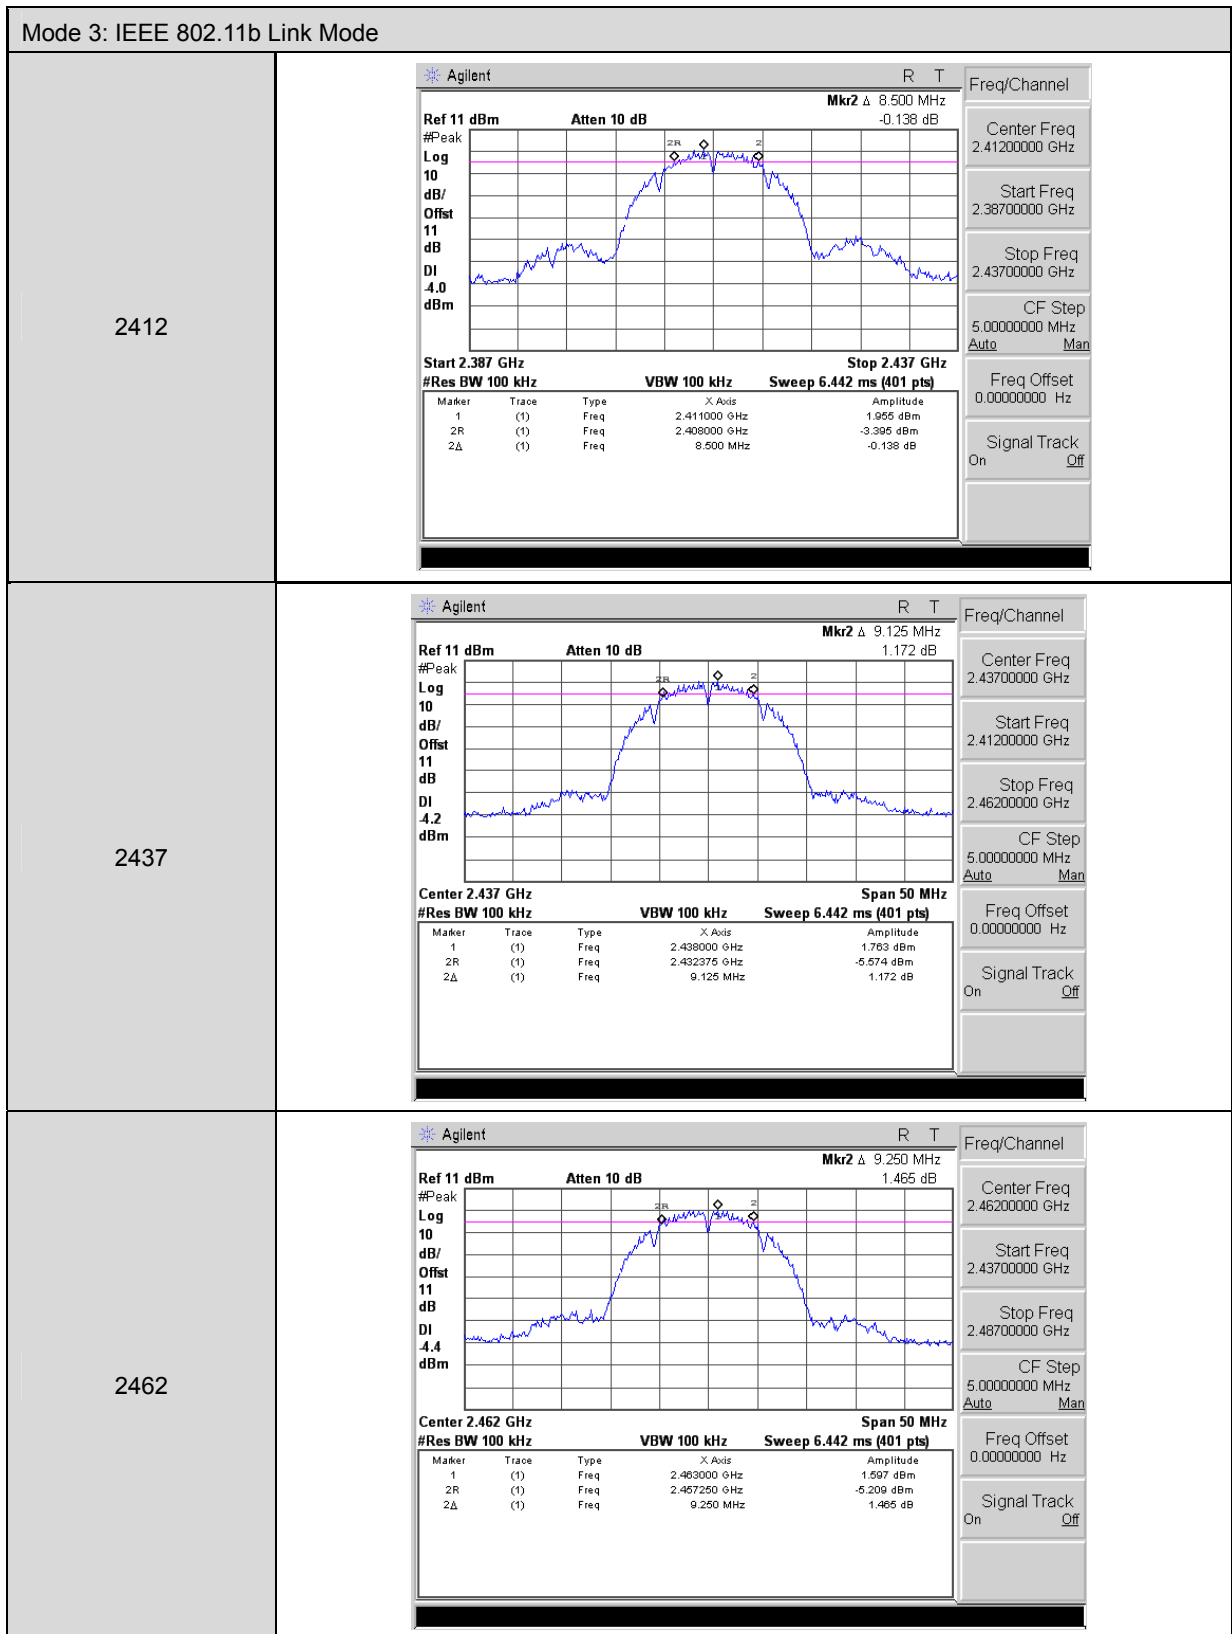


## Mode 4: IEEE 802.11g Link Mode


2412

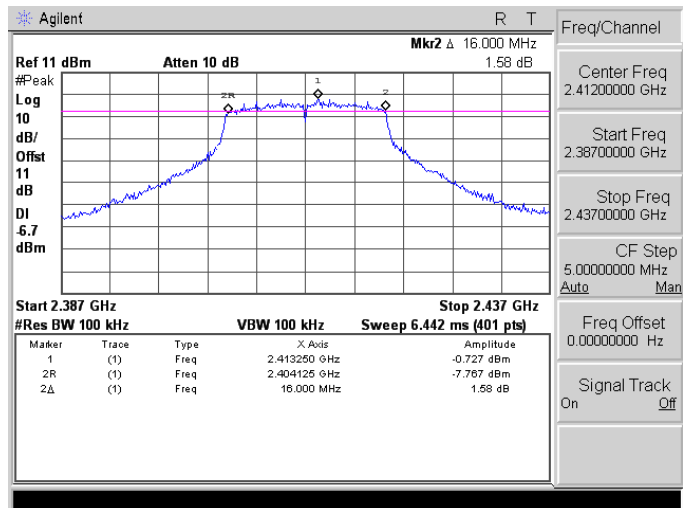

2437

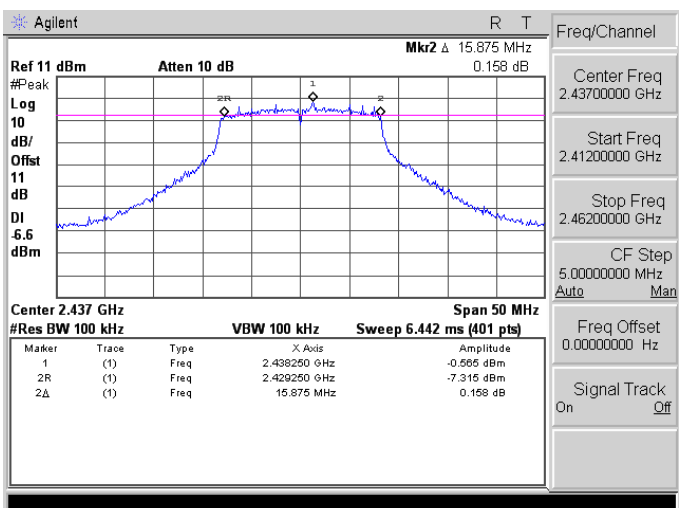


2462

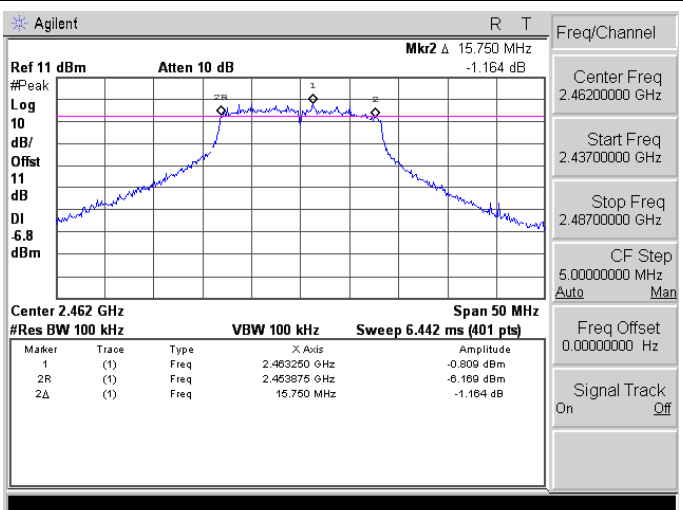


Mode 5: draft 802.11n Standard-20MHz Link Mode


2412

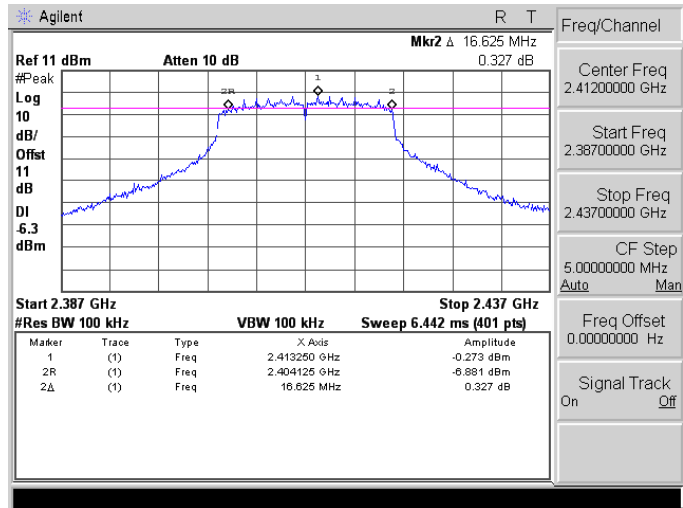

2437

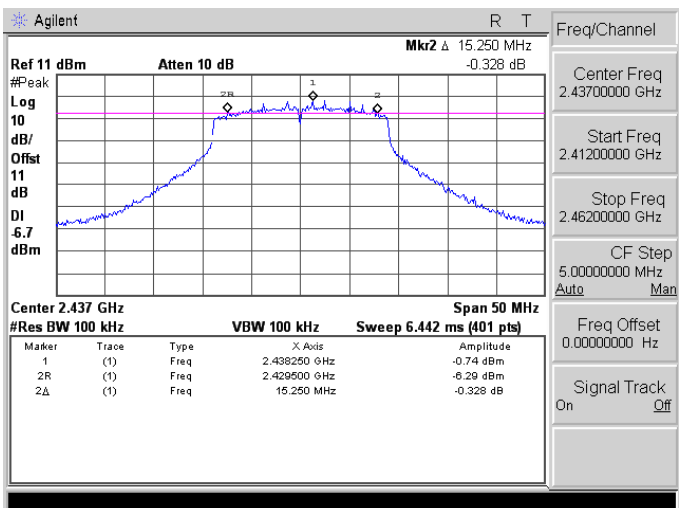

2462

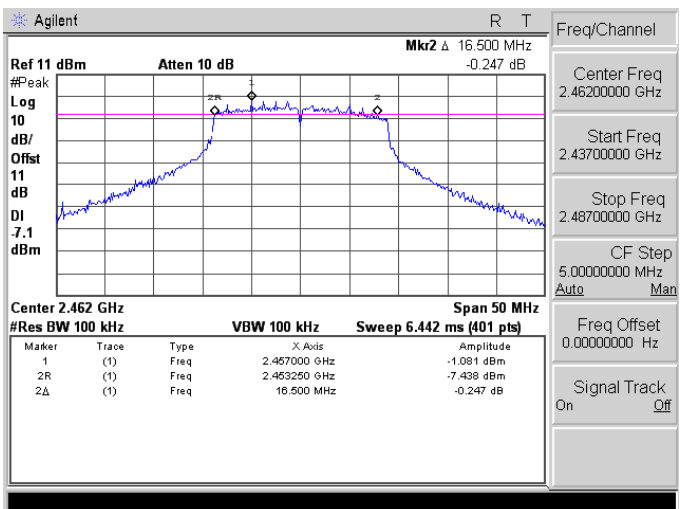


## 8 Maximum Power Density Measurement

### 8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.2. Test Setup

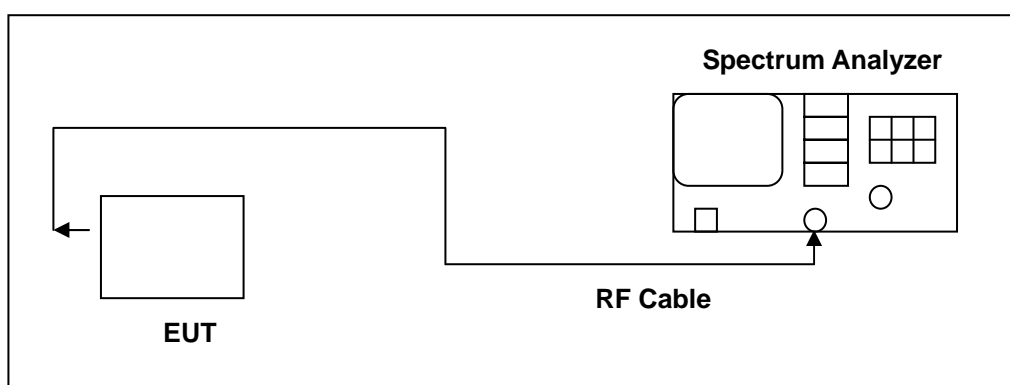

### 8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The spectrum analyzer RES BW was set to 3 kHz. The START and STOP frequencies were set to the band edges of the maximum output pass band. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs. The specification calls for a 1 second interval at each 3 kHz bandwidth; total SWEEP TIME is calculated as follows:

$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz}) / 3 \text{ kHz}$$

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.




## 8.5. Test Result

Model Number	KINZO		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	08/31/2011	Test Site	TE02
Frequency (MHz)	Measurement (dBm)	Limit (dBm)	
2412	-12.74	< 8	
2437	-12.63	< 8	
2462	-12.27	< 8	

Model Number	KINZO		
Test Item	Maximum Power Density		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	08/31/2011	Test Site	TE02
Frequency (MHz)	Measurement (dBm)	Limit (dBm)	
2412	-11.66	< 8	
2437	-14.52	< 8	
2462	-13.18	< 8	


Model Number	KINZO		
Test Item	Maximum Power Density		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	08/31/2011	Test Site	TE02
Frequency (MHz)	Measurement (dBm)	Limit (dBm)	
2412	-12.97	< 8	
2437	-13.67	< 8	
2462	-13.00	< 8	

## 8.6. Test Graphs

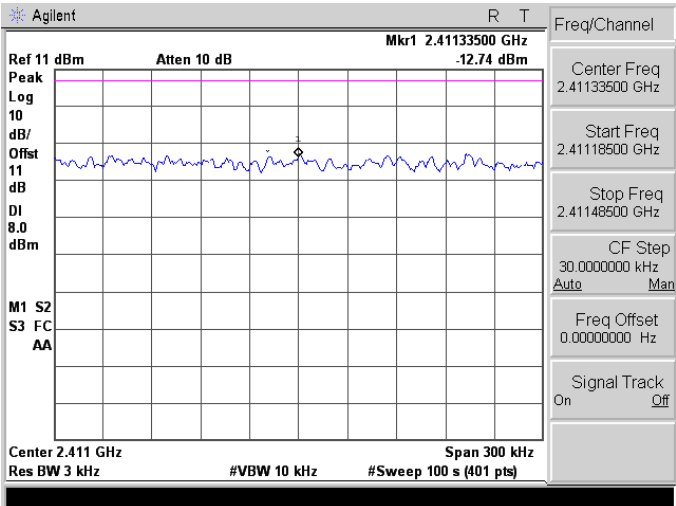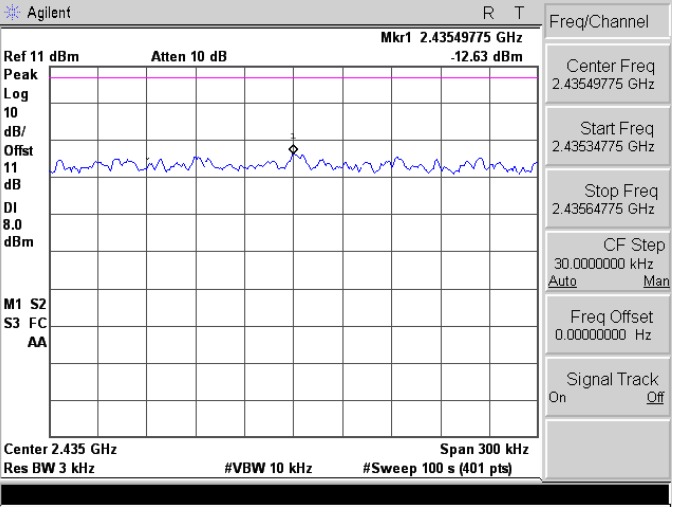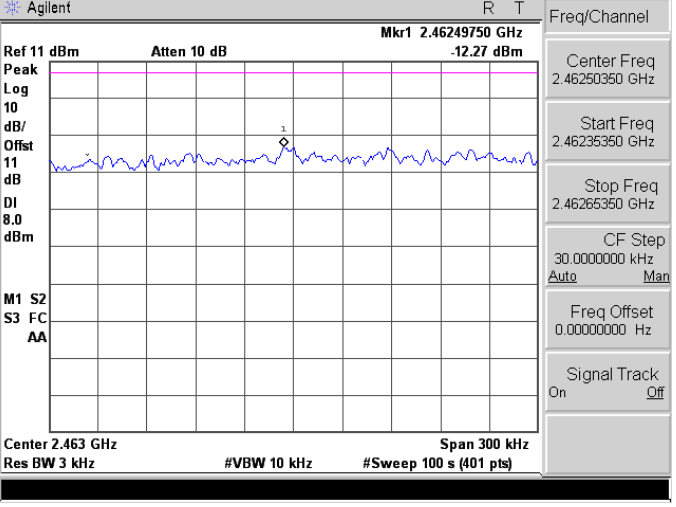
Mode 3: IEEE 802.11b Link Mode	
2412	 <p>Agilent R T</p> <p>Ref 11 dBm Atten 10 dB Mkr1 2.41133500 GHz -12.74 dBm</p> <p>Peak Log 10 dB/Offset 11 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.411 GHz Res BW 3 kHz Span 300 kHz #VBW 10 kHz #Sweep 100 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.41133500 GHz</p> <p>Start Freq 2.41118500 GHz</p> <p>Stop Freq 2.41148500 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	 <p>Agilent R T</p> <p>Ref 11 dBm Atten 10 dB Mkr1 2.43549775 GHz -12.53 dBm</p> <p>Peak Log 10 dB/Offset 11 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.435 GHz Res BW 3 kHz Span 300 kHz #VBW 10 kHz #Sweep 100 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.43549775 GHz</p> <p>Start Freq 2.43534775 GHz</p> <p>Stop Freq 2.43564775 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	 <p>Agilent R T</p> <p>Ref 11 dBm Atten 10 dB Mkr1 2.46249750 GHz -12.27 dBm</p> <p>Peak Log 10 dB/Offset 11 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.463 GHz Res BW 3 kHz Span 300 kHz #VBW 10 kHz #Sweep 100 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.46250350 GHz</p> <p>Start Freq 2.46235350 GHz</p> <p>Stop Freq 2.46265350 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 4: IEEE 802.11g Link Mode


2412

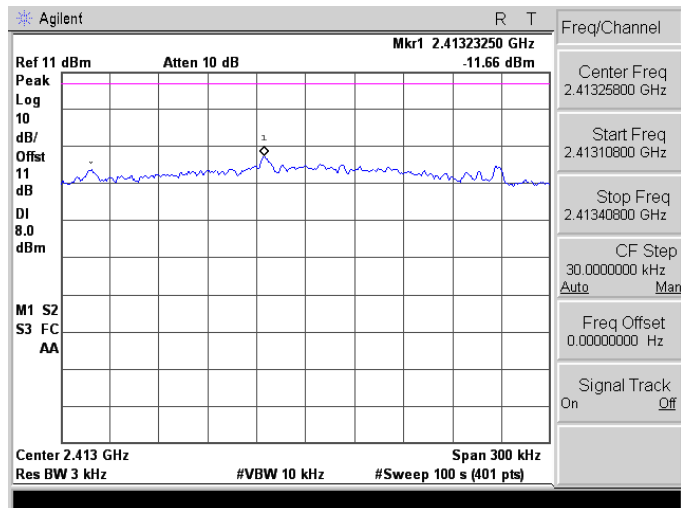

2437

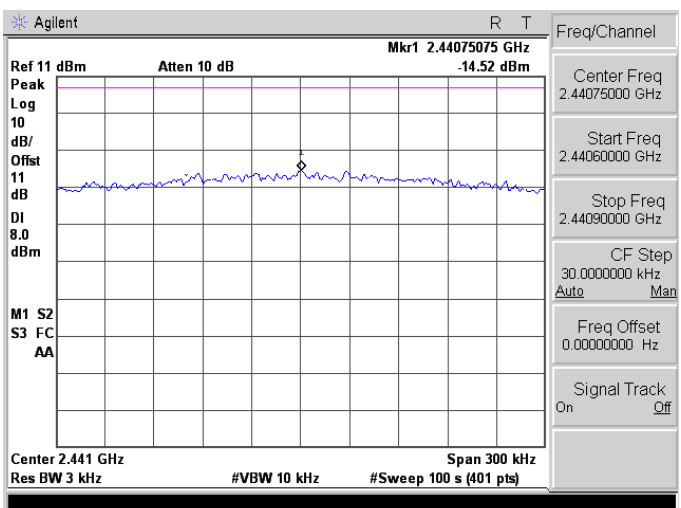


2462

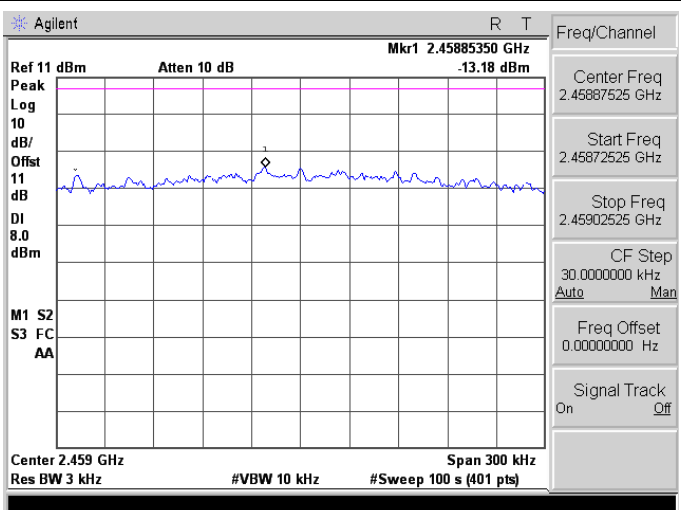


Mode 5: draft 802.11n Standard-20MHz Link Mode


2412

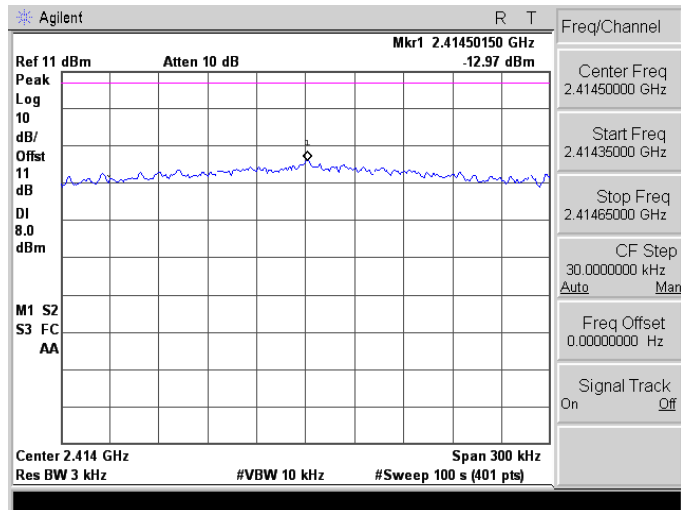

2437

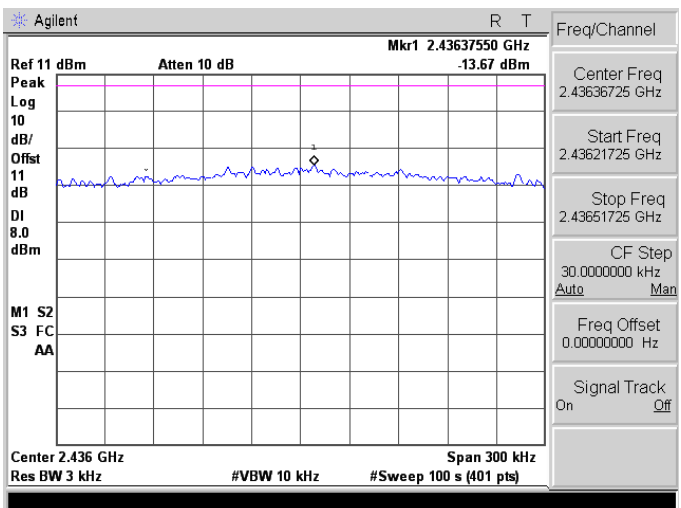

2462

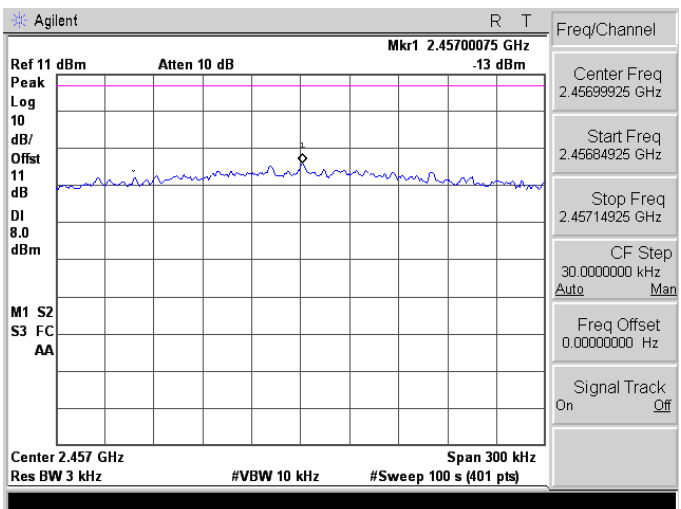




## 9 Out of Band Conducted Emissions Measurement

### 9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### 9.2. Test Setup

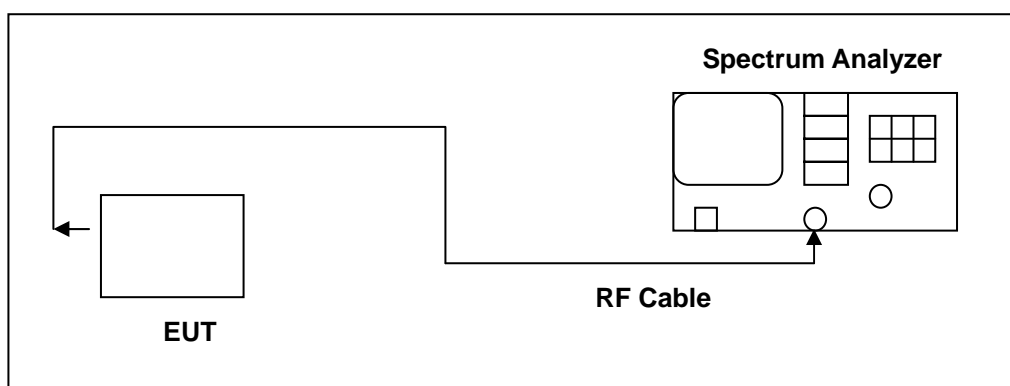

### 9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/07/2011	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.


All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 1, 6, 11)

## 9.5. Test Graphs


Mode 3: IEEE 802.11b Link Mode	
2412	
2437	
2462	

Mode 4: IEEE 802.11g Link Mode


2412

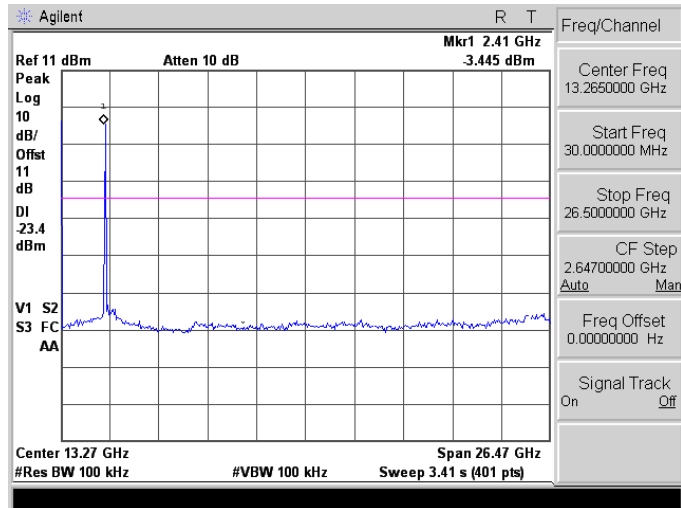

2437

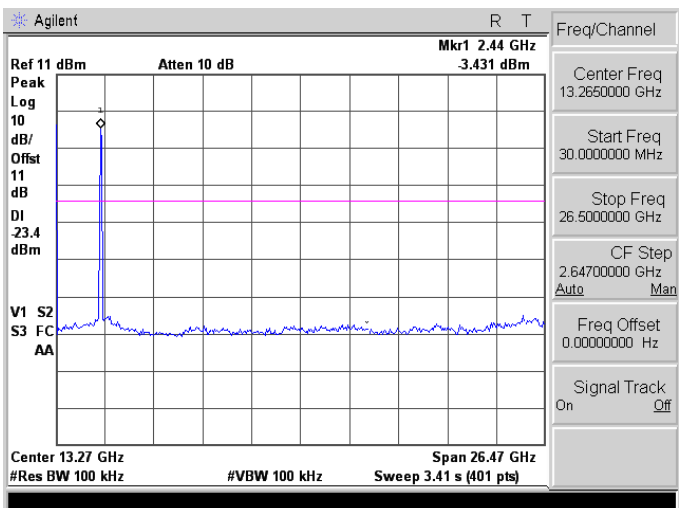


2462

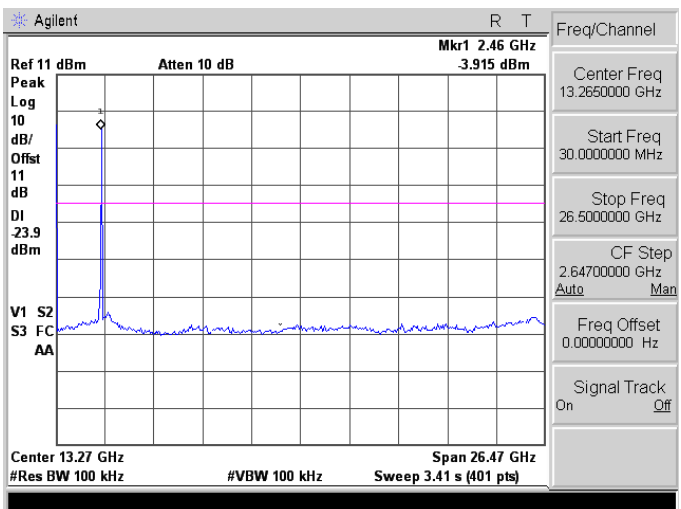


Mode 5: draft 802.11n Standard-20MHz Link Mode


2412

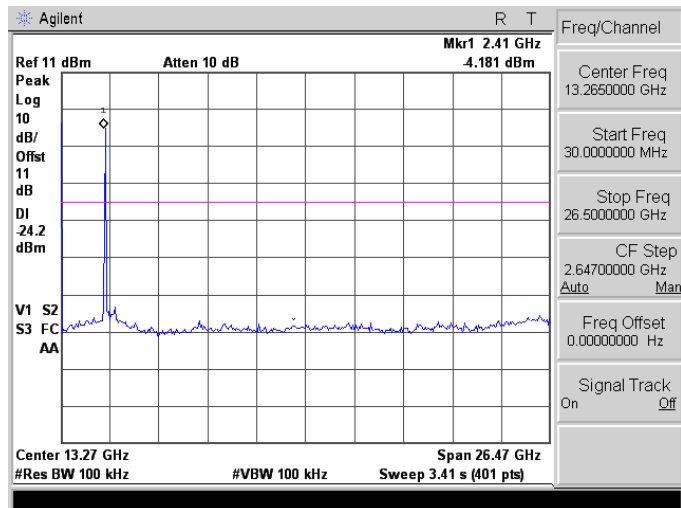

2437

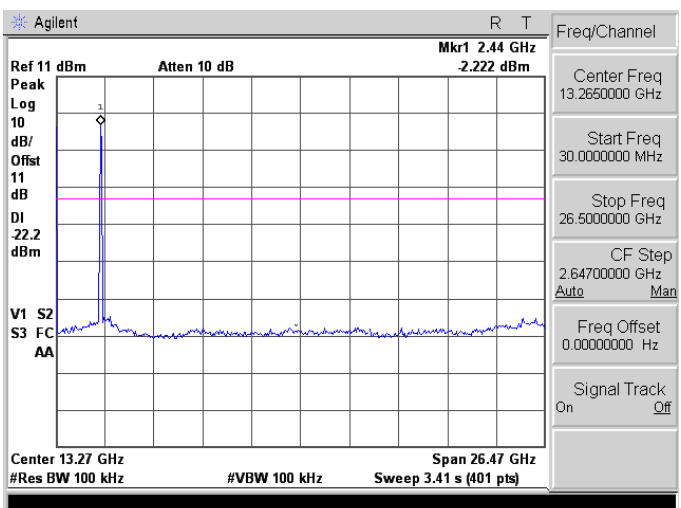

2462

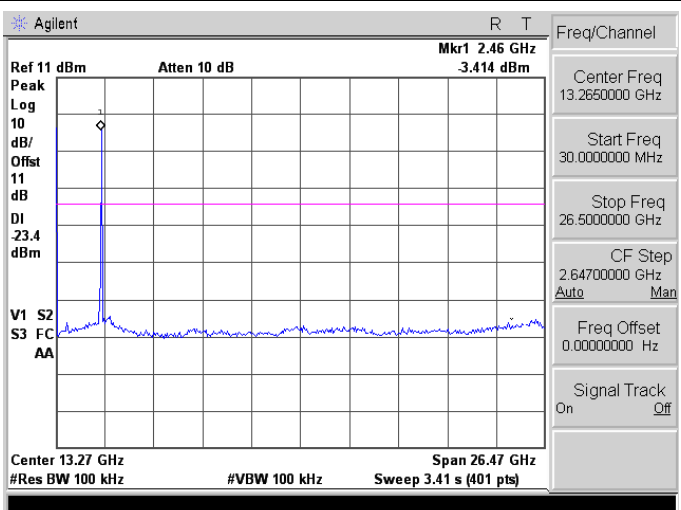


## 10 Band Edges Measurement

### 10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 10.2.Test Setup

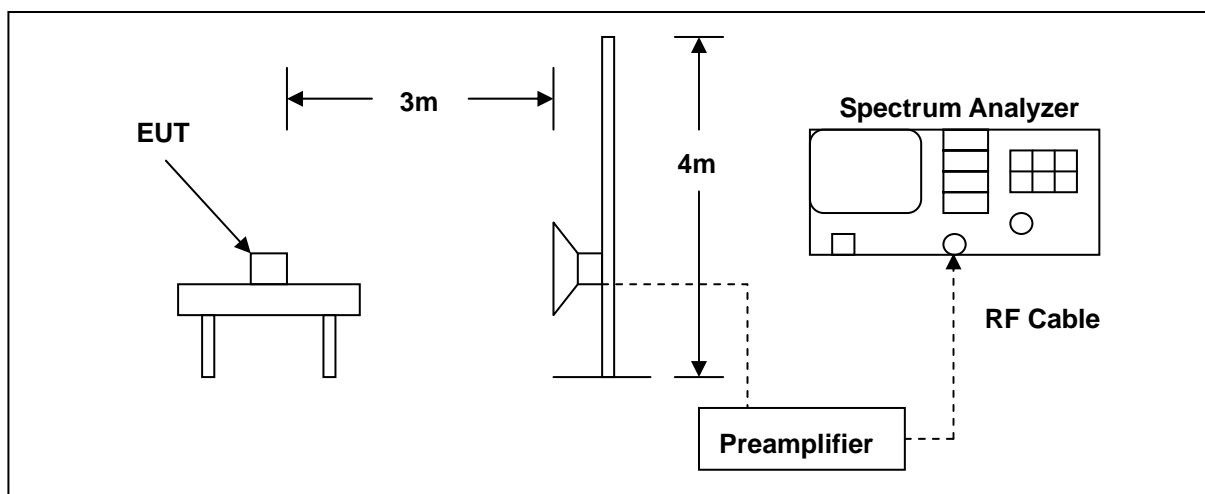

### 10.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/07/2011	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/23/2011	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	06/29/2011	(1)
Test Site	ATL	TE01	888001	12/24/2010	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

#### **10.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.


The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


## 10.5.Test Result

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/20/2011
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

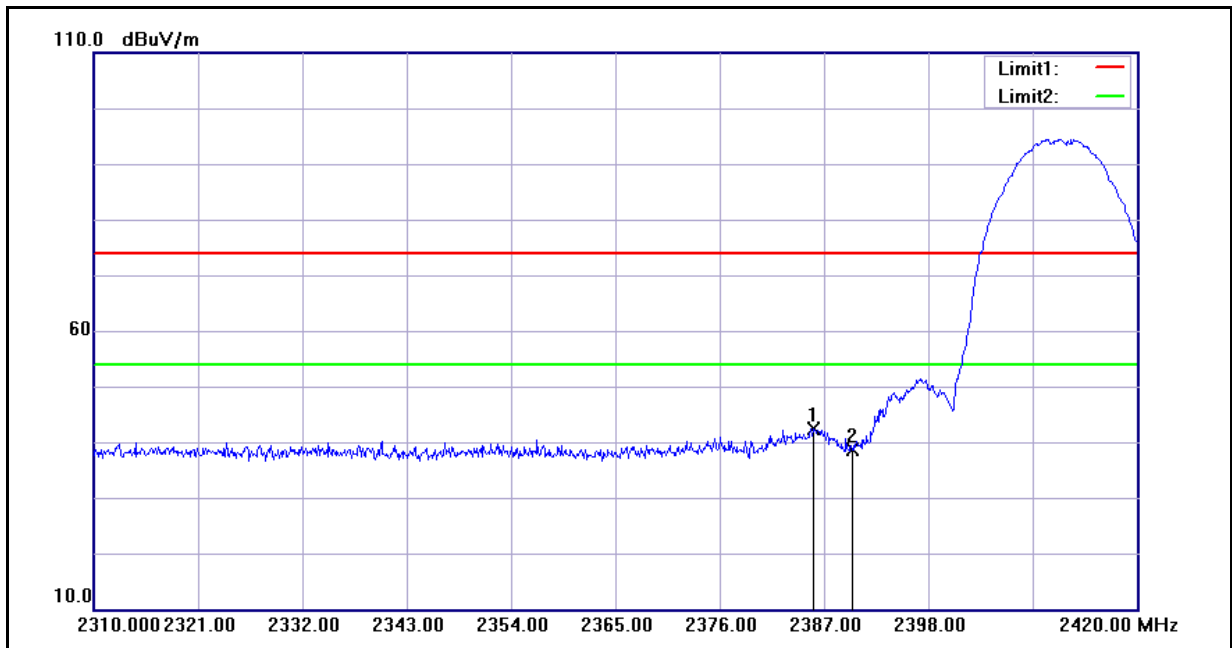

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.900	42.44	-0.08	42.36	74.00	-31.64	peak
2	2390.000	38.71	-0.06	38.65	74.00	-35.35	peak


Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/20/2011
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

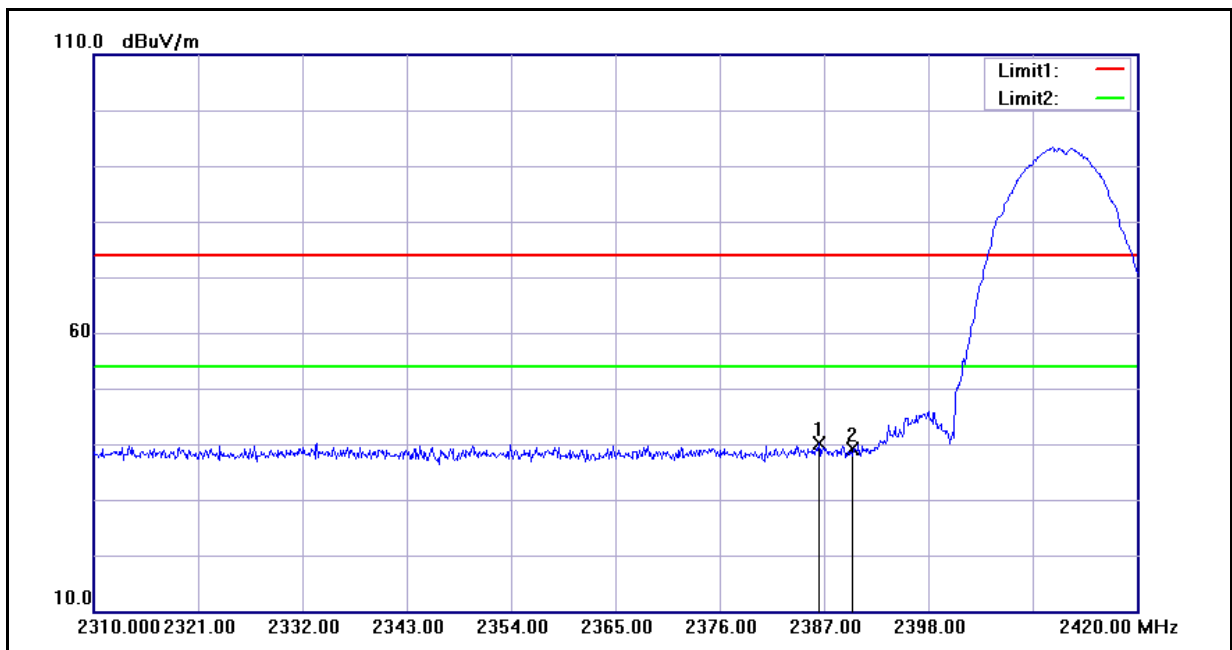

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.450	40.31	-0.08	40.23	74.00	-33.77	peak
2	2390.000	39.17	-0.06	39.11	74.00	-34.89	peak




Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/20/2011
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

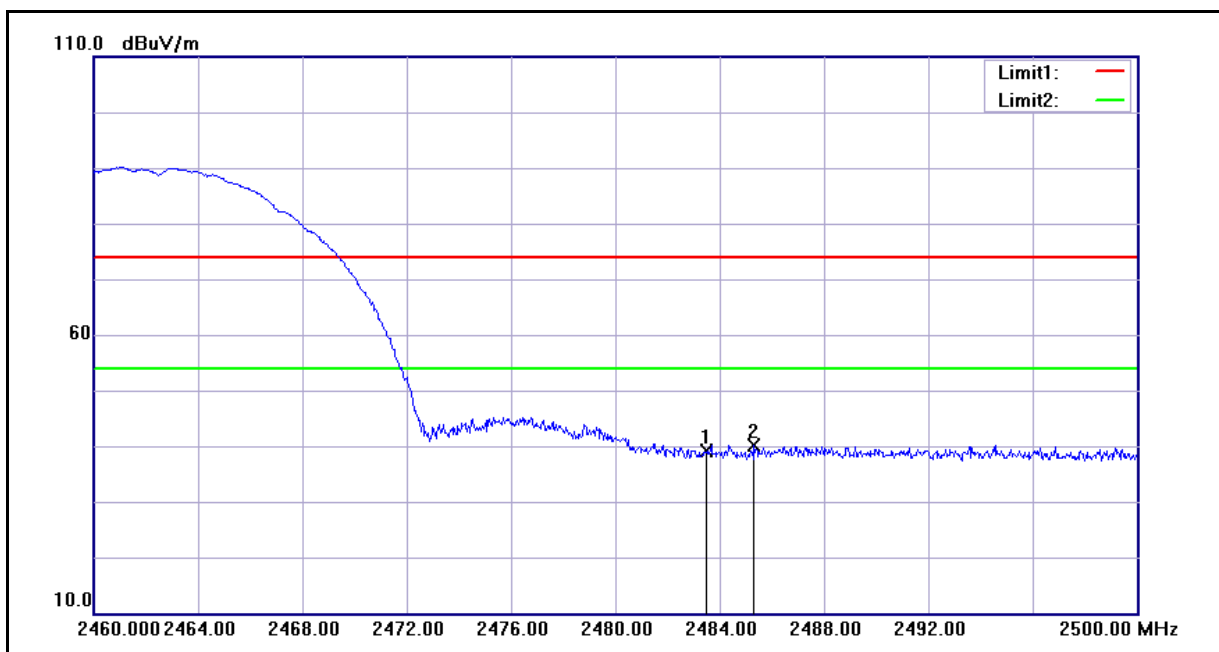


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.67	0.35	39.02	74.00	-34.98	peak
2	2485.320	39.80	0.36	40.16	74.00	-33.84	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/20/2011
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

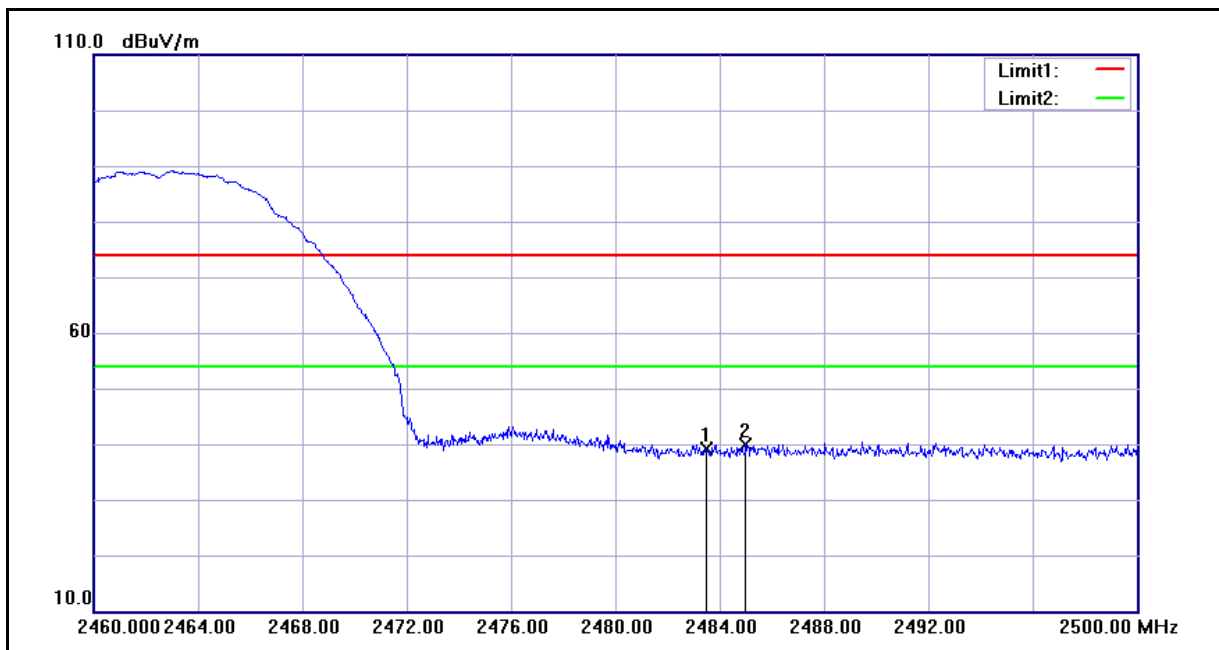


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.74	0.35	39.09	74.00	-34.91	peak
2	2485.000	39.65	0.35	40.00	74.00	-34.00	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/20/2011
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

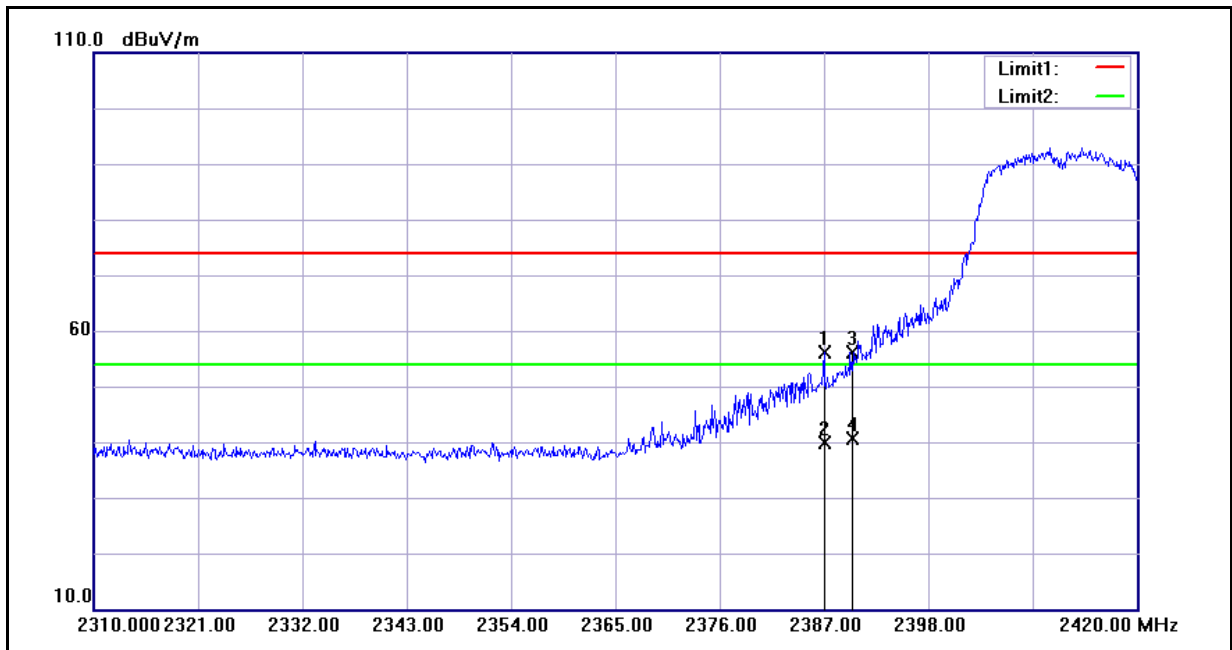


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.000	56.20	-0.07	56.13	74.00	-17.87	peak
2	2387.000	39.96	-0.07	39.89	54.00	-14.11	AVG
3	2390.000	56.07	-0.06	56.01	74.00	-17.99	peak
4	2390.000	40.71	-0.06	40.65	54.00	-13.35	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/20/2011
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

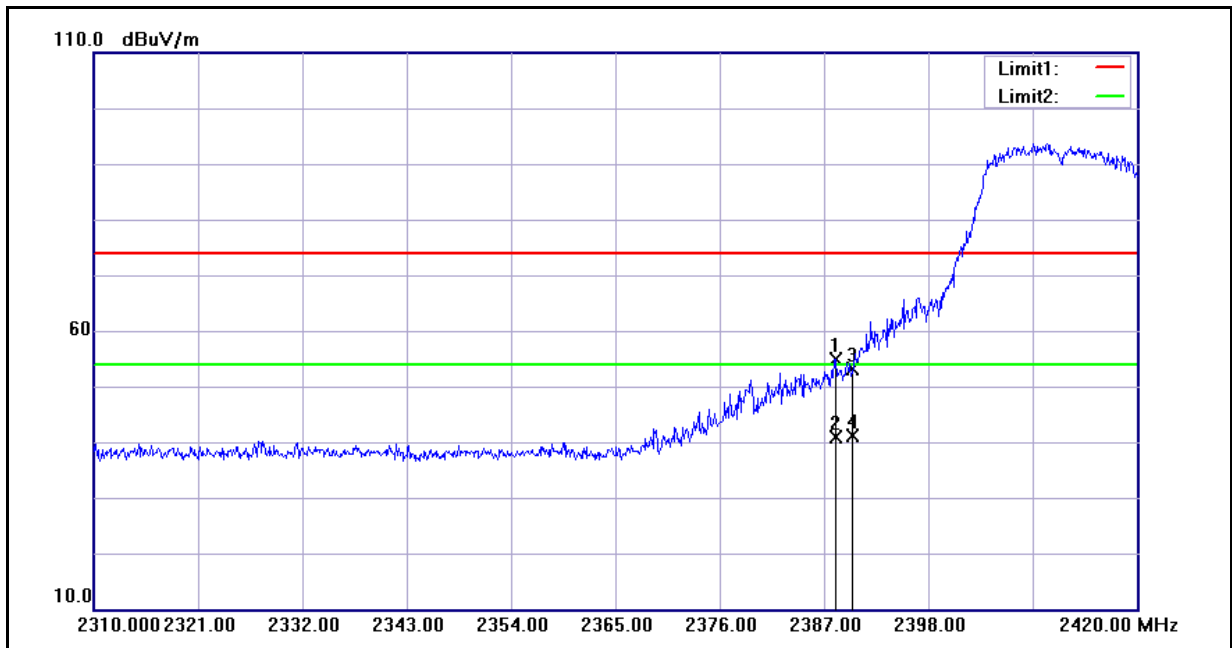


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.210	54.91	-0.07	54.84	74.00	-19.16	peak
2	2388.210	40.96	-0.07	40.89	54.00	-13.11	AVG
3	2390.000	53.08	-0.06	53.02	74.00	-20.98	peak
4	2390.000	41.22	-0.06	41.16	54.00	-12.84	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/20/2011
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

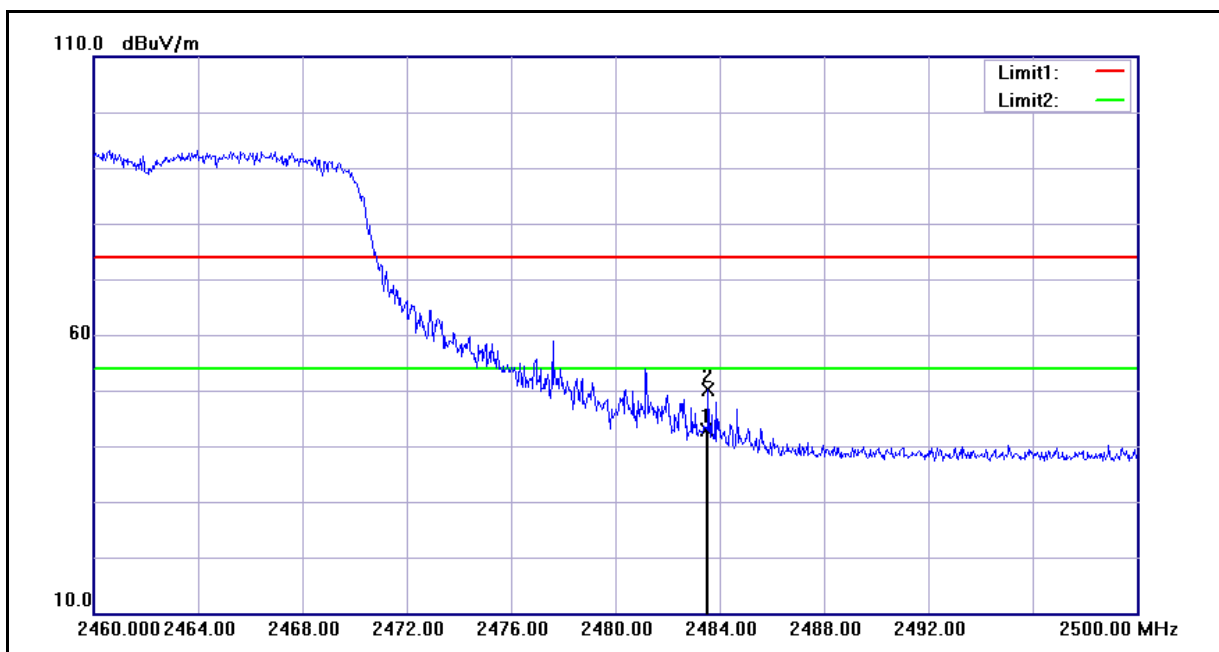


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	42.64	0.35	42.99	74.00	-31.01	peak
2	2483.560	49.69	0.35	50.04	74.00	-23.96	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/20/2011
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

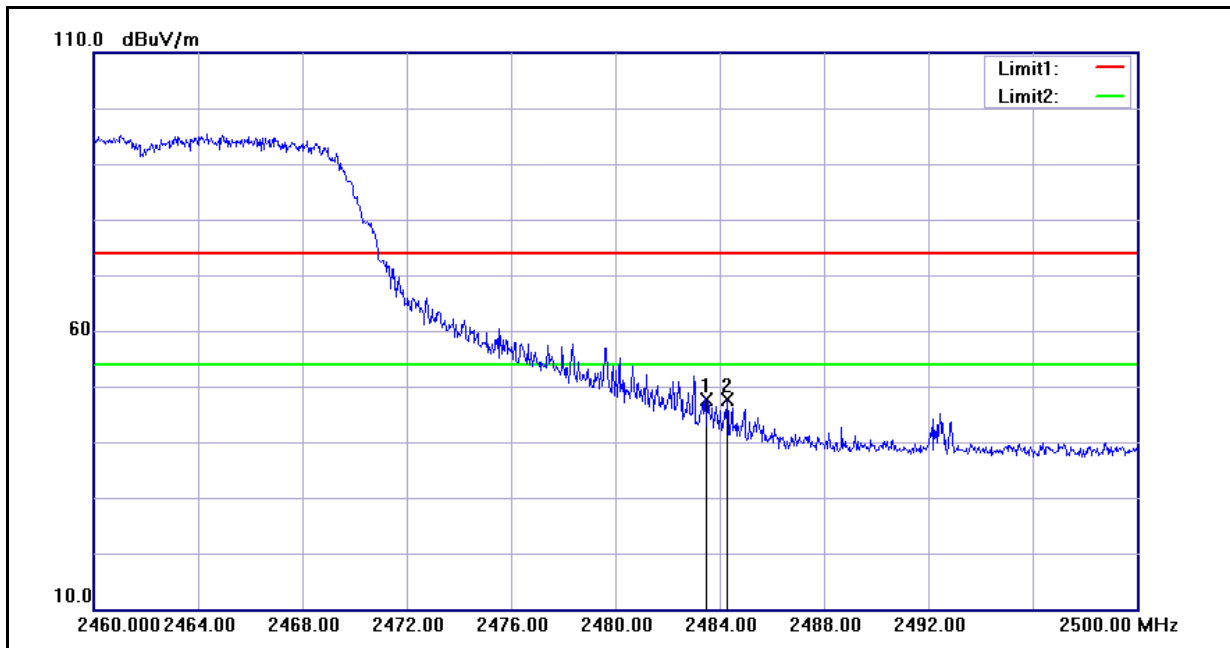


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	47.24	0.35	47.59	74.00	-26.41	peak
2	2484.280	47.19	0.35	47.54	74.00	-26.46	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/20/2011
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

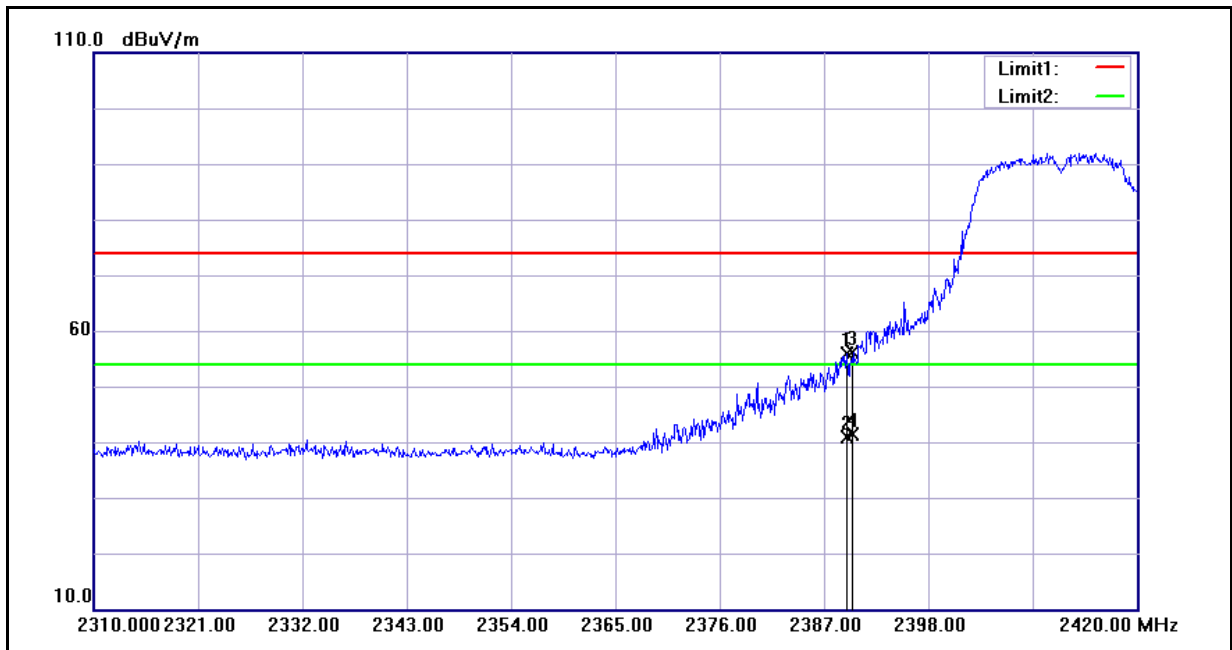

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	55.95	-0.06	55.89	74.00	-18.11	peak
2	2389.420	40.95	-0.06	40.89	54.00	-13.11	AVG
3	2390.000	56.26	-0.06	56.20	74.00	-17.80	peak
4	2390.000	41.54	-0.06	41.48	54.00	-12.52	AVG


Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/20/2011
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

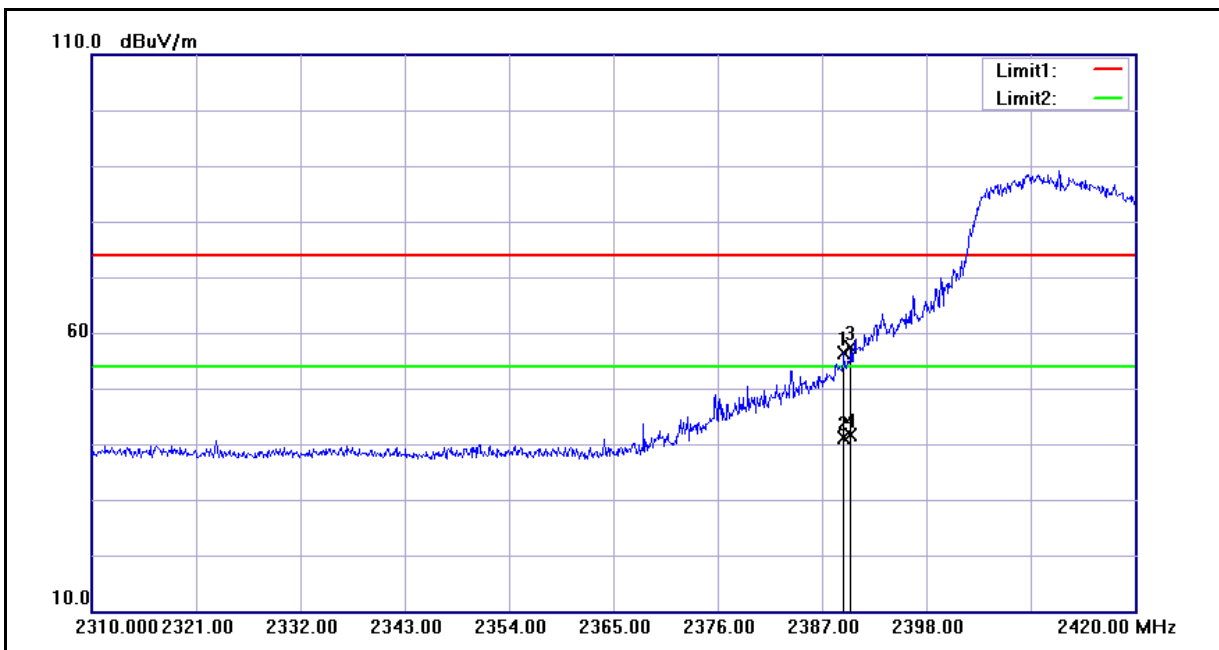

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.310	56.46	-0.06	56.40	74.00	-17.60	peak
2	2389.310	41.21	-0.06	41.15	54.00	-12.85	AVG
3	2390.000	57.36	-0.06	57.30	74.00	-16.70	peak
4	2390.000	41.61	-0.06	41.55	54.00	-12.45	AVG




Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/20/2011
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

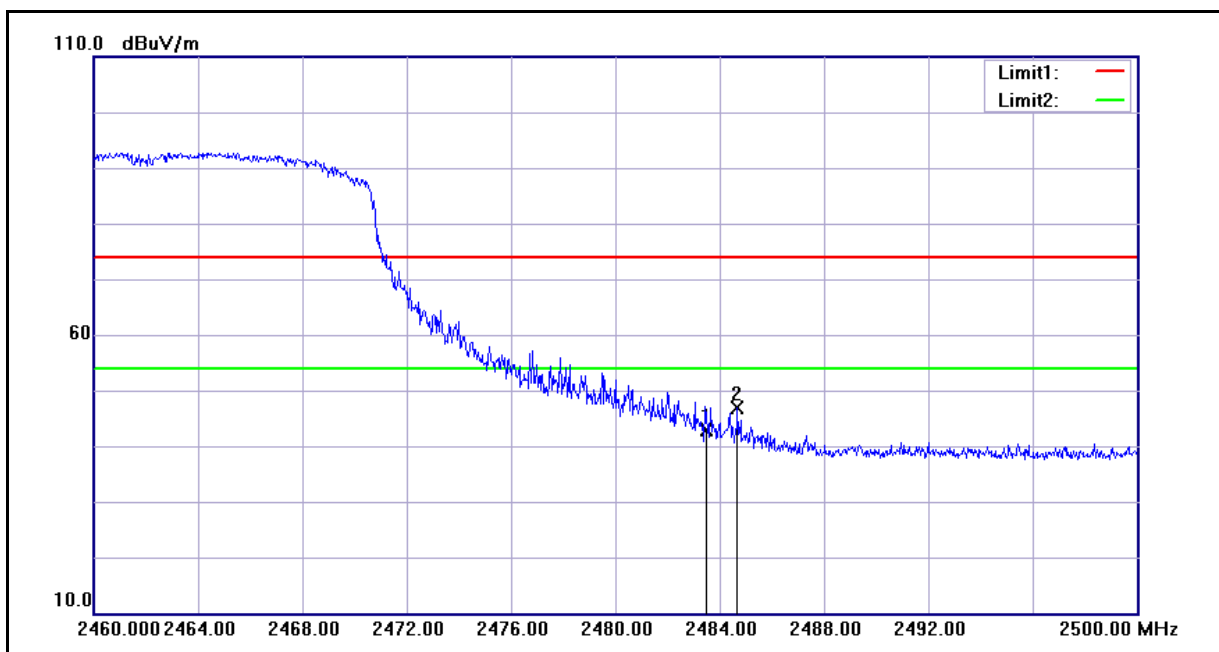

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	42.52	0.35	42.87	74.00	-31.13	peak
2	2484.680	46.54	0.35	46.89	74.00	-27.11	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	KINZO	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/20/2011
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

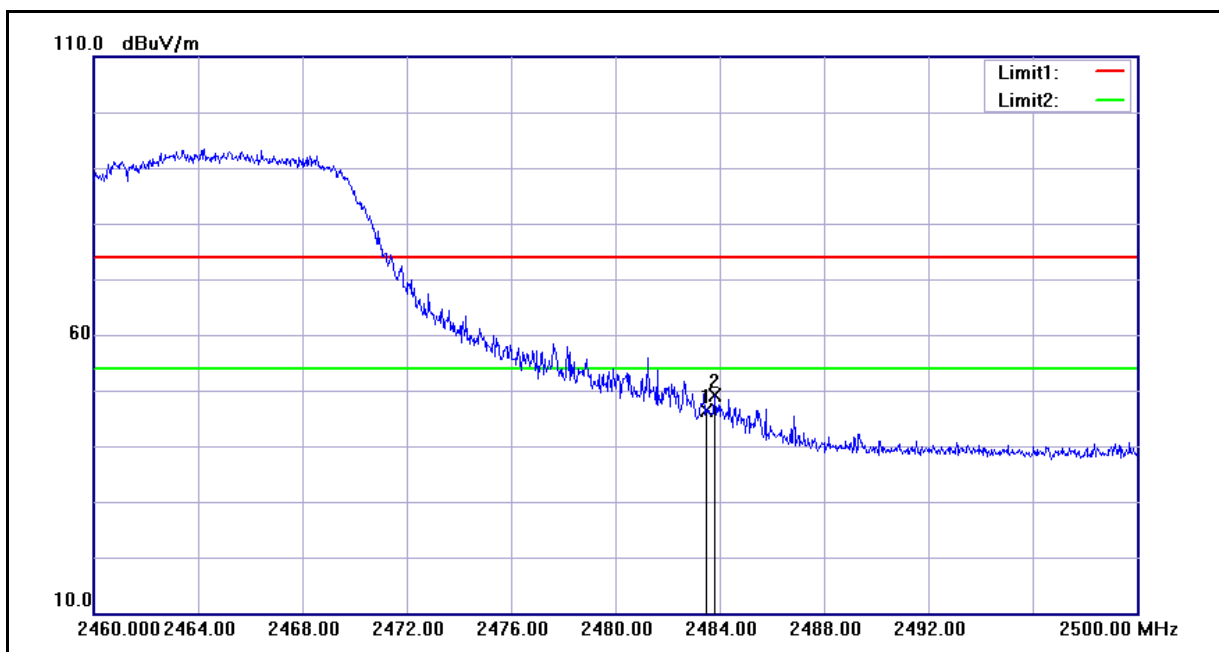


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.04	0.35	46.39	74.00	-27.61	peak
2	2483.800	48.67	0.35	49.02	74.00	-24.98	peak

## 11 99 % Occupied Bandwidth Measurement

### 11.1.Limit

N/A

### 11.2.Test Setup

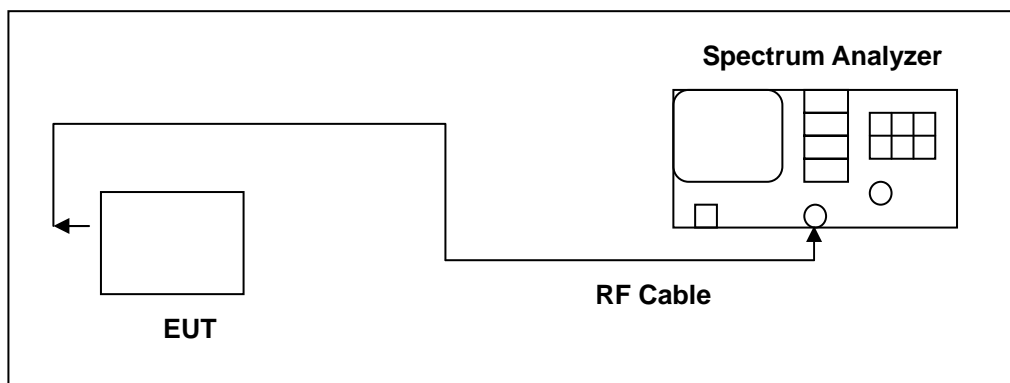

### 11.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 11.4.Test Procedure

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.



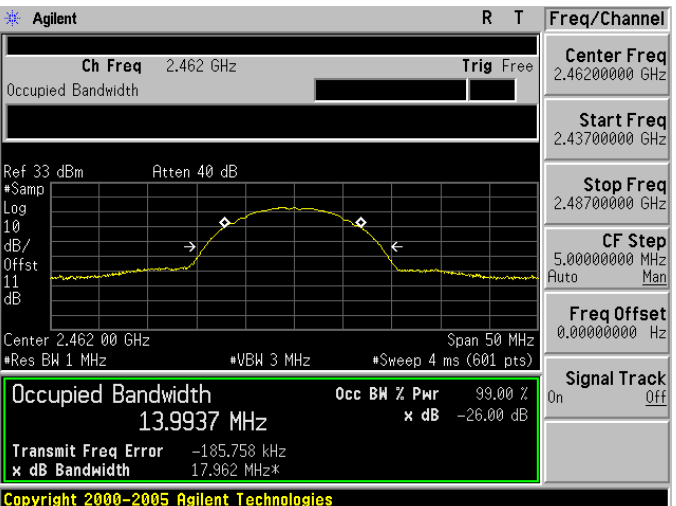
## 11.5.Test Result

Model Number	KINZO		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	11/09/2011	Test Site	TE02
Frequency (MHz)	Measurement (kHz)	Limit (kHz)	
2412	13.8768	-----	
2437	13.8677	-----	
2462	13.9937	-----	

Model Number	KINZO		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	11/09/2011	Test Site	TE02
Frequency (MHz)	Measurement (kHz)	Limit (kHz)	
2412	17.7532	-----	
2437	17.6695	-----	
2462	17.7501	-----	


Model Number	KINZO		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	11/09/2011	Test Site	TE02
Frequency (MHz)	Measurement (kHz)	Limit (kHz)	
2412	18.0289	-----	
2437	19.4485	-----	
2462	17.8189	-----	

## 11.6. Test Graphs

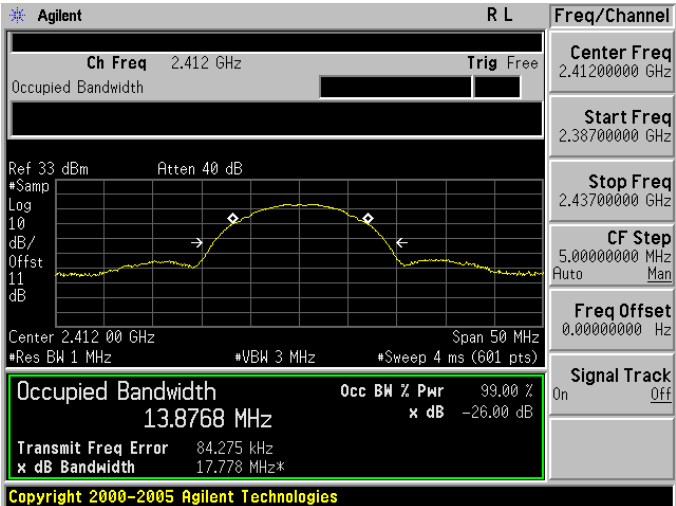
Mode 3: IEEE 802.11b Link Mode	
2412	 <p><b>Agilent</b> R L</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 33 dBm Atten 40 dB</p> <p>*Samp Log 10 dB/Offst 11 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>*Res BW 1 MHz *VBW 3 MHz *Sweep 4 ms (601 pts)</p> <p><b>Occupied Bandwidth</b> 13.8768 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 84.275 kHz</p> <p>x dB Bandwidth 17.778 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p><b>Freq/Channel</b></p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	 <p><b>Agilent</b> R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 33 dBm Atten 40 dB</p> <p>*Samp Log 10 dB/Offst 11 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>*Res BW 1 MHz *VBW 3 MHz *Sweep 4 ms (601 pts)</p> <p><b>Occupied Bandwidth</b> 13.8677 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 115.312 kHz</p> <p>x dB Bandwidth 17.791 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p><b>Freq/Channel</b></p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	 <p><b>Agilent</b> R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 33 dBm Atten 40 dB</p> <p>*Samp Log 10 dB/Offst 11 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>*Res BW 1 MHz *VBW 3 MHz *Sweep 4 ms (601 pts)</p> <p><b>Occupied Bandwidth</b> 13.9937 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -185.758 kHz</p> <p>x dB Bandwidth 17.962 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p><b>Freq/Channel</b></p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 4: IEEE 802.11g Link Mode


2412

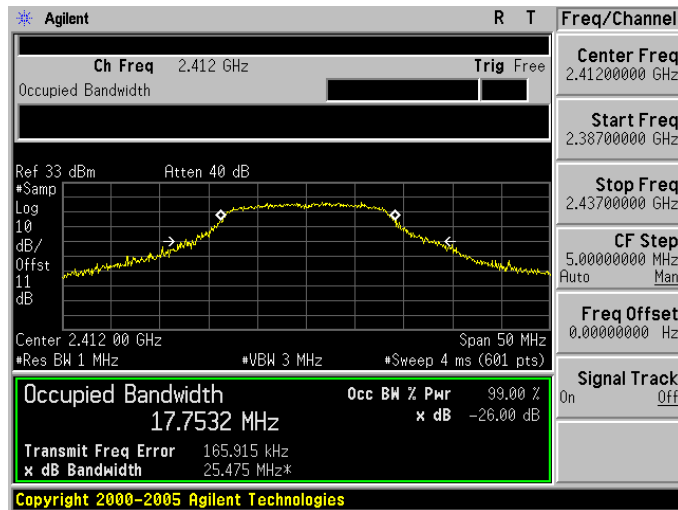

2437

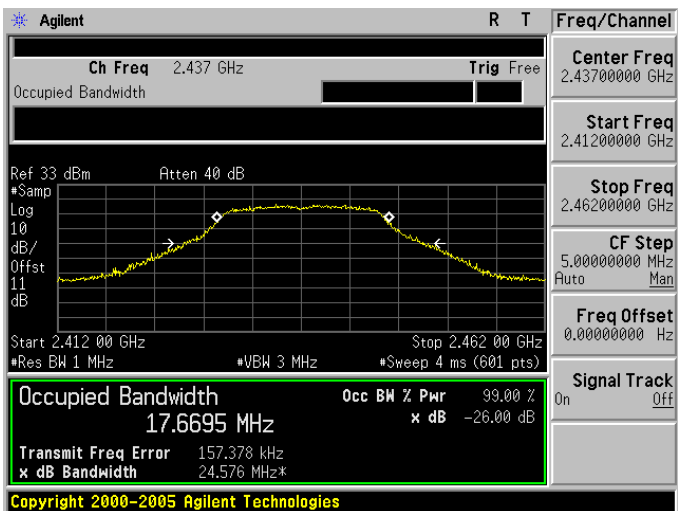


2462

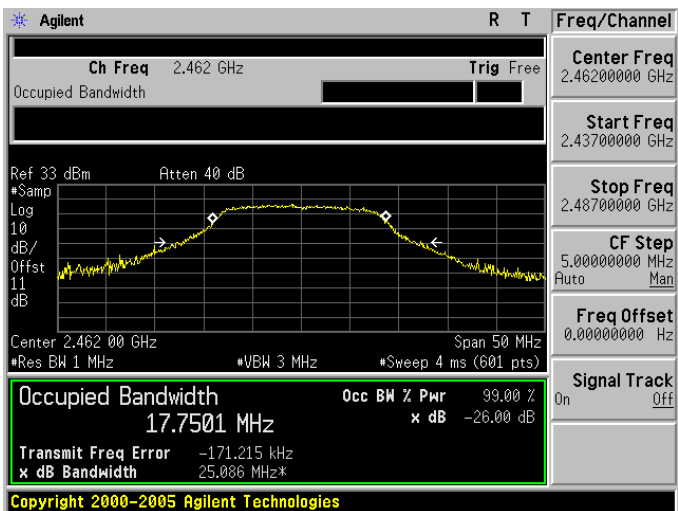


Mode 5: draft 802.11n Standard-20MHz Link Mode


2412

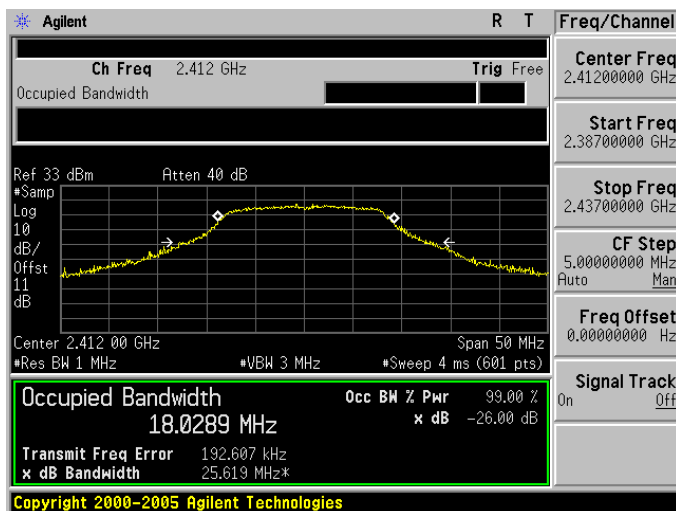

2437

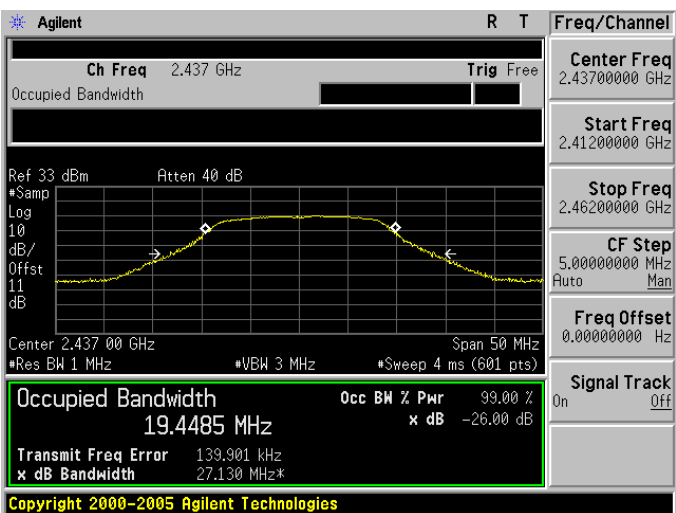

2462

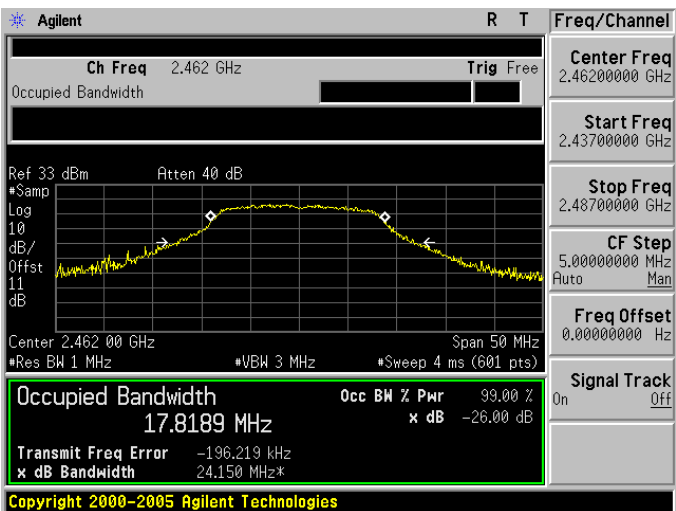

## **12 Antenna Measurement**

### **12.1.Limit**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **12.2.Antenna Connector Construction**

The antenna used in this product is **Internal antenna**. And the maximum Gain of this antenna is only **-4.0 dBi**.