

FCC TEST REPORT
FOR
10MOONS TECHNOLOGY DEVELOPMENT CO., LTD.

Digital Media Player
Model No.: DMP560

Prepared for : 10MOONS TECHNOLOGY DEVELOPMENT CO., LTD.
Address : 6F, Bldg. A, 10moons Technology Park, No.6 Hechang Road,
Zhongkai High-tech Zone, Huizhou, P.R.China

Prepared By : Anbotek Compliance Laboratory Limited
Address : 1/F, 1/Build, SEC Industrial Park, No. 4 Qianhai Road, Nanshan
District, Shenzhen, 518054, China
Tel: (86) 755-26014771
Fax: (86) 755-26014772

Report Number : 201111761F
Date of Test : Nov. 19~23, 2011
Date of Report : Nov. 24, 2011

TABLE OF CONTENTS

Description	
	Page
Test Report Verification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
1.2. Auxiliary Equipment Used during Test	5
1.3. Description of Test Facility	6
1.4. Measurement Uncertainty	6
1.5. Test Summary	6
2. POWER LINE CONDUCTED MEASUREMENT	7
2.1. Test Equipment	7
2.2. Block Diagram of Test Setup	7
2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15 Subpart B Class B)	8
2.4. Configuration of EUT on Measurement	8
2.5. Operating Condition of EUT	8
2.6. Test Procedure	8
2.7. Power Line Conducted Emission Measurement Results	8
3. RADIATED EMISSION MEASUREMENT	15
3.1. Test Equipment	15
3.2. Block Diagram of Test Setup	15
3.3. Radiated Emission Limit (Subpart B Class B)	16
3.4. EUT Configuration on Measurement	16
3.5. Operating Condition of EUT	16
3.6. Test Procedure	16
3.7. Radiated Emission Measurement Results	17
4. PHOTOGRAPH	24
4.1. Photo of Power Line Conducted Emission Test	24
4.2. Photo of Radiated Emission Test	25

APPENDIX I (Photos of EUT) (3 Pages)

TEST REPORT VERIFICATION

Applicant : 10MOONS TECHNOLOGY DEVELOPMENT CO., LTD.
Manufacturer : 10MOONS TECHNOLOGY DEVELOPMENT CO., LTD.
EUT : Digital Media Player
Model No. : DMP560
Rating : 12V $\overline{=}$, 24W, 2A
Trade Mark : N.A.

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart B 2010 & FCC / ANSI C63.4-2009

The device described above is tested by Anbotek Compliance Laboratory Limited To determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited Is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited

Date of Test : Nov. 19~23, 2011

Prepared by :




(Engineer / Andy Chen)

Reviewer :



(Project Manager / Coco Xiang)

Approved & Authorized Signer :



(Manager / Henry Yang)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	: Digital Media Player
Model Number	: DMP560
Test Power Supply	: 120V~, 60Hz for Adapter
Switching Adapter	: Input: 100~240V~, 50/60Hz Output: 12V==, 2.0A UL, FCC
Applicant	: 10MOONS TECHNOLOGY DEVELOPMENT CO., LTD.
Address	: 6F, Bldg. A, 10moons Technology Park, No.6 Hechang Road, Zhongkai High-tech Zone, Huizhou, P.R.China
Manufacturer	: 10MOONS TECHNOLOGY DEVELOPMENT CO., LTD.
Address	: 6F, Bldg. A, 10moons Technology Park, No.6 Hechang Road, Zhongkai High-tech Zone, Huizhou, P.R.China
Date of Sample received	: Nov. 18, 2011
Date of Test	: Nov. 19~23, 2011

1.2. Auxiliary Equipment Used during Test

PC	Manufacturer: IBM M/N: 2373 S/N: 2373 RATING: 16V $\overline{\text{---}}$, 4.5A CE, FCC
MOUSE	: Manufacturer: DELL M/N: M-UARDEL7 S/N: N/A CE , FCC: DOC
Earphone	: Manufacturer: Ouyun M/N: OH601 S/N: N/A CE , FCC: DOC
SD card	Manufacturer: Kingston M/N: SD4/4GBFE S/N: N/A CE , FCC: DOC
USB Cable	: 0.5m, SHIELD
Monitor	Lenovo MODEL NO.: X61 S/N: L3-L3729 08/03

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Anbotech Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, August 20, 2010

IC-Registration No.: 8058A-1

Anbotech Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, August 30, 2010

Test Location

All Emissions tests were performed

Anbotech Compliance Laboratory Limited. at 1/F, 1/Build, SEC Industrial Park, No. 4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

1.5. Test Summary

For the EUT described above. The standards used were FCC Part 15 Subpart B for Emissions.

Table 1 : Tests Carried Out Under FCC Part 15 Subpart B

Standard	Test Items	Status
FCC Part 15 Subpart B	Power Line Conducted Emission Test (150KHz To 30MHz)	√
FCC Part 15 Subpart B	Radiated Emission Test (30MHz To 1000MHz)	√

√ Indicates that the test is applicable

x Indicates that the test is not applicable

2. POWER LINE CONDUCTED MEASUREMENT

2.1. Test Equipment


The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2011	1 Year
2.	Two-Line V-network	Rohde & Schwarz	ENV216	10055	May 19, 2011	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2011	1 Year
4.	EMI Test Software	ES-K1	N/A	N/A	N/A	N/A


2.2. Block Diagram of Test Setup

2.2.1. Block diagram of connection between the EUT and simulators


2.1.1.1. Hard Disk Playing Mode

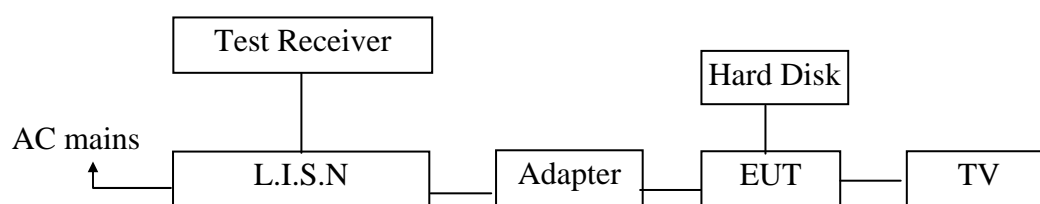

2.1.1.2. USB Playing Mode

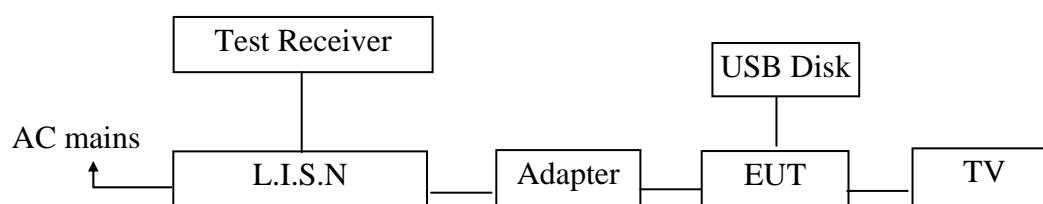

2.1.1.3. Connect to PC Mode

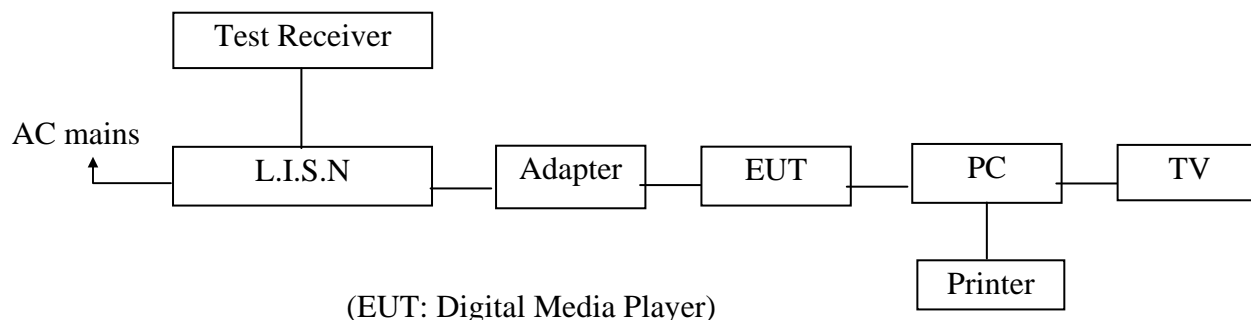

2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15 Subpart B Class B)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2.3.1. The lower limit shall apply at the transition frequencies.

2.4. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Digital Media Player
 Model Number : DMP560
 Applicant : 10MOONS TECHNOLOGY DEVELOPMENT CO., LTD.

2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulator as shown as Section 2.2.

2.5.2. Turn on the power of all equipment.

2.5.3. Let the EUT work in test mode (On) and measure it.

2.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2009 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test result are reported on Section 2.7.

2.7. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.

The test curves are shown in the following pages.


FCC ID: Z32DMP560

CONDUCTED EMISSION TEST DATA

EUT: Digital Media Player M/N: DMP560
 Operating Condition: Hard Disk Playing
 Test Site: 1# Shielded Room
 Operator: Andy Chen
 Test Specification: 120V~, 60Hz for Adapter
 Comment: Live Line
 Tem:22.2 Hum:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

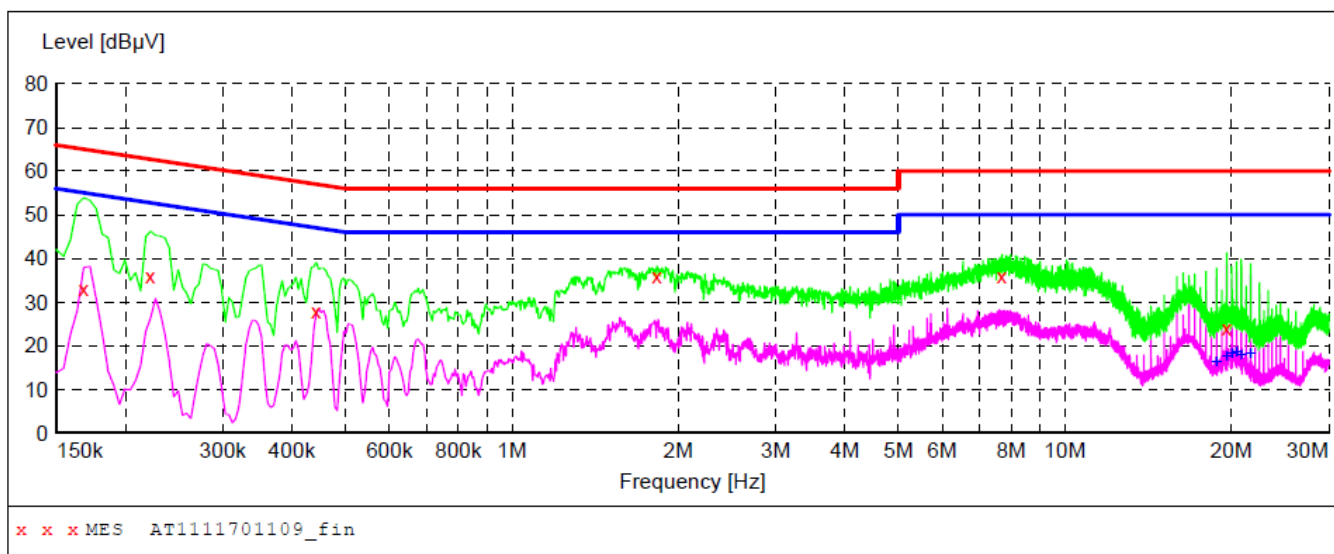**MEASUREMENT RESULT: "AT1111701109_fin"**

11/21/2011 10:16AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	33.00	10.1	65	32.1	QP	L1	GND
0.222000	35.80	10.1	63	26.9	QP	L1	GND
0.442500	27.90	10.1	57	29.1	QP	L1	GND
1.828000	36.00	10.3	56	20.0	QP	L1	GND
7.691500	36.10	10.5	60	23.9	QP	L1	GND
19.616500	23.90	10.8	60	36.1	QP	L1	GND

MEASUREMENT RESULT: "AT1111701109_fin2"

11/21/2011 10:16AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
18.797500	16.40	10.8	50	33.6	AV	L1	GND
19.616500	17.60	10.8	50	32.4	AV	L1	GND
20.026000	18.10	10.8	50	31.9	AV	L1	GND
20.431000	18.40	10.8	50	31.6	AV	L1	GND
20.840500	18.00	10.8	50	32.0	AV	L1	GND
21.659500	18.30	10.8	50	31.7	AV	L1	GND


FCC ID: Z32DMP560

CONDUCTED EMISSION TEST DATA

EUT: Digital Media Player M/N: DMP560
 Operating Condition: Hard Disk Playing
 Test Site: 1# Shielded Room
 Operator: Andy Chen
 Test Specification: 120V~, 60Hz for Adapter
 Comment: Neutral Line
 Tem:22.2 Hum:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

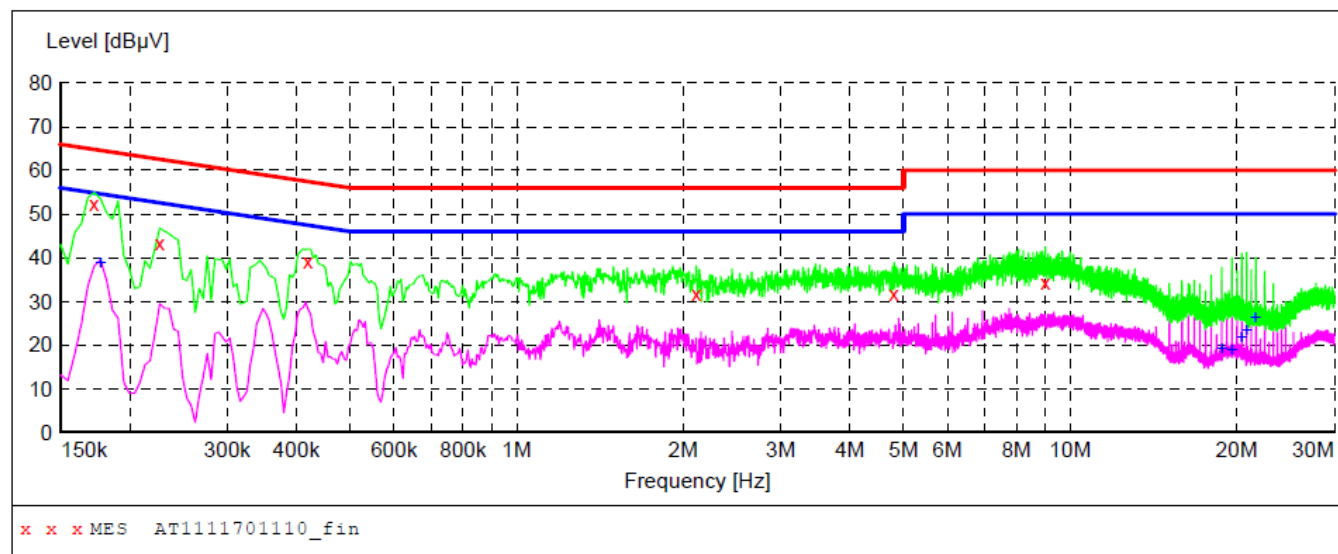**MEASUREMENT RESULT: "AT1111701110_fin"**

11/21/2011 10:19AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.172500	52.50	10.1	65	12.3	QP	N	GND
0.226500	43.50	10.1	63	19.1	QP	N	GND
0.420000	39.10	10.1	57	18.3	QP	N	GND
2.111500	31.90	10.3	56	24.1	QP	N	GND
4.802500	31.70	10.5	56	24.3	QP	N	GND
9.019000	34.40	10.6	60	25.6	QP	N	GND

MEASUREMENT RESULT: "AT1111701110_fin2"

11/21/2011 10:19AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.177000	38.80	10.1	55	15.8	AV	N	GND
18.779500	19.20	10.8	50	30.8	AV	N	GND
19.594000	18.80	10.8	50	31.2	AV	N	GND
20.413000	21.90	10.8	50	28.1	AV	N	GND
20.822500	23.40	10.8	50	26.6	AV	N	GND
21.641500	26.40	10.8	50	23.6	AV	N	GND


FCC ID: Z32DMP560

CONDUCTED EMISSION TEST DATA

EUT: Digital Media Player M/N: DMP560
 Operating Condition: USB Playing
 Test Site: 1# Shielded Room
 Operator: Andy Chen
 Test Specification: 120V~, 60Hz for Adapter
 Comment: Live Line
 Tem:22.2 Hum:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

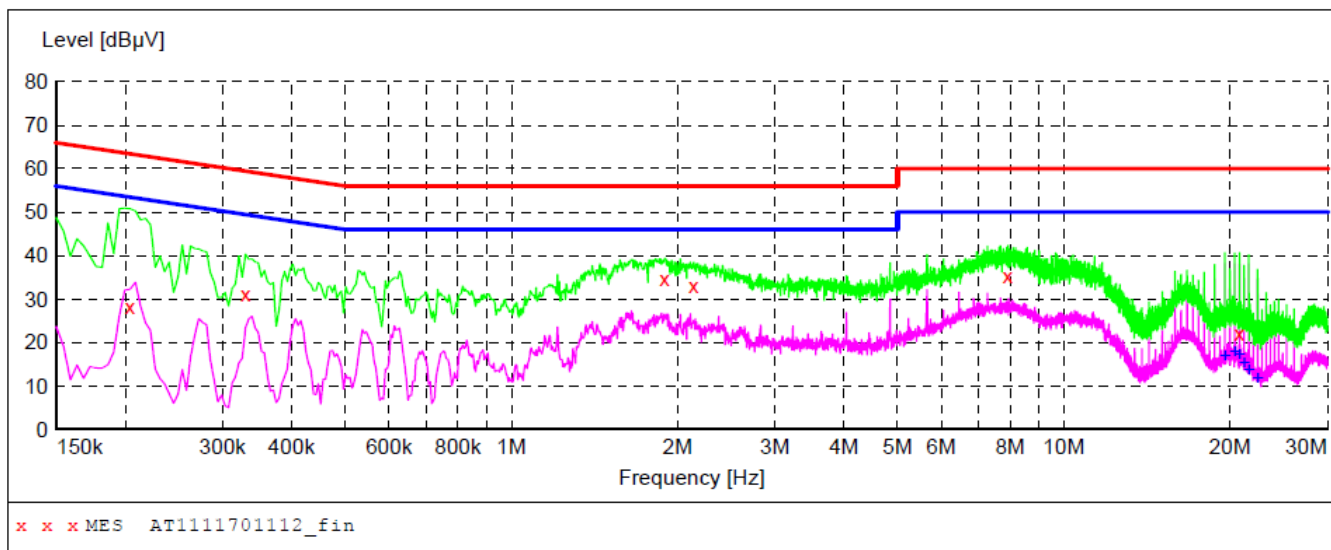**MEASUREMENT RESULT: "AT1111701112_fin"**

11/21/2011 10:25AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.204000	28.10	10.1	63	35.3	QP	L1	GND
0.330000	31.00	10.1	60	28.5	QP	L1	GND
1.895500	34.50	10.3	56	21.5	QP	L1	GND
2.138500	33.10	10.3	56	22.9	QP	L1	GND
7.925500	35.40	10.5	60	24.6	QP	L1	GND
20.791000	22.00	10.8	60	38.0	QP	L1	GND

MEASUREMENT RESULT: "AT1111701112_fin2"

11/21/2011 10:25AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
19.567000	17.10	10.8	50	32.9	AV	L1	GND
20.381500	18.00	10.8	50	32.0	AV	L1	GND
20.791000	17.20	10.8	50	32.8	AV	L1	GND
21.200500	15.40	10.8	50	34.6	AV	L1	GND
21.610000	13.70	10.8	50	36.3	AV	L1	GND
22.429000	11.70	10.8	50	38.3	AV	L1	GND


FCC ID: Z32DMP560

CONDUCTED EMISSION TEST DATA

EUT: Digital Media Player M/N: DMP560
 Operating Condition: USB Playing
 Test Site: 1# Shielded Room
 Operator: Andy Chen
 Test Specification: 120V~, 60Hz for Adapter
 Comment: Neutral Line
 Tem:22.2 Hum:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

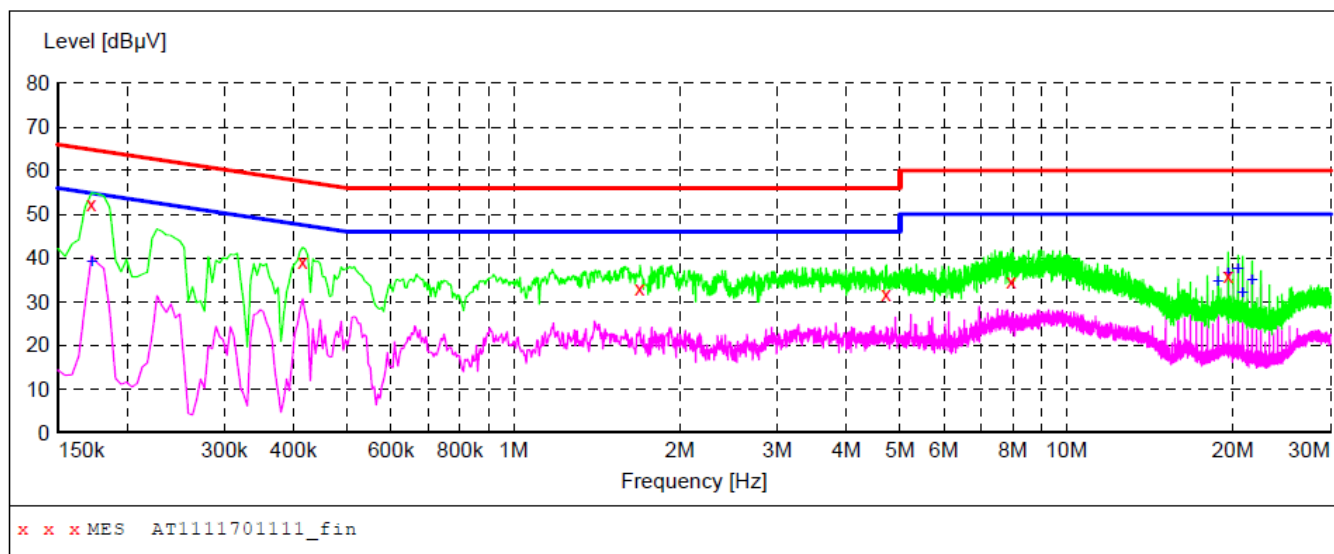**MEASUREMENT RESULT: "AT1111701111_fin"**

11/21/2011 10:22AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.172500	52.50	10.1	65	12.3	QP	N	GND
0.415500	39.30	10.1	58	18.2	QP	N	GND
1.693000	33.20	10.3	56	22.8	QP	N	GND
4.726000	31.80	10.5	56	24.2	QP	N	GND
7.948000	34.80	10.5	60	25.2	QP	N	GND
19.603000	35.90	10.8	60	24.1	QP	N	GND

MEASUREMENT RESULT: "AT1111701111_fin2"

11/21/2011 10:22AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.172500	39.10	10.1	55	15.7	AV	N	GND
18.788500	34.70	10.8	50	15.3	AV	N	GND
19.603000	36.50	10.8	50	13.5	AV	N	GND
20.422000	37.60	10.8	50	12.4	AV	N	GND
20.827000	32.10	10.8	50	17.9	AV	N	GND
21.646000	35.10	10.8	50	14.9	AV	N	GND


FCC ID: Z32DMP560

CONDUCTED EMISSION TEST DATA

EUT: Digital Media Player M/N: DMP560
 Operating Condition: Connect to PC
 Test Site: 1# Shielded Room
 Operator: Andy Chen
 Test Specification: 120V~, 60Hz for Adapter
 Comment: Live Line
 Tem:22.2 Hum:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

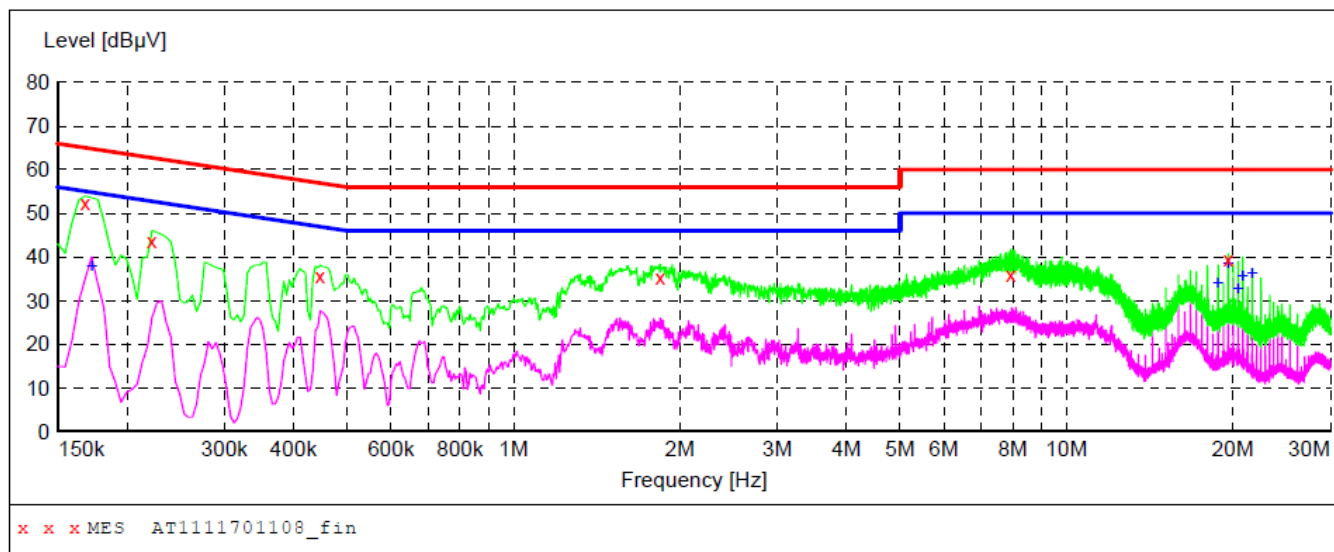**MEASUREMENT RESULT: "AT1111701108_fin"**

11/21/2011 10:13AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	52.50	10.1	65	12.6	QP	L1	GND
0.222000	43.70	10.1	63	19.0	QP	L1	GND
0.447000	35.70	10.1	57	21.2	QP	L1	GND
1.841500	35.20	10.3	56	20.8	QP	L1	GND
7.934500	35.90	10.5	60	24.1	QP	L1	GND
19.612000	39.50	10.8	60	20.5	QP	L1	GND

MEASUREMENT RESULT: "AT1111701108_fin2"

11/21/2011 10:13AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.172500	38.00	10.1	55	16.8	AV	L1	GND
18.793000	34.00	10.8	50	16.0	AV	L1	GND
19.612000	38.40	10.8	50	11.6	AV	L1	GND
20.426500	32.60	10.8	50	17.4	AV	L1	GND
20.836000	35.50	10.8	50	14.5	AV	L1	GND
21.655000	36.10	10.8	50	13.9	AV	L1	GND


FCC ID: Z32DMP560

CONDUCTED EMISSION TEST DATA

EUT: Digital Media Player M/N: DMP560
 Operating Condition: Connect to PC
 Test Site: 1# Shielded Room
 Operator: Andy Chen
 Test Specification: 120V~, 60Hz for Adapter
 Comment: Neutral Line
 Tem:22.2 Hum:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

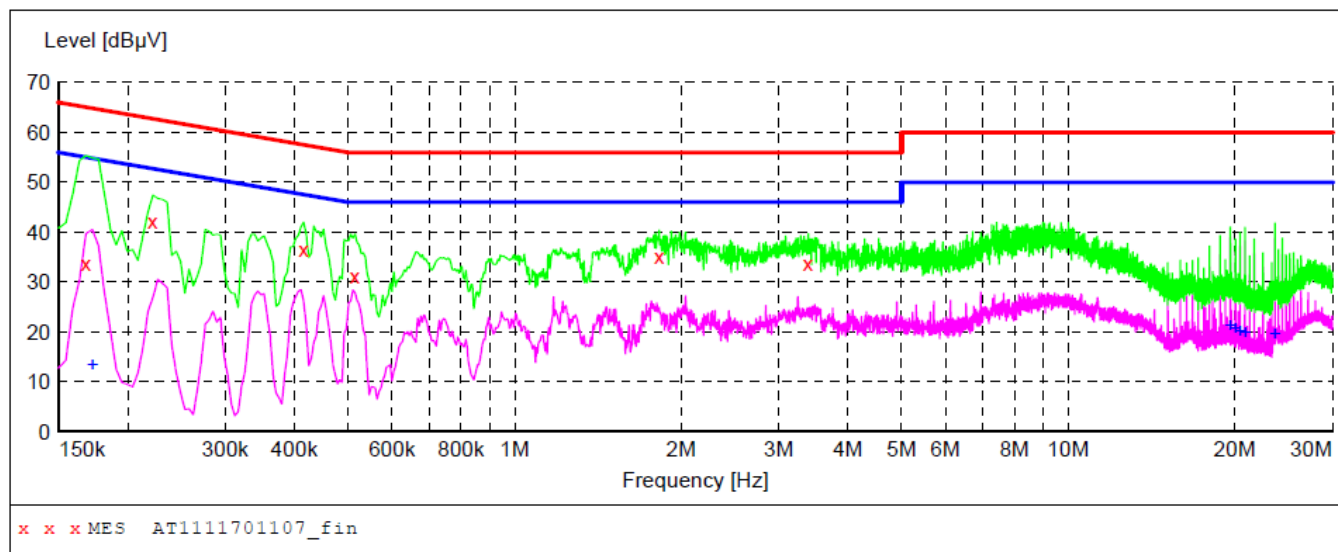**MEASUREMENT RESULT: "AT1111701107_fin"**

11/21/2011 10:09AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	33.80	10.1	65	31.3	QP	N	GND
0.222000	42.30	10.1	63	20.4	QP	N	GND
0.415500	36.40	10.1	58	21.1	QP	N	GND
0.514500	31.30	10.1	56	24.7	QP	N	GND
1.823500	35.20	10.3	56	20.8	QP	N	GND
3.389500	33.70	10.4	56	22.3	QP	N	GND

MEASUREMENT RESULT: "AT1111701107_fin2"

11/21/2011 10:09AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.172500	13.50	10.1	55	41.3	AV	N	GND
19.625500	21.20	10.8	50	28.8	AV	N	GND
20.030500	20.80	10.8	50	29.2	AV	N	GND
20.440000	20.20	10.8	50	29.8	AV	N	GND
20.849500	19.80	10.8	50	30.2	AV	N	GND
23.621500	19.60	10.8	50	30.4	AV	N	GND

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipments are used during the radiated emission measurement:


3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2011	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	100015	May 17, 2011	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2011	1 Year
4.	EMI Test Software	ES-K1	N/A	N/A	N/A	N/A


3.2. Block Diagram of Test Setup

3.2.1. Block diagram of connection between the EUT and simulators


3.1.1.1. Hard Disk Playing Mode

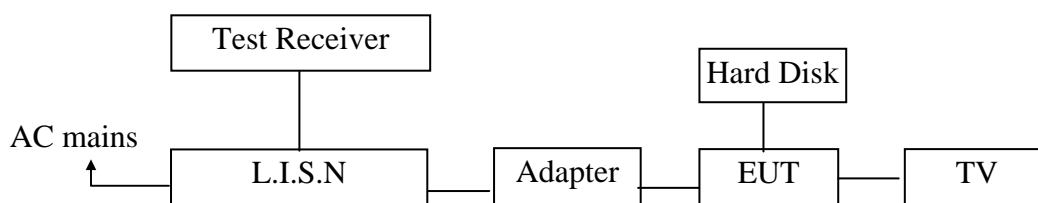


3.1.1.2. USB Playing Mode

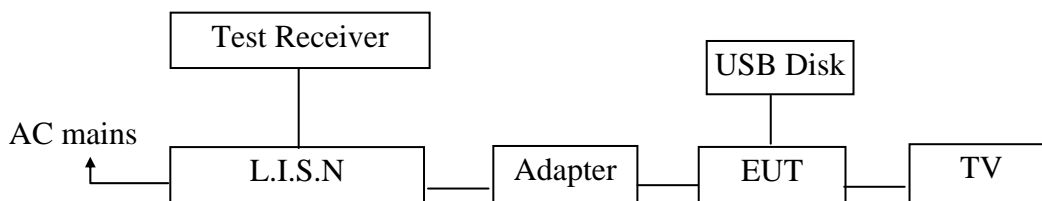

3.1.1.3. Connect to PC Mode

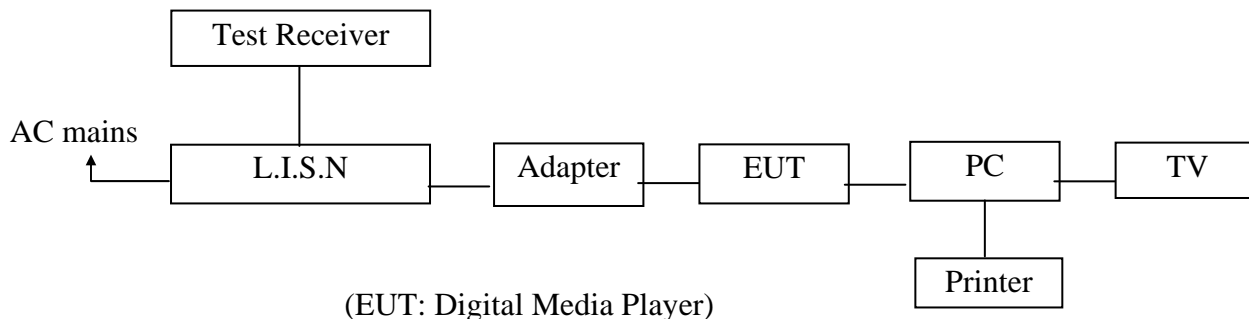

3.2.2. Anechoic Chamber Test Setup Diagram

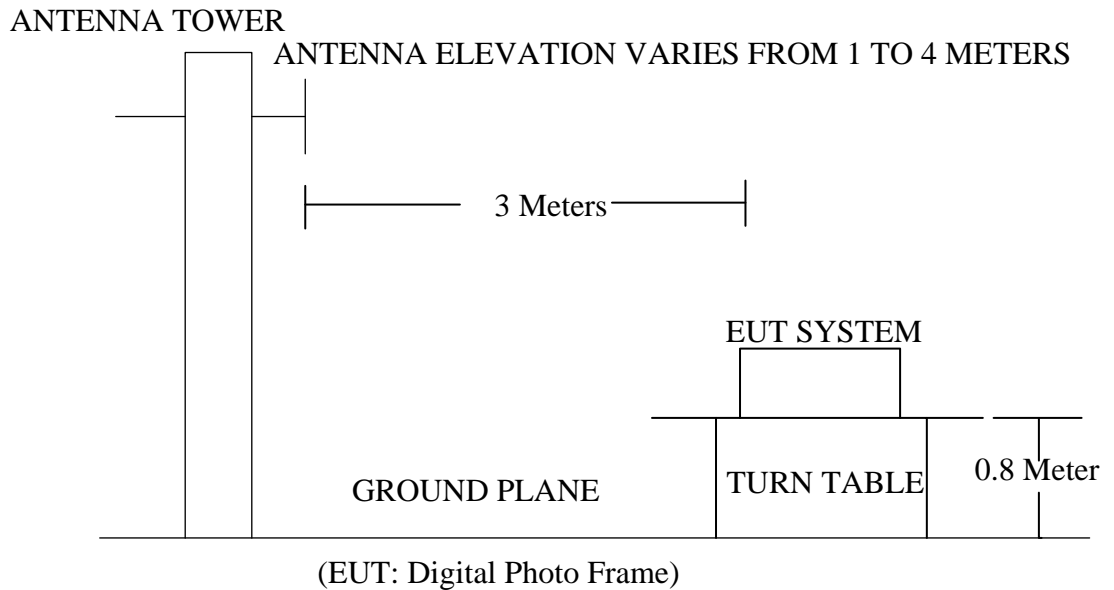

3.3. Radiated Emission Limit (Subpart B Class B)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0

- Remark :
- (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Measurement

The following equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

EUT : Digital Media Player
 Model Number : DMP560
 Applicant : 10MOONS TECHNOLOGY DEVELOPMENT CO., LTD.

3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT as shown in Section 3.2.
- 3.5.2. Let the EUT work in test mode (On) and measure it.

3.6. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the

maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (Trilog Broadband Antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009 on radiated emission measurement.

The bandwidth of the EMI test receiver (ESCI) is set at 120kHz.

The frequency range from 30MHz to 1000MHz is checked.

The test mode (On) is tested in chamber and all the test results are listed in Section 3.7.

3.7. Radiated Emission Measurement Results

PASS.

The test curves are shown in the following pages.


FCC ID: Z32DMP560

**Anbotek Compliance Laboratory Limited**

1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,
Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26014771
Fax: (86)755-26014772
Http://www.anbotek.com

Job No.:	AT1111701F	Polarization:	Horizontal
Standard:	(RE)FCC PART15 B _3m	Power Source:	120V~, 60Hz
Test item:	Radiation Test	Date:	2011/11/22
Temp.(C)/Hum.(%RH):	24.3(C)/55%RH	Time:	15:36:05
EUT:	Digital Media Player	Test By:	Andy Chen
Model:	DMP560	Distance:	3m
Note:	Hard Disk Playing		

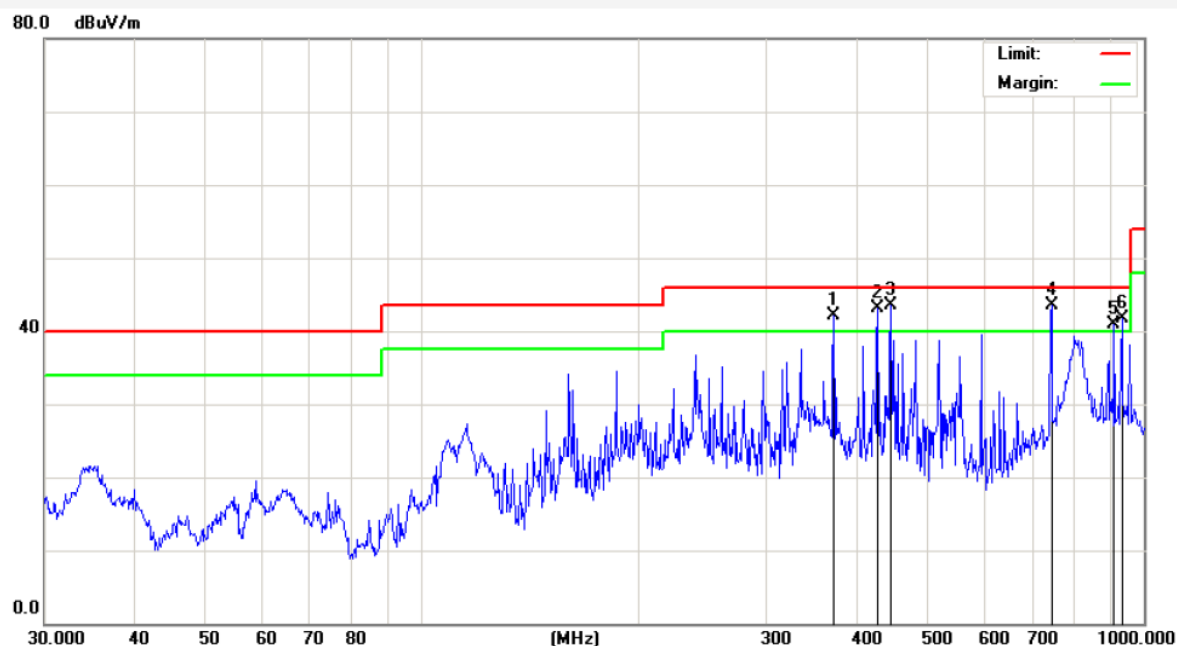

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	372.0045	64.18	-21.98	42.20	46.00	-3.80	QP	100	0	
2	428.0192	63.89	-20.81	43.08	46.00	-2.92	QP	100		
3	446.4141	64.21	-20.63	43.58	46.00	-2.42	QP	100	0	
4	744.8659	58.01	-14.60	43.41	46.00	-2.59	QP	100	360	
5	909.6666	52.42	-11.58	40.84	46.00	-5.16	QP	100	0	
6	932.2715	53.02	-11.34	41.68	46.00	-4.32	QP	100	0	


Anbotek Compliance Laboratory Limited

1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,
Nanshan District, Shenzhen, 518054, China


Tel: (86)755-26014771

Fax: (86)755-26014772

Http://www.anbotek.com

Job No.:	AT1111701F	Polarization:	Vertical
Standard:	(RE)FCC PART15 B _3m	Power Source:	120V~, 60Hz
Test item:	Radiation Test	Date:	2011/11/22
Temp.(C)/Hum.(%RH):	24.3(C)/55%RH	Time:	15:42:28
EUT:	Digital Media Player	Test By:	Andy Chen
Model:	DMP560	Distance:	3m

Note: Hard Disk Playing

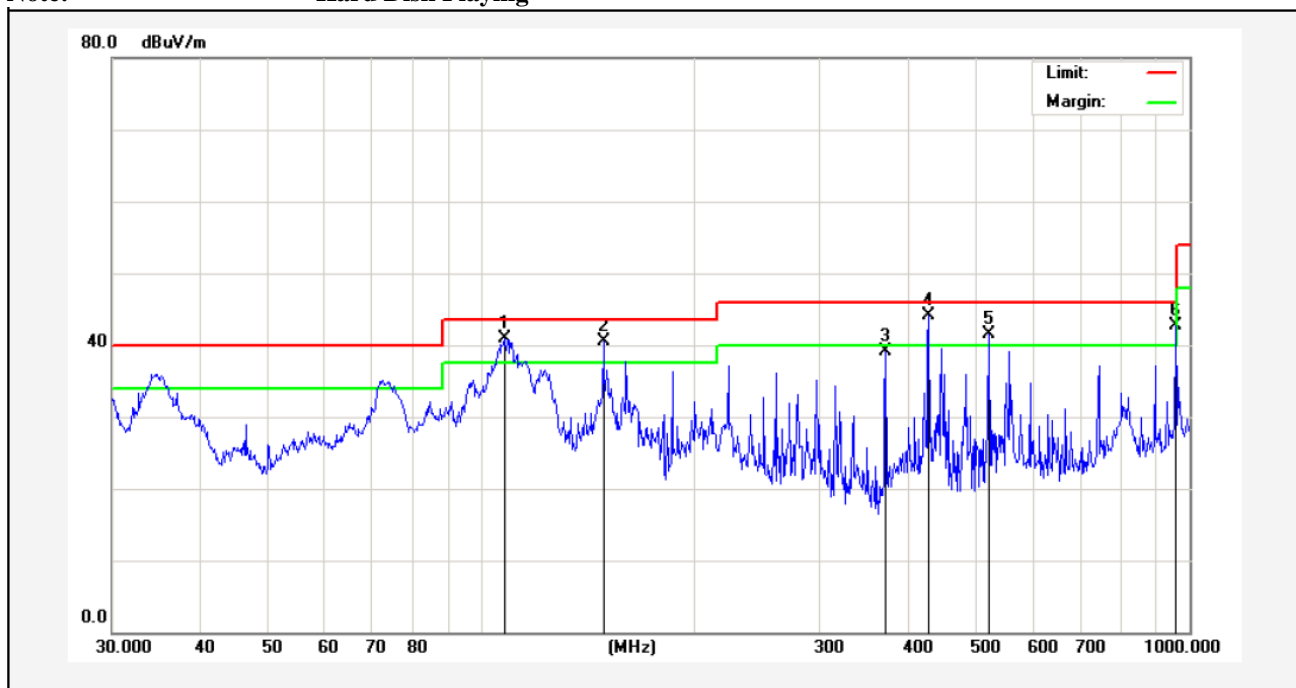


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	107.5101	65.29	-24.39	40.90	43.50	-2.60	QP	100	0	
2	148.4410	67.56	-27.00	40.56	43.50	-2.94	QP	100	360	
3	372.0045	60.13	-20.98	39.15	46.00	-6.85	peak			
4	428.0193	63.79	-19.75	44.04	46.00	-1.96	QP	100	360	
5	520.8882	60.31	-18.72	41.59	46.00	-4.41	QP	100	360	
6	955.4379	52.82	-10.09	42.73	46.00	-3.27	QP	100	0	


Anbotek Compliance Laboratory Limited

 1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,
 Nanshan District, Shenzhen, 518054, China

 Tel: (86)755-26014771
 Fax: (86)755-26014772
 Http://www.anbotek.com

Job No.:	AT1111701F	Polarization:	Horizontal
Standard:	(RE)FCC PART15 B _3m	Power Source:	120V~, 60Hz
Test item:	Radiation Test	Date:	2011/11/22
Temp.(C)/Hum.(%RH):	24.3(C)/55%RH	Time:	15:48:02
EUT:	Digital Media Player	Test By:	Andy Chen
Model:	DMP560	Distance:	3m
Note:	USB Playing		

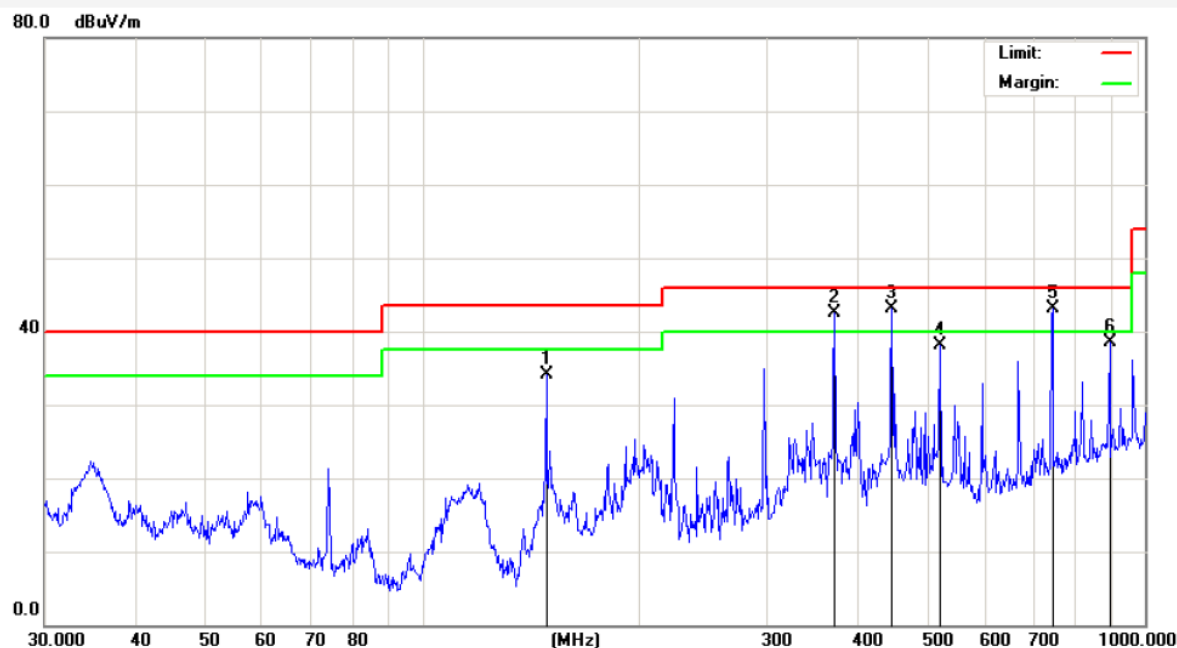

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	148.4410	66.19	-32.00	34.19	43.50	-9.31	peak			
2	372.0045	64.54	-21.98	42.56	46.00	-3.44	QP	100	0	
3	446.4141	63.78	-20.63	43.15	46.00	-2.85	QP	100	360	
4	520.8881	57.24	-19.14	38.10	46.00	-7.90	QP	100	0	
5	744.8659	57.72	-14.60	43.12	46.00	-2.88	QP	100	360	
6	893.8567	50.24	-11.79	38.45	46.00	-7.55	peak			


Anbotek Compliance Laboratory Limited


 1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,
 Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26014771

Fax: (86)755-26014772

Http://www.anbotek.com

Job No.:	AT1111701F	Polarization:	Vertical
Standard:	(RE)FCC PART15 B _3m	Power Source:	120V~, 60Hz
Test item:	Radiation Test	Date:	2011/11/22
Temp.(C)/Hum.(%RH):	24.3(C)/55%RH	Time:	15:53:40
EUT:	Digital Media Player	Test By:	Andy Chen
Model:	DMP560	Distance:	3m
Note:	USB Playing		

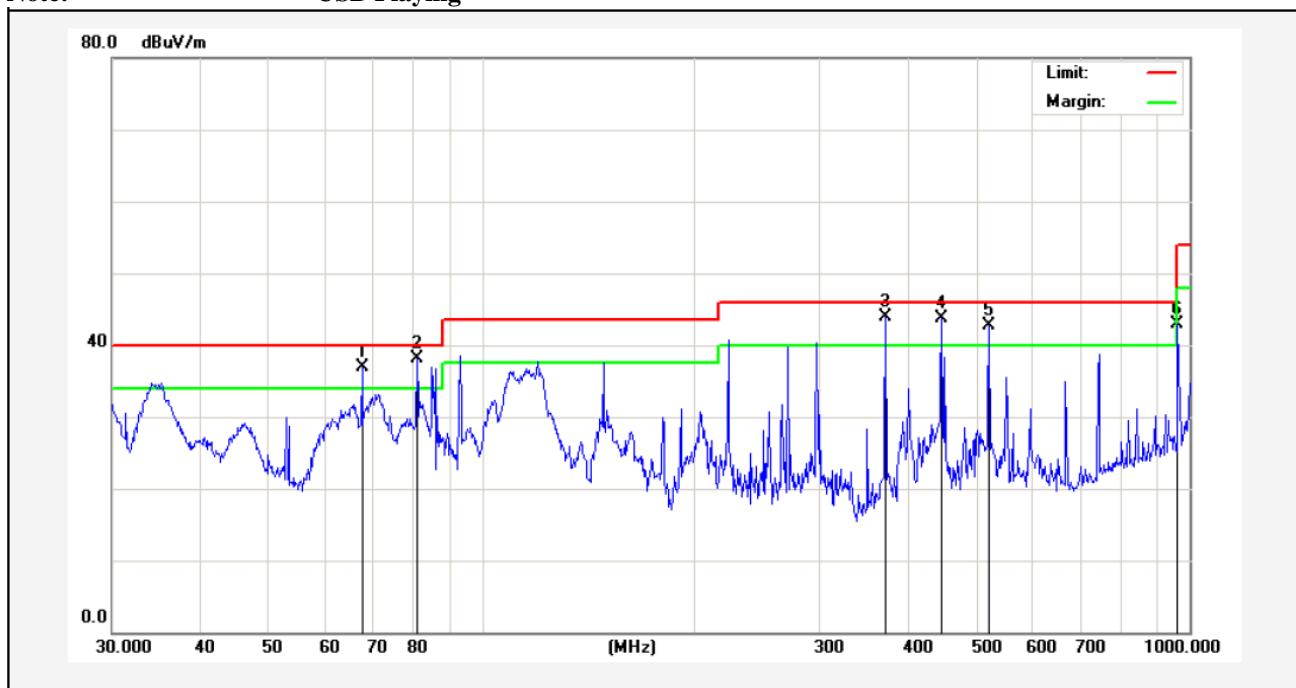


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	67.6751	65.21	-28.40	36.81	40.00	-3.19	QP	100	0	
2	80.9274	67.06	-29.04	38.02	40.00	-1.98	QP	100	0	
3	372.0045	64.86	-20.98	43.88	46.00	-2.12	QP	100	360	
4	446.4141	63.68	-19.95	43.73	46.00	-2.27	QP	100	360	
5	520.8881	61.47	-18.72	42.75	46.00	-3.25	QP	100	0	
6	962.1621	52.83	-10.02	42.81	54.00	-11.19	peak			


Anbotek Compliance Laboratory Limited

 1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,
 Nanshan District, Shenzhen, 518054, China

 Tel: (86)755-26014771
 Fax: (86)755-26014772
 Http://www.anbotek.com

Job No.:	AT1111701F	Polarization:	Horizontal
Standard:	(RE)FCC PART15 B _3m	Power Source:	120V~, 60Hz
Test item:	Radiation Test	Date:	2011/11/22
Temp.(C)/Hum.(%RH):	24.3(C)/55%RH	Time:	15:58:18
EUT:	Digital Media Player	Test By:	Andy Chen
Model:	DMP560	Distance:	3m
Note:	Connect to PC		

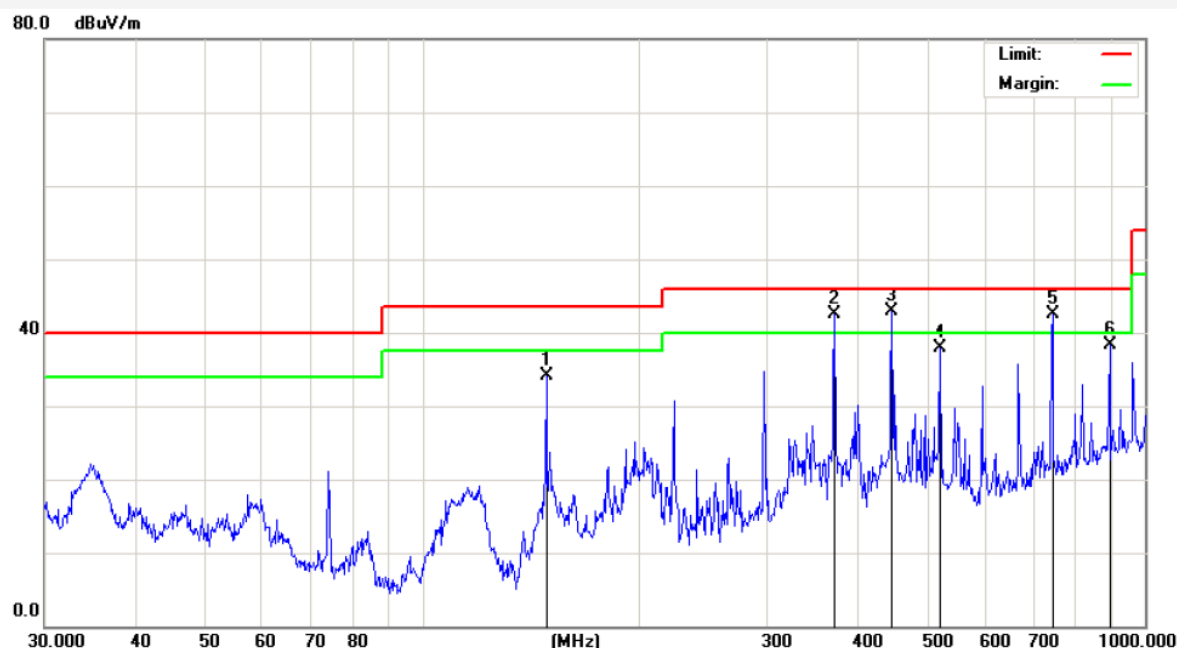

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	148.4410	66.04	-32.00	34.04	43.50	-9.46	peak			
2	372.0045	64.39	-21.98	42.41	46.00	-3.59	QP	100	0	
3	446.4141	63.63	-20.63	43.00	46.00	-3.00	QP	100	360	
4	520.8881	57.09	-19.14	37.95	46.00	-8.05	peak			
5	744.8659	57.07	-14.60	42.47	46.00	-3.53	QP	100	0	
6	893.8567	50.09	-11.79	38.30	46.00	-7.70	peak			


Anbotek Compliance Laboratory Limited

1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,
Nanshan District, Shenzhen, 518054, China


Tel: (86)755-26014771

Fax: (86)755-26014772

Http://www.anbotek.com

Job No.:	AT1111701F	Polarization:	Vertical
Standard:	(RE)FCC PART15 B _3m	Power Source:	120V~, 60Hz
Test item:	Radiation Test	Date:	2011/11/22
Temp.(C)/Hum.(%RH):	24.3(C)/55%RH	Time:	16:02:42
EUT:	Digital Media Player	Test By:	Andy Chen
Model:	DMP560	Distance:	3m

Note: Connect to PC

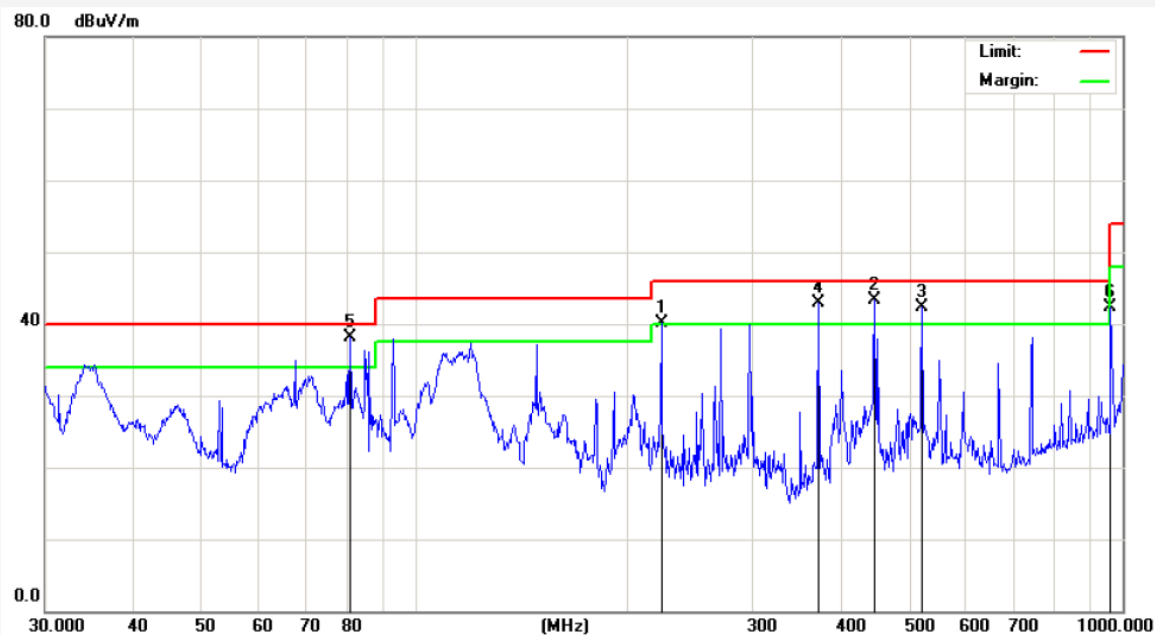

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	222.9499	63.66	-23.48	40.18	46.00	-5.82	QP	100	0	
2	446.4141	63.23	-19.95	43.28	46.00	-2.72	QP	100	360	
3	520.8881	61.02	-18.72	42.30	46.00	-3.70	QP	100	0	
4	372.0045	63.91	-20.98	42.93	46.00	-3.07	QP	100	360	
5	80.9274	67.11	-29.04	38.07	40.00	-1.93	QP	100	0	
6	962.1621	52.38	-10.02	42.36	54.00	-11.64	peak			