

# ***FCC TEST REPORT***

**FCC ID** : Z5M-LUVGECAM  
**Applicant** : Egerium BV  
**Address** : Kleveringweg 25, 2616ZL Delft Netherlands

**Equipment Under Test (EUT) :**

Product Name : Digital wireless camera and monitor system  
Model No. : GRAND ELITE CAMERA

**Standards** : FCC CFR47 Part 15 Section 15.247:2009

**Date of Test** : October 13, 2011 ~ October 26, 2011

**Date of Issue** : October 29, 2011

**Test Engineer** : Hunk yan



**Reviewed By** : Philo zhong



<b>Test Result</b>	<b>: PASS</b>
--------------------	---------------

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,  
Shenzhen 518105, China

Tel :+86-755-27553488

Fax:+86-755-27553868

- ✧ The sample detailed above has been tested to the requirements of Council Directives ANSI C63.4:2003. The test results have been reviewed against the Directives above and found to meet their essential requirements.

WALTEK SERVICES

Reference No.: WT11105436-S-E-F

## 2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions (9kHz to 25GHz)	15.205(a) 15.209 15.247(d)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

### 3 Contents

<b>1</b>	<b>COVER PAGE.....</b>	<b>1</b>
<b>2</b>	<b>TEST SUMMARY .....</b>	<b>2</b>
<b>3</b>	<b>CONTENTS.....</b>	<b>3</b>
<b>4</b>	<b>GENERAL INFORMATION .....</b>	<b>4</b>
4.1	CLIENT INFORMATION.....	4
4.2	GENERAL DESCRIPTION OF E.U.T. ....	4
4.3	DETAILS OF E.U.T.....	4
4.4	DESCRIPTION OF SUPPORT UNITS.....	4
4.5	STANDARDS APPLICABLE FOR TESTING .....	4
4.6	TEST FACILITY .....	5
4.7	TEST LOCATION .....	5
<b>5</b>	<b>EQUIPMENT USED DURING TEST .....</b>	<b>6</b>
<b>6</b>	<b>CONDUCTED EMISSION .....</b>	<b>7</b>
<b>7</b>	<b>RADIATED SPURIOUS EMISSIONS.....</b>	<b>12</b>
<b>8</b>	<b>RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....</b>	<b>23</b>
<b>9</b>	<b>20 DB BANDWIDTH MEASUREMENT.....</b>	<b>28</b>
<b>10</b>	<b>MAXIMUM PEAK OUTPUT POWER .....</b>	<b>30</b>
<b>11</b>	<b>HOPPING CHANNEL SEPARATION.....</b>	<b>31</b>
<b>12</b>	<b>NUMBER OF HOPPING FREQUENCY .....</b>	<b>34</b>
<b>13</b>	<b>DWELL TIME .....</b>	<b>35</b>
<b>14</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>38</b>
<b>15</b>	<b>RF EXPOSURE .....</b>	<b>38</b>
<b>16</b>	<b>PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....</b>	<b>40</b>
16.1	PRODUCT VIEW .....	40
16.2	EUT – APPEARENCE VIEW .....	40
16.3	EUT – OPEN VIEW .....	41
16.4	EUT - PCB VIEW .....	42
16.5	RF MODULE - VIEW .....	44
16.6	ADAPTER - OPEN VIEW .....	45
16.7	ADAPTER - PCB VIEW.....	46
<b>17</b>	<b>FCC LABEL.....</b>	<b>47</b>

Egerium BV

FCC ID: Z5M-LUVGECAM

## 4 General Information

### 4.1 Client Information

**Applicant** : Egerium BV  
**Address of Applicant** : Kleveringweg 25, 2616ZL Delft Netherlands

**Manufacturer** : RDI Technology (Shenzhen) Co., Ltd.  
**Address of Manufacturer** : Building C1 Xingtang Industrial Park, East Baishixia, Fuyong, Baoan, Shenzhen, PRC

### 4.2 General Description of E.U.T.

**Product Name** : Digital wireless camera and monitor system  
**Model No.** : GRAND ELITE CAMERA

### 4.3 Details of E.U.T.

**Technical Data** : Adapter Input: 100 – 240V, 50/60Hz, 0.3A  
Adapter Output: 9.0VDC, 0.6A  
DC 6.0V (4 \* 1.5V “AA” SIZE Battery)  
**Operation Frequency** : 2402MHz ~ 2480MHz  
**Antenna Gain** : -2.39 dBi

### 4.4 Description of Support Units

The EUT has been tested as an independent unit.

### 4.5 Standards Applicable for Testing

The customer requested FCC tests for a Digital wireless camera and monitor system. The standards used were FCC CFR47 Part 15 Section 15.247, Section 15.207 and Section 15.209.

#### 4.6 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: IC7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A, August 3, 2010.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

#### 4.7 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd.,Songgang Street, Baoan District, Shenzhen, China

## 5 Equipment Used during Test

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Uncertainty
EMC Analyzer	Agilent/ E7405A	MY45114943	W2008001	9k-26.5GHz	Aug. 2, 2011	Aug. 1, 2012	±1dB
Trilog Broadband Antenne	SCHWARZBECK MESS-ELEKTROM / VULB9163	336	W2008002	30-3000 MHz	Aug. 2, 2011	Aug. 1, 2012	±1dB
Broad-band Horn Antenna	SCHWARZBECK MESS-ELEKTROM / BBHA 9120D(1201)	667	W2008003	1-18GHz	Aug. 2, 2011	Aug. 1, 2012	f < 10 GHz : ±1dB 10GHz < f < 18 GHz : ±1.5dB
Broadband Preamplifier	SCHWARZBECK MESS-ELEKTROM / BBV 9718	9718-148	W2008004	0.5-18GHz	Aug. 2, 2011	Aug. 1, 2012	±1.2dB
10m Coaxial Cable with N-male Connectors	SCHWARZBECK MESS-ELEKTROM / AK 9515 H	-	-	-	Aug. 2, 2011	Aug. 1, 2012	-
10m 50 Ohm Coaxial Cable	SCHWARZBECK MESS-ELEKTROM / AK 9513	-	-	-	Aug. 2, 2011	Aug. 1, 2012	-
Positioning Controller	C&C LAB/ CC-C-IF	-	-	-	Aug. 2, 2011	Aug. 1, 2012	-
Color Monitor	SUNSPOT/ SP-14C	-	-	-	Aug. 2, 2011	Aug. 1, 2012	-
Test Receiver	ROHDE&SCHWARZ/ ESPI	101155	W2005001	9k-3GHz	Aug. 2, 2011	Aug. 1, 2012	±1dB
Two-Line V-Network	ROHDE&SCHWARZ/ ENV216	100115	W2005002	50Ω/50μH	Aug. 2, 2011	Aug. 1, 2012	±10%
RF Generator	TESEQ GmbH/ NSG4070	25781	W2008008	Freq-range : 9K-1GHz RF voltage : -60 dBm-+10dBm	Aug. 2, 2011	Aug. 1, 2012	Power_freq distinguish0.1Hz RFelectricity distinguish 0.1B
Active Loop Antenna	Beijing Dazhi / ZN30900A	-	-	-	Aug. 2, 2011	Aug. 1, 2012	±1dB

## 6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz 56 dB $\mu$ V between 0.5MHz & 5MHz 60 dB $\mu$ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

### E.U.T. Operation

#### Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar


#### EUT Operation:

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

**EUT Setup**

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 B 15.207 limits.

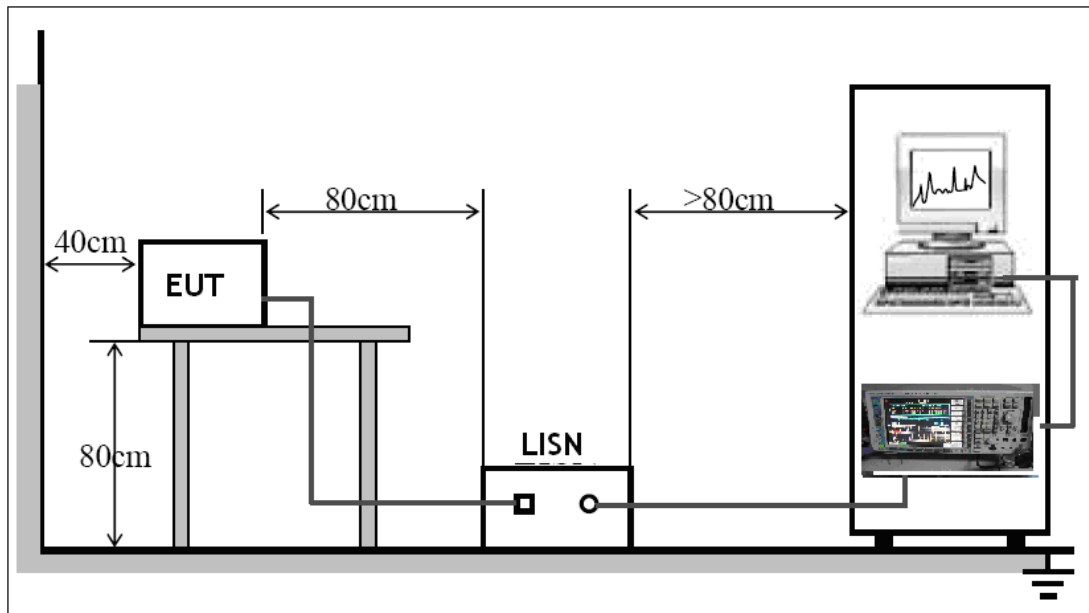

The EUT was placed on the test table in shielding room

**Conducted Emission Test Result**


An initial pre-scan was performed on the live and neutral lines.

The EUT was tested in Normal Linking mode.



Egerium BV

FCC ID: Z5M-LUVGECAM

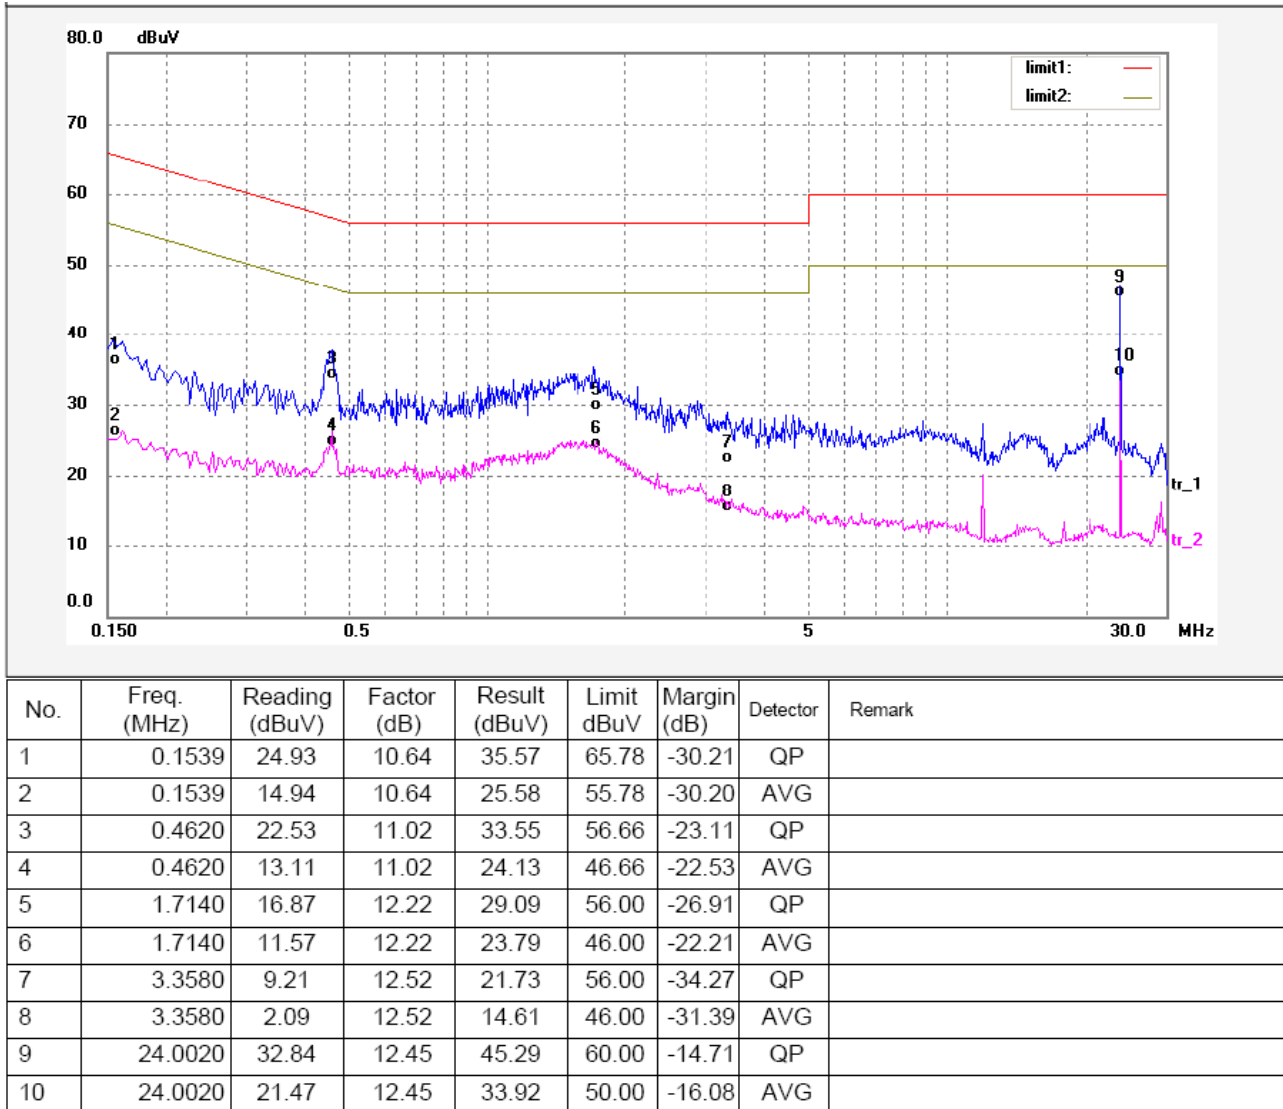*Live line:*


WALTEK SERVICES

Reference No.: WT11105436-S-E-F

Egerium BV

FCC ID: Z5M-LUVGECAM

Neutral line:

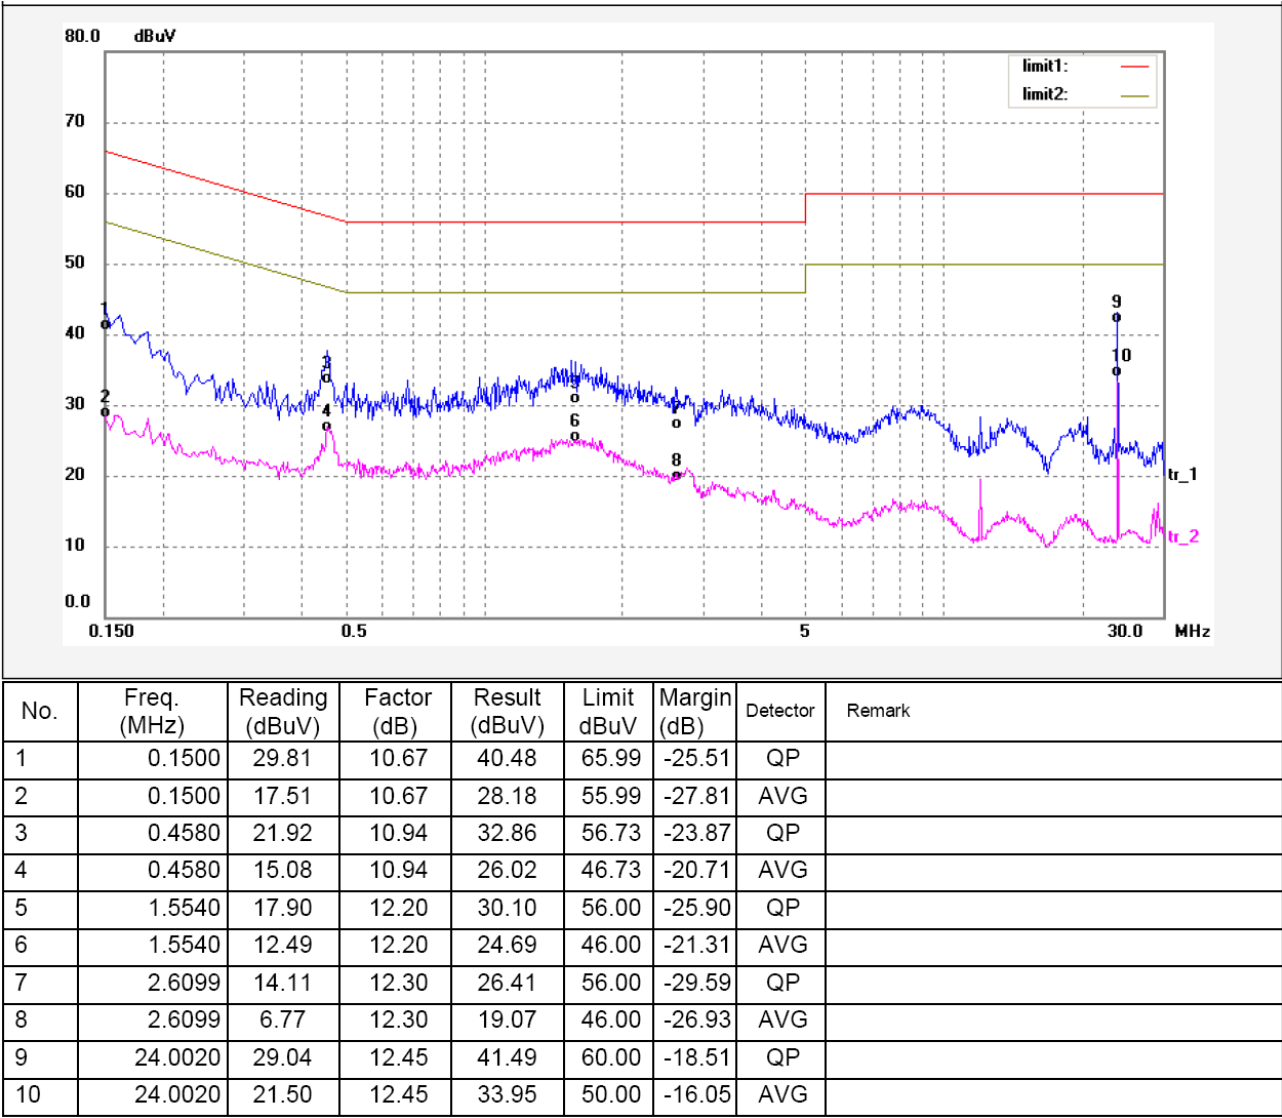

Egerium BV

FCC ID: Z5M-LUVGECAM

**Photograph – Conducted Emission Test Setup**



WALTEK SERVICES

Reference No.: WT11105436-S-E-F

## 7 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: Base on ANSI C63.4:2003

Test Result: PASS

Frequency Range: 9kHz to 25GHz

Measurement Distance: 3m

15.209 Limit: 40.0 dBuV/m between 30MHz & 88MHz  
43.5 dBuV/m between 88MHz & 216MHz  
46.0 dBuV/m between 216MHz & 960MHz  
54.0 dBuV/m above 960MHz

15.247 (d) Limit: (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test mode: The EUT was tested in continuously Transmit mode.

### EUT Operation :

#### Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar

### Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Waltek EMC Lab is  $\pm 5.03$ dB.


### Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003.

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

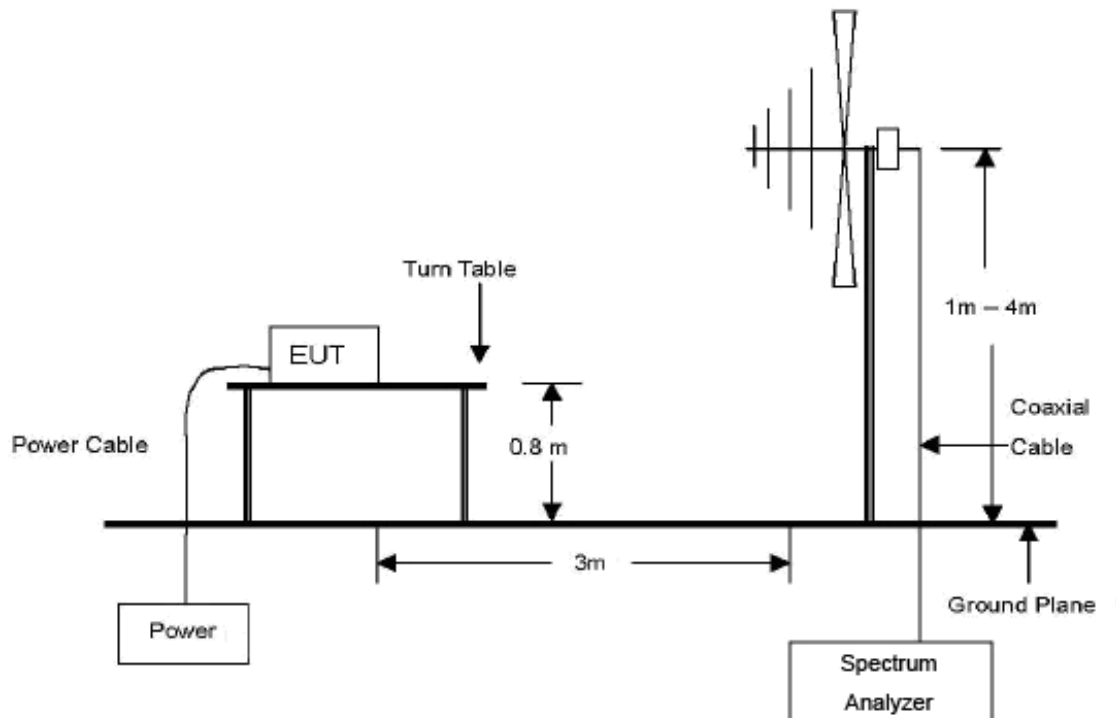

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 25 GHz Emissions.

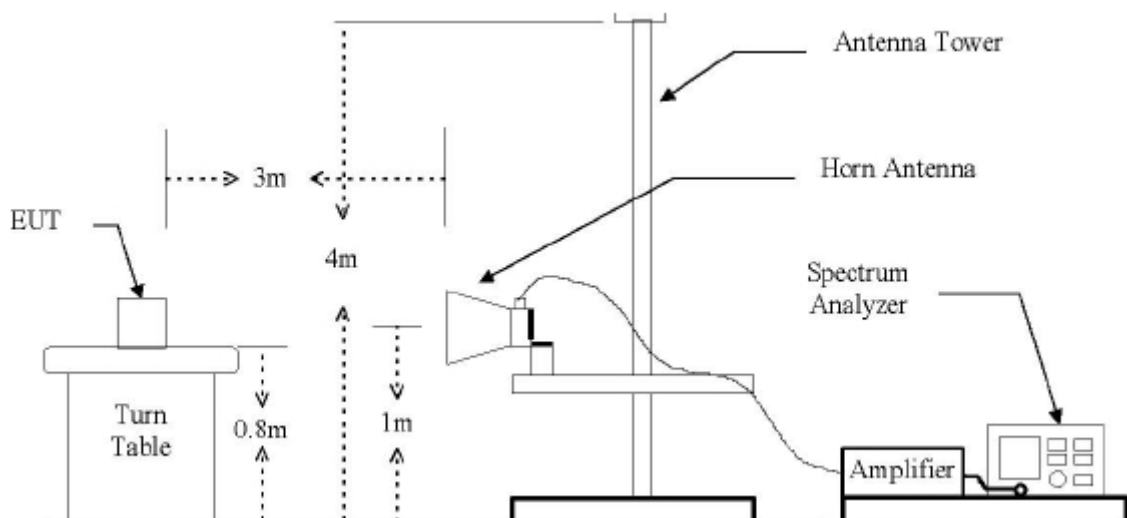

**Spectrum Analyzer Setup**

According to FCC Part15 Rules, the system was tested 9kHz to 25000MHz.

9kHz ~ 30MHz

Start Frequency .....	9kHz
Stop Frequency .....	30MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10KHz
Video Bandwidth.....	10KHz
Resolution Bandwidth.....	10KHz

30MHz ~ 1GHz

Start Frequency .....	30 MHz
Stop Frequency .....	1000MHz
Sweep Speed.....	Auto
IF Bandwidth.....	120 KHz
Video Bandwidth.....	100KHz
Quasi-Peak Adapter Bandwidth .....	120 KHz
Quasi-Peak Adapter Mode .....	Normal
Resolution Bandwidth .....	100KHz

Above 1GHz

Start Frequency .....	1000 MHz
Stop Frequency .....	25000MHz
Sweep Speed.....	Auto
IF Bandwidth.....	120 KHz
Video Bandwidth.....	1MHz
Quasi-Peak Adapter Bandwidth .....	120 KHz
Quasi-Peak Adapter Mode .....	Normal
Resolution Bandwidth .....	1MHz

**Test Procedure**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X(normal uses) axis positioning. And all the modes was tested in the report.Only the worst case is shown in the report.

**Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

**Summary of Test Results**


According to the data in this section, the EUT complied with the FCC CFR47 Part 15 Section 15.209 & 15.247 standards.

**Test mode: continuously receive mode**


Remark: the EUT was pre-tested at the high, middle and low channel, and the worse case was the low Channel, so the data show was the low channel's only. Because the emissions below 30MHz are more than 20dB below the limit, the data is not show in the report.

Test Frequency : 30MHz ~ 1000MHz

Antenna polarization: Vertical

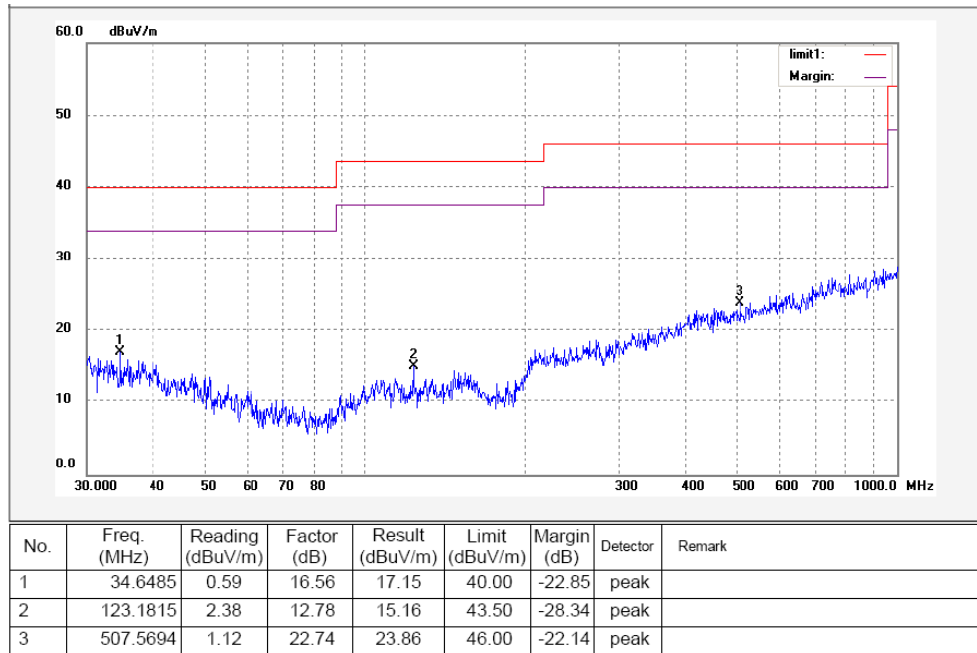

Antenna polarization: Horizontal

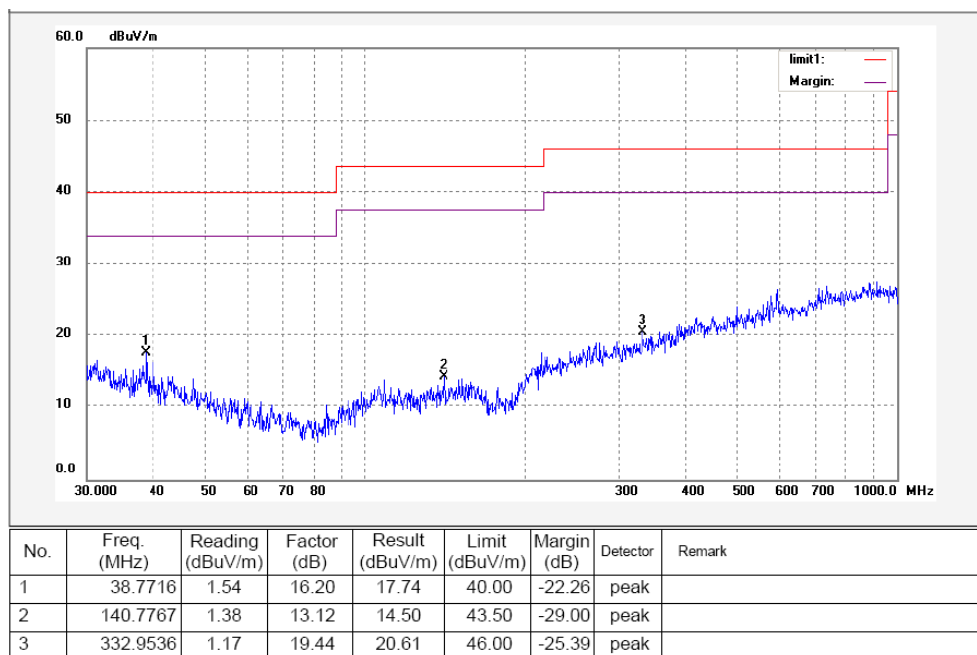





Egerium BV

FCC ID: Z5M-LUVGECAM

Test Frequency: Above 1GHz radiation test data:  
Remark: above 18GHz, the test signal below the noise level, so the data was not performed.  
Antenna polarization: Vertical

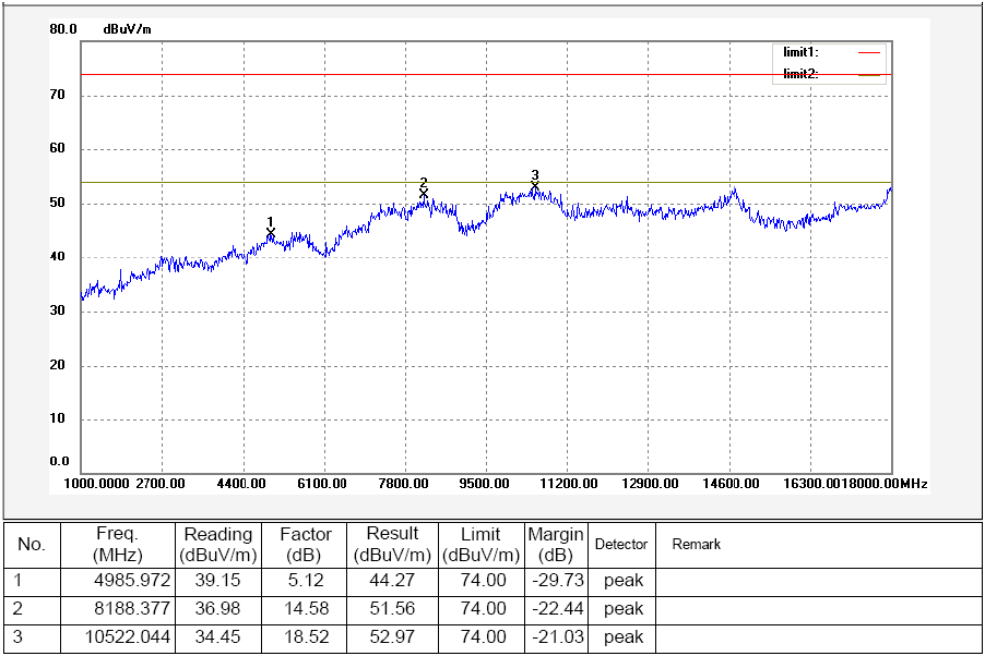

Antenna polarization: Horizontal

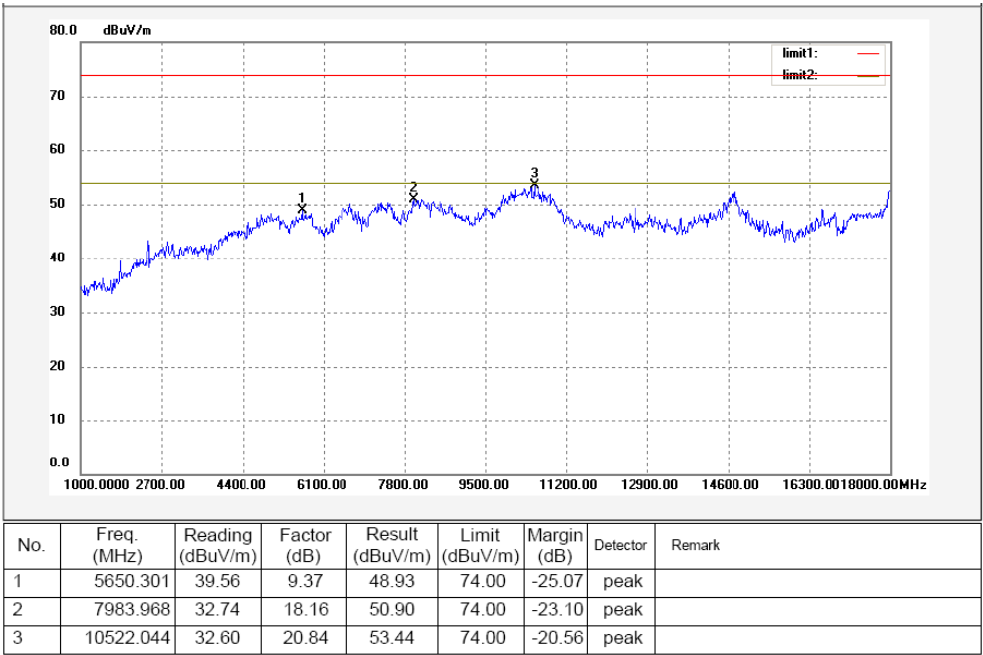


**Test mode: continuously transmit mode**


Test Frequency : 30MHz ~ 1000MHz

Remark: the EUT was pretested at the high, middle and low channel, and the worse case was the low Channel, so the data show was the low channel only. Because the emissions below 30MHz are more than 20dB below the limit, the data is not show in the report.

Antenna polarization: Vertical

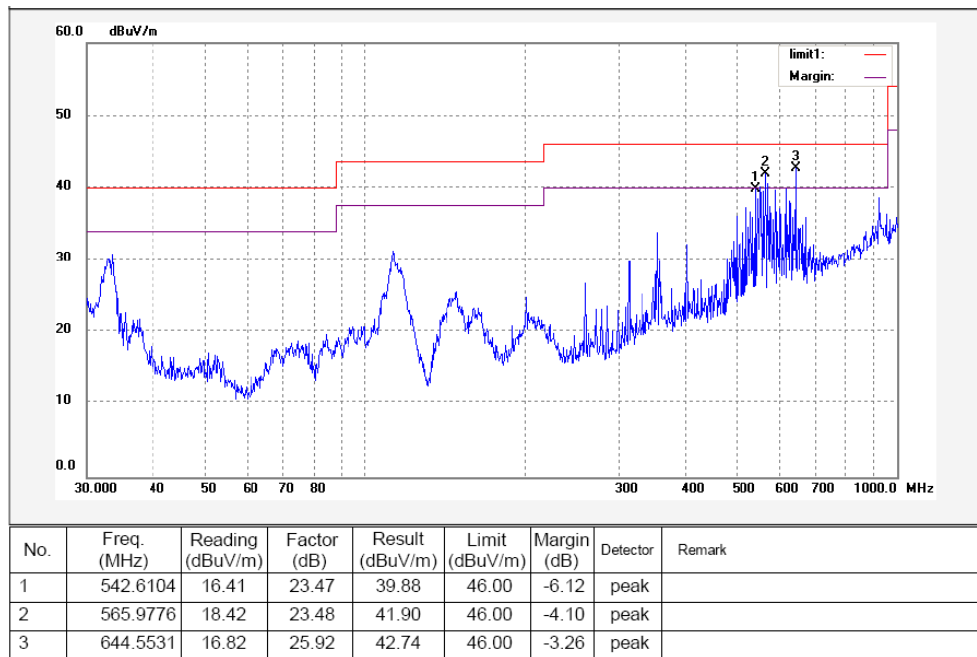

Antenna polarization: Horizontal

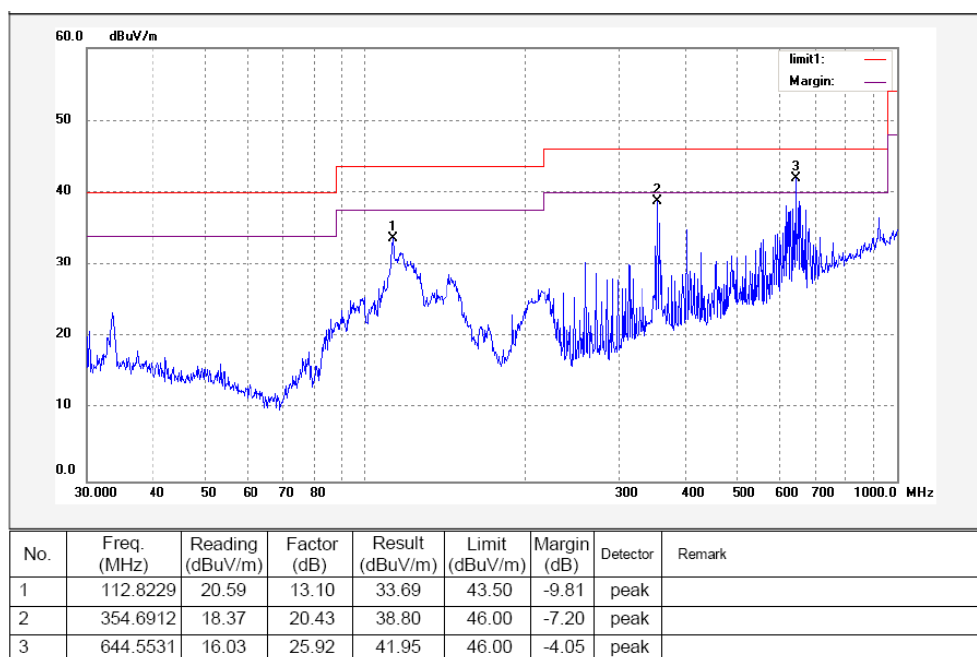

WALTEK SERVICES

Reference No.: WT11105436-S-E-F

Egerium BV

FCC ID: Z5M-LUVGECAM

Test Frequency: 1GHz ~ 25GHz

And the below is the Fundamental and Harmonic

Frequency (MHz)	Detector	Antenna Polarization	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
<b>Low frequency</b>							
2402.00	AV	Vertical	98.59		(Fund.)	1.1	20
4804.00	AV	Vertical	44.07	54.00	-9.93	1.1	65
7206.00	AV	Vertical	45.01	54.00	-8.99	1.4	140
9608.00	AV	Vertical	41.74	54.00	-12.26	1.7	80
12010.00	AV	Vertical	38.10	54.00	-15.90	1.5	155
14412.00	AV	Vertical	39.39	54.00	-14.61	1.3	140
16814.00	AV	Vertical	36.20	54.00	-17.80	1.6	120
19216.00	AV	Vertical	34.48	54.00	-19.52	1.4	80
21618.00	AV	Vertical	32.26	54.00	-21.74	1.5	20
24020.00	AV	Vertical	33.41	54.00	-20.59	1.1	80
2402.00	AV	Horizontal	92.52		(Fund.)	2.2	20
4804.00	AV	Horizontal	43.38	54.00	-10.62	1.9	140
7206.00	AV	Horizontal	41.13	54.00	-12.87	2.0	80
9608.00	AV	Horizontal	38.24	54.00	-15.76	2.4	120
12010.00	AV	Horizontal	40.22	54.00	-13.78	1.7	80
14412.00	AV	Horizontal	35.13	54.00	-18.87	2.1	140
16814.00	AV	Horizontal	41.23	54.00	-12.77	1.8	120
19216.00	AV	Horizontal	33.08	54.00	-20.92	1.5	120
21618.00	AV	Horizontal	34.41	54.00	-19.59	2.5	120
24020.00	AV	Horizontal	36.18	54.00	-17.82	1.9	30
2402.00	PK	Vertical	117.24		(Fund.)	1.4	20
4804.00	PK	Vertical	57.07	74.00	-16.93	1.7	80
7206.00	PK	Vertical	58.01	74.00	-15.99	1.5	110
9608.00	PK	Vertical	54.74	74.00	-19.26	1.3	200
12010.00	PK	Vertical	51.10	74.00	-22.90	1.1	80
14412.00	PK	Vertical	52.39	74.00	-21.61	1.1	80
16814.00	PK	Vertical	49.20	74.00	-24.80	1.3	155
19216.00	PK	Vertical	47.48	74.00	-26.52	1.1	140
21618.00	PK	Vertical	45.26	74.00	-28.74	1.6	80
24020.00	PK	Vertical	46.41	74.00	-27.59	1.3	110
2402.00	PK	Horizontal	112.40		(Fund.)	2.0	80
4804.00	PK	Horizontal	43.38	74.00	-30.62	2.2	110
7206.00	PK	Horizontal	41.13	74.00	-32.87	2.5	80
9608.00	PK	Horizontal	38.24	74.00	-35.76	1.7	20
12010.00	PK	Horizontal	40.22	74.00	-33.78	1.9	155
14412.00	PK	Horizontal	35.13	74.00	-38.87	1.4	20
16814.00	PK	Horizontal	41.23	74.00	-32.77	2.1	200

WALTEK SERVICES

Reference No.: WT11105436-S-E-F

Egerium BV

FCC ID: Z5M-LUVGECAM

19216.00	PK	Horizontal	33.08	74.00	-40.92	2.4	80
21618.00	PK	Horizontal	34.41	74.00	-39.59	1.8	140
24020.00	PK	Horizontal	36.18	74.00	-37.82	2.3	80
<b>Middle frequency</b>							
2440.00	AV	Vertical	96.85		(Fund.)	1.0	20
4880.00	AV	Vertical	45.95	54.00	-8.05	1.0	110
7320.00	AV	Vertical	44.06	54.00	-9.94	1.3	110
9760.00	AV	Vertical	39.92	54.00	-14.08	1.6	20
12200.00	AV	Vertical	43.16	54.00	-10.84	1.4	20
14640.00	AV	Vertical	35.83	54.00	-18.17	1.2	170
17080.00	AV	Vertical	39.08	54.00	-14.92	1.5	20
19520.00	AV	Vertical	33.89	54.00	-20.11	1.3	20
21960.00	AV	Vertical	37.88	54.00	-16.12	1.4	200
24400.00	AV	Vertical	30.94	54.00	-23.06	1.0	110
2440.00	AV	Horizontal	90.65		(Fund.)	2.1	140
4880.00	AV	Horizontal	41.02	54.00	-12.98	1.8	110
7320.00	AV	Horizontal	42.75	54.00	-11.25	1.9	290
9760.00	AV	Horizontal	36.86	54.00	-17.14	2.3	140
12200.00	AV	Horizontal	39.61	54.00	-14.39	1.6	170
14640.00	AV	Horizontal	35.01	54.00	-18.99	2.0	200
17080.00	AV	Horizontal	32.20	54.00	-21.80	1.7	155
19520.00	AV	Horizontal	34.89	54.00	-19.11	1.4	110
21960.00	AV	Horizontal	36.12	54.00	-17.88	2.4	170
24400.00	AV	Horizontal	30.80	54.00	-23.20	1.8	140
2440.00	PK	Vertical	117.77		(Fund.)	1.3	20
4880.00	PK	Vertical	58.95	74.00	-15.05	1.6	110
7320.00	PK	Vertical	57.06	74.00	-16.94	1.4	120
9760.00	PK	Vertical	52.92	74.00	-21.08	1.2	140
12200.00	PK	Vertical	56.16	74.00	-17.84	1.0	200
14640.00	PK	Vertical	48.83	74.00	-25.17	1.0	20
17080.00	PK	Vertical	52.08	74.00	-21.92	1.2	20
19520.00	PK	Vertical	46.89	74.00	-27.11	1.0	140
21960.00	PK	Vertical	50.88	74.00	-23.12	1.5	155
24400.00	PK	Vertical	43.94	74.00	-30.06	1.2	140
2440.00	PK	Horizontal	113.26		(Fund.)	1.9	20
4880.00	PK	Horizontal	54.02	74.00	-19.98	2.1	65
7320.00	PK	Horizontal	55.75	74.00	-18.25	2.4	110
9760.00	PK	Horizontal	49.86	74.00	-24.14	1.6	80
12200.00	PK	Horizontal	52.61	74.00	-21.39	1.8	170
14640.00	PK	Horizontal	48.01	74.00	-25.99	1.3	170
17080.00	PK	Horizontal	45.20	74.00	-28.80	2.0	140
19520.00	PK	Horizontal	47.89	74.00	-26.11	2.3	170
21960.00	PK	Horizontal	49.12	74.00	-24.88	1.7	20

WALTEK SERVICES

Reference No.: WT11105436-S-E-F

Egerium BV

FCC ID: Z5M-LUVGECAM

24400.00	PK	Horizontal	43.80	74.00	-30.20	2.2	155
<b>High frequency</b>							
2480.00	AV	Vertical	96.60		(Fund.)	1.2	170
4960.00	AV	Vertical	44.97	54.00	-9.03	1.2	20
7440.00	AV	Vertical	41.40	54.00	-12.60	1.5	140
9920.00	AV	Vertical	43.86	54.00	-10.14	1.8	80
12400.00	AV	Vertical	38.96	54.00	-15.04	1.6	110
14880.00	AV	Vertical	45.51	54.00	-8.49	1.4	140
17360.00	AV	Vertical	39.54	54.00	-14.46	1.7	120
19840.00	AV	Vertical	40.41	54.00	-13.59	1.5	200
22320.00	AV	Vertical	38.73	54.00	-15.27	1.6	140
24800.00	AV	Vertical	32.35	54.00	-21.65	1.2	155
2480.00	AV	Horizontal	89.09		(Fund.)	2.3	140
4960.00	AV	Horizontal	41.36	54.00	-12.64	2.0	170
7440.00	AV	Horizontal	39.67	54.00	-14.33	2.1	140
9920.00	AV	Horizontal	40.49	54.00	-13.51	2.5	200
12400.00	AV	Horizontal	38.35	54.00	-15.65	1.8	155
14880.00	AV	Horizontal	32.54	54.00	-21.46	2.2	140
17360.00	AV	Horizontal	36.75	54.00	-17.25	1.9	200
19840.00	AV	Horizontal	31.42	54.00	-22.58	1.6	80
22320.00	AV	Horizontal	34.25	54.00	-19.75	2.6	110
24800.00	AV	Horizontal	29.63	54.00	-24.37	2.0	110
2480.00	PK	Vertical	116.09		(Fund.)	1.5	200
4960.00	PK	Vertical	57.97	74.00	-16.03	1.8	50
7440.00	PK	Vertical	54.40	74.00	-19.60	1.6	130
9920.00	PK	Vertical	56.86	74.00	-17.14	1.4	120
12400.00	PK	Vertical	51.96	74.00	-22.04	1.2	110
14880.00	PK	Vertical	58.51	74.00	-15.49	1.2	80
17360.00	PK	Vertical	52.54	74.00	-21.46	1.4	110
19840.00	PK	Vertical	53.41	74.00	-20.59	1.2	140
22320.00	PK	Vertical	51.73	74.00	-22.27	1.7	140
24800.00	PK	Vertical	45.35	74.00	-28.65	1.4	155
2480.00	PK	Horizontal	109.88		(Fund.)	2.1	200
4960.00	PK	Horizontal	54.36	74.00	-19.64	2.3	80
7440.00	PK	Horizontal	52.67	74.00	-21.33	2.6	140
9920.00	PK	Horizontal	53.49	74.00	-20.51	1.8	200
12400.00	PK	Horizontal	51.35	74.00	-22.65	2.0	110
14880.00	PK	Horizontal	45.54	74.00	-28.46	1.5	110
17360.00	PK	Horizontal	49.75	74.00	-24.25	2.2	170
19840.00	PK	Horizontal	44.42	74.00	-29.58	2.5	170
22320.00	PK	Horizontal	47.25	74.00	-26.75	1.9	140
24800.00	PK	Horizontal	42.63	74.00	-31.37	2.4	200

WALTEK SERVICES


Reference No.: WT11105436-S-E-F

Egerium BV


FCC ID: Z5M-LUVGECAM

**Photograph – Radiation Spurious Emission Test Setup**

Below 1GHz

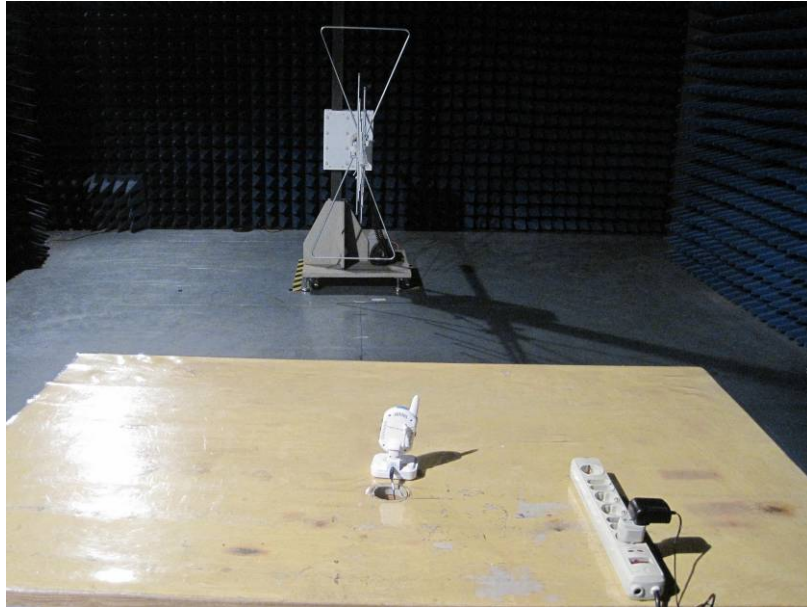

Above 1GHz

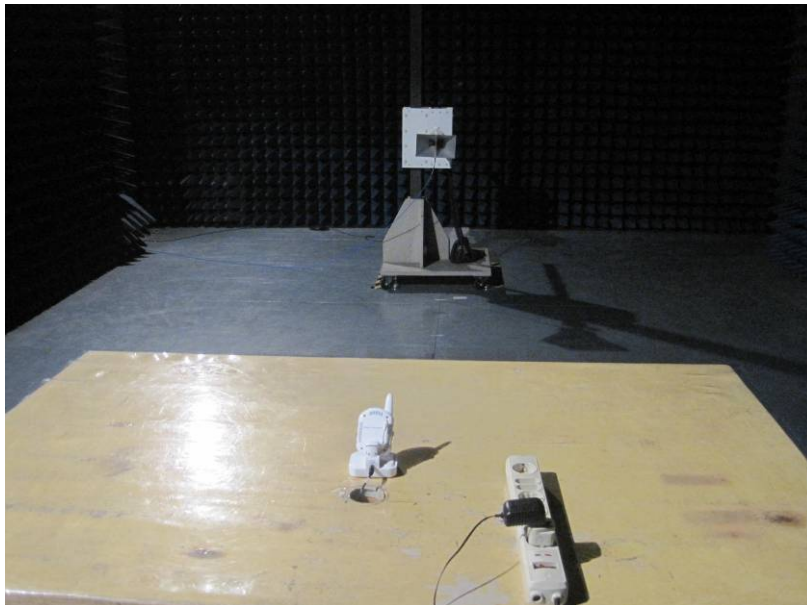

WALTEK SERVICES

Reference No.: WT11105436-S-E-F


## 8 Radiated Emissions which fall in the restricted bands

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	Base on ANSI C63.4:2003
Measurement Distance:	3m
Limit:	40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz
Detector:	For Peak value: RBW = 1 MHz for $f \geq 1$ GHz VBW $\geq$ RBW; Sweep = auto Detector function = peak Trace = max hold For AVG value: RBW = 1 MHz for $f \geq 1$ GHz VBW = 10Hz; Sweep = auto Detector function = AVG Trace = max hold

Egerium BV

FCC ID: Z5M-LUVGECAM

Test Result:  
Low Channel – Peak

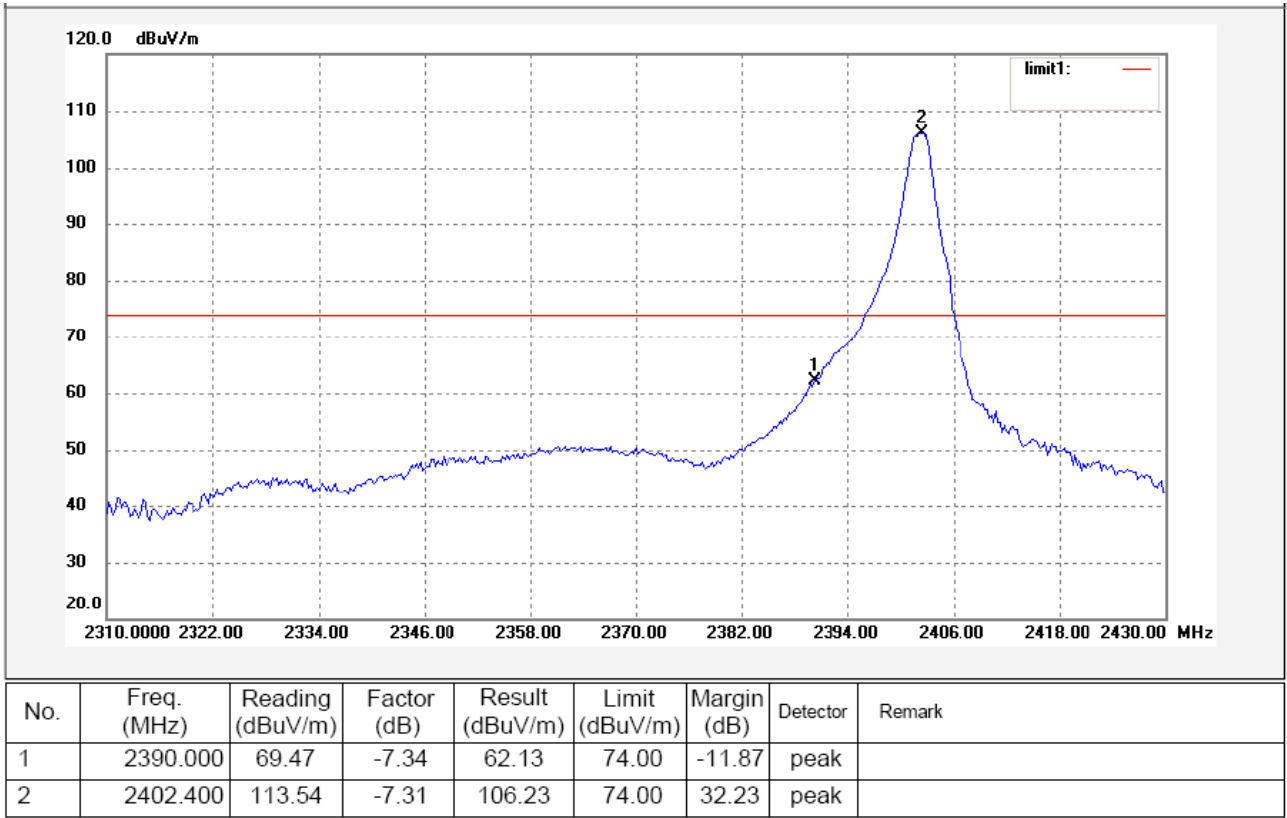




Egerium BV

FCC ID: Z5M-LUVGECAM


Low Channel – AV

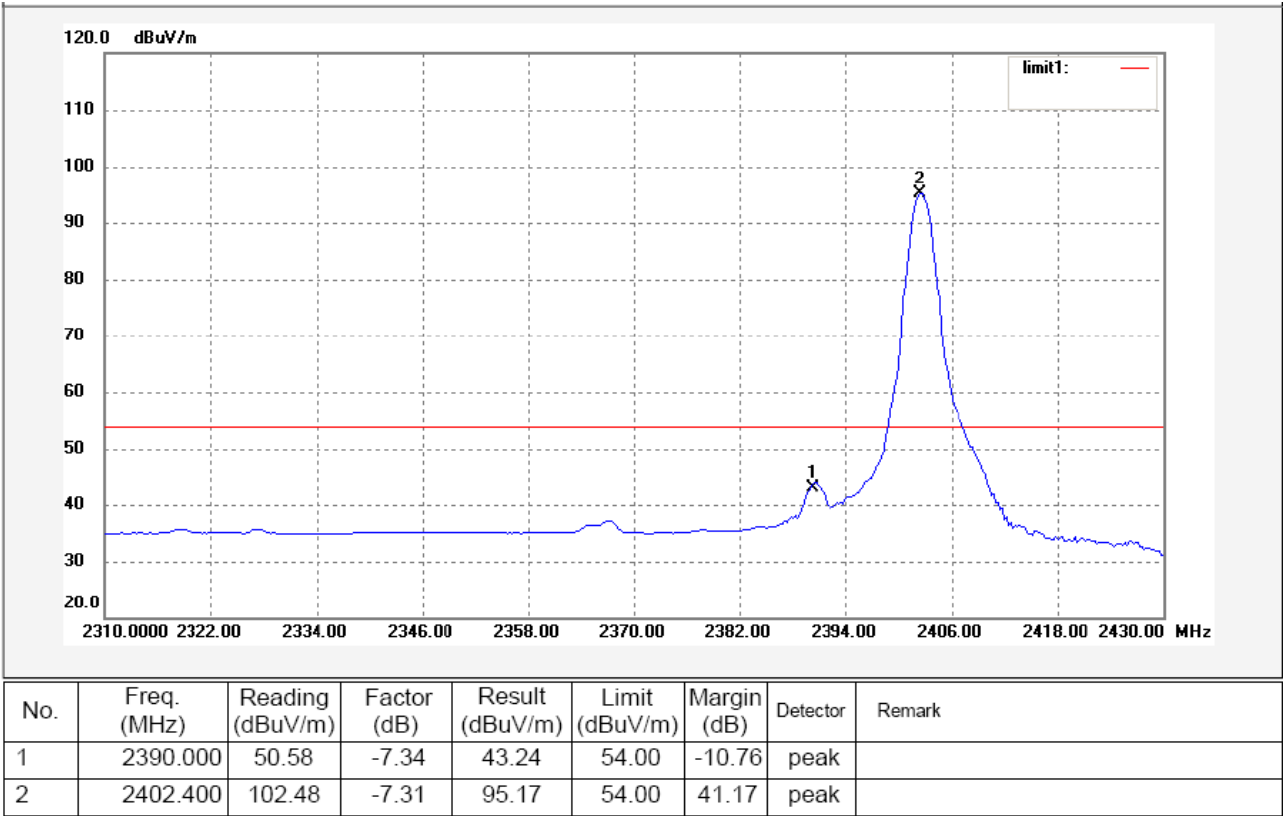

Egerium BV

FCC ID: Z5M-LUVGECAM


High Channel – Peak

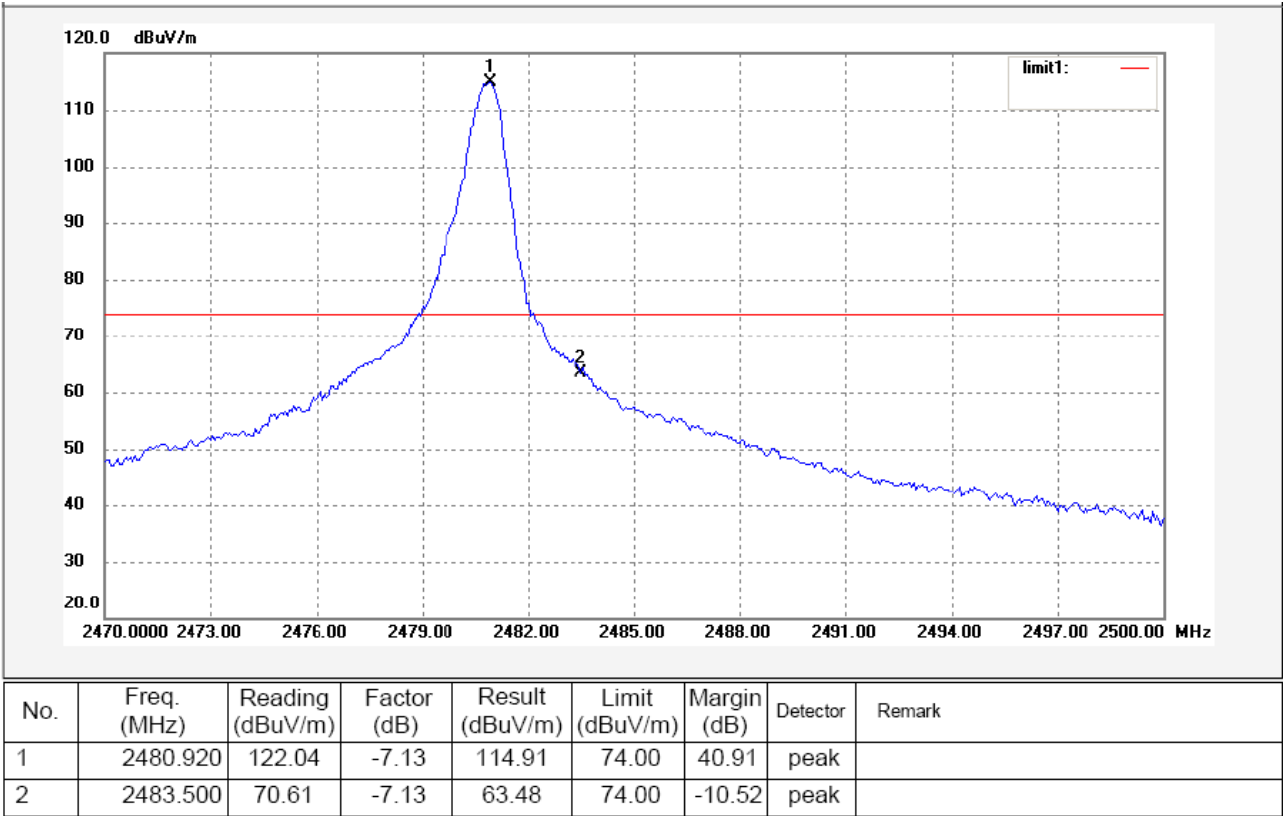

Egerium BV

FCC ID: Z5M-LUVGECAM

High Channel – AV

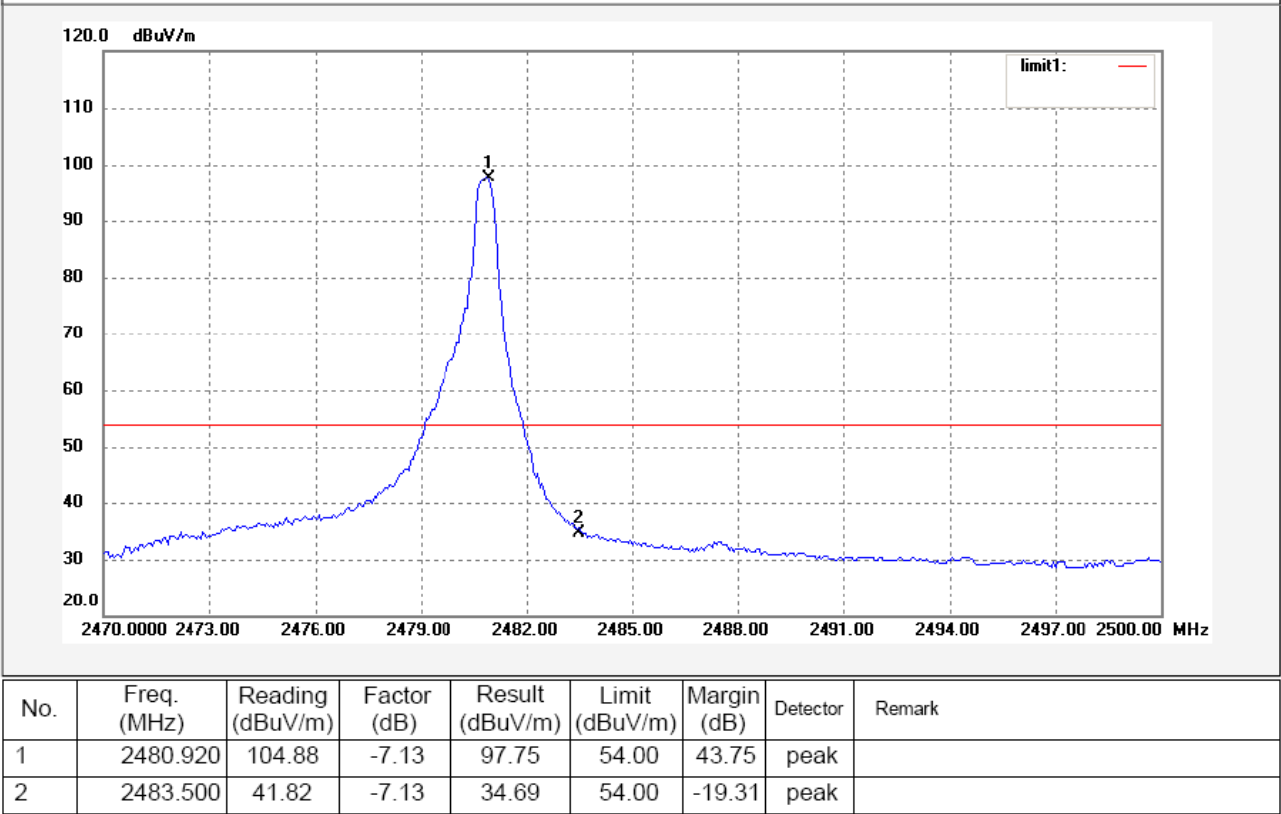

## 9 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247  
 Test Method: Based on FCC Part 15.247  
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.

### Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 100kHz

### Test Result:

Test Channel	Bandwidth
Low	840kHz
Middle	950kHz
High	1.33MHz

Test result plot as follows:


Low Channel

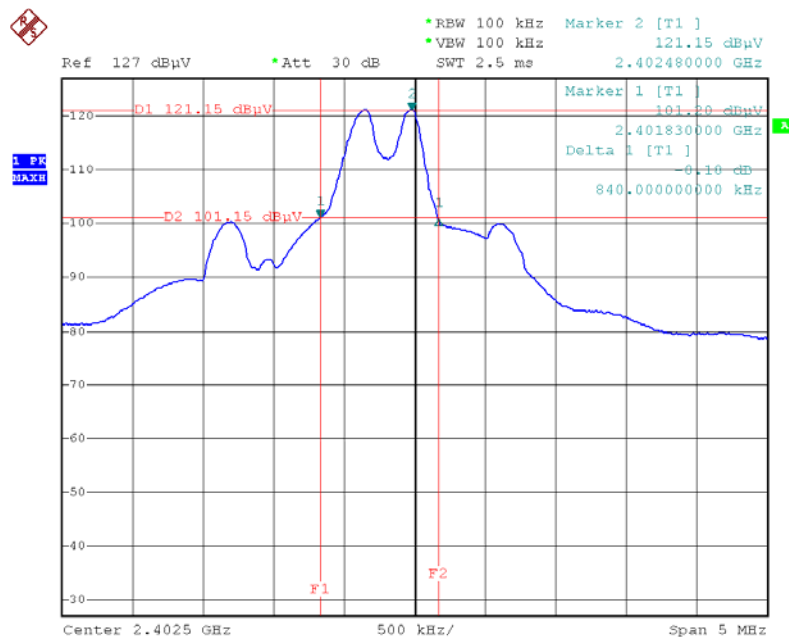


Egerium BV

FCC ID: Z5M-LUVGECAM

Middle Channel

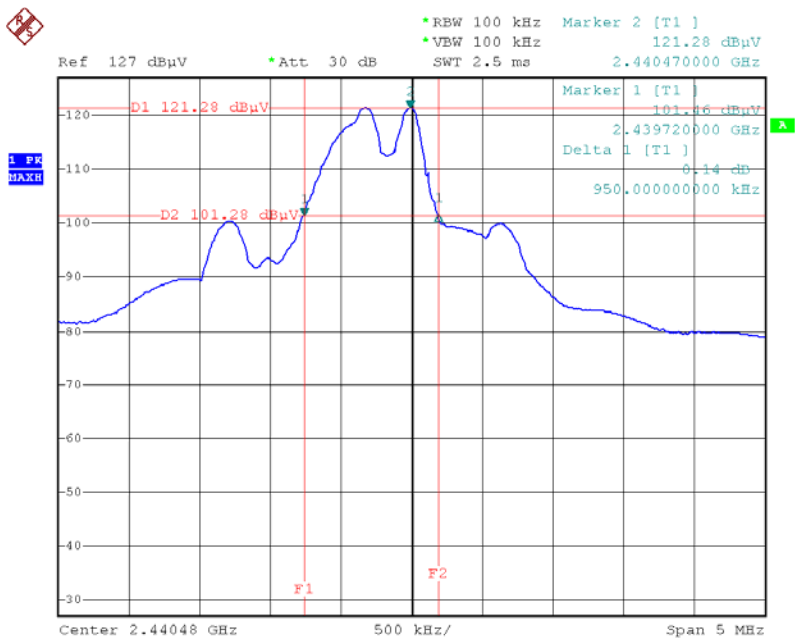

High Channel

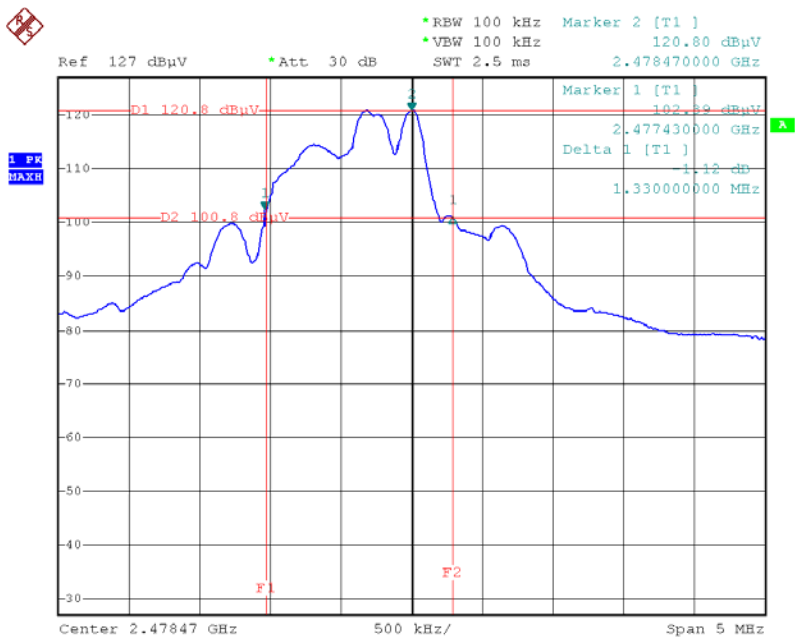

WALTEK SERVICES

Reference No.: WT11105436-S-E-F

## 10 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	Based on ANSI C63.4:2003
Test Limit:	Regulation 15.247 (b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result “Number of Hopping Frequency” of this document. The 0.125watts (20.97 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

### Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 1 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### Test Result:

Test Channel	Output Power (dBm)	Limit (dBm)
Low	14.17	20.97
Middle	14.30	20.97
High	13.81	20.97

## 11 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	Based on FCC Part 15.247
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Test Mode:	Test in hopping transmitting operating mode.

### Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 4MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


### Test Result:

Test Channel	Separation (MHz)	Result
Low	1.928	PASS
Middle	2.080	PASS
High	1.992	PASS


Egerium BV

FCC ID: Z5M-LUVGECAM

Test result plot as follows:  
Low Channel:

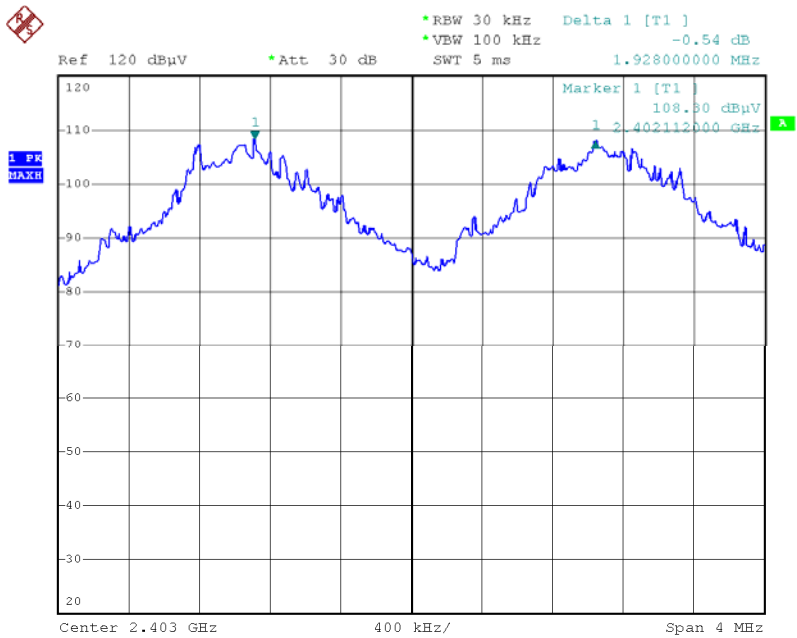

Middle Channel

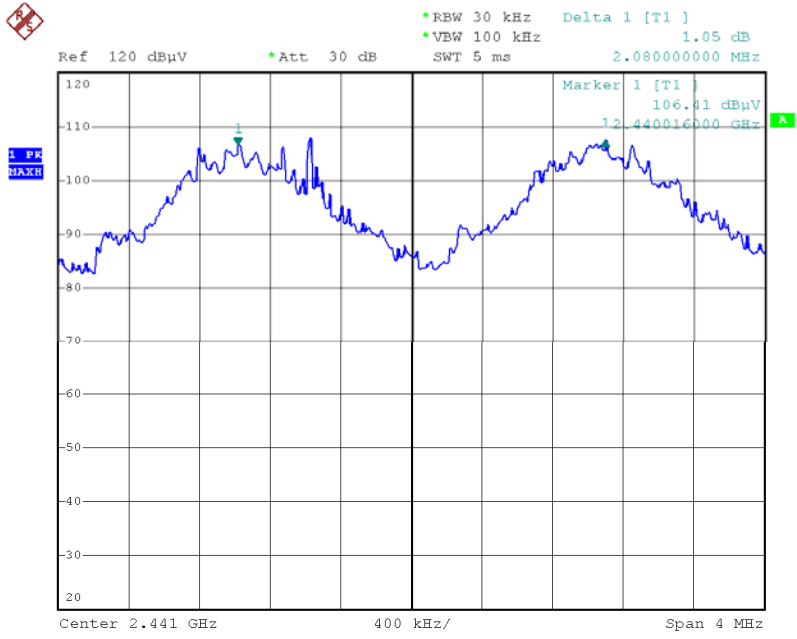




Egerium BV

FCC ID: Z5M-LUVGECAM

High Channel

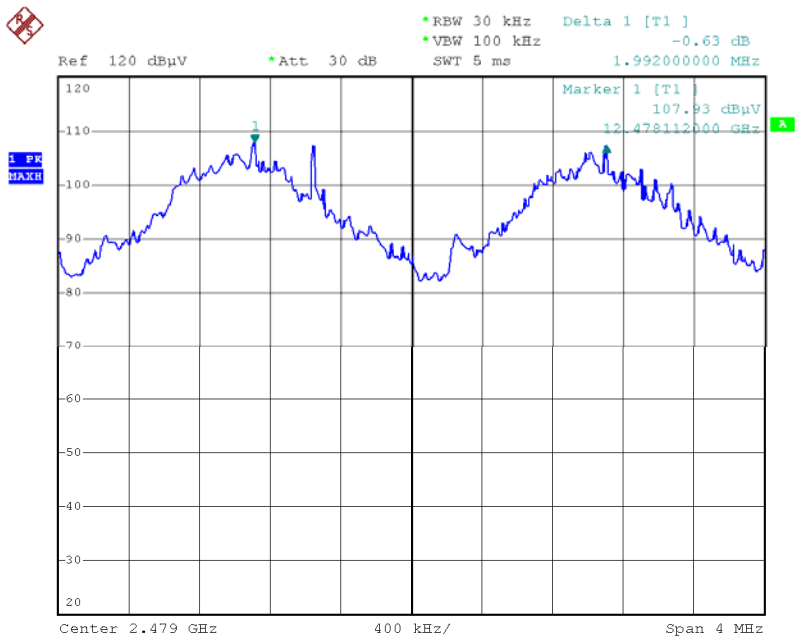


## 12 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	Based on FCC Part 15.247
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

### Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 100 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2398MHz, Stop Frequency = 2483MHz. Submit the test result graph.

**Test Result: Total Channels are 40 Channels.**

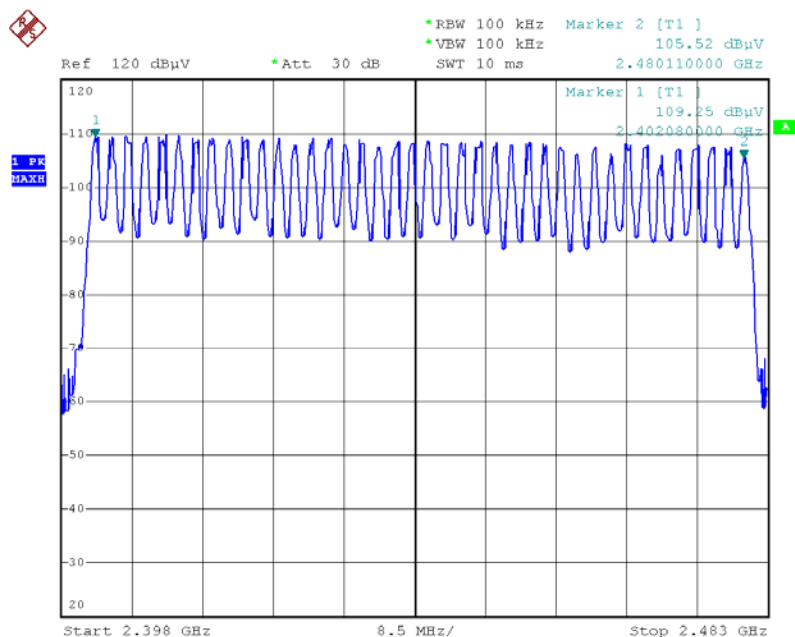

### 13 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	Based on FCC Part 15.247
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

#### Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centered on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 1MHz.Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

#### Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period:  $T = 0.4(s) * 40 = 16 (s)$

So, the Dwell Time can be calculated as follows:

Dwell time =  $84 * 16 * (MkrDelta) / 1000$


**Note** : Mkr Delta is once pulse time.

Frequency	Mkr Delta(ms)	Dwell Time(s)	Limits(s)	Result
2402 MHz	216	0.290	0.400	Pass
2440 MHz	215	0.289	0.400	Pass
2480 MHz	214	0.288	0.400	Pass


Egerium BV

FCC ID: Z5M-LUVGECAM

Low Channel: 2402MHz

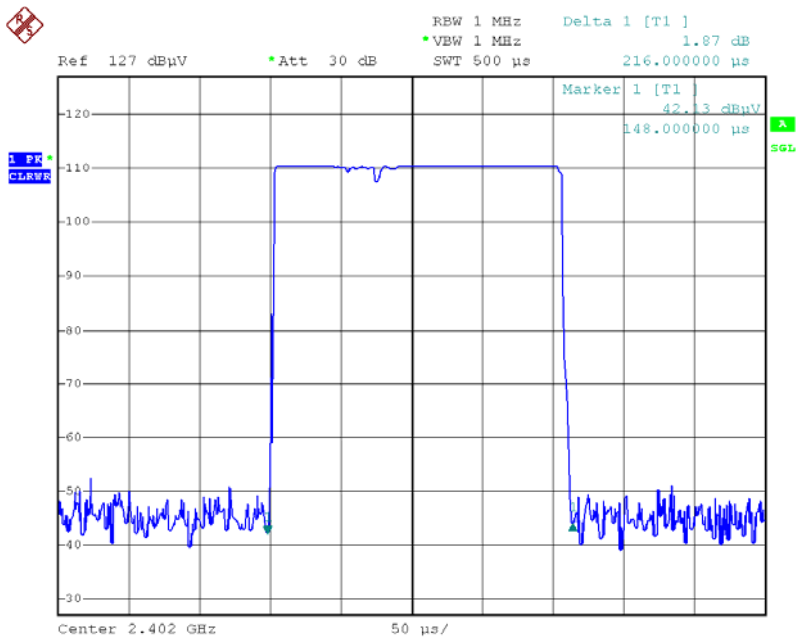

Middle Channel: 2440MHz

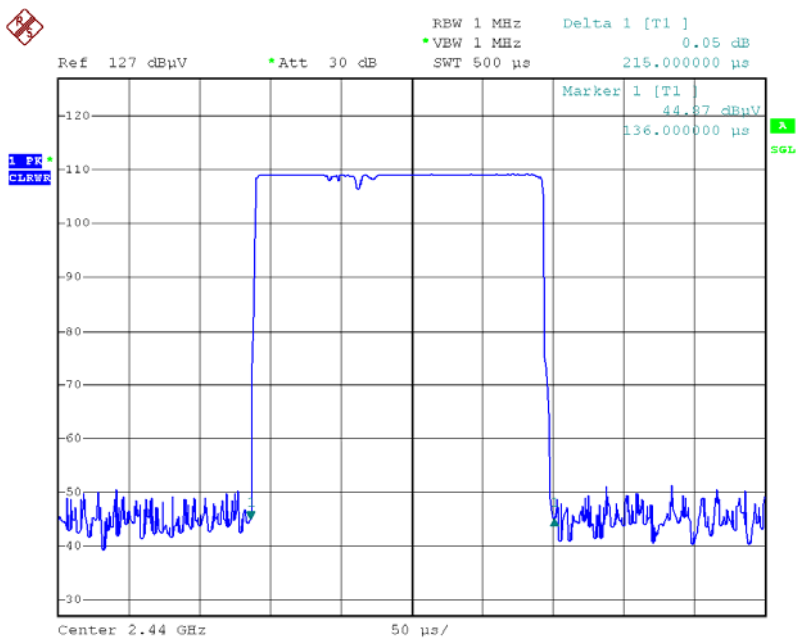


WALTEK SERVICES

Reference No.: WT11105436-S-E-F

Egerium BV

FCC ID: Z5M-LUVGECAM

High Channel: 2480MHz

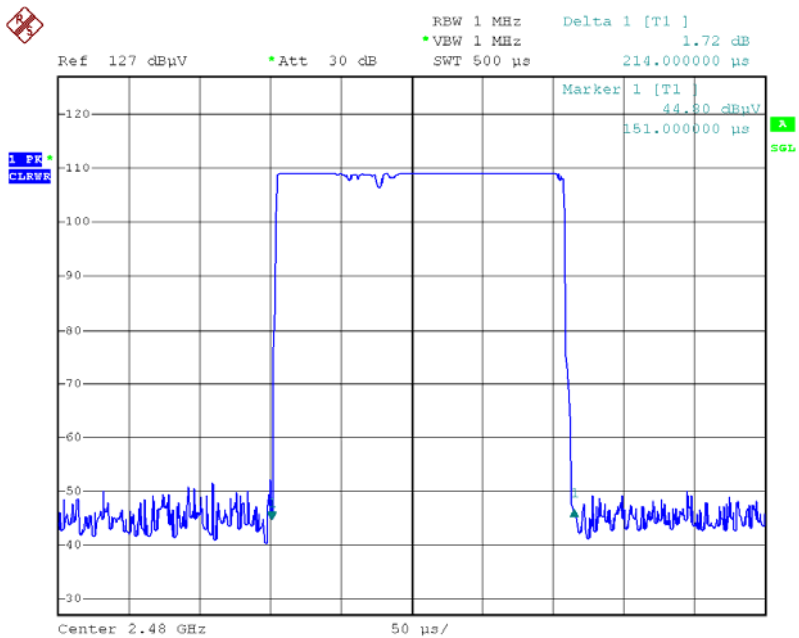

WALTEK SERVICES

Reference No.: WT11105436-S-E-F

## 14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product has a permanent antenna, fulfill the requirement of this section.

## 15 RF Exposure

Test Requirement: FCC Part 1.1307  
 Test Method: Based on FCC Part 15.247  
 Test Mode: The EUT work in test mode(Tx).

### Requiments:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

### The procedures / limit

#### (A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

#### (B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

**MPE Calculation Method**

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm <sup>2</sup> )	Limit of Power Density (S) (mW/cm <sup>2</sup> )	Test Result
-2.39	0.58	14.17	26.121614	0.003014	1	Complies
-2.39	0.58	14.30	26.915348	0.003106	1	Complies
-2.39	0.58	13.81	24.043620	0.002774	1	Complies

Egerium BV

FCC ID: Z5M-LUVGECAM

## 16 Photographs - Constructional Details

### 16.1 Product View



### 16.2 EUT – Appearance View




WALTEK SERVICES

Reference No.: WT11105436-S-E-F




Egerium BV

FCC ID: Z5M-LUVGECAM

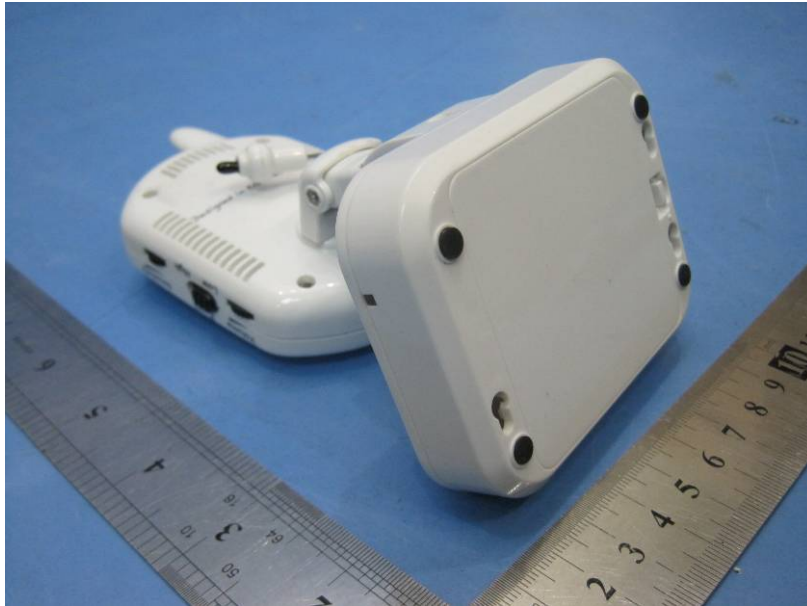

### 16.3 EUT – Open View

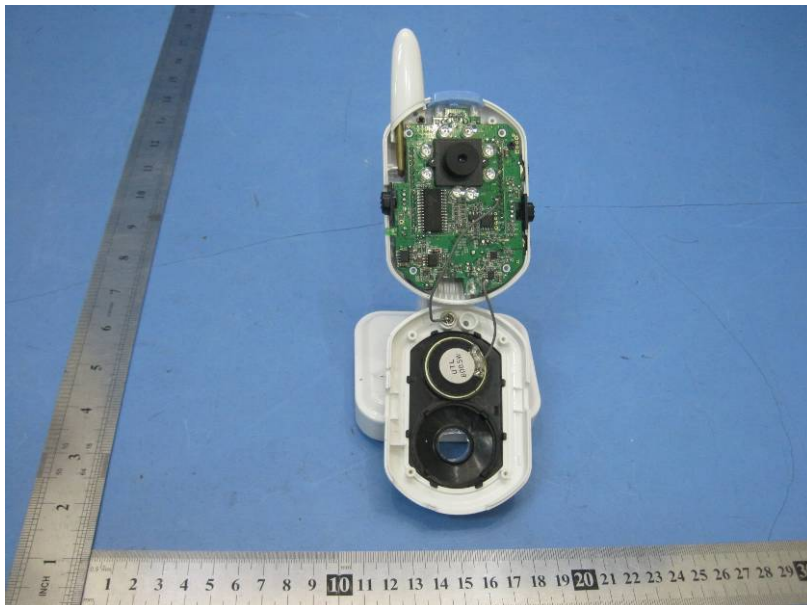


WALTEK SERVICES

Reference No.: WT11105436-S-E-F

Egerium BV

FCC ID: Z5M-LUVGECAM

#### 16.4 EUT - PCB View


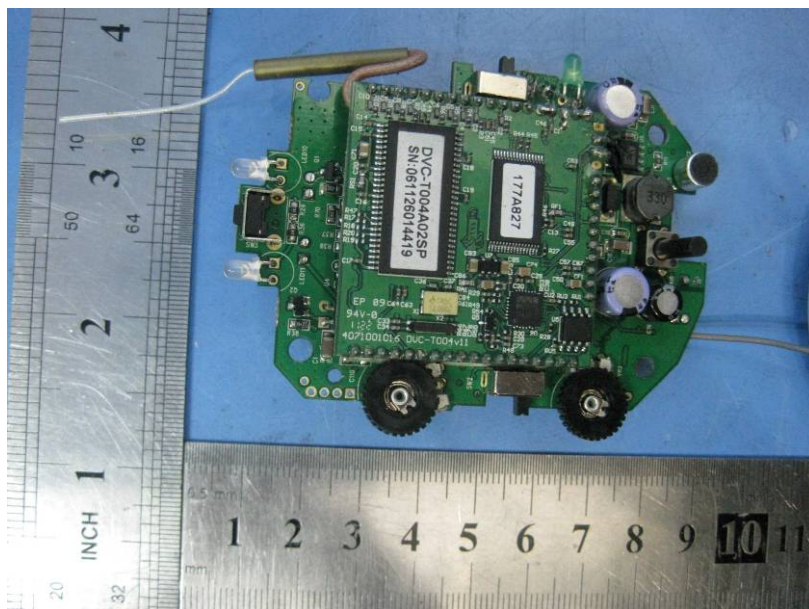


WALTEK SERVICES

Reference No.: WT11105436-S-E-F

Egerium BV

FCC ID: Z5M-LUVGECAM

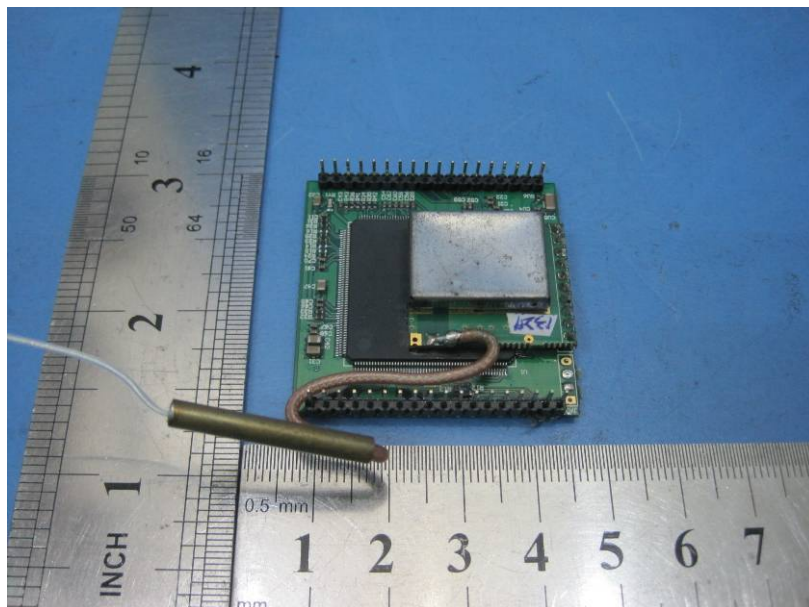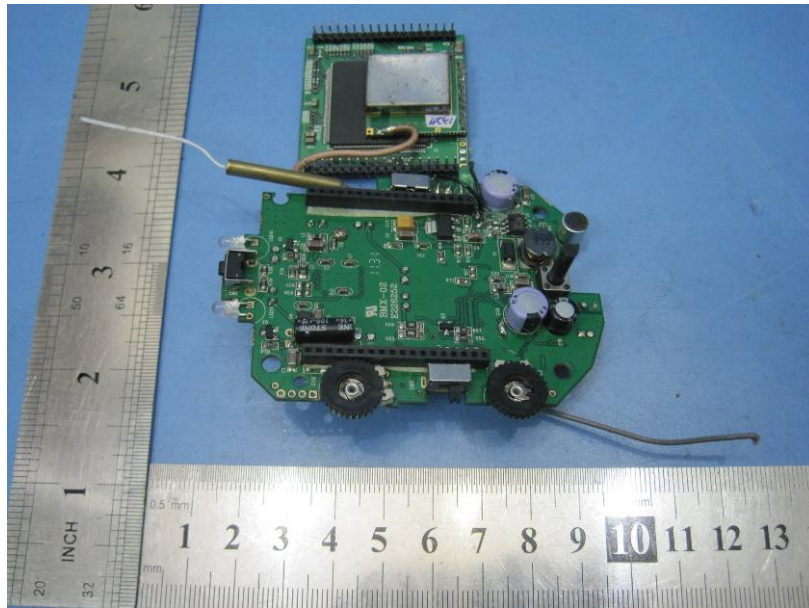

WALTEK SERVICES



Reference No.: WT11105436-S-E-F



Egerium BV

FCC ID: Z5M-LUVGECAM

### 16.5 RF Module - View

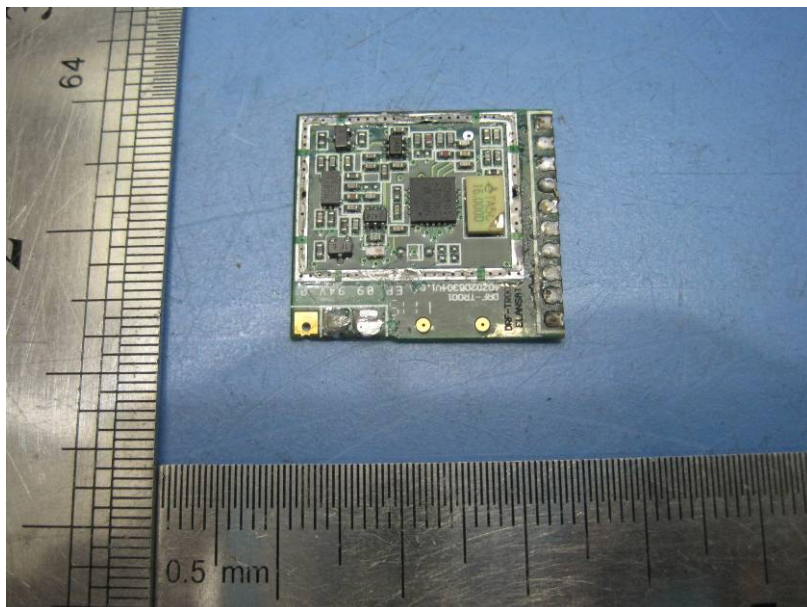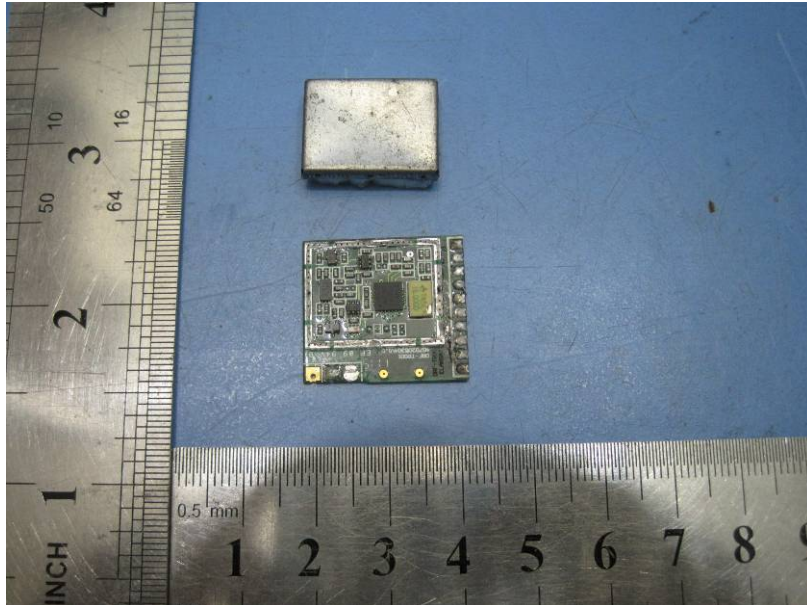


WALTEK SERVICES


Reference No.: WT11105436-S-E-F

Egerium BV

FCC ID: Z5M-LUVGECAM

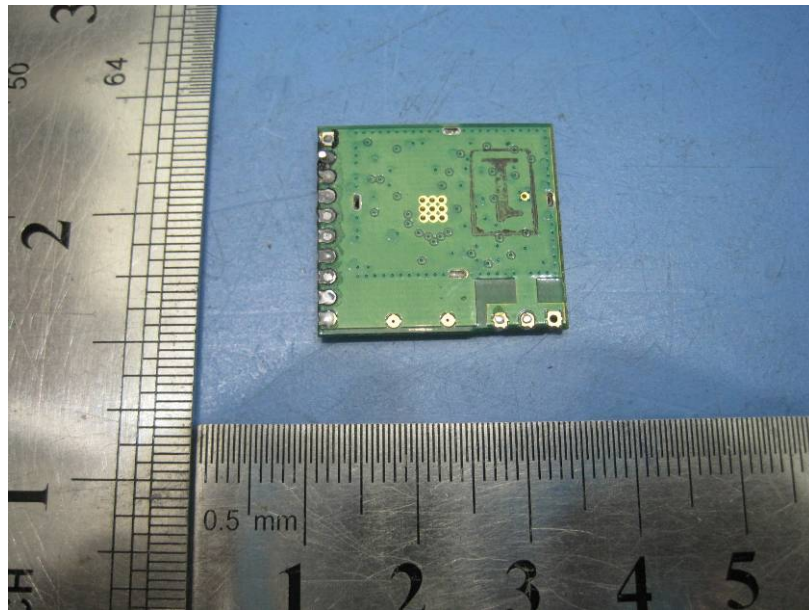

#### 16.6 Adapter - Open View

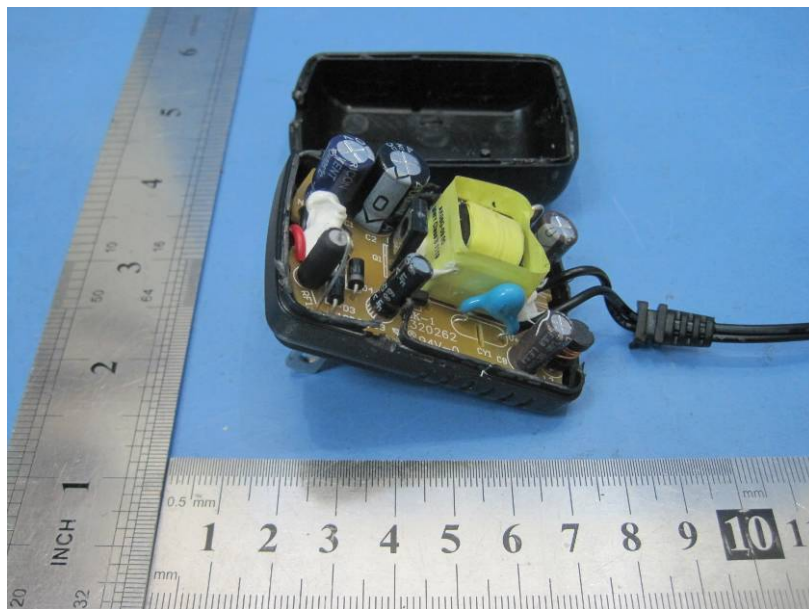



WALTEK SERVICES

Reference No.: WT11105436-S-E-F

Egerium BV

FCC ID: Z5M-LUVGECAM

### 16.7 Adapter - PCB View

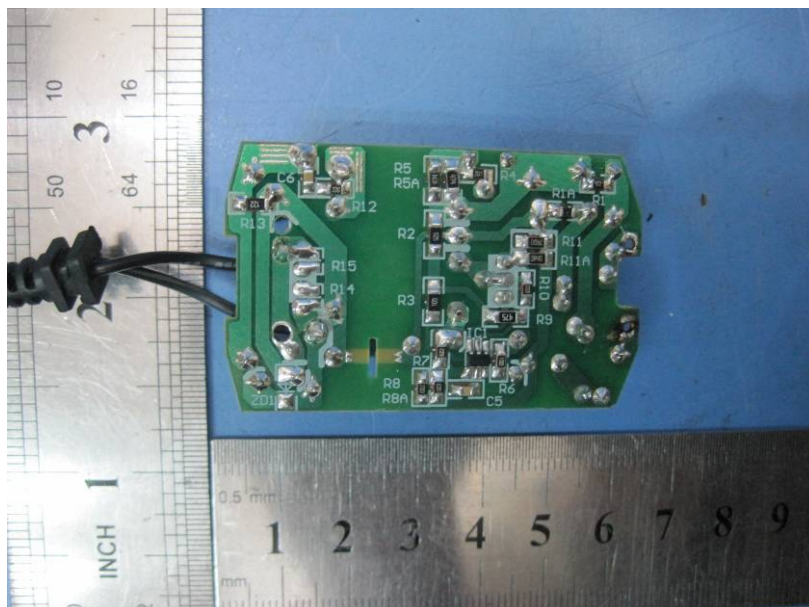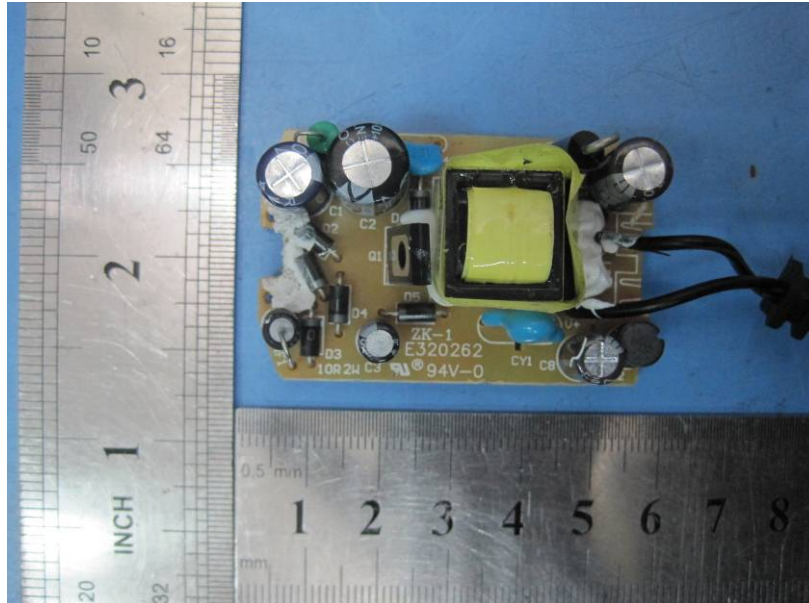

WALTEK SERVICES

Reference No.: WT11105436-S-E-F



## 17 FCC Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT  
EUT Back View/ proposed FCC Label Location

