







ISO/IEC17025Accredited Lab.

Report No: FCC TW1110096-01 File reference No: 2011-11-09

Applicant: E-STAR ELECTRONICS TECHNOLOGY LIMITED

Product: MID

Model No: MD-702, MID-703, MID-704

Trademark: E-STAR, Dopo

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: November 09, 2011

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1110096-01 Page 2 of 83

Date: 2011-11-09



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC-Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 83

Report No: 1110096-01

Date: 2011-11-09



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample.	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details.	9
3.1	Summary of Test Results	9
3.2	Test Standards.	9
4.0	EUT Modification.	9
5.0	Power Line Conducted Emission Test.	10
5.1	Schematics of the Test.	10
5.2	Test Method and Test Procedure.	10
5.3	Configuration of the EUT.	10
5.4	EUT Operating Condition.	11
5.5	Conducted Emission Limit.	11
5.6	Test Result.	11
6.0	Radiated Emission test.	14
5.1	Test Method and Test Procedure.	14
5.2	Configuration of the EUT.	14
6.3	EUT Operation Condition.	14
6.4	Radiated Emission Limit.	15
7.0	6dB Bandwidth Measurement.	34
8.0	Maximum Peak Output Power.	45
9.0	Power Spectral Density Measurement.	48
10.0	Out of Band Measurement.	56
11.0	Antenna Requirement.	69
12.0	RF Exposure.	70
13.0	FCC ID Label.	71
14.0	Photo of Test Setup and EUT View.	72

Date: 2011-11-09



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd. CheGongMiao,FuTian District, Shenzhen,

CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: E-STAR ELECTRONICS TECHNOLOGY LIMITED

Address: FLAT U,11/F, BLOCK 3, CAMELPAINT BLDG., 60 HOI YUEN HONG KONG.

Telephone: 852-23445685 Fax: 852-29510086

1.3 Description of EUT

Product: MID

Manufacturer: Dong Guan Hop Wo Electronic Product Co., Ltd

Address: 122 Qing Hu Road, Qing Hu Tou, Tang Xia Town, Dong Guan City,

Guang Dong Province, China

Brand Name: E-STAR, Dopo

Model Number: MD-702

Additional Model Number: MID-702, MID-703, MID-704

Power Adapter Model: FJ-SW0601500U, Input:100-240V~, 50-60Hz,0.35A;

Output: DC6V, 1500mA

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, BPSK)

IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g: 2412-2462MHz

Channel Spacing IEEE 802.11b/g: 5MHz

Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

Frequency Selection By software

Channel Number IEEE 802.11b/g: 11 Channels

Antenna: PFC Antenna with maximum gain 3.3dBi

1.4 Submitted Sample: 2 Sample

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1110096-01 Page 5 of 83

TIMEWAY

1.5 Test Duration 2011-10-18 to 2011-11-09

Date: 2011-11-09

1.6 Test UncertaintyConducted Emissions Uncertainty =3.6dBRadiated Emissions Uncertainty =4.7dB

1.7 Test Engineer Terry Tang
The sample tested by

Print Name: Terry Tang

Page 6 of 83

Report No: 1110096-01

Date: 2011-11-09



2.0	Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2011-04-26	2012-04-25	
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2011-04-26	2012-04-25	
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2011-04-26	2012-04-25	
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2011-04-26	2012-04-25	
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2011-04-26	2012-04-25	
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2011-04-26	2012-04-25	
System Controller	CT	SC100	•			
Printer	EPSON	РНОТО ЕХЗ	CFNH234850			
Computer	IBM	8434	1S8434KCE99BLXL O*			
Loop Antenna	EMCO	6502	00042960	2011-04-26	2012-04-25	
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2011-04-26	2012-04-25	
3m OATS			N/A	2011-04-26	2012-04-25	
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2011-04-26	2012-04-25	
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2011-04-26	2012-04-25	
Power meter	Anritsu	ML2487A	6K00003613	2011-04-26	2012-04-25	
Power sensor	Anritsu	MA2491A	32263	2011-04-26	2012-04-25	
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2011-04-26	2012-04-25	
LISN	AFJ	LS16C	10010947251	2011-04-26	2012-04-25	
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2011-04-26	2012-04-25	
9*6*6 Anechoic			N/A	2011-04-26	2012-04-25	
EMI Test Receiver	RS	ESCS30	100139	2011-04-26	2012-04-25	
LISN	AFJ	LS16C	10010947251	2011-04-26	2012-04-25	
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2011-04-26	2012-04-25	

Report No: 1110096-01 Page 7 of 83

Date: 2011-11-09

2.1 **Auxiliary Equipment**

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
Earphone				-	-
TF			Kingston		
PC	R400		IBM		FCC ID
Mouse	M-F105		L.SEletron		FCC DOC
Keyboard	KB-0225		IBM		FCC DOC

Report No: 1110096-01

Date: 2011-11-09



Page 8 of 83

3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 54Mbps data rate (worst case) were chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2412 MHz.

Report No: 1110096-01 Date: 2011-11-09



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested ac	ccording to the following speci	fications:	
Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0


No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

Report No: 1110096-01 Date: 2011-11-09



5. Power Line Conducted Emission Test

5.1 Schematics of the test

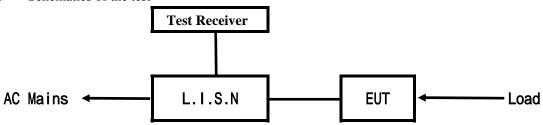


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2009.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

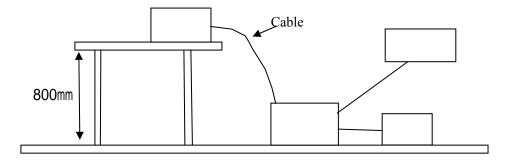

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2009. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
MID	Dong Guan Hop Wo Electronic Product Co., Ltd	MD-702	Z6CMD702

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1110096-01 Page 11 of 83

Date: 2011-11-09



C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2009.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB μ V)	
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.0	66.0	66.0 ~ 56.0*	56.0 ~ 46.0*
0.50 ~ 5.00	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No: 1110096-01 Page 12 of 83

Date: 2011-11-09




A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Keep WIFI Transmitting, Play Memory and Running EMC test

Software

Results: Pass

Please refer to following diagram for individual

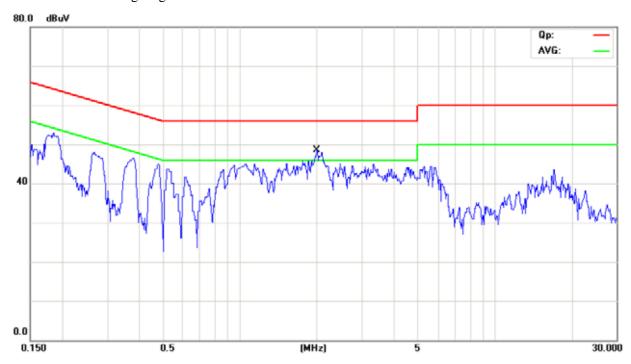

Eraguanav	Reading(dB μ V)				Limit	
Frequency (MHz)	Line	;	Neutral		$(dB \mu V)$	
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
2.003	46.30	29.80			56.00	46.00

Report No: 1110096-01 Page 13 of 83

Date: 2011-11-09




B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Keep WIFI Transmitting, Play Memory and Running EMC test

Software

Results: Pass

Please refer to following diagram for individual

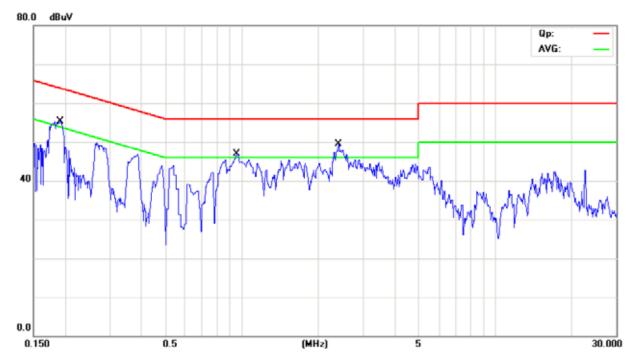

Emagniaman	Reading(dB μ V)				Limit	
Frequency (MHz)	Live	;	Neutral (dB µ		V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
2.392			47.56	34.16	56.00	46.00
0.192			50.44	32.54	63.95	53.95
0.955			45.75	20.55	56.00	46.00

Date: 2011-11-09



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2009. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2009.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier Furn-table Receiver

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No: 1110096-01 Page 15 of 83

Date: 2011-11-09



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

		E 1
Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No: 1110096-01 Page 16 of 83

Date: 2011-11-09



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep WIFI Transmitting, Play Memory and Running EMC test

Software

Results: Pass

Frequency (MHz)	Level@3m (dB \(\mu\) V/m)	Antenna Polarity	Limit@3m (dB µ V/m)		
162.002	40.18	Н	43.50		
189.003	39.87	Н	43.50		
269.994	41.94	Н	46.00		
297.027	40.05	Н	46.00		
911.975	911.975 41.43		46.00		
189.006	39.44	V	43.50		
161.990	39.58	V	43.50		
135.006	40.35	V	43.50		
216.006	40.85	V	46.00		


Report No: 1110096-01

Date: 2011-11-09




Test Figure:

H

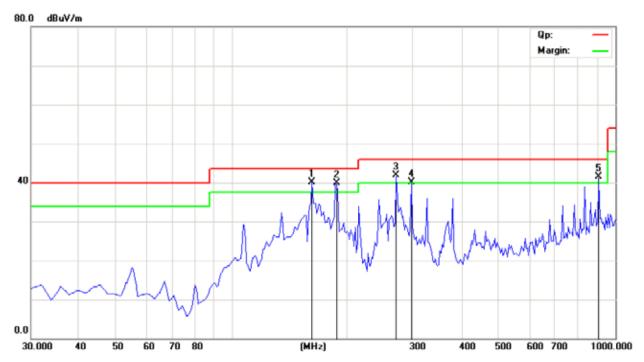

Test Figure:

V

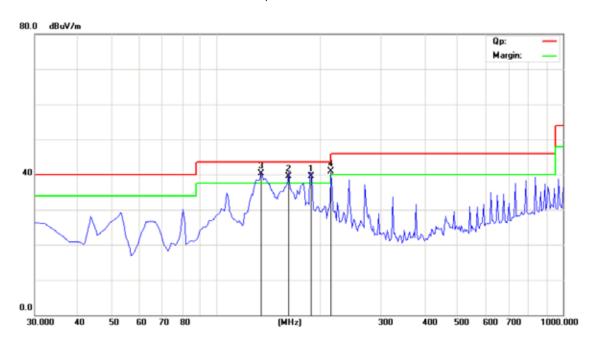

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1110096-01 Page 18 of 83

Date: 2011-11-09



Operation Mode: Transmitting & Receiving under CH01 at 54Mbps

Frequency (MHz)	Level@3m (dB \mu V/m)	Antenna Polarity	Limit@3m (dB μ V/m)	
2412.00	88.53 (PK))	Н	Even dominated Engagement	
2412.00	91.14 (PK)	V	Fundamental Frequency	
4824.00		Н	74(Peak)/ 54(AV)	
4824.00		V	74(Peak)/ 54(AV)	
7236.00		H/V	74(Peak)/ 54(AV)	
9648.00		H/V	74(Peak)/ 54(AV)	
12060		H/V	74(Peak)/ 54(AV)	
14472		H/V	74(Peak)/ 54(AV)	
16884		H/V	74(Peak)/ 54(AV)	
19296		H/V	74(Peak)/ 54(AV)	
21708		H/V	74(Peak)/ 54(AV)	
24120		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured

^{3.} For 802.11g mode 54Mbps

Report No: 1110096-01

Date: 2011-11-09



Operation Mode: Transmitting & Receiving under CH06 at 54Mbps

Frequency (MHz)	Level@3m (dB \(\mu\) V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
2437.00	89.10 (PK)	Н	Fundamental Frequency
2437.00	90.42 (PK)	V	Fundamental Frequency
4874.00		Н	74(Peak)/ 54(AV)
4874.00		V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54Mbps

Operation Mode: Transmitting & Receiving under CH11 at 54Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \(\mu\) V/m)	
2462.00	2462.00 88.48 (PK) 2462.00 92.08 (PK)		Fundamental Frequency	
2462.00				
4924	1	Н	74(Peak)/ 54(AV)	
4924	-	V	74(Peak)/ 54(AV)	
7368	-	H/V	74(Peak)/ 54(AV)	
9848	1	H/V	74(Peak)/ 54(AV)	
12310	-	H/V	74(Peak)/ 54(AV)	
14772	-	H/V	74(Peak)/ 54(AV)	
17234	1	H/V	74(Peak)/ 54(AV)	
19696	1	H/V	74(Peak)/ 54(AV)	
22158		H/V	74(Peak)/ 54(AV)	
24650		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 54Mbps

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Report No: 1110096-01 Date: 2011-11-09



Please refer to the following test plots for details:

CH01 at 54Mbps: Horizontal

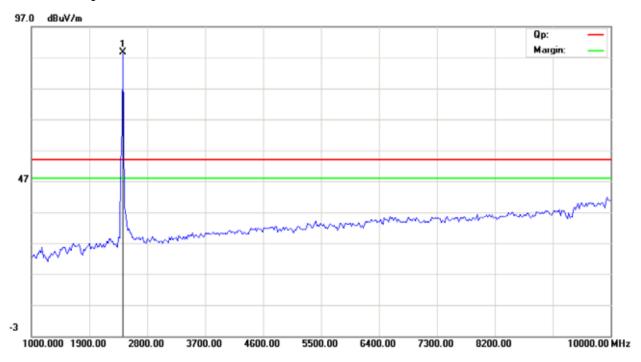

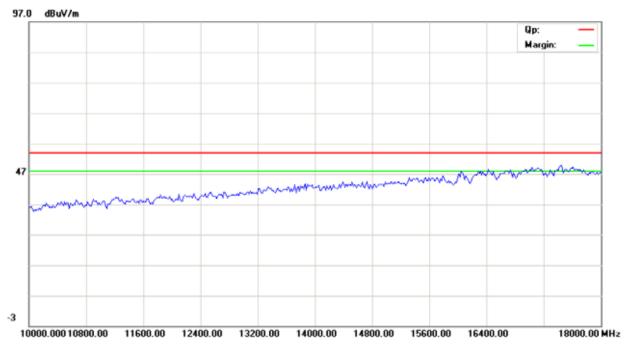


Page 21 of 83


Report No: 1110096-01

Date: 2011-11-09



CH01 at 54Mbps: Vertical

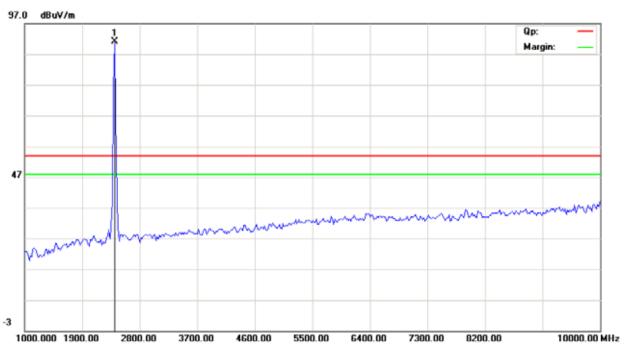

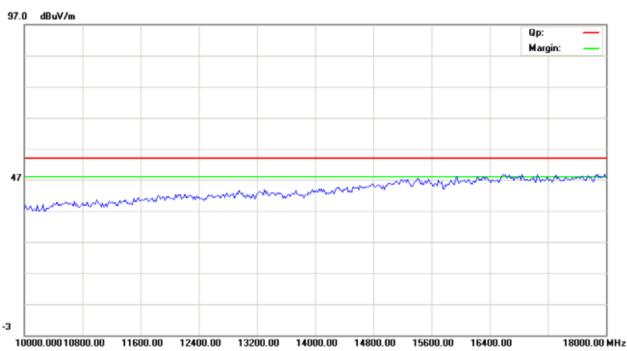



Page 22 of 83

Report No: 1110096-01 Date: 2011-11-09



CH06 at 54Mbps: Vertical

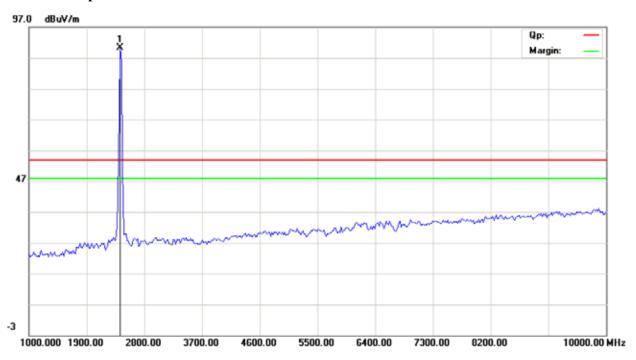

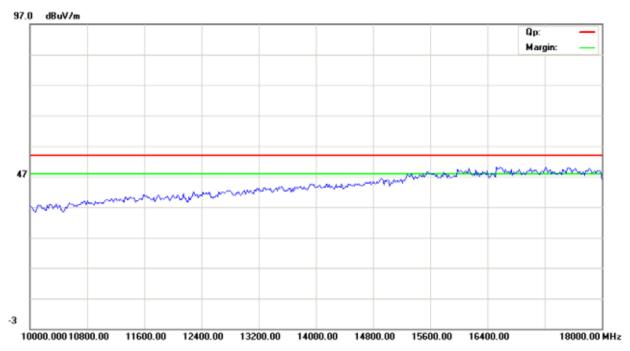


Page 23 of 83


Report No: 1110096-01

Date: 2011-11-09



CH06 at 54Mbps: Horizontal

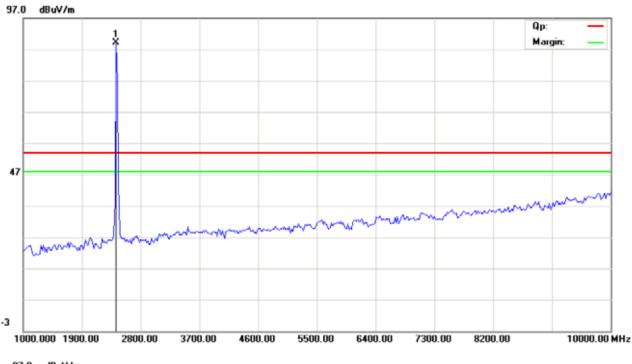

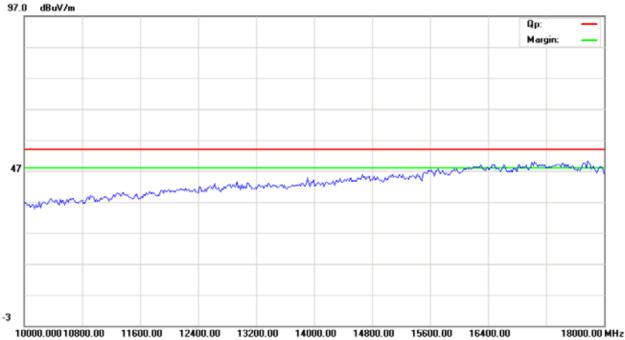



Page 24 of 83

Report No: 1110096-01 Date: 2011-11-09



CH11 at 54Mbps: Vertical

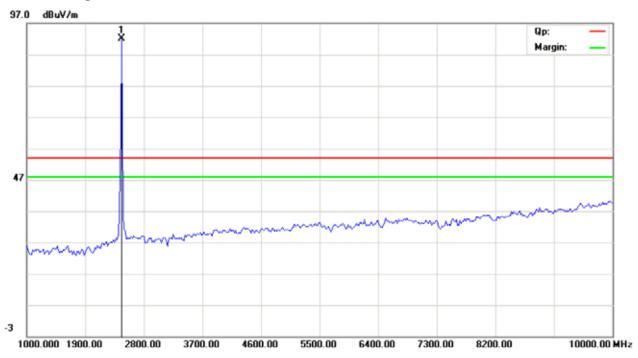


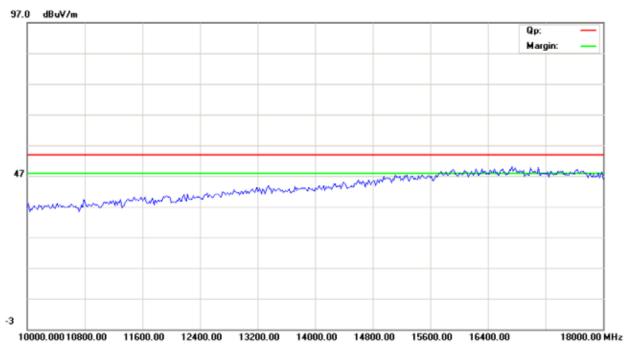

Page 25 of 83

Report No: 1110096-01 Date: 2011-11-09 TIMEWAY PRATRICE LANGE

CH11at 54Mbps: Horizontal

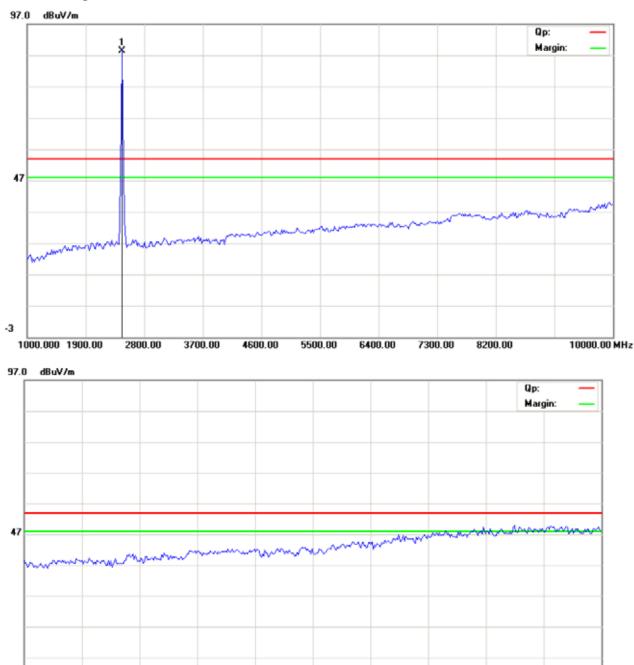

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

12400.00

13200.00

11600.00

10000.000 10800.00

14000.00

14800.00

16400.00

18000.00 MHz

Date: 2011-11-09



Operation Mode: Transmitting & Receiving under CH01 at 11Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)	
2412.00	87.49 (PK)	Н	Fundamental Frequency	
2412.00	92.30 (PK)	V		
4824.00		Н	74(Peak)/ 54(AV)	
4824.00		V	74(Peak)/ 54(AV)	
7236.00		H/V	74(Peak)/ 54(AV)	
9648.00		H/V	74(Peak)/ 54(AV)	
12060		H/V	74(Peak)/ 54(AV)	
14472		H/V	74(Peak)/ 54(AV)	
16684		H/V	74(Peak)/ 54(AV)	
19296		H/V	74(Peak)/ 54(AV)	
21708		H/V	74(Peak)/ 54(AV)	
24120		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

Operation Mode: Transmitting & Receiving under CH06 at 11Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \(\mu\) V/m)	
2437.00	, ,		Fundamental Frequency	
2437.00				
4874.00	1	Н	74(Peak)/ 54(AV)	
4874.00	-	V	74(Peak)/ 54(AV)	
7311.00	-	H/V	74(Peak)/ 54(AV)	
9748.00	9748.00		74(Peak)/ 54(AV)	
12185	-	H/V		
14622	-	H/V	74(Peak)/ 54(AV)	
17059	ı	H/V	74(Peak)/ 54(AV)	
19496	H/V		74(Peak)/ 54(AV)	
21933		H/V	74(Peak)/ 54(AV)	
24370		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1110096-01 Page 27 of 83

Date: 2011-11-09



Operation Mode: Transmitting & Receiving under CH11 at 11Mbps

	0 0		
Frequency (MHz)	Level@3m (dB \(\mu\) V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
2462.00	2462.00 89.79 (PK)		Fundamental Frequency
2462.00	92.53 (PK)	V	Fundamental Frequency
4924		Н	74(Peak)/ 54(AV)
4924		V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310	H/V		74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured

^{3.} For 802.11b mode at 11Mbps


Report No: 1110096-01


Date: 2011-11-09



Please refer to the following test plots for details:

CH01 at 11Mbps: Horizontal

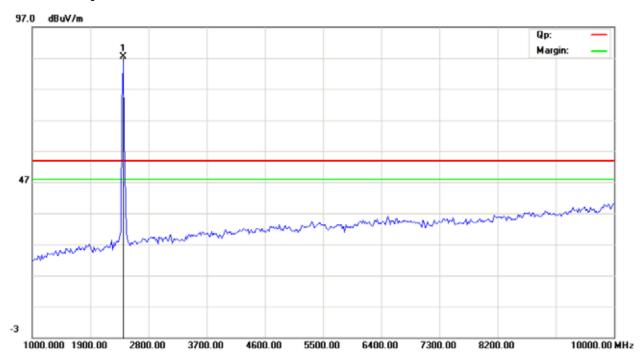

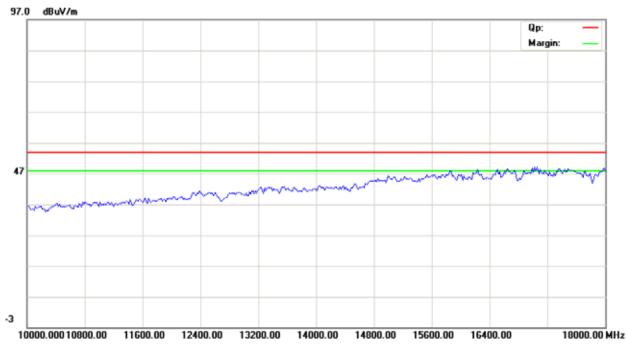


Page 29 of 83


Report No: 1110096-01

Date: 2011-11-09



CH01 at 11Mbps: Vertical

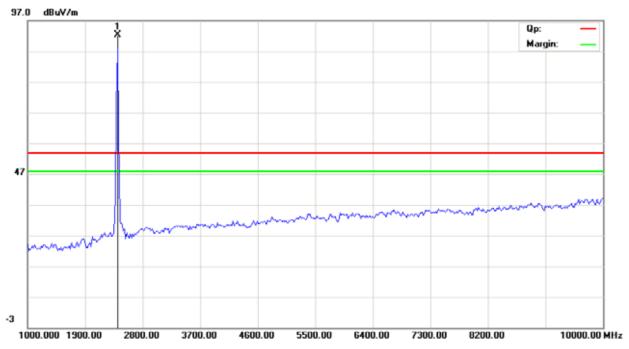

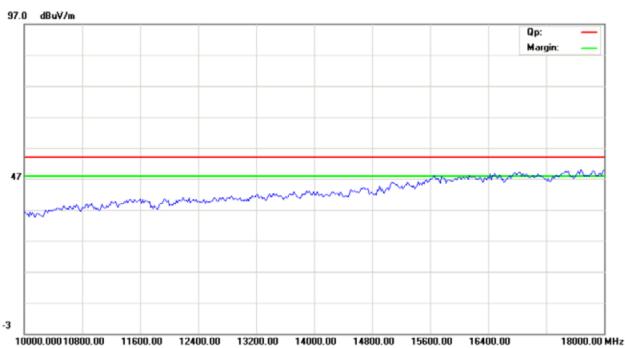


Page 30 of 83


Report No: 1110096-01

Date: 2011-11-09



CH06 at 11Mbps: Vertical

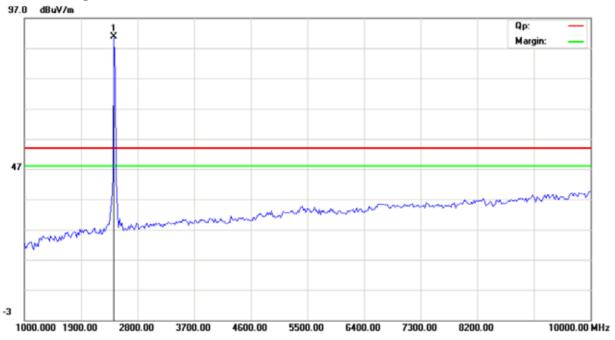

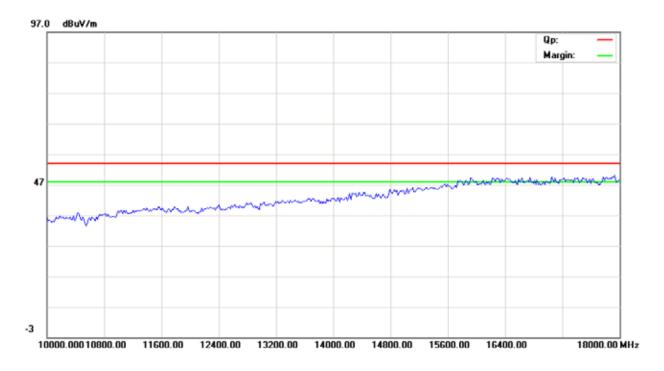


Page 31 of 83

Report No: 1110096-01

Date: 2011-11-09



CH06 at 11Mbps: Horizontal

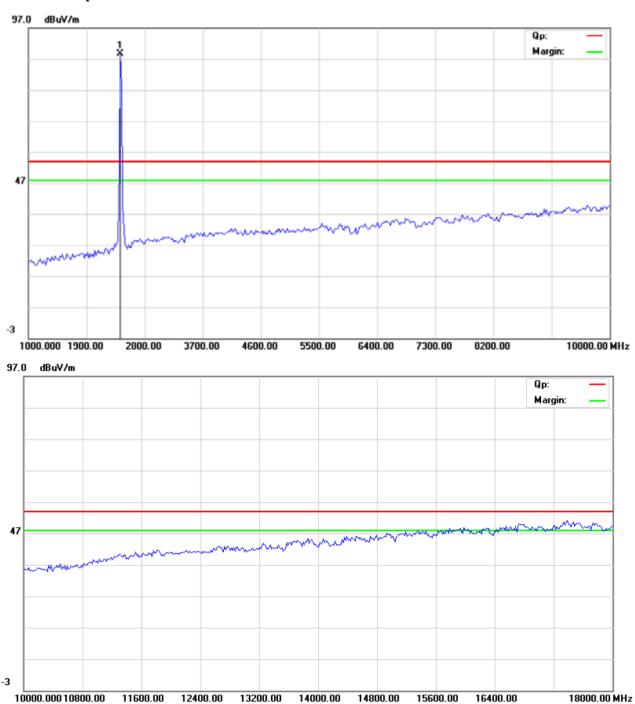



Page 32 of 83

Report No: 1110096-01 Date: 2011-11-09



CH11 at 11Mbps: Vertical

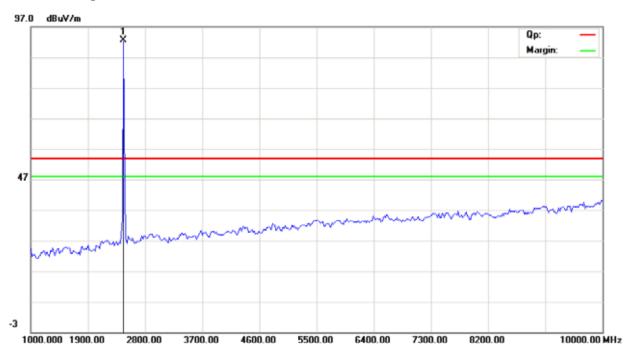

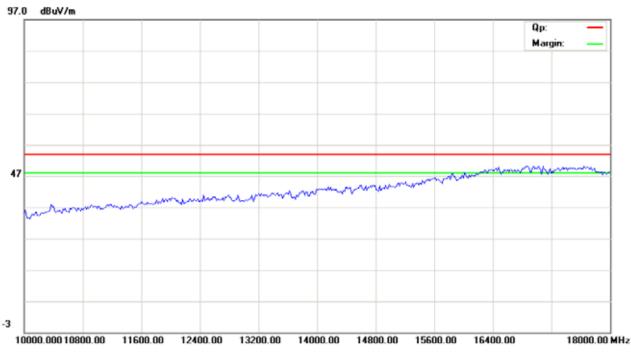


Page 33 of 83

Report No: 1110096-01 Date: 2011-11-09



CH11 at 11Mbps: Horizontal

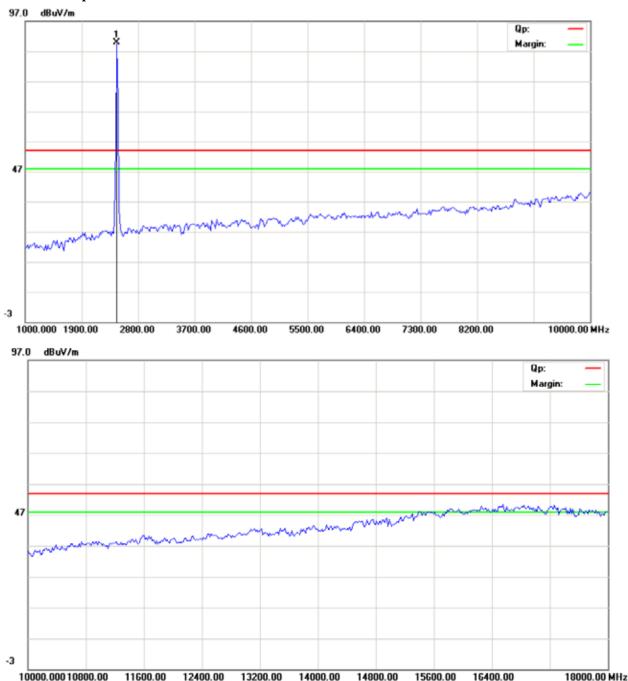

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.


Report No: 1110096-01 Page 34 of 83

Date: 2011-11-09



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500kHz

7.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator.

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW for 802.11b/g mode; The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

7.4 Test Result

Page 35 of 83

Report No: 1110096-01

Date: 2011-11-09



EUT		MID		Model			MD-702		
Mode		802.11b			Input Voltage			AC 120V	
Temperat	emperature 24 deg. C, Humidity		56% RH						
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail	
1		2412	1	10.04		0.5		Pass	
6		2437	1	10.12		0.5		Pass	
11		2462	1	10.12		0.5		Pass	
1		2412	11	9.96			0.5	Pass	
6		2437	11	9.96			0.5	Pass	
11		2462	11	9.92		9.92 0.5		Pass	
1		2412	6	16.56			0.5	Pass	
6		2437	6	16.56			0.5	Pass	
11		2462	6	16.64			0.5	Pass	


Page 36 of 83

Report No: 1110096-01

Date: 2011-11-09



1. 802.11b at 1Mbps of CH01

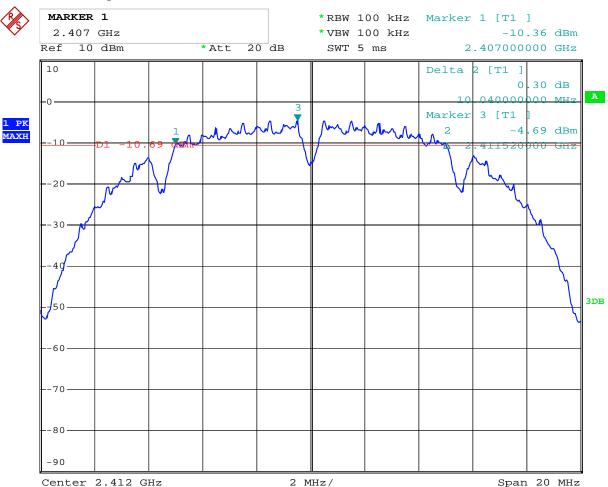


Date: 2.NOV.2011 10:06:51

Report No: 1110096-01 Page 37 of 83

Date: 2011-11-09



2. 802.11b at 1Mbps of CH06

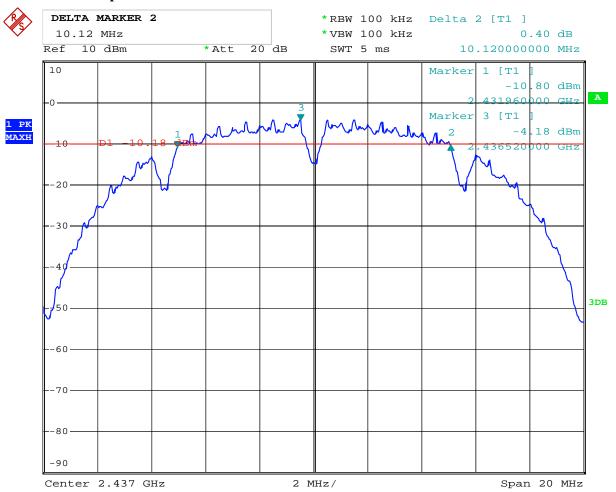

Date: 2.NOV.2011 10:13:24


Page 38 of 83

Report No: 1110096-01

Date: 2011-11-09



3. 802.11b at 1Mbps of CH11

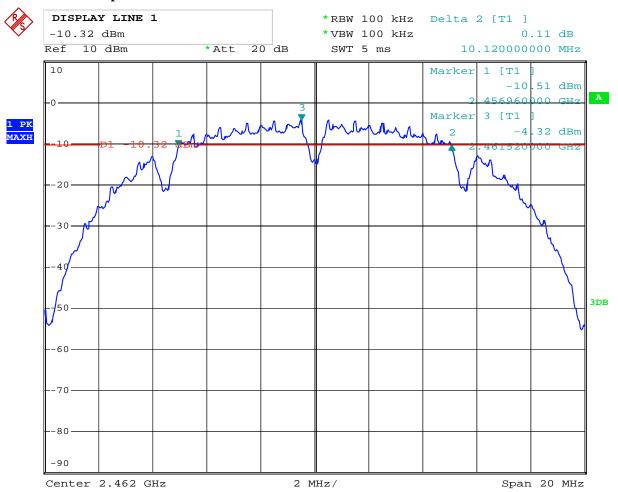


Date: 2.NOV.2011 10:16:14

Report No: 1110096-01 Page 39 of 83

Date: 2011-11-09



4. 802.11b at 6 Mbps of CH01

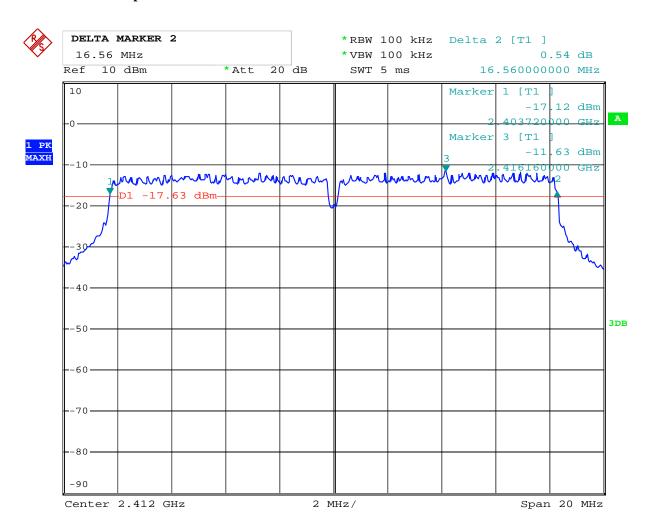

Date: 2.NOV.2011 10:10:11


Page 40 of 83

Report No: 1110096-01

Date: 2011-11-09



5. 802.11b at 6 Mbps of CH06

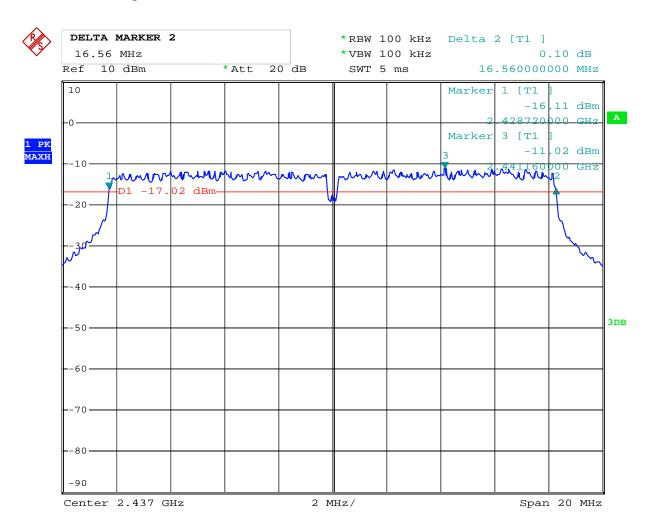


Date: 2.NOV.2011 10:11:04

Report No: 1110096-01 Page 41 of 83

Date: 2011-11-09



6. 802.11b at 6 Mbps of CH11

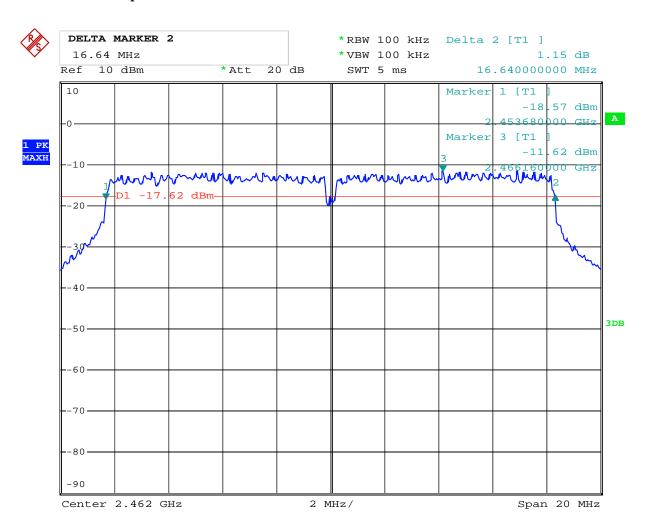

Date: 2.NOV.2011 10:17:40


Page 42 of 83

Report No: 1110096-01

Date: 2011-11-09



7. 802.11b at 11Mbps of CH01

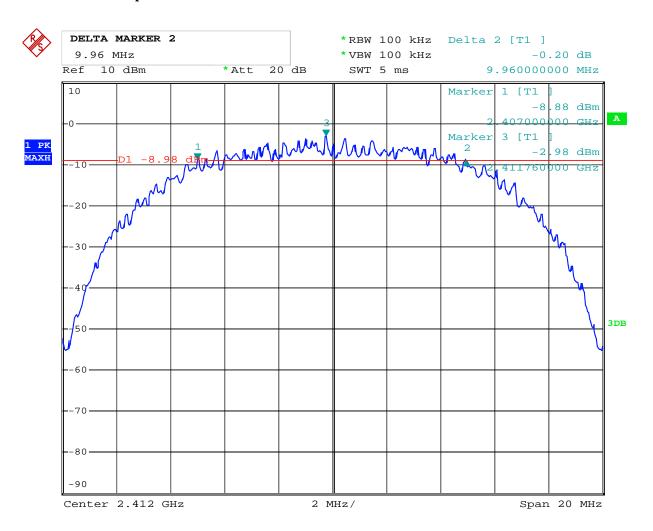

Date: 2.NOV.2011 10:09:19


Page 43 of 83

Report No: 1110096-01

Date: 2011-11-09



8. 802.11b at 11Mbps of CH06

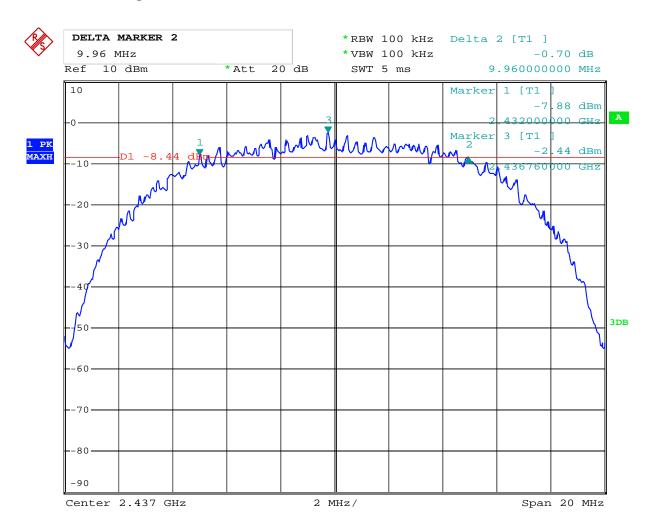

Date: 2.NOV.2011 10:11:59


Page 44 of 83

Report No: 1110096-01

Date: 2011-11-09



9. 802.11b at 11Mbps of CH11

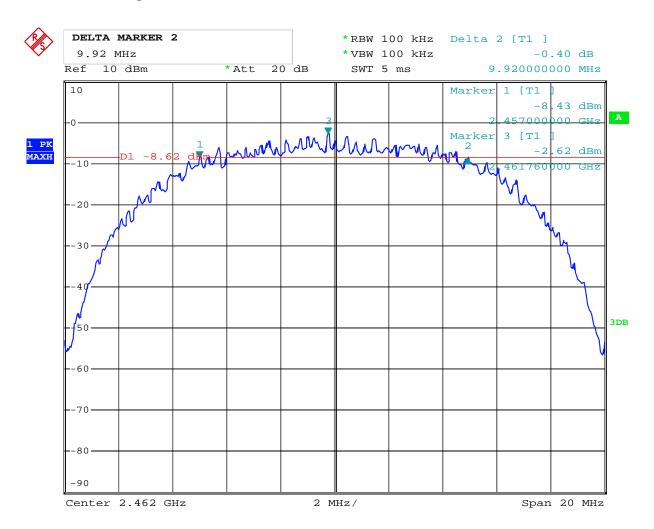

Date: 2.NOV.2011 10:16:50

Report No: 1110096-01 Page 45 of 83

Date: 2011-11-09



8. Maximum Peak Output Power

8.1 Test Setup



8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured

Page 46 of 83

Report No: 1110096-01

Date: 2011-11-09



8.4Test Results

EUT		MII	D	Model		MD-702	
Mode		802.11b		Input Voltage			See Below
Temperati	ure	24 deg	g. C,	Hun	Humidity		56% RH
Channel	Cha	annel Frequency (MHz)	Peak Power C (dBm)	- L Lin		nit	Pass/ Fail
			Test '	Voltage: 1	20V~		
1		2412	9.79		30		Pass
6		2437	9.71		30		Pass
11		2462 9.65			30		Pass
			Test '	Voltage: 1	38V~		
1		2412	9.75		30)	Pass
6		2437	9.68		30)	Pass
11		2462 9.62			30		Pass
Test Voltage: 102				02V~			
1		2412	9.72		30)	Pass
6		2437	9.73		30)	Pass
11		2462	9.68		30)	Pass

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

^{2.} The result basic equation calculation as follow:

Report No: 1110096-01 Page 47 of 83

Date: 2011-11-09



EUT		MI	D	Model			MD-702
Mode		802.1	1g	Input Voltage			See Below
Temperat	ure	24 deg	g. C,	Hun	nidity		56% RH
Channel	Cha	annel Frequency (MHz)	Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail
			Test Voltag	e:120V~			
1		2412	8.41		30		Pass
6		2437	8.76		30		Pass
11		2462	9.17		30		Pass
			Test Voltag	e:138V~			
1		2412	8.45		30)	Pass
6		2437	8.72	30)	Pass
11		2462	9.12		30		Pass
Test Voltage: 102V~							
1		2412	2412 8.36		30)	Pass
6		2437	8.79		30)	Pass
11		2462	9.22		30)	Pass

Note: 1. At finial test to get the worst-case emission at 54Mbps for CH01, CH06 and CH11

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

^{2.} The result basic equation calculation as follow:


Report No: 1110096-01 Page 48 of 83

Date: 2011-11-09



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 10kHz VBW, set sweep time=100s, **PK detector.**

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3 kHz for a full response of the mixer in the spectrum analyzer.

Page 49 of 83

Report No: 1110096-01

Date: 2011-11-09



9.4Test Result

EUT		MII	D Model			MD-702	
Mode		802.1	Ilb Input		Voltage	AC 120V	
Temperati	ure	24 deg	g. C,	Humidity			56% RH
Channel	Cha	annel Frequency (MHz)	Final RF Po Level in 3kH (dBm)		Maximur (dB		Pass/ Fail
				11Mbps	3		
1		2412	-17.21		8		Pass
6		2437	-17.14		8		Pass
11		2462	-16.76		8	•	Pass

Note: At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

EUT		MII	D Model				MD-702	
Mode		802.1	1g	Input Voltage		AC 120V		
Temperat	ure	re 24 deg. C, Humidity		56% RH				
Channel	Cha	annel Frequency (MHz)	Final RF Po Level in 3kH: (dBm)		Maximum Limit (dBm)		Pass/ Fail	
			6Mbps	3				
1		2412	-20.19		8		Pass	
6	·	2437 -20.44			8		Pass	
11		2462	-25.85		8		Pass	

Note: At finial test to get the worst-case emission at 54Mbps for CH01, CH06 and CH11

Page 50 of 83


Report No: 1110096-01

Date: 2011-11-09



9.5 Photo of Power Spectral Density Measurement

1. 802.11g at 11Mbps of CH01

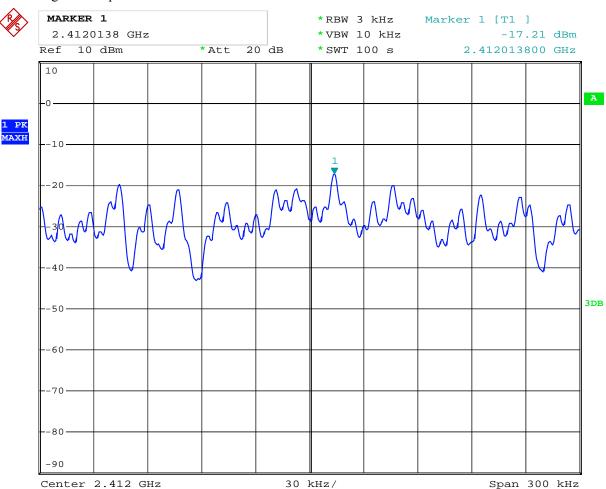


Date: 2.NOV.2011 12:31:19

Page 51 of 83

Report No: 1110096-01 Date: 2011-11-09



2. 802.11g at 11Mbps of CH06

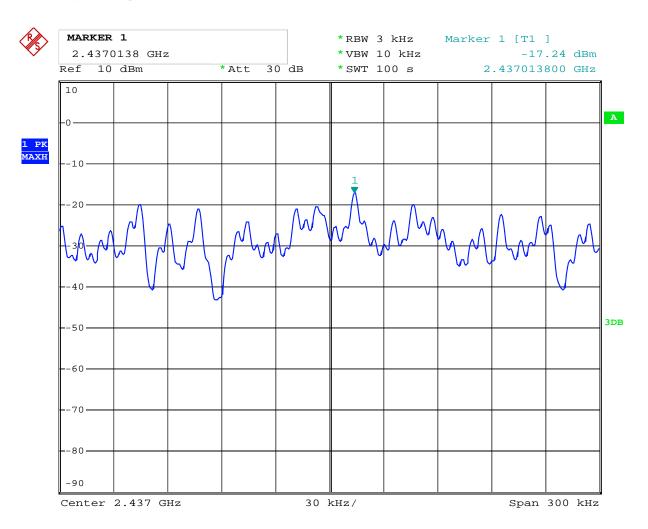


Date: 2.NOV.2011 12:54:01

Page 52 of 83

Report No: 1110096-01 Date: 2011-11-09



3. 802.11g at 11Mbps of CH11

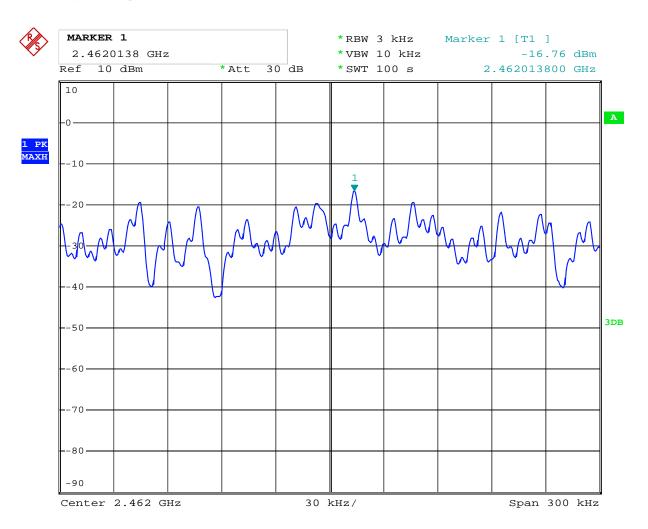


Date: 2.NOV.2011 12:57:44

Page 53 of 83

Report No: 1110096-01 Date: 2011-11-09



4. 802.11g at 54Mbps of CH1

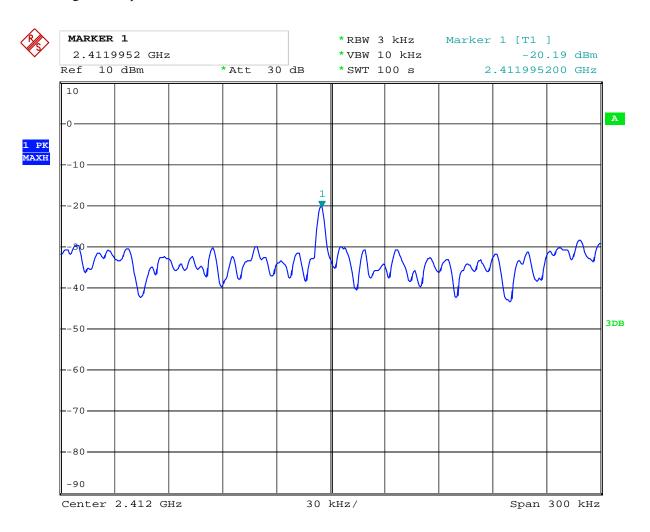


Date: 2.NOV.2011 12:45:52

Page 54 of 83

Report No: 1110096-01 Date: 2011-11-09



5. 802.11g at 54Mbps of CH6

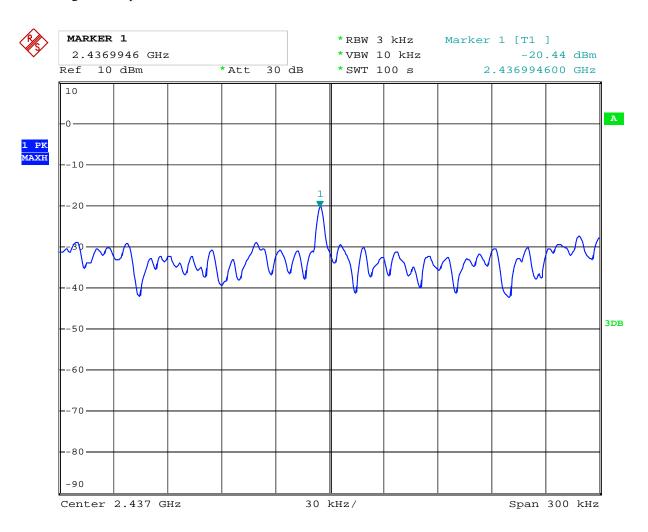

Date: 2.NOV.2011 12:50:07


Page 55 of 83

Report No: 1110096-01

Date: 2011-11-09



6. 802.11g at 54Mbps of CH11

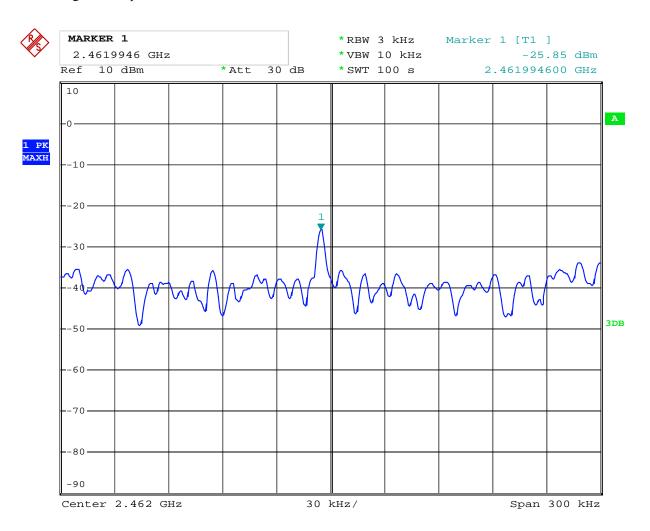

Date: 2.NOV.2011 13:02:15


Report No: 1110096-01 Page 56 of 83

Date: 2011-11-09



10 Out of Band Measurement

10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position.

Page 57 of 83

Report No: 1110096-01

Date: 2011-11-09




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge Measurement

Product:	MID	Model:	MD-702
Mode	Keeping Transmitting	Input Voltage	AC 120V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

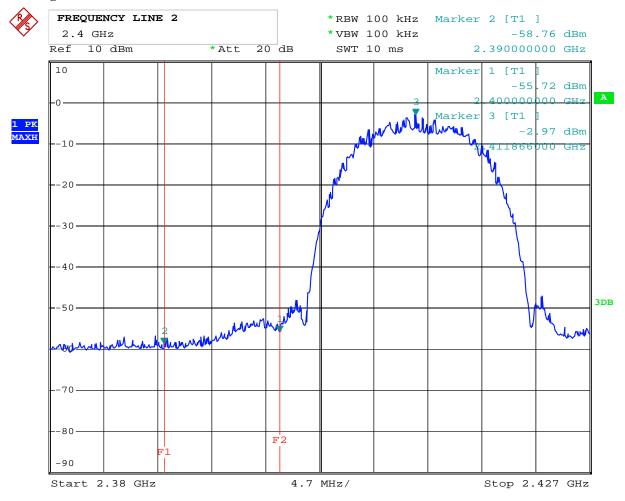

Date: 2.NOV.2011 10:33:40

Page 58 of 83

Report No: 1110096-01

Date: 2011-11-09




CH11 at 11Mbps

10.4 Band-edge Measurement

Product:	MID	Model:	MD-702
Mode	Keeping Transmitting	Input Voltage	AC 120V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

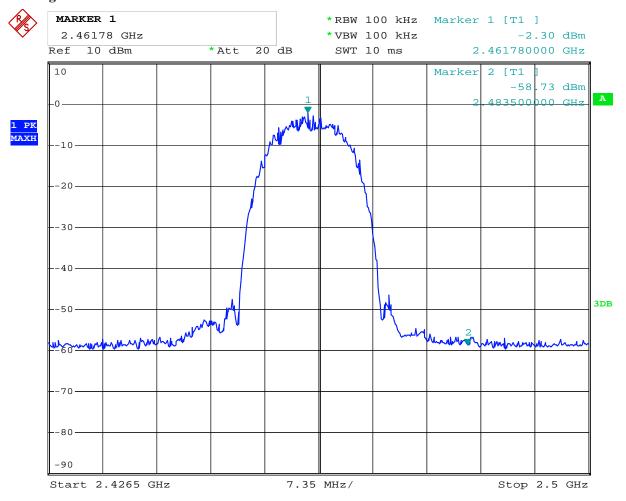

Date: 2.NOV.2011 10:32:12

Page 59 of 83

Report No: 1110096-01

Date: 2011-11-09




For 802.11g mode

CH01 at 54Mbps

10.4 Band-edge Measurement

Product:	MID	Model:	MD-702
Mode	Keeping Transmitting	Input Voltage	AC 120V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

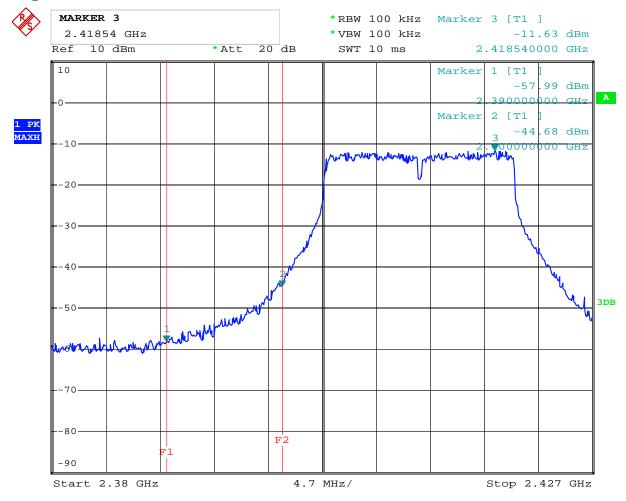

Date: 2.NOV.2011 10:27:53

Page 60 of 83

Report No: 1110096-01

Date: 2011-11-09




CH11 at 54Mbps

10.4 Band-edge Measurement

Product:	MID	Model:	MD-702
Mode	Keeping Transmitting	Input Voltage	AC 120V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

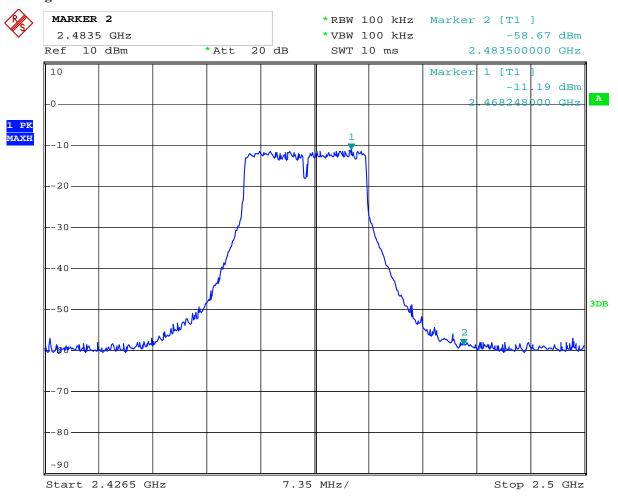

Date: 2.NOV.2011 10:30:12

Page 61 of 83

Report No: 1110096-01

Date: 2011-11-09




For 802.11b mode

CH01 at 11Mbps

10.4 Restricted band Measurement

Product:	MID		Model:	MD-702
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBµV/m)	45.67	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)
2390	PK (dBμV/m)	37.44	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure: Horizontal

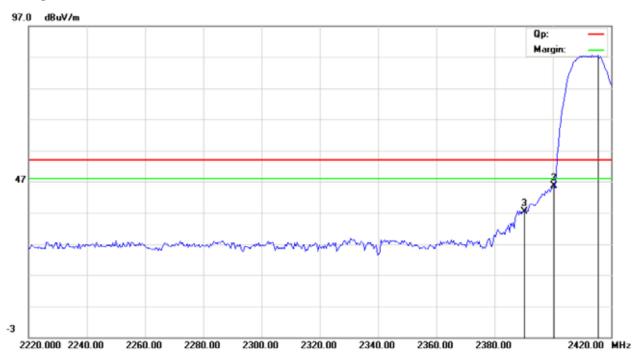

Page 62 of 83

Report No: 1110096-01

Date: 2011-11-09




For 802.11b mode

CH01 at 11Mbps

10.4 Restricted band Measurement

Product:	MID		Model:	MD-702
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBµV/m)	45.46	Limit	$74(dB\mu V/m)$
	AV $(dB\mu V/m)$		Liiiit	$54(dB\mu V/m)$
2390	PK (dBµV/m)	36.45	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure: Vertical

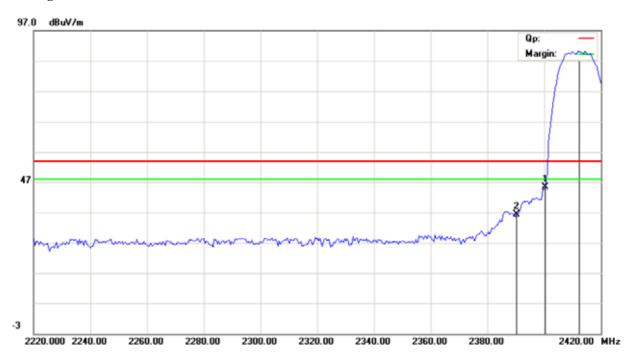

Page 63 of 83

Report No: 1110096-01

Date: 2011-11-09




For 802.11b mode

CH11 at 11Mbps

10.4 Restricted band Measurement

Product:	MID		Model:	MD-702
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.500	PK (dBμV/m)	35.99	T ::4	74(dBμV/m)
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure: Vertical

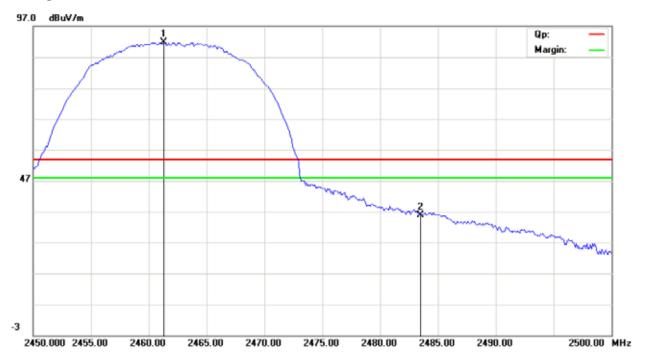

Page 64 of 83

Report No: 1110096-01

Date: 2011-11-09




For 802.11b mode

CH11 at 11Mbps

10.4 Restricted band Measurement

Product:	MID		Model:	MD-702
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.500	PK (dBµV/m)	31.15	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Lillit	$54(dB\mu V/m)$

Test Figure: Horizontal

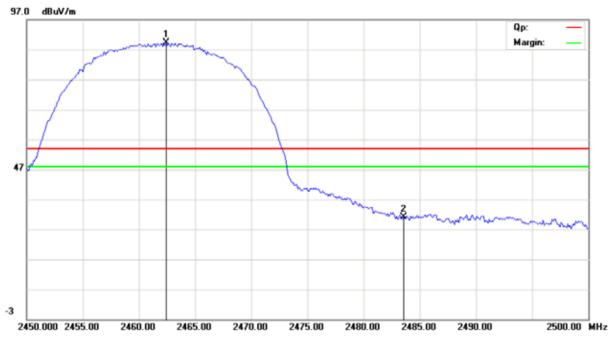

Page 65 of 83

Report No: 1110096-01

Date: 2011-11-09




For 802.11g mode

CH01 at 54Mbps

10.4 Restricted band Measurement

Product:	MID		Model:	MD-702
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2390.000	PK (dBμV/m)	44.01	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$
2400.000	PK (dBμV/m)	65.17	Limit	74(dBμV/m)
	AV (dBμV/m)	46.89		54(dBμV/m)

Test Figure: Horizontal

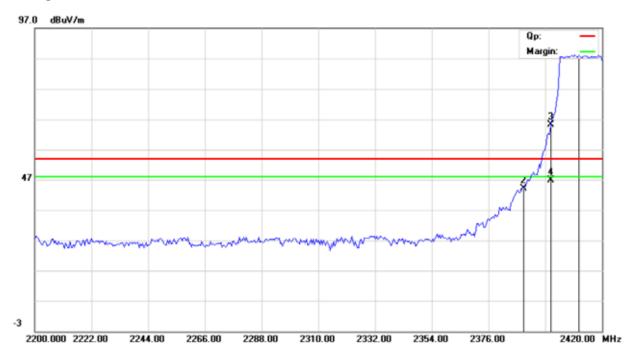

Page 66 of 83

Report No: 1110096-01

Date: 2011-11-09




For 802.11g mode

CH01 at 54Mbps

10.4 Restricted band Measurement

Product:	MID		Model:	MD-702
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2390.000	PK (dBµV/m)	43.05	Limit	74(dBµV/m)
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$
2400.000	PK (dBµV/m)	66.83	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)	47.36		$54(dB\mu V/m)$

Test Figure: Vertical

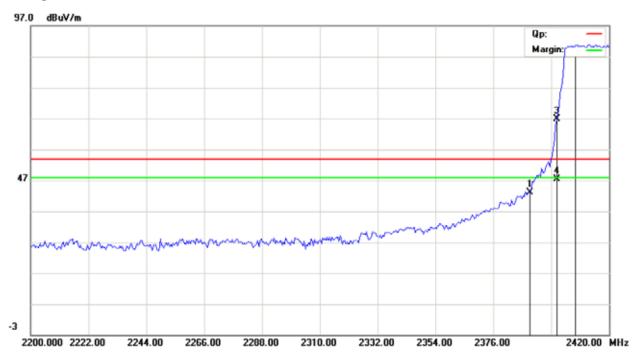

Report No: 1110096-01 Page 67 of 83

Date: 2011-11-09




For 802.11g mode

CH11 at 54Mbps

10.4 Restricted band Measurement

Product:	MID		Model:	MD-702
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.500	PK (dBµV/m)	48.09	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure: Vertical

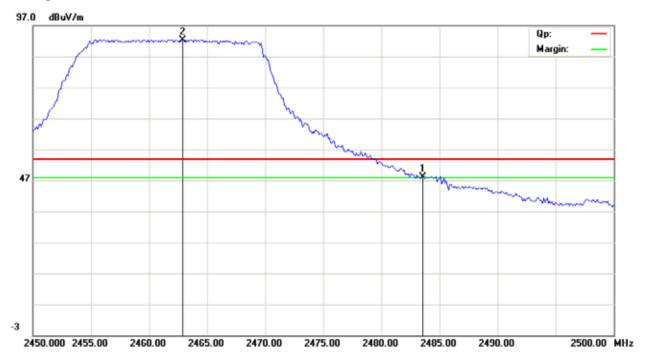

Page 68 of 83

Report No: 1110096-01

Date: 2011-11-09




For 802.11g mode

CH11 at 54Mbps

10.4 Restricted band Measurement

Product:	MID		Model:	MD-702
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.500	PK (dBµV/m)	47.00	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure: Horizontal

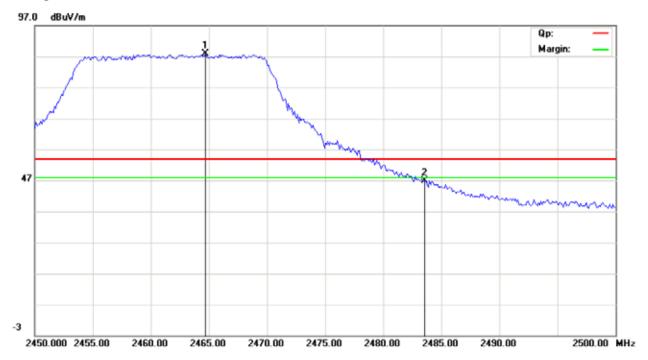

Report No: 1110096-01

Date: 2011-11-09



Page 69 of 83

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

PFC antenna used. The maximum Gain of the antennas is 3.3dBi.

Report No: 1110096-01

Date: 2011-11-09



Page 70 of 83

12.0 RF Exposure

Applicable Standard

According to §1.1307(b)(5), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a Portable device. KDB616217 was used as the guidance.

According to §1.1310 and §2.1093 RF exposure is calculated.

Measurement Result

For 802.11g Mode:

This is a Mobile Internet Device and the conducted output power is 9.22dBm (8.356mW), so the EIRP is 8.356*2.138=17.865mW which is lower than low threshold 60/fGHz mW (60/2.462GHz= 24.37 mW), and the antenna is 3.3dBi which is less than 6dBi.

For 802.11b Mode:

This is a Mobile Internet Device and the conducted output power is 9.79dBm (9.528mW), so the EIRP is 9.528*2.138=20.371mW which is lower than low threshold 60/fGHz mW (60/2.462GHz= 24.37 mW), and the antenna is 3.3dBi which is less than 6dBi.

The SAR measurement is not necessary.

Report No: 1110096-01 Page 71 of 83

Date: 2011-11-09




13.0 FCC ID Label

FCC ID: Z6CMD702

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

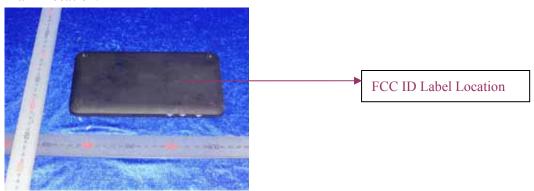

Report No: 1110096-01

Date: 2011-11-09



14.0 Photo of testing

Conducted Emissions





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Page 73 of 83

Report No: 1110096-01

Date: 2011-11-09



Radiated Emissions

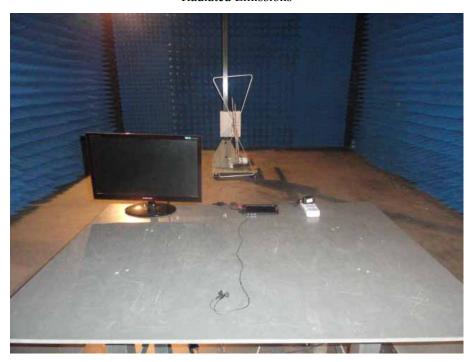




Report No: 1110096-01 Date: 2011-11-09



Photo for the EUT

Outside view

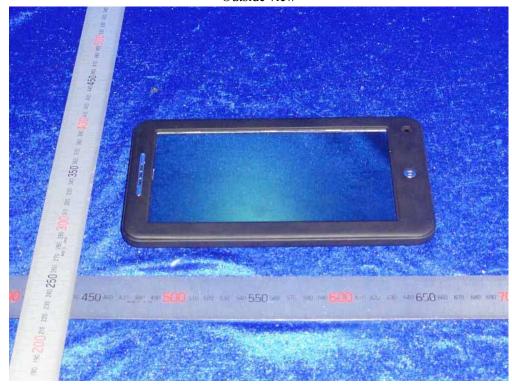



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1110096-01

Date: 2011-11-09



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Report No: 1110096-01

Date: 2011-11-09



Inside view



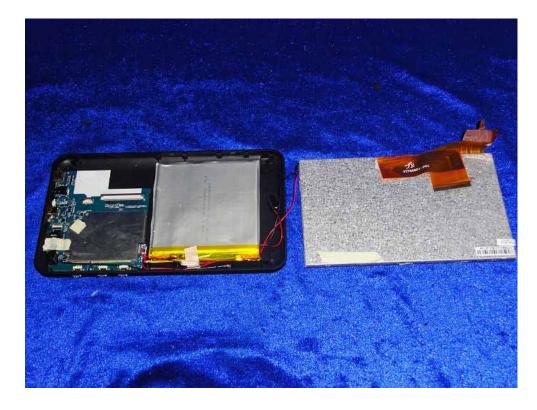

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 77 of 83

Report No: 1110096-01

Date: 2011-11-09



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1110096-01

Date: 2011-11-09



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 79 of 83

Report No: 1110096-01 Date: 2011-11-09



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 80 of 83

Report No: 1110096-01

Date: 2011-11-09



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 81 of 83

Report No: 1110096-01 Date: 2011-11-09



Inside view



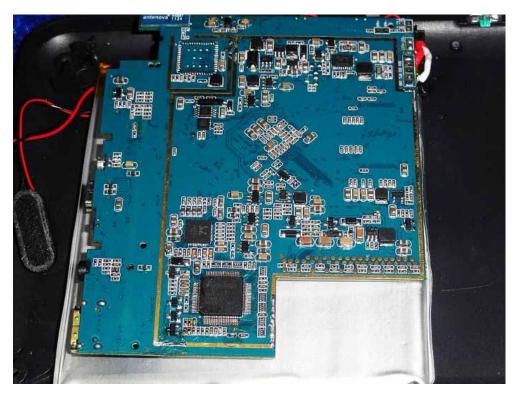

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No: 1110096-01

Date: 2011-11-09



Appendix:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1110096-01 Page 83 of 83

Date: 2011-11-09



Appendix:



End of the report