

Series Part Numbers

Connector Code - XXX -	Description	P/N
RMM	MMCX Right Angle Plug	S131CL2-L-RMM-2450S
ММ	MMCX Straight Plug	S131CL2-L-MM-2450S
RMX	MCX Right Angle Plug	S131CL2-L-RMX-2450S

Electrical Properties:

Frequency Range: $2.4\sim2.5~\text{GHz}$ Impedance: 50Ω nominal

VSWR: <2.0:1

Gain: 2 dBi(without ext. cable)

Radiation: Omni Polarization: Vertical

Wave: Half Wave Dipole

Mechanical Properties:

Cable: M17/93-RG178 Coaxial

Cable with L inches.

Material:

Whip: Polyurethene(Black)
Swivel Joint: Polyurethene(Black)
Clip Nut: Polycarbonate(Black)
Operation Temp.: -20°C to +65°C


Operation Temp.: -20°C to +65°C Storage Temp.: -30°C to +75°C

This is a RoHS compliance product.

	1	2.4GHz Flying Lead Panel Click DATE			SHEET
TITLE		Antenna 03/25/09		1 of 4	
UNIT		DWG. NO.	S131CL2-L-XXX-2450S		А
in.(mm)					_
SCALE	<u> </u>		NEARS		

^{*}Gain is measured under no flying lead.


E-Plane Pattern @ 2.45GHz

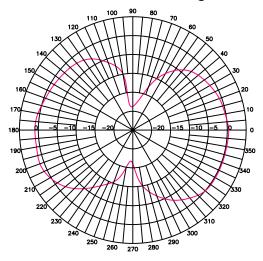


connector direction point down as shown




Housing Wall

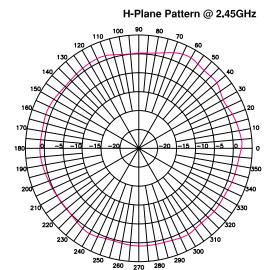


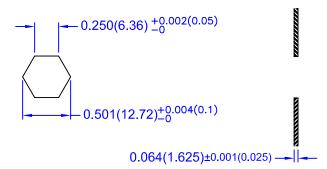


Recommended Mounting - Hole Dimensions


TITLE	2.4GHz Flying Lead Panel Click DATE		SHEET	
	Antenna		03/25/09	2 of 4
UNIT	DWG. NO.	S131CL2-L-XXX-2450S)	А
in (mm)				
SCALE	<u>:</u>	NEARS		
none		1040		

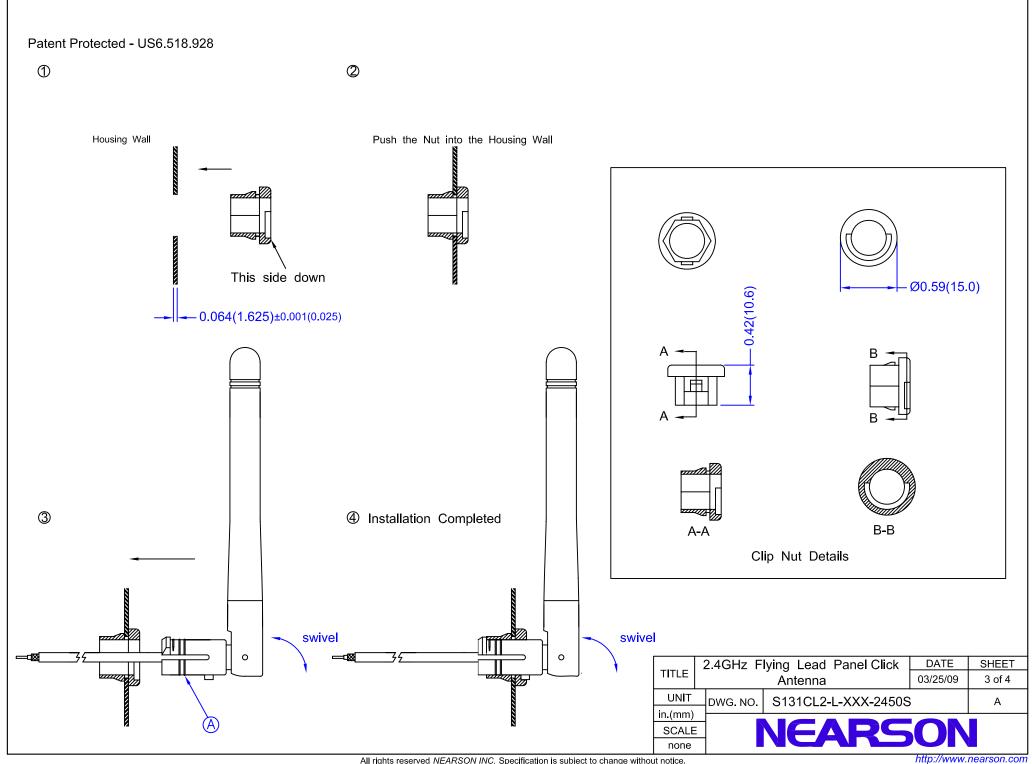

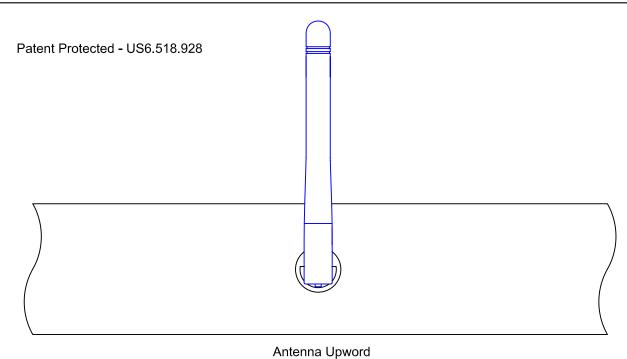

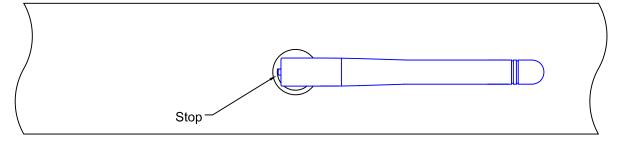

Rotation +90°

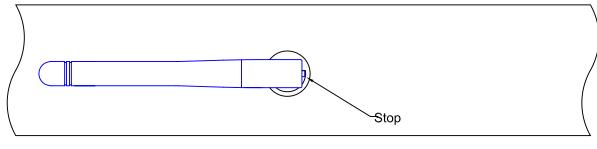

Rotation -90°

- 1. 131CL2 model can also rotate in panel parallel direction.
- 2. Rotate in -90° to +90° prevent the cable over-twisted inside the device.
- 3. The antenna can stay in any angle between -90° and +90°.

L (inch)	ch) Attenuation (dB)	
3"	0.20 dB	
4"	0.27 dB	
5"	0.33 dB	
6"	0.40 dB	
8"	0.53 dB	
10"	0.66 dB	
12"	0.79 dB	

Flying Lead Cable Length v.s. Attenuation Table Standard M17/93-RG178 Cable Measured @ 2.4GHz

	-	2.4GHz Flying Lead Panel Click DATE		SHEET	
TITLE		• •		03/25/09	4 of 4
UNIT		DWG. NO.	S131CL2-L-XXX-2450S		А
in (mm)					_
SCALE	=		NEARS		
		1			