



BT-ComPact

2.4 GHz 1/4 Wave

Stubby Antenna

Features

- 1/4 Wave Stubby Antenna
- Straight SMA or MMCX Connector
- Groundplane Dependent
- Ideal for fixed devices

Specifications

Specifications	
Radiating element	1/4 Wave
Frequency range	2.4 - 2.5 GHz
Peak gain	0 dBi
Polarisation	Linear
Return Loss	-8 dB
Impedance	50 Ohm
Cable / Connector	SMA-Male Straight or MMCX-Male Straight
Dimensions	27 x 7.5 mm (max)

Ordering Options

FBMS35152-SM-ST	BT-Compact with SMA-Male ST Connector
FBMS35152-MS-ST	BT-ComPact with MMCX-Male ST Connector


Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK


Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

BT-ComPact | 2.4 GHz Stubby ST Antenna

Return Loss

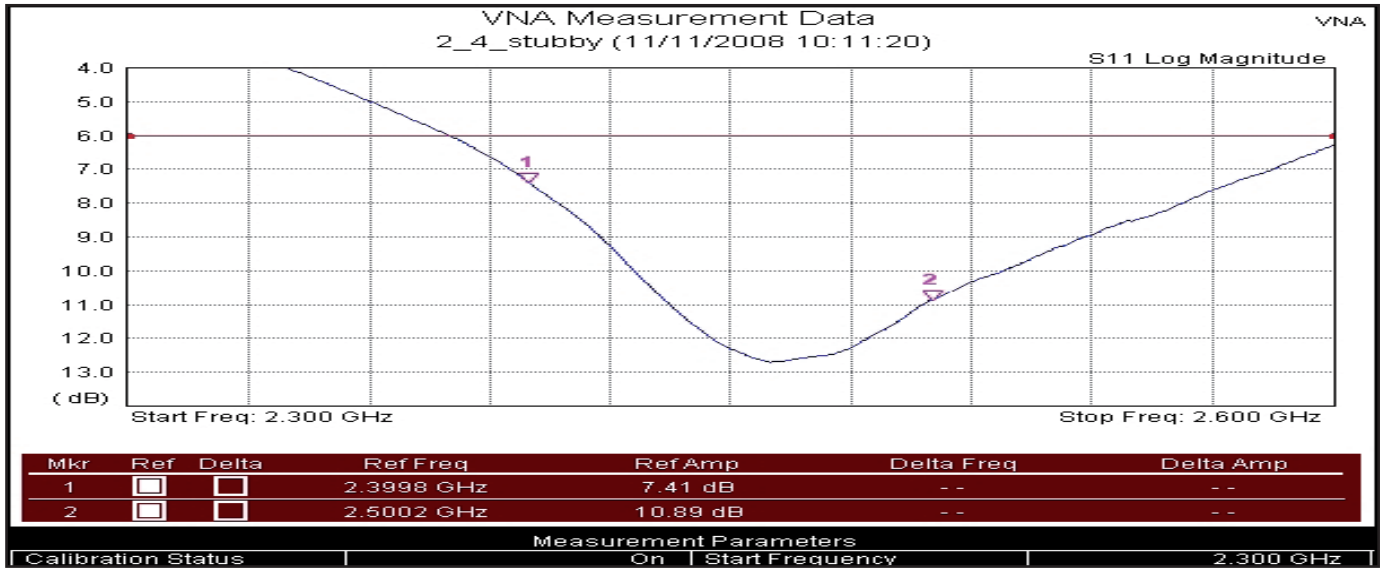

Outline Drawing

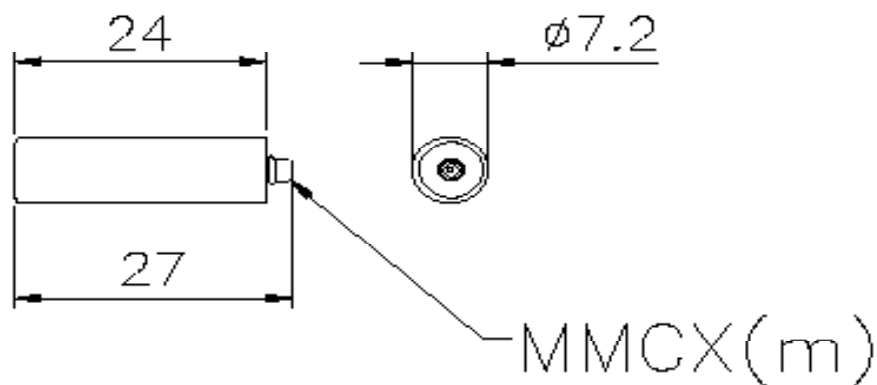

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

EAD
embedded antenna design ltd
Delivering Antenna Innovation