

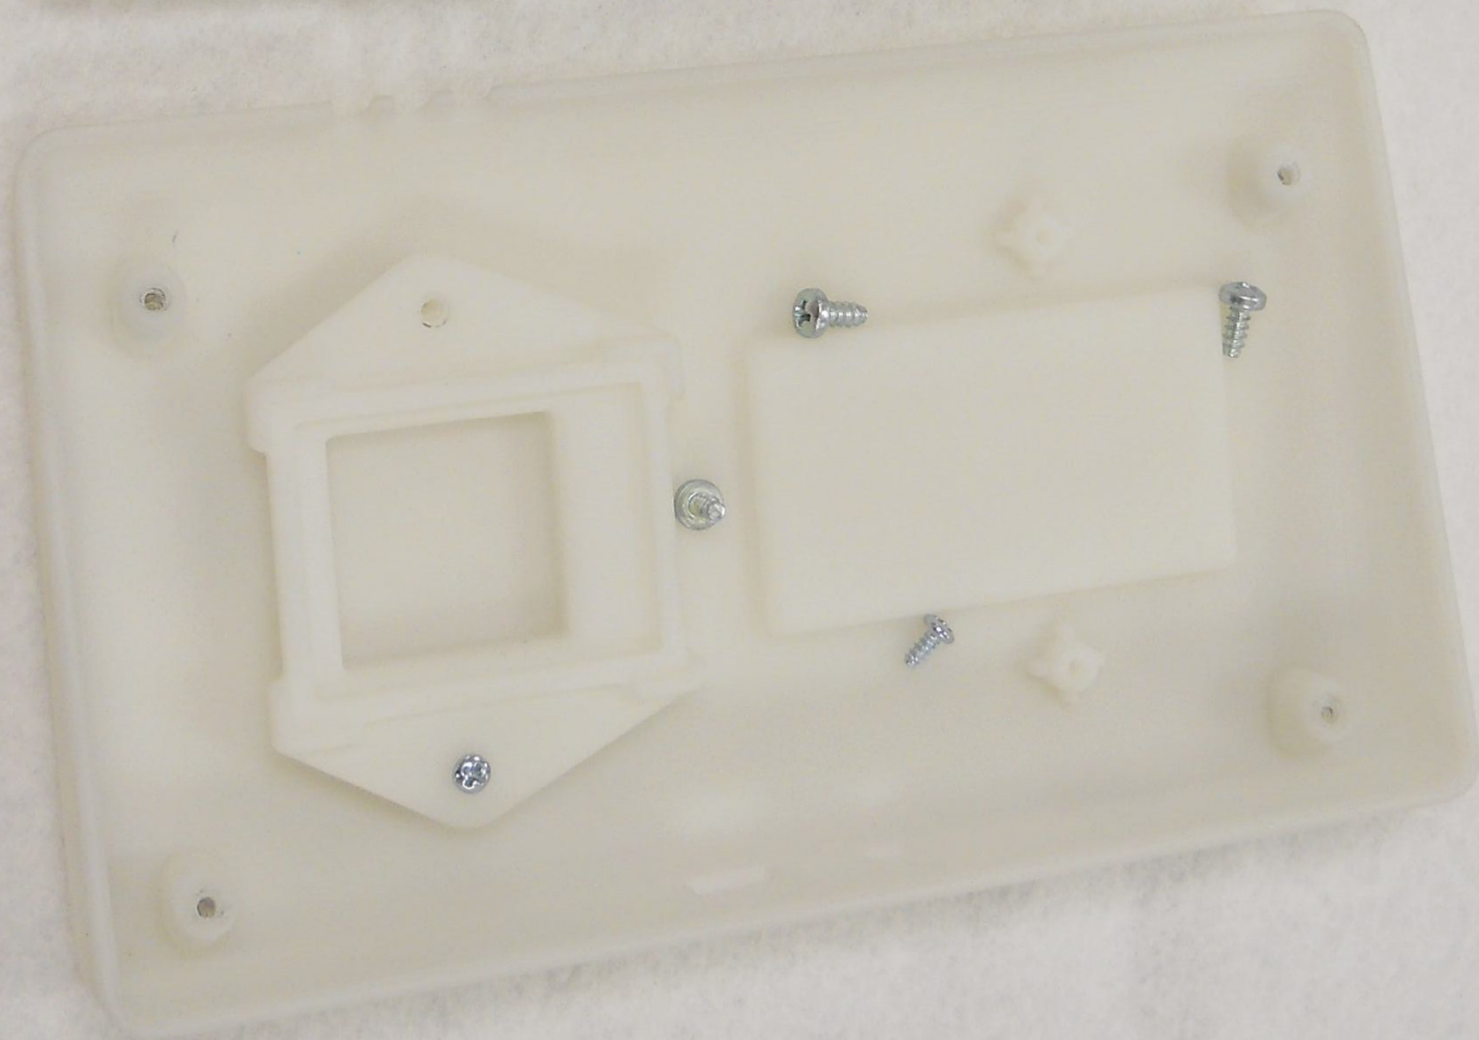
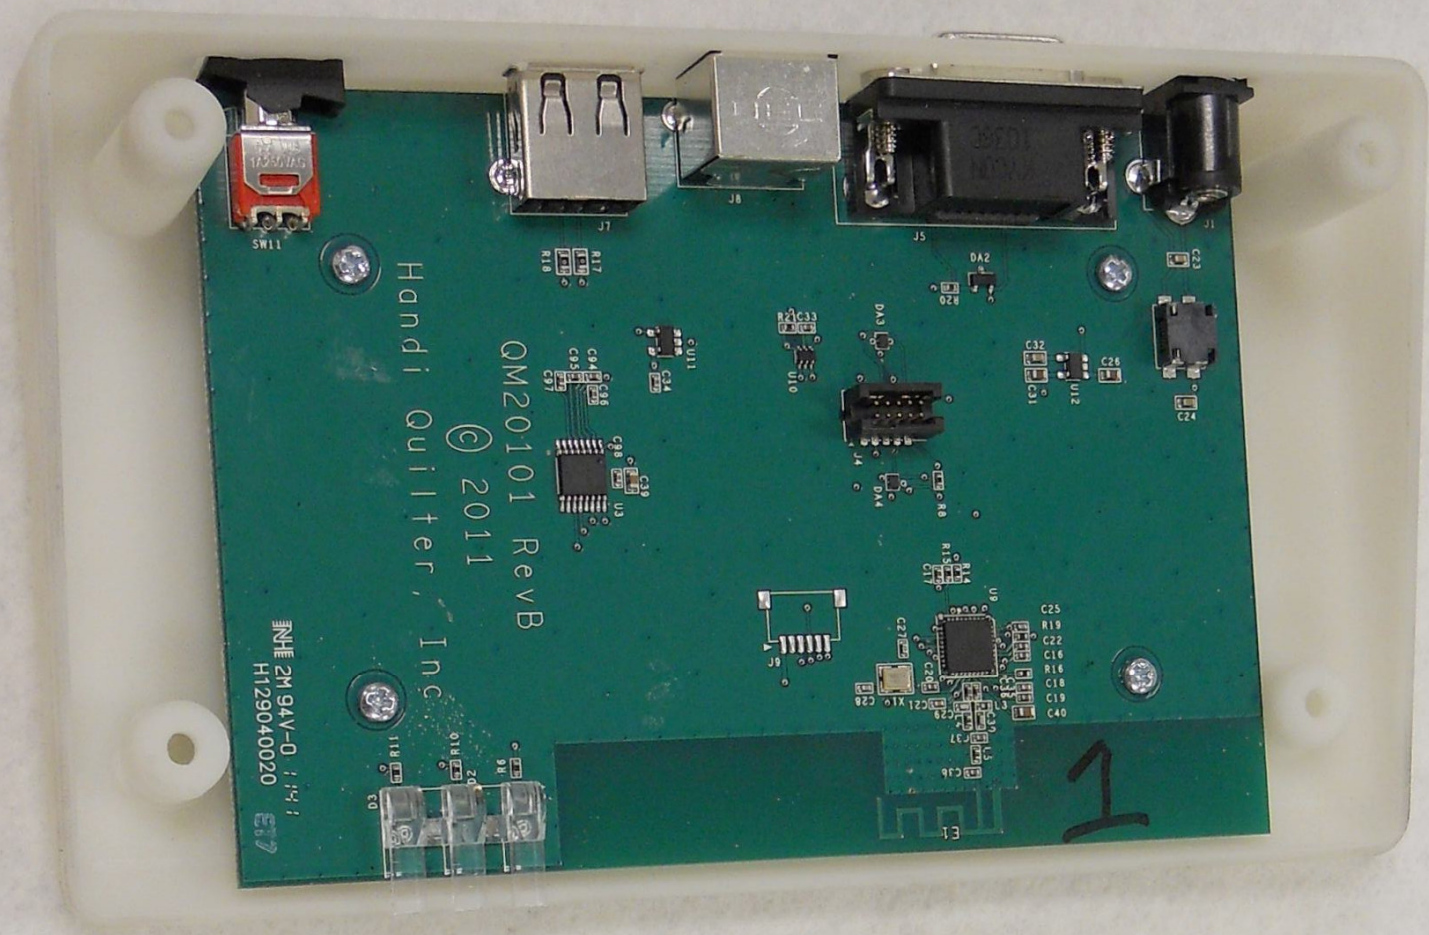


rke

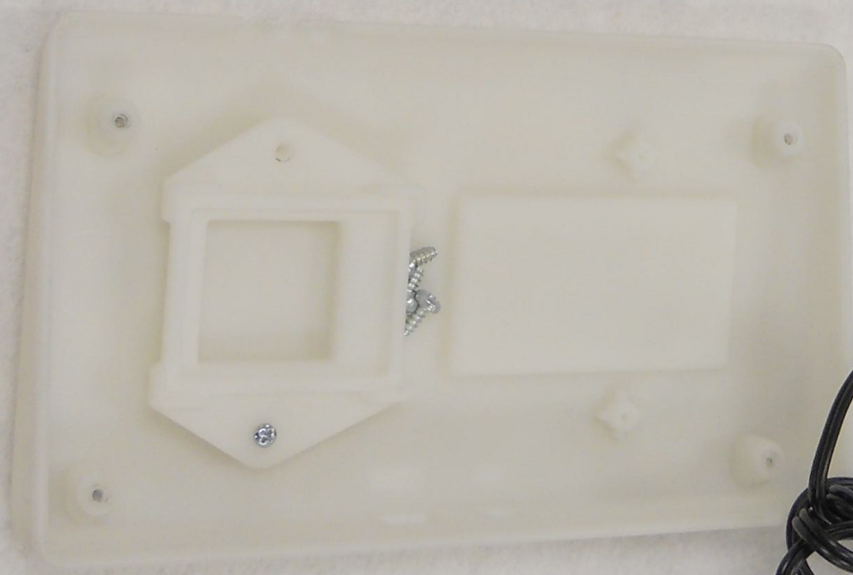

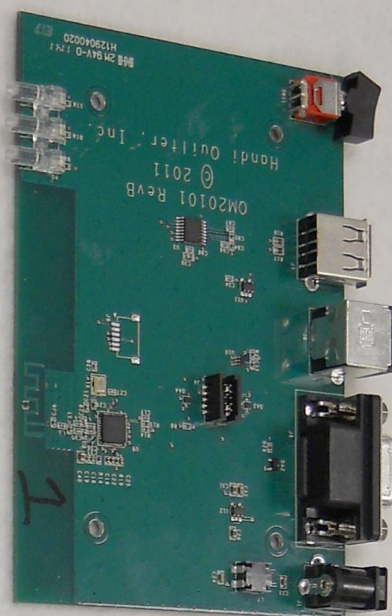

QM20101 RevB
© 2011

Handi Quilter, Inc.

2M 94V-0 1141
H129040020

Header connector with pins labeled D4, R6, D2, R10, R11.

Red push button switch labeled SW11, 1A250VAC, 125US.

USB Type-A connector labeled J7.

USB Type-B connector labeled J8.

Large black multi-pin connector labeled J5.

Black cylindrical component labeled J1.

Microcontroller chip U3 with various capacitors (C34, C39, C94, C95, C96, C97) and resistors (R17, R18).

Small integrated circuit U10 with resistors R2, C3, C33.

Connector J4 with associated components DA3, DA4, R8.

Main microcontroller chip U9 with a large array of capacitors (C19-C25, C27, C28, C29, C30, C31, C32, C33, C36, C37, C38, C39, C40) and resistors (R14, R15, R16, R19, R20, R24).

Small component U9 with a 5-pin header J9.

Green PCB extension with a 13-pin header labeled 13.

Handwritten number 1