Safety Label Note:

- 1) Printing color: Black
- 2) 製造國家 (MFG Country): Decided by import & export country

For example:

- 1. MADE IN TAIWAN / Made in Taiwan
- 2. MADE IN CHINA / Made in China

印刷廠商代號(Vender ID): (SP® CSA Request)


Decided by Vender

製造工廠代號 (MFG Factory): (UL Request)

視代工廠而定(Decided by MFG Factory):

- 1. 昊陽/Joytech (深圳/ShenZhen)-----> None
- 2. Accton -----> AC
- 3 If UL logo is printed, Vender must use the label material applied for UL certification (PGDQ2) 需符合Outdoor Use

89.0mm 3_{mm} 22.0mm

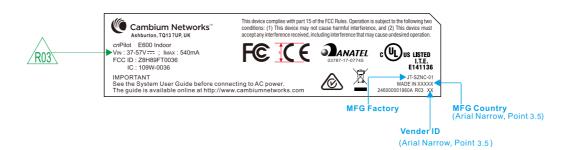

正峰UL代碼: CM-100-088 Corrugate list Unspecialized = +/ - 0.3 mm | BE Bag (A Degree) | Clear | Pink Label list Comply with RoHs Modification Card Paper / Top lineboard (Total Thickness = mm±10%) Accton TECHNOLOGY CORP. Anti-Static ESD Value/_{ohm} = 9-11 R02 Add FCC ID & IC & ANATEL# Adhesive Others Material & Thickness Add Cambium address Crease Line Electronic ESD Value/ \(\frac{\Omega}{\Omega} \) < 5 Art paper 0.025mm / 25# / 1mil Acrylic Del IC logo & CE"() ' PBL) Rartial Blunt Lin Part No. 246000001960A **REV. 03** 0.04 0.06 0.08 ✓ Metalized 0.050mm, /, 50#, /, 2mil V Acrylic, UL approved T=0.022m Modify output rating Single Put-in material >= 8 kg layer (By 1.5M / Width x 100M / Length) White Polyester 0.076mm / 75# / 3mil Description: Printing Tolerance = +/ - mm (PP)Pepa paper 0.178mm / 7mil Please refer to Water Adhesive T=0.022mr UL LABEL EAP8416A-1016-CAM PC 8B35 0.254mm / 10mil 3M 467 Approve Melody JUL21'17 В Weight/gs= PC 8010 3M 468 SCALE 1 / 1 SIZE A3 0.381mm / 15mil UNIT This document and the technical data disclosed are proprietary to Accton Tech. Corp. and shall not b duplicated, used, released, or disclosed without T=0.127mm Check 2.0 Density (kg / m³) Thickness/mm 3M 7945 MM Outside View Sheet 1 of 1 (MI) Draft Angle 3° Hydrous % 7-1 Non - laminated PP Film ✓ **LF** (T = 0.045mm) **DF** (T = 0.035mm) Design Carry JUL21'17

(18) S/N LABEL:MSN, ESN 需與機構上的序號相同 246200000168A ACCLABEL 47X35mm(珍珠龍)

