
Page No. : 9 of 16




For Antenna 2:




SPORTON INTERNATIONAL INC.

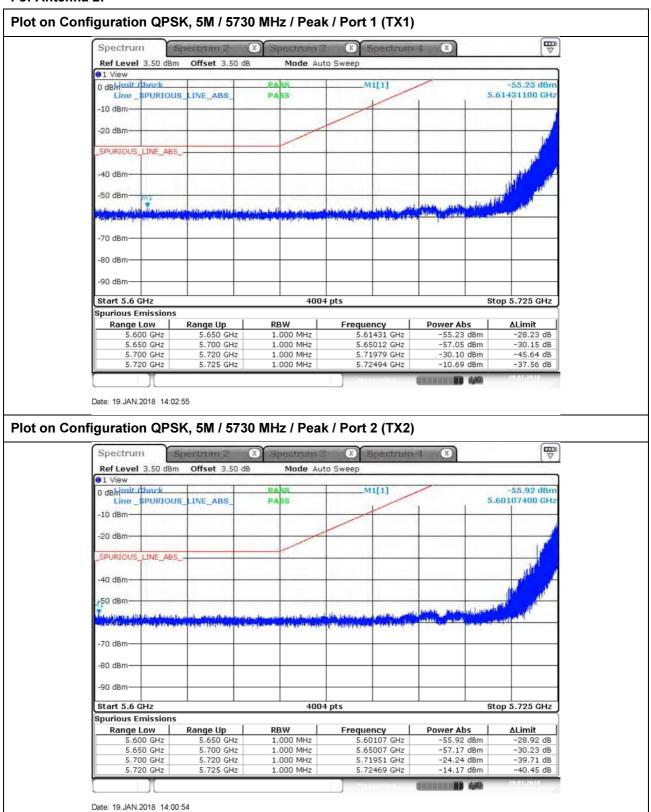

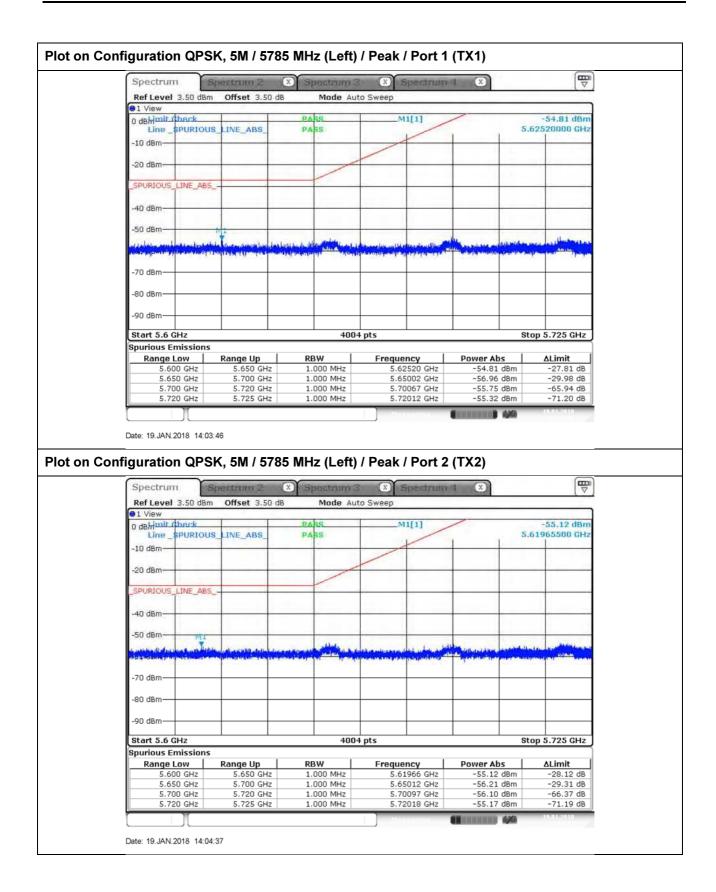


Page No. : 11 of 16



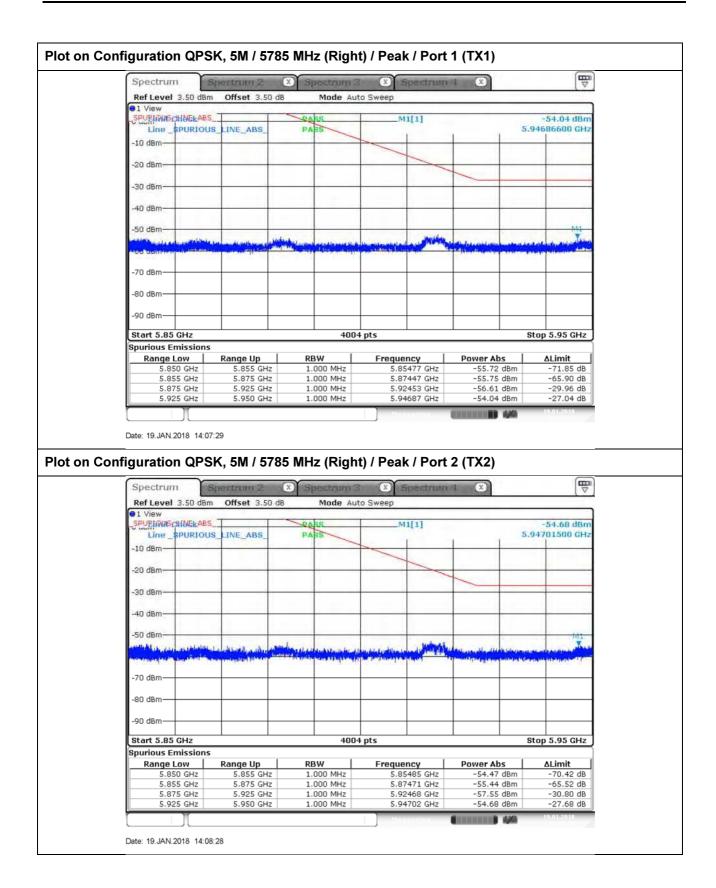


Page No. : 12 of 16



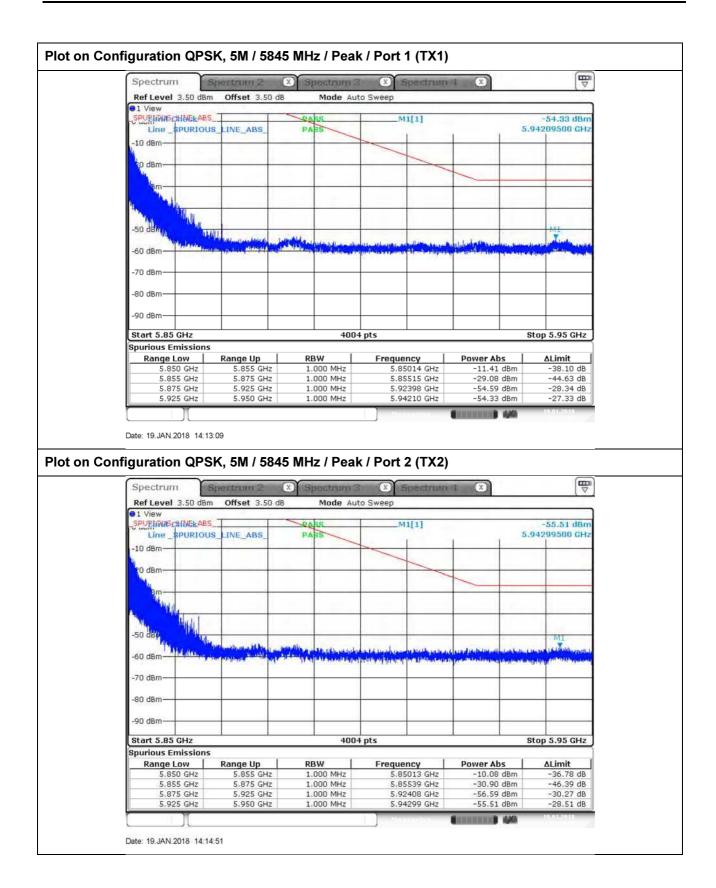




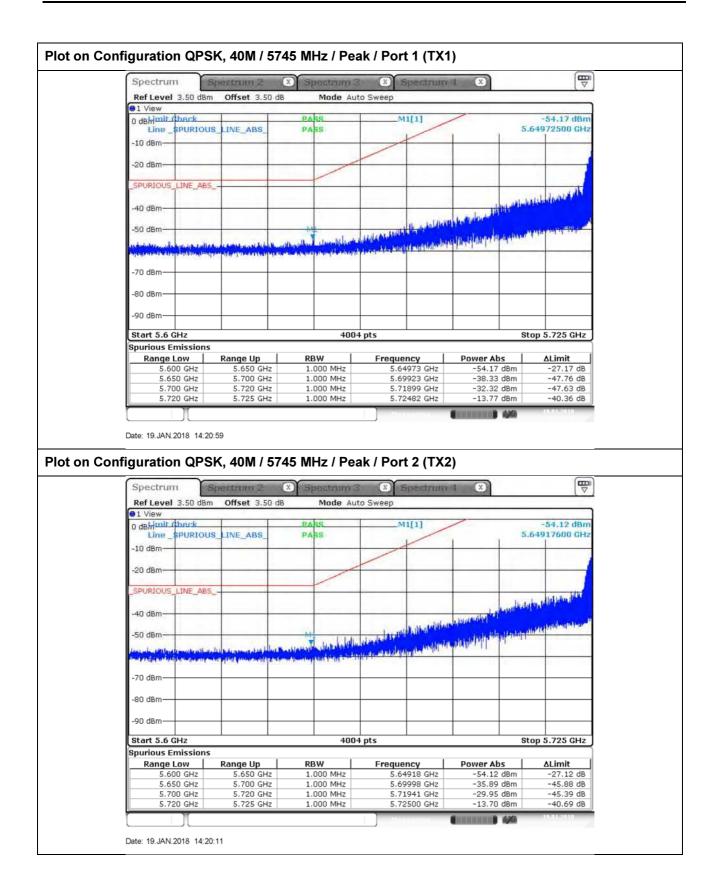


Page No. : 14 of 16



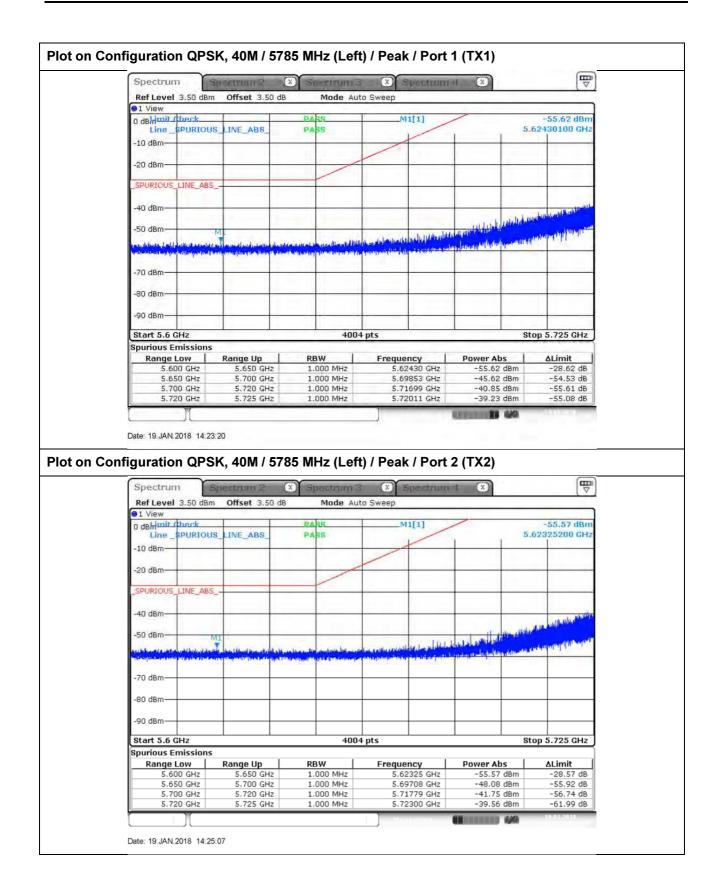


SPORTON INTERNATIONAL INC.



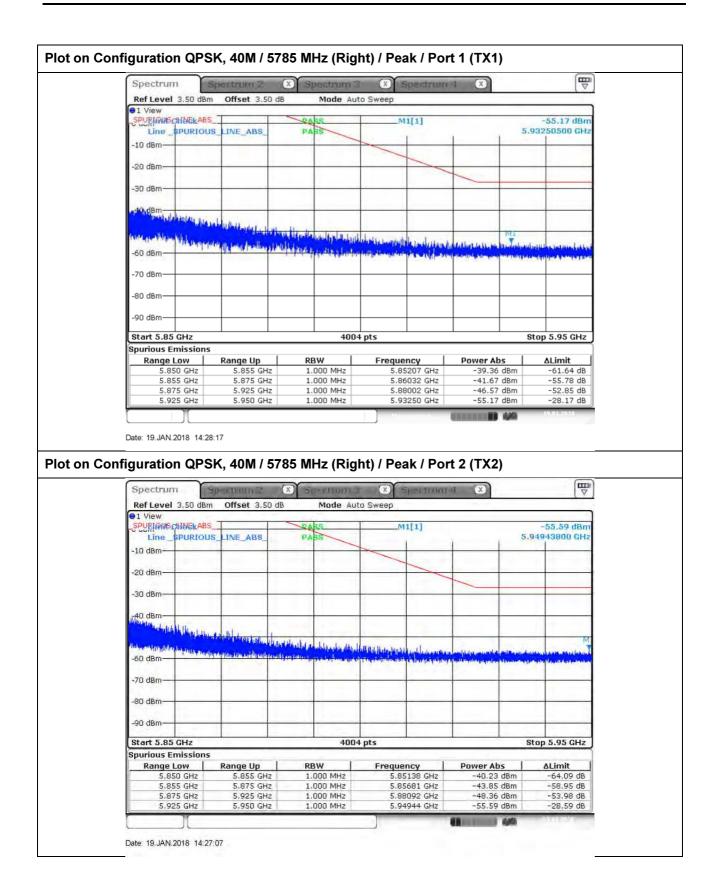



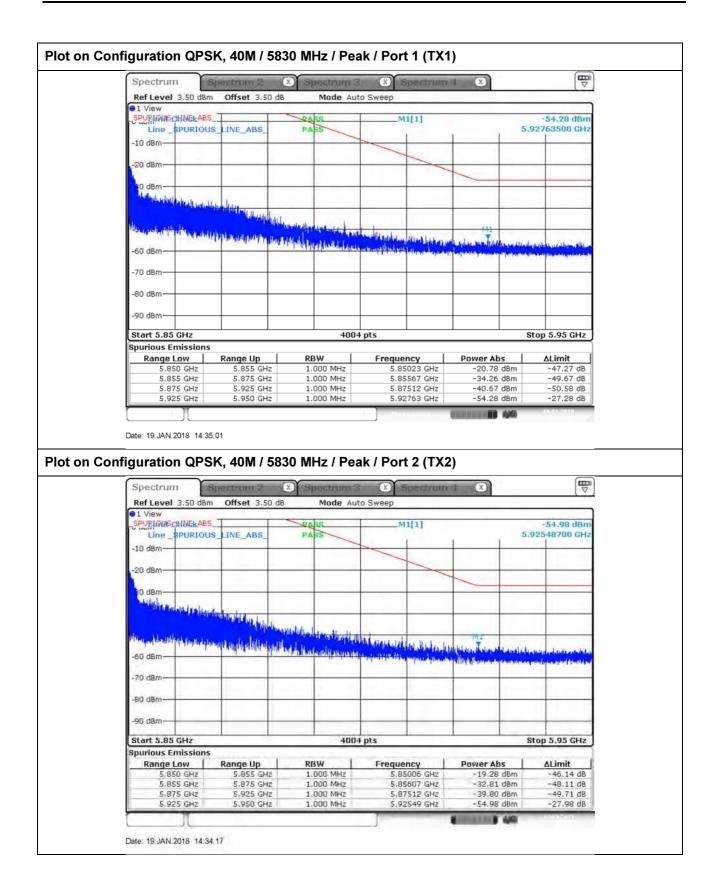



FS Result Appendix F

Mode: 5, 40 MHz / Port 1 Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)				
(V)	5785 MHz				
	0 Minute	2 Minute	5 Minute	10 Minute	
126.50	5784.9968	5784.9960	5784.9956	5784.9949	
110.00	5784.9963	5784.9957	5784.9953	5784.9950	
93.50	5784.9961	5784.9951	5784.9944	5784.9943	
Max. Deviation (MHz)	0.0039	0.0049	0.0056	0.0057	
Max. Deviation (ppm)	0.67	0.85	0.97	0.99	
Result	Pass				

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)				
(℃)	5785 MHz				
	0 Minute	2 Minute	5 Minute	10 Minute	
-40	5784.9874	5784.9865	5784.986	5784.9854	
-30	5784.9891	5784.9889	5784.9888	5784.9881	
-20	5784.9908	5784.9901	5784.9894	5784.9890	
-10	5784.9917	5784.9908	5784.9905	5784.9895	
0	5784.9929	5784.9925	5784.9918	5784.9912	
10	5784.9947	5784.9946	5784.9936	5784.9928	
20	5784.9963	5784.9961	5784.9957	5784.9949	
30	5784.9971	5784.9965	5784.9960	5784.9957	
40	5784.9991	5784.9988	5784.9981	5784.9979	
50	5785.0009	5785.0008	5784.9998	5784.9996	
60	5785.0015	5785.0005	5784.9998	5784.9997	
70	5785.0022	5785.0014	5785.0012	5785.0004	
Max. Deviation (MHz)	0.0109	0.0111	0.0112	0.0119	
Max. Deviation (ppm)	1.88	1.92	1.94	2.06	
Result	Pass				

SPORTON INTERNATIONAL INC. Page No. : 1 of 1